



**THE DATASHEET OF
DS2488EVKIT#**



DS2488 Evaluation Kit

Evaluates: DS2488

General Description

The DS2488 evaluation kit (EV kit) provides the hardware and software necessary to exercise the features of the DS2488. The EV system consists of two boards: the DS9401 and DS2488 EV kit boards. The DS2488 board contains two DS2488 parts. The evaluation software runs on Windows® 10, 8, and 7 operating systems. It provides a handy user interface to exercise the features of the DS2488.

Features

- Demonstrates the Features of the DS2488
- Fully Compliant with USB Specification v2.0
- Software Runs on Windows 10, 8, and 7
- Convenient On-Board Test Points

DS2488 EV Kit Contents

QTY	DESCRIPTION
1	DS9401 1-Wire® master with 5V charging board
1	DS2488 EV kit evaluation board with two DS2488 parts
2	USB Type-A to Micro-USB Type-B Cable

[Ordering Information](#) appears at end of data sheet.

Windows is a registered trademark and service mark of Microsoft Corporation.

1-Wire is a registered trademark of Maxim Integrated Products, Inc.

Quick Start

Required Equipment

This section includes a list of recommended equipment and instructions on how to set up the Windows-based PC for the evaluation software.

- DS9401 (included)
- DS2488 EV kit (included)
- 2 USB Type A to Micro-USB Type B cable (included)
- PC with a Windows 10, 8, or 7 operating system and two spare USB 2.0 or higher ports
- Download DS2488 EV kit software

Software and Hardware Installation and Setup

- 1) Unplug any Maxim adapters before installing software.
- 2) Install Prolific drivers from http://www.prolific.com.tw/US/ShowProduct.aspx?p_id=225&pcid=41 if not already installed.
- 3) Unzip the EV kit software folder.
- 4) Run **setup.exe** to run installer.
- 5) Click the **Install** button on the **Application Install - Security Warning** notification to install the EV kit software (see [Figure 1](#)).
- 6) Connect JB1 on DS9401 board (see [Figure 2](#)).

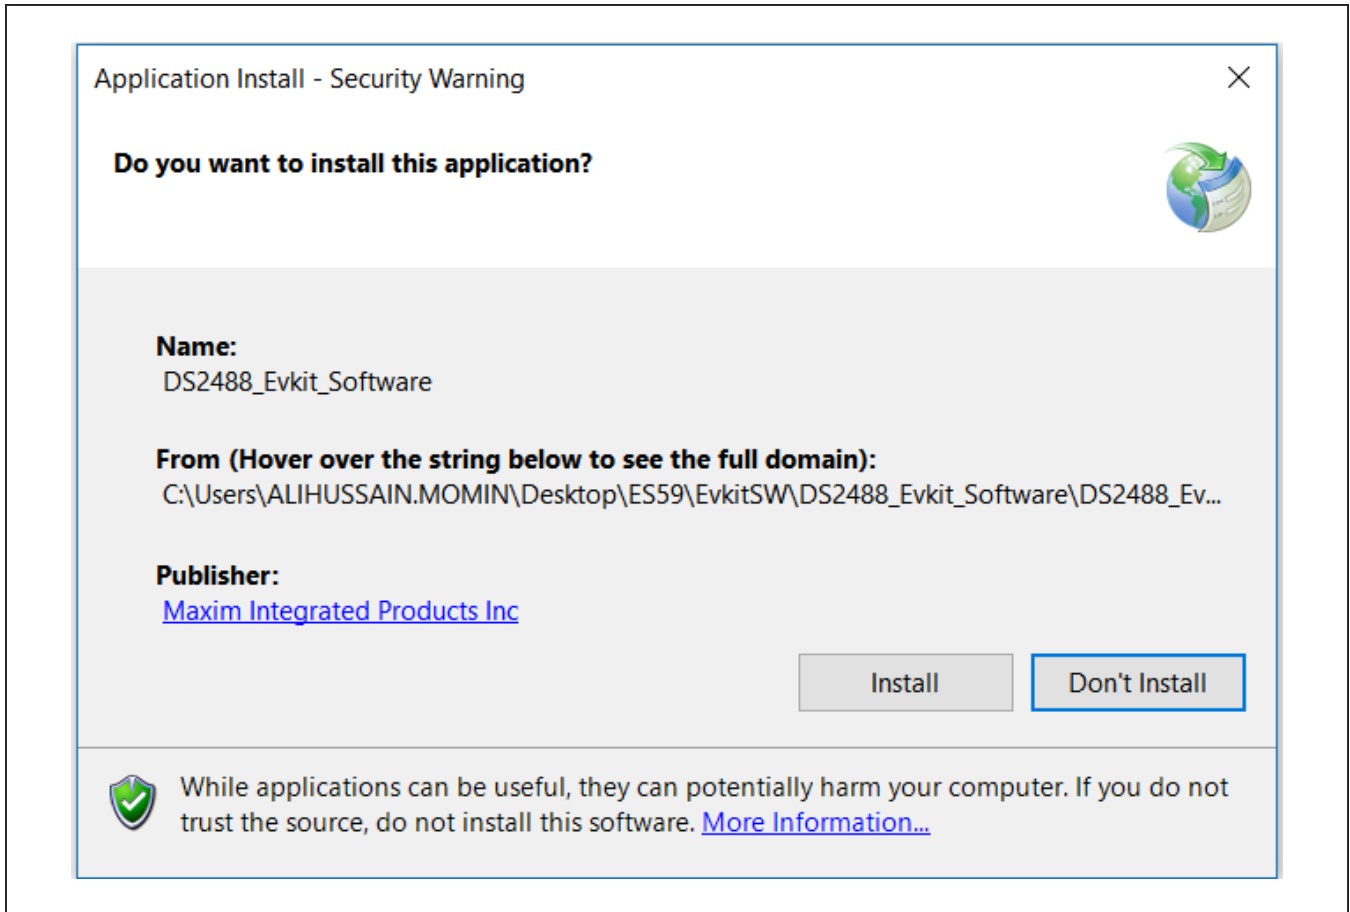


Figure 1. Install Warning

- 7) Connect JB1, JB2, JB3, JB5, JB6 and the VL row on JB4 on the DS2488 EV kit board (see [Figure 3](#)).
- 8) Connect the DS9401 and DS2488 EV kit boards to the PC using the USB cables. Ensure no other prolific devices are connected to the PC.
- 9) Connect the DS9401 to the DS2488 EV kit board.
- 10) Launch the DS2488 EV kit software.

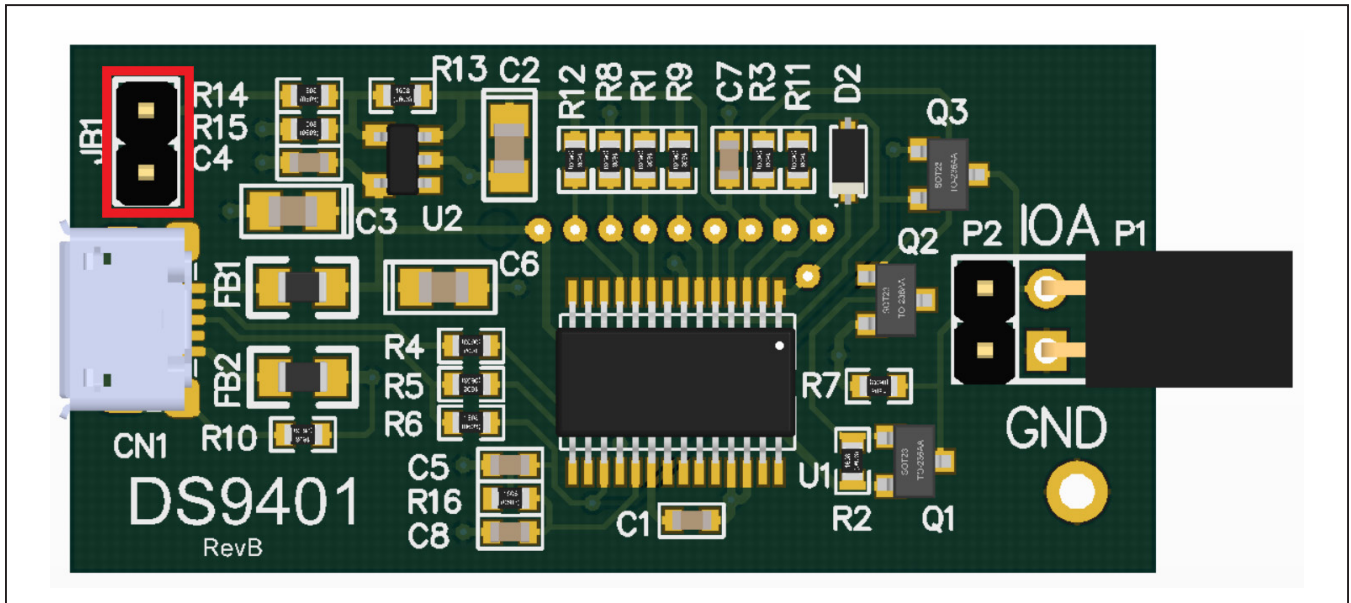


Figure 2. DS9401 Board

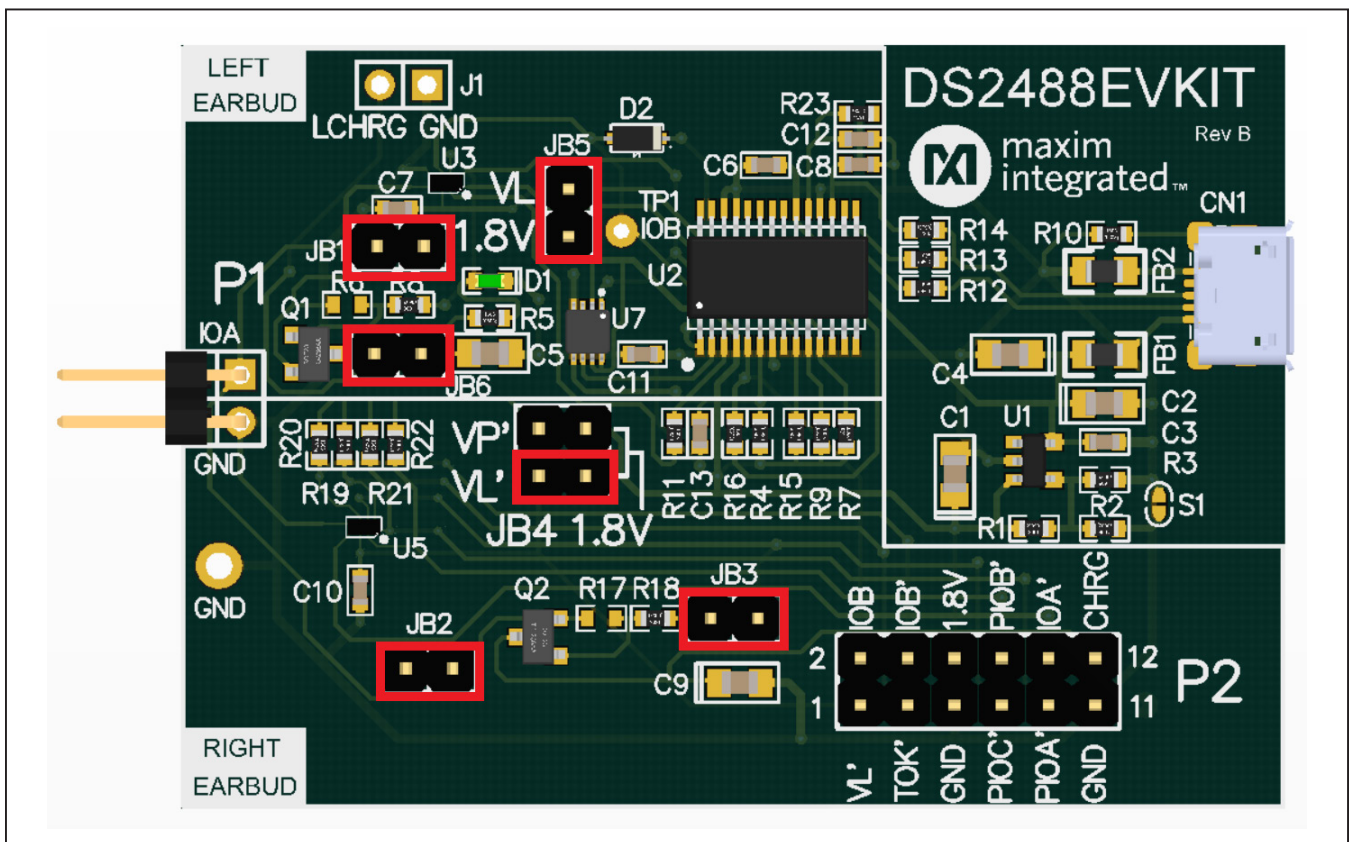


Figure 3. DS2488 EV Kit Board

- 11) Click on **Auto Detect** (see [Figure 4](#)).
- 12) Click on **Connect** (see [Figure 4](#)) and the window automatically changes to the **TWS Demo** tab if a connection to the hardware is successful (see [Figure 5](#)).

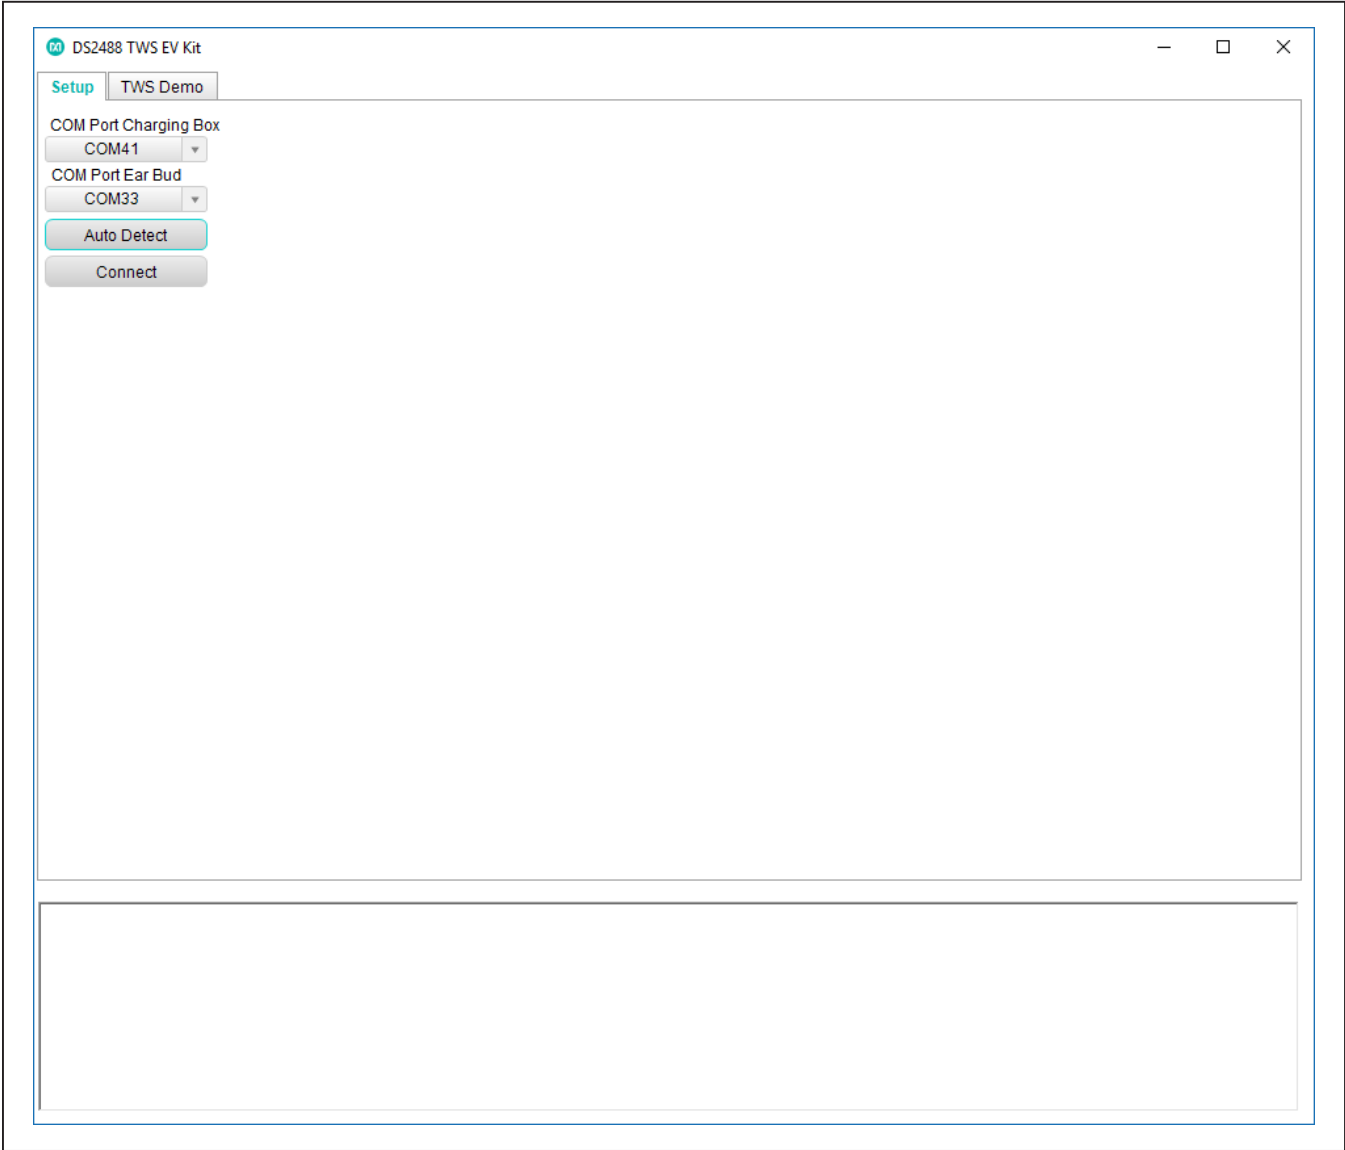


Figure 4. EV Kit Setup Tab

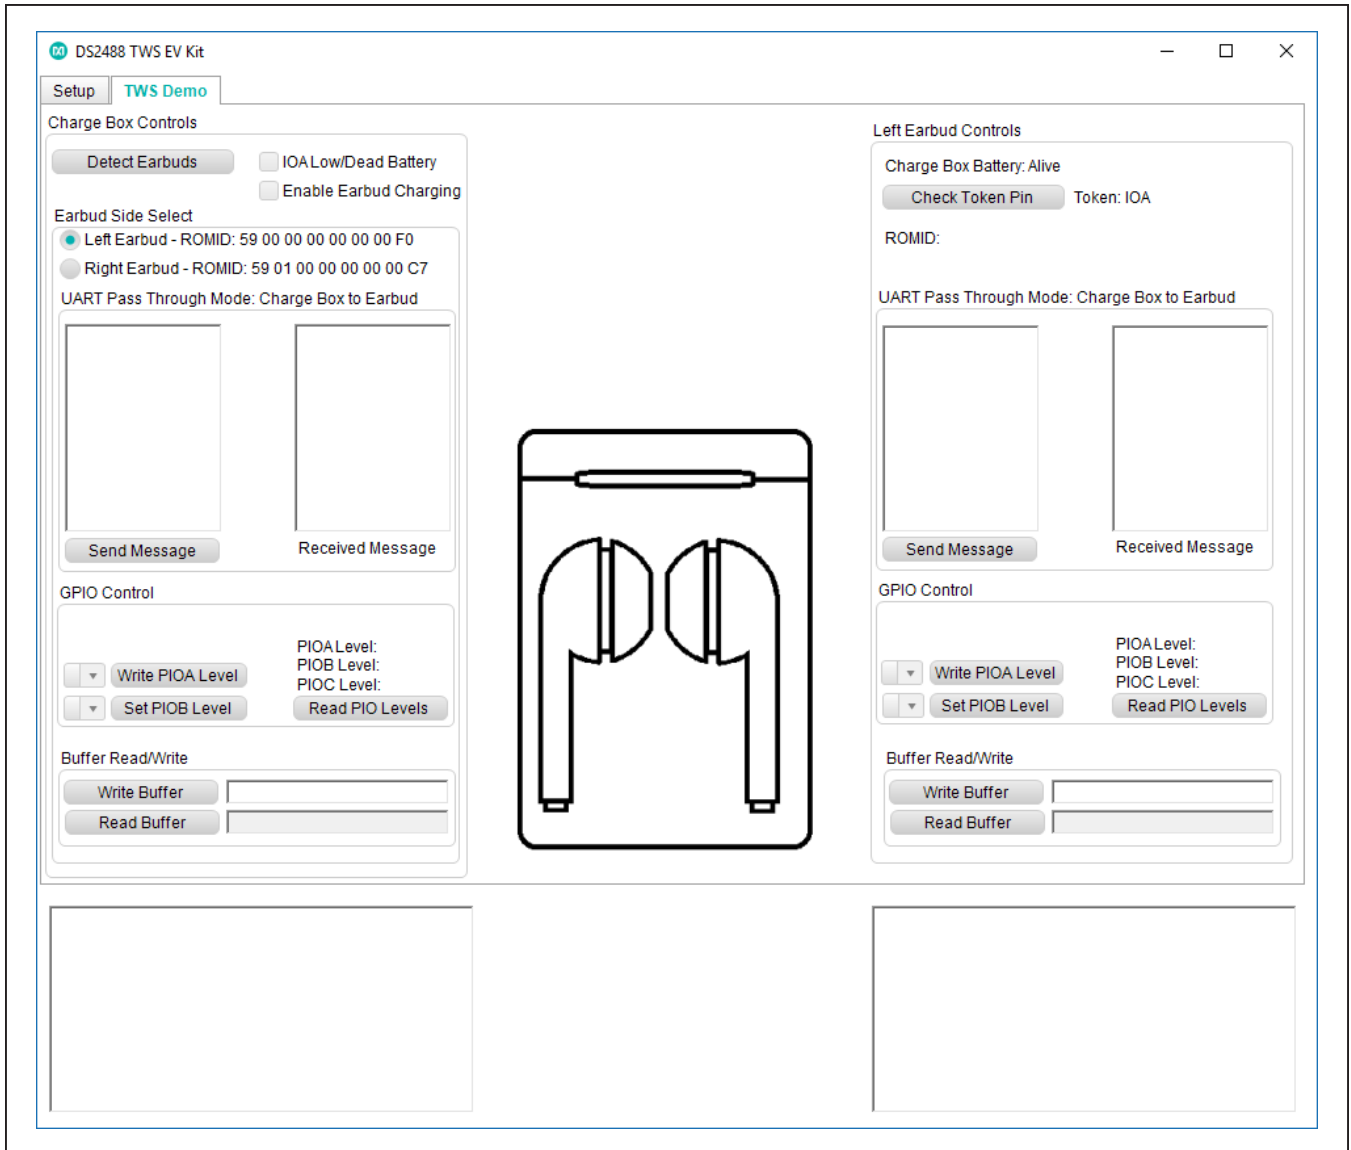


Figure 5. EV Kit Software Demo Tab

EV Kit Supported Functions

The DS2488 EV kit program is designed as a usage example.

Use the software to evaluate the DS2488 and the GUI displays the 1-Wire sequences for each step to assist the firmware engineer.

Table 1. Usage Flows

FLOW	DESCRIPTION
Detect Earbuds	Does a 1-Wire, Search ROM to determine which earbuds are connected to the charge box.
IOA Low/Dead Battery	Set IOA to logic-low to simulate dead battery, or to pass token to IOB
Send Message	Uses UART to send message between charge box and ear bud
Write PIOA Level	Use 1-Wire commands to set the PIOA level
Set PIOB Level	Set PIOB level using pin from the prolific chip
Read PIO Levels	Uses 1-Wire commands to read the levels of the PIO pin
Write buffer	Writes specified hex data to 8-byte buffer
Read buffer	Reads written data in 8-byte buffer

Ordering Information

PART	TYPE
DS2488EVKIT#	EV Kit

#Denotes RoHS compliance.


DS9401 Bill of Materials

DESIGNATOR	QTY	DESCRIPTION	MANUFACTURER	PART NO.
C1, C4, C8	3	CAP CER 0.1UF 16V X7R 0603	Kemet	C0603C104K4RACTU
C2, C3	2	CAP CER 4.7UF 16V Y5V 0805	Samsung Electro-Mechanics	CL21F475ZOFNNNE
C6	1	CAP CER 10UF 10V Y5V 0805	Yageo	C2012Y5V1A106Z
C7,C5	2	CAP CER 2.2UF 6.3V 10% X5R 0603	Yageo	CC0603KRX5R5BB225
CN1	1	CONN RCPT USB2.0 MICRO B SMD R/A	Amphenol ICC (FCI)	10118193-0001LF
D2	1	DIODE SCHOTTKY 40V 200MA SOD323 (DNP)	Nexperia USA Inc.	1PS76SB21,115
FB1, FB2	2	FERRITE BEAD 220 OHM 0805 1LN	Murata Electronics North America	BLM21PG221SN1D
JB1	1	CONN HEADER VERT 2POS 2.54MM	Amphenol ICC (FCI)	68000-102HLF
P1	1	CONN HDR 2POS 0.1 GOLD PCB R/A	Sullins Connector Solutions	PPPC021LGBN-RC
P2	1	CONN HEADER VERT 2POS 2.54MM	Amphenol ICC (FCI)	68000-102HLF
Q1	1	MOSFET P-CH 20V 2.8A SOT-23	PMV65XP,215	PMV65XP,215
Q2, Q3	2	MOSFET N-CH 60V 115MA SOT23-3	Diodes Incorporated	2N7002-7-F
R1, R7, R9, R12	4	RES SMD 200K OHM 1% 1/10W 0603	Yageo	RC0603FR-07200KL
R2, R8	2	RES SMD 1K OHM 1% 1/10W 0603	Panasonic Electronic Components	ERJ-3EKF1002V
R3, R11	2	RES SMD 1K OHM 1% 1/10W 0603	Yageo	RC0603FR-071KL
R4, R5	2	RES SMD 0.0 OHM JUMPER 1/10W	Panasonic Electronic Components	ERJ-3GEY0R00V
R6	1	DNP		
R10	1	RES SMD 10 OHM 1% 1/10W 0603	Yageo	RC0603FR-0710RL
R13	1	RES SMD 5.1K OHM 1% 1/10W 0603	Bourns Inc.	CR0603-FX-5101ELF
R14	1	RES 4.12K OHM 1% 1/10W 0603	Stackpole Electronics Inc	RMCF0603FT4K12
R15	1	RES 11K OHM 1% 1/10W 0603	Stackpole Electronics Inc	RMCF0603FT11K0
R16	1	RES SMD 4.7K OHM 1% 1/10W 0603	Rohm Semiconductor	MCR03ERTF4701
U1	1	USB to Serial Bridge	Prolific	PL-2303GC
U2	1	High-Voltage, Low-Power Linear Regulator	Maxim Integrated Products	MAX1616EUK+


DS2488EVKIT Bill of Materials

DESIGNATOR	QTY	DESCRIPTION	MANUFACTURER	PART NO.
C1, C2	2	CAP CER 4.7UF 16V Y5V 0805	Samsung Electro-Mechanics	CL21F475ZOFNNNE
C3, C6, C7, C10, C11, C12	6	CAP CER 0.1UF 16V X7R 0603	Kemet	C0603C104K4RACTU
C4	1	CAP CER 10UF 10V Y5V 0805	Yageo	C2012Y5V1A106Z
C5, C9	2	CAP CER 2.2UF 16V Y5V 0805	Yageo	CC0805ZRY5V7BB225
C8, C13	2	CAP CER 2.2UF 6.3V X5R 0603	Taiyo Yuden	JMK107BJ225KA-T
CN1	1	CONN RCPT USB2.0 MICRO B SMD R/A	Amphenol ICC (FCI)	10118193-0001LF
D1	1	Green 523nm LED Indication - Discrete 3.2V 0603	Dialight	5988081107F
D2	1	DIODE SCHOTTKY 40V 200MA SOD323	Nexperia USA Inc.	1PS76SB21,115
FB1, FB2	2	FERRITE BEAD 220 OHM 0805 1LN	Murata Electronics North America	BLM21PG221SN1D
JB1, JB2, JB3, JB5, JB6, J1	6	CONN HEADER VERT 2POS 2.54MM	Amphenol ICC (FCI)	68000-102HLF
JB4	1	CONN HEADER VERT 4POS 2.54MM	Amphenol ICC (FCI)	67996-104HLF
P1	1	CONN HEADER R/A 2POS 2.54MM	Sullins Connector Solutions	PRPC002SBAN-M71RC
P2	1	CONN HEADER VERT 12POS 2.54MM	Amphenol	67996-212HLF
Q1, Q2	2	TRANS PNP 40V 0.6A SOT23	On Semiconductor	MMBT4403LT1G
R1	1	RES SMD 5.1K OHM 1% 1/10W 0603	Panasonic Electronic Components	ERJ-3EKF5101V
R2	1	RES SMD 4.12K OHM 1% 1/10W 0603	Panasonic Electronic Components	ERJ-3EKF4121V
R3	1	RES SMD 11K OHM 0.1% 1/10W 0603	Panasonic Electronic Components	ERA-3AEB113V
R4, R7	2	RES SMD 200K OHM 1% 1/10W 0603	Panasonic Electronic Components	ERJ-3EKF2003V
R5, R8, R18	3	RES SMD 680 OHM 1% 1/10W 0603	Vishay Dale	CRCW0603680RFKEA
R6, R17	2	100K/0603	Yageo	RC0603FR-07100KL
R9	1	RES SMD 10K OHM 1% 1/10W 0603	Panasonic Electronic Components	ERJ-3EKF1002V
R10	1	RES SMD 10 OHM 1% 1/10W 0603	Yageo	RC0603FR-0710RL
R11	1	RES SMD 220 OHM 1% 1/10W 0603	Panasonic Electronic Components	ERJ-3EKF2200V
R12, R13	2	RES SMD 0.0 OHM JUMPER 1/10W	Panasonic Electronic Components	ERJ-3GEY0R00V
R14	1	DNP		
R15, R19, R20, R21, R22	5	RES SMD 100K OHM 1% 1/10W 0603	Vishay Dale	CRCW0603100KFKEA
R16	1	RES SMD 1K OHM 1% 1/10W 0603	Yageo	RC0603FR-071KL
R23	1	RES SMD 4.7K OHM 1% 1/10W 0603	Vishay Dale	CRCW06034K70FKEA
U1	1	Linear Voltage Regulator	Maxim Integrated Products	MAX1616EUK+
U2	1	USB to Serial Bridge	Prolific/Techtonica	PL-2303GC
U3, U5	2	1-Wire Dual Port Link	Maxim Integrated	DS2488X+U
U7	1	IC FF D-TYPE SNGL 1BIT US8	ON Semiconductor	NC7SZ74K8X

DS9401 Schematic

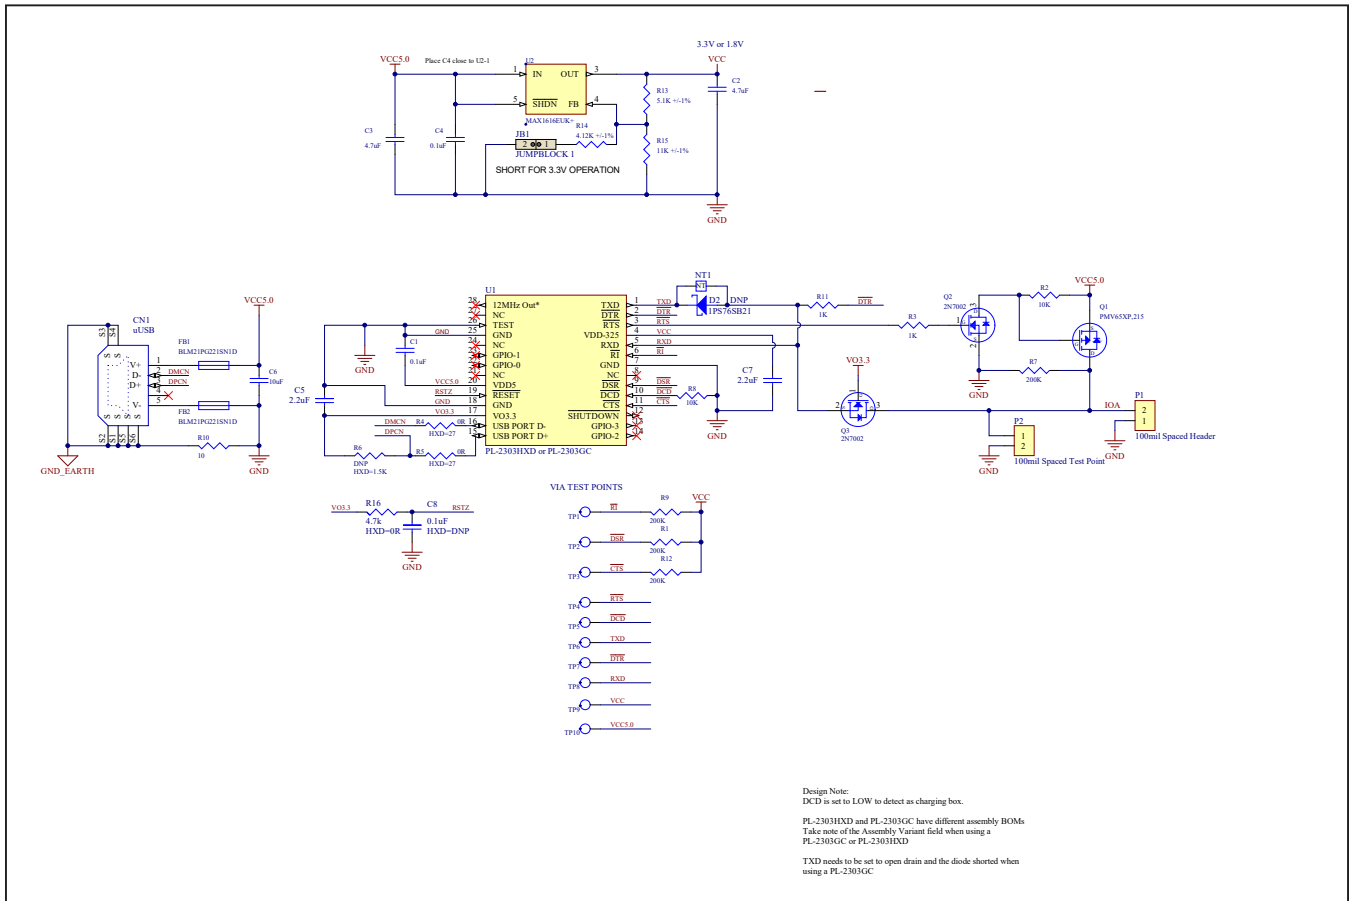

DS2488 EV Kit Schematic

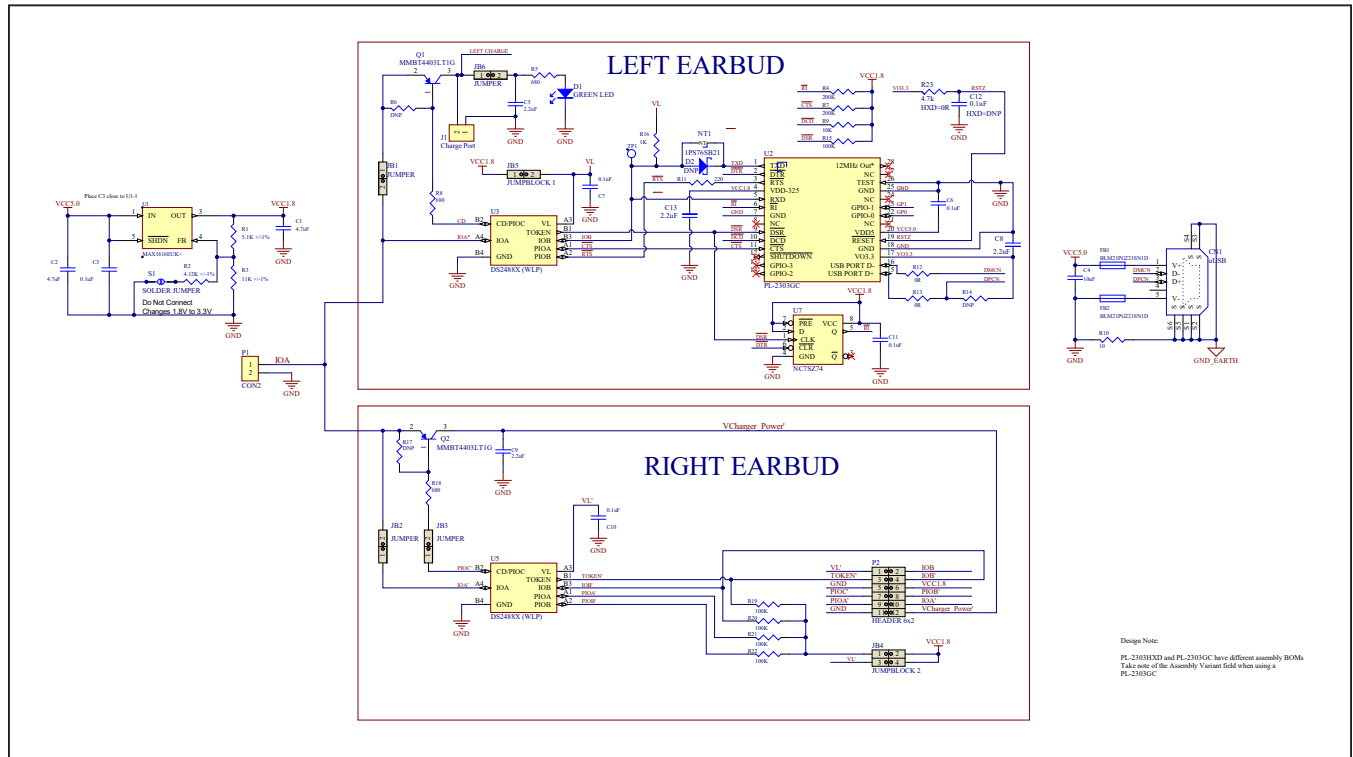

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	9/20	Initial release	—

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View DS2488EVKIT#](#) on WIN SOURCE
- ⊖ [Maxim Integrated](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management