



# THE DATASHEET OF HMC600LP4





## 75 dB LOGARITHMIC DETECTOR / CONTROLLER 50 - 4000 MHz

### Typical Applications


The HMC600LP4 / HMC600LP4E is ideal for IF and RF applications in:

- Cellular/PCS/3G
- WiMAX, WiBro & Fixed Wireless
- Power Monitoring & Control Circuitry
- Receiver Signal Strength Indication (RSSI)
- Automatic Gain & Power Control

### Features

- Wide Dynamic Range: up to 75 dB
- Flexible Supply Voltage: +2.7V to +5.5V
- Power-Down Mode
- Excellent Stability over Temperature
- Compact 4x4mm Leadless SMT Package

### Functional Diagram

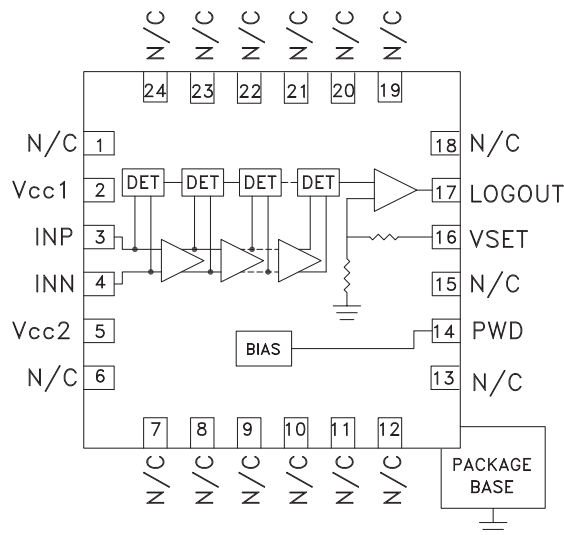

### General Description

The HMC600LP4(E) Logarithmic Detector/Controller converts RF signals at its input, to a proportional DC voltage at its output. The HMC600LP4(E) employs a successive compression topology which delivers extremely high dynamic range and conversion accuracy over a wide input frequency range. As the input power is increased, successive amplifiers move into saturation one by one creating an accurate approximation of the logarithm function. The output of a series of square law detectors is summed, converted into voltage domain and buffered to drive the LOGOUT output. For detection mode, the LOGOUT pin is shorted to the VSET input, and will provide a nominal logarithmic slope of 19mV/dB and an intercept of -95 dBm. The HMC600LP4(E) can also be used in the controller mode where an external voltage is applied to the VSET pin, to create an AGC or APC feedback loop.

### Electrical Specifications, $T_A = +25C$ , $PWD = 0V$ , $V_{cc1}$ , $V_{cc2} = +3.3V$ [1]

| Parameter                                   | Typ. | Typ. | Typ. | Typ.  | Typ.  | Typ.  | Typ. | Typ.  | Units            |
|---|------|------|------|-------|-------|-------|------|-------|------------------|
| Input Frequency                             | 50   | 100  | 500  | 900   | 1900  | 2500  | 3500 | 4000  | MHz              |
| $\pm 3$ dB Dynamic Range                    | 74   | 74   | 74   | 74    | 70    | 66    | 51   | 48    | dB               |
| $\pm 3$ dB Dynamic Range Center             | -30  | -30  | -30  | -30.5 | -31.0 | -31.0 | -27  | -23.5 | dBm              |
| $\pm 1$ dB Dynamic Range                    | 64   | 64   | 64   | 65    | 62    | 59    | 44   | 41    | dB               |
| Output Slope                                | 19.6 | 19.5 | 19.4 | 19.2  | 19.1  | 19.5  | 21.0 | 22.3  | mV/dB            |
| Output Intercept                            | -96  | -96  | -96  | -96   | -95   | -93   | -79  | -72   | dBm              |
| Temperature Sensitivity @ -10 dBm Input [2] | -2.7 | -2.8 | -3.6 | -4.8  | -6.9  | -7.4  | -8.3 | -12.9 | mdB/ $^{\circ}C$ |

[1] Detector mode measurements; LOGOUT (Pin 17) is shorted to VSET (Pin 16).

[2] Measured from  $T_A = -40C$  to  $T_A = +85C$

| Parameter               | Conditions                                     | Min. | Typ. | Max. | Units      |
|-------------------------|--|------|------|------|------------|
| <b>RF Input (INP)</b>   |  |      |      |      |            |
| Return Loss             | F = 50 - 4000 MHz, $Z_o = 50\Omega$ , See plot |      | 10   |      | dB         |
| <b>LOGOUT Interface</b> |  |      |      |      |            |
| Open Loop Impedance     |  |      | 16   |      | k $\Omega$ |
| Current Drive (Source)  |  |      | 0.4  |      | mA         |

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D



## 75 dB LOGARITHMIC DETECTOR / CONTROLLER 50 - 4000 MHz

### Electrical Specifications, (continued)


| Parameter  | Conditions                                     | Min.                  | Typ.               | Max.                   | Units |
|--|--|-----------------------|--------------------|------------------------|-------|
| Current Drive (Sink)                                   | For 1% change in the output voltage            |                       | 2.25               |                        | mA    |
| Output Voltage Range                                   |  | 0                     |                    | V <sub>CC</sub> - 0.13 | V     |
| Small Signal Response Time (10% to 90%)                | Pin = -60 to -57 dBm                           |                       | 50                 |                        | ns    |
| Large Signal Response Time (±0.5 dB Settling)          | Pin = No Signal to 0 dBm                       |                       | 150                |                        | ns    |
| Output Rise Time                                       | From 0% to 90%                                 |                       | 90                 |                        | ns    |
| Ripple   | Fin = 100 MHz                                  |                       | <2                 |                        | mVpp  |
| <b>VSET Interface</b>                                  |  |                       |                    |                        |       |
| Input Impedance  |  |                       | 30                 |                        | kΩ    |
| Input Voltage Range                                    |  |                       | 0.6 to 1.9         |                        | V     |
| Low Frequency Gain                                     | VSET to LOGOUT                                 |                       | 78                 |                        | dB    |
| Open Loop Corner Frequency                             |  |                       | 1.6                |                        | kHz   |
| <b>Power Down (PWD) Interface</b>                      |  |                       |                    |                        |       |
| Voltage Range for Normal Mode                          |  | 0                     |                    | 0.2 x V <sub>CC</sub>  | V     |
| Voltage Range for Shutdown Mode                        |  | 0.8 x V <sub>CC</sub> |                    | V <sub>CC</sub>        | V     |
| Threshold Voltage                                      |  |                       | V <sub>CC</sub> /2 |                        | V     |
| Power-up Response Time                                 | 50% PWD to ±0.5 dB Settling of LOGOUT          |                       | 1                  |                        | μs    |
| Power-Down Response Time                               | 50% PWD to 10% I <sub>CC</sub>                 |                       | 2.5                |                        | μs    |
| <b>Power Supply (V<sub>CC1</sub>, V<sub>CC2</sub>)</b> |  |                       |                    |                        |       |
| Operating Voltage Range                                |  | 2.7                   |                    | 5.5                    | V     |
| Supply Current in Normal Mode                          | V <sub>CC</sub> = +3.3V, PWD = 0V              |                       | 29                 | 36                     | mA    |
| Supply Current in Power Down Mode                      | V <sub>CC</sub> = +3.3V, PWD = V <sub>CC</sub> |                       | 1                  |                        | mA    |

### Test Conditions


| Parameter                           | Condition |
|-------------------------------------|-----------|
| V <sub>CC1</sub> , V <sub>CC2</sub> | +3.3V     |
| Input Z <sub>o</sub>                | 50Ω       |
| T <sub>A</sub>                      | +25C      |
| Fin                                 | 900 MHz   |

INN Port connected to ground through a 1000pF capacitor

**LOGOUT Voltage & Error vs. Input Power, Fin = 50 MHz**

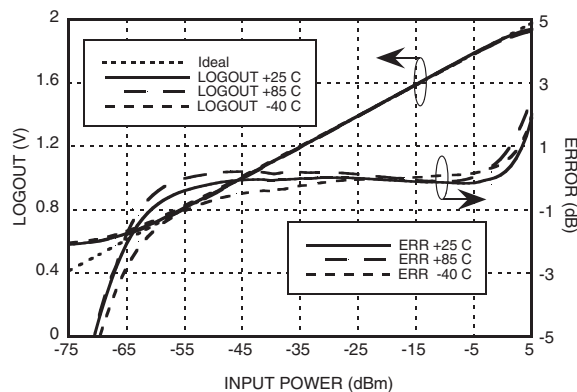

**LOGOUT Voltage & Error vs. Input Power, Fin = 100 MHz**

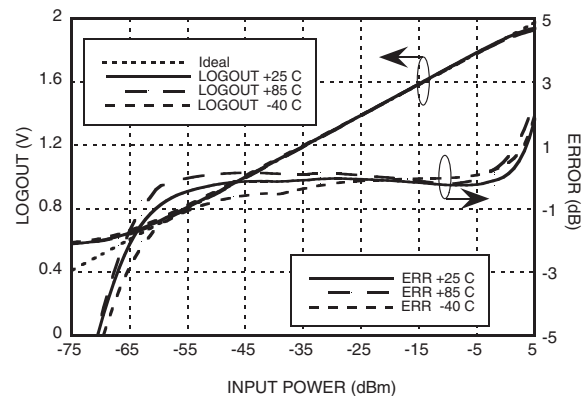

Unless otherwise noted: V<sub>CC1</sub>, V<sub>CC2</sub> = +3.3V, T<sub>A</sub> = +25C


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**75 dB LOGARITHMIC DETECTOR / CONTROLLER 50 - 4000 MHz**


**LOGOUT Voltage & Error vs. Input Power,  $f_{in} = 500$  MHz**

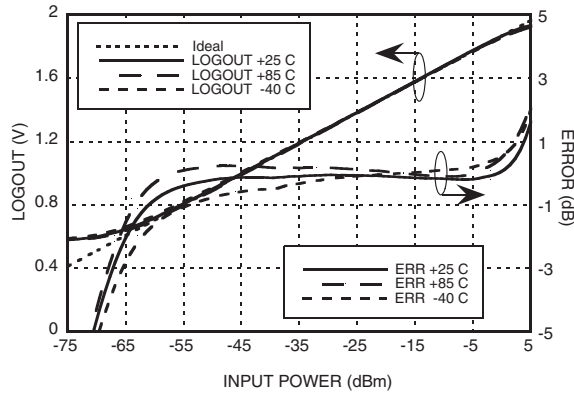


**LOGOUT Voltage & Error vs. Input Power,  $f_{in} = 900$  MHz**

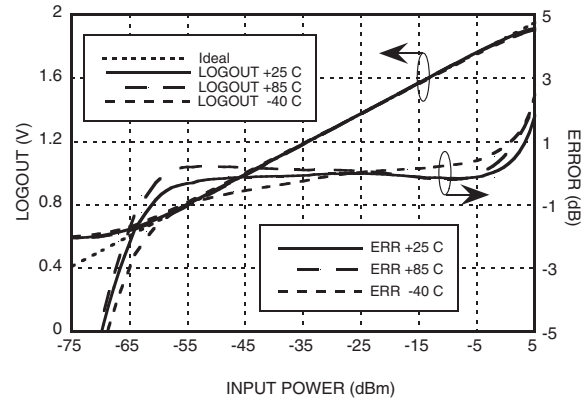


**LOGOUT Voltage & Error vs. Input Power,  $f_{in} = 1900$  MHz**

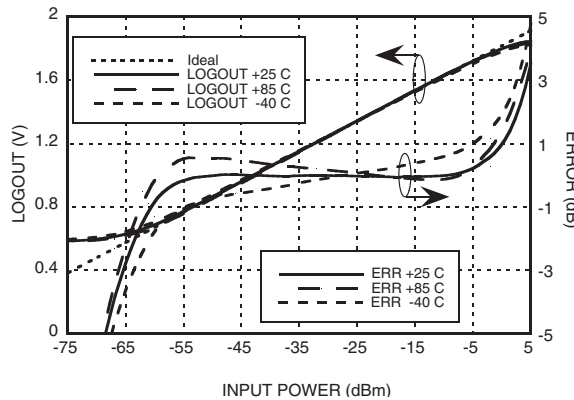


**LOGOUT Voltage & Error vs. Input Power,  $f_{in} = 2500$  MHz**

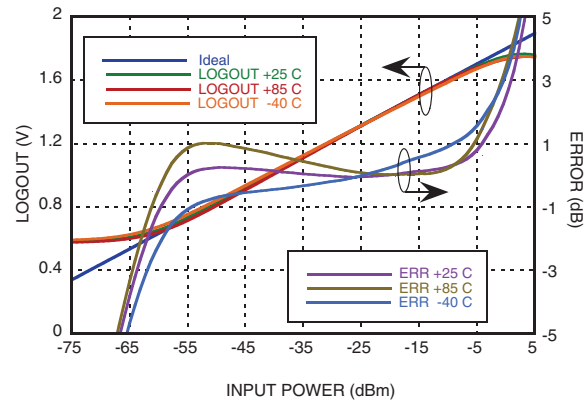

**LOGOUT Voltage & Error vs. Input Power,  $f_{in} = 3500$  MHz**

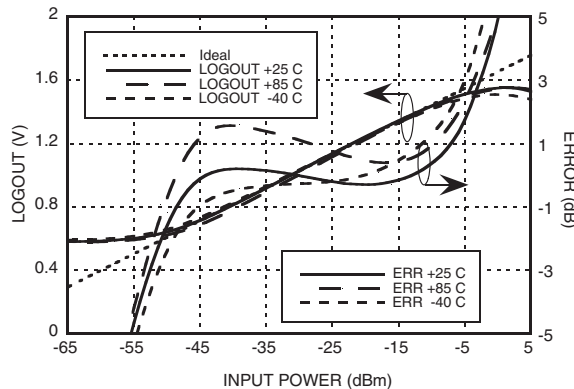

**LOGOUT Voltage & Error vs. Input Power,  $f_{in} = 4000$  MHz**

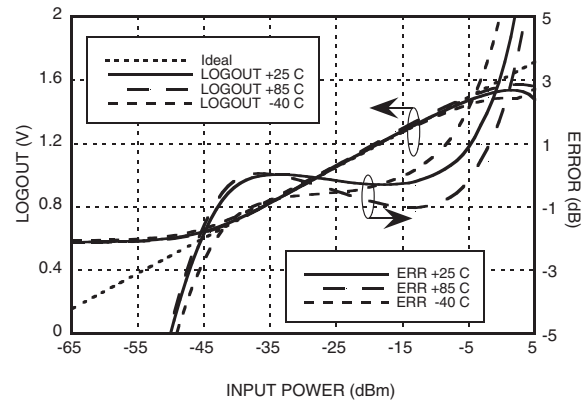

Unless otherwise noted:  $V_{cc1}, V_{cc2} = +3.3V, T_A = +25C$


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**75 dB LOGARITHMIC DETECTOR / CONTROLLER 50 - 4000 MHz**


**LOGOUT Slope vs. Frequency,  $V_{CC} = 3.3V$**

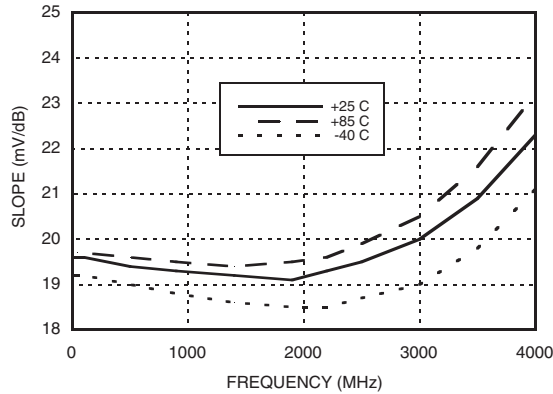


**LOGOUT Slope vs. Supply Voltage,  $T_A = +25C$**

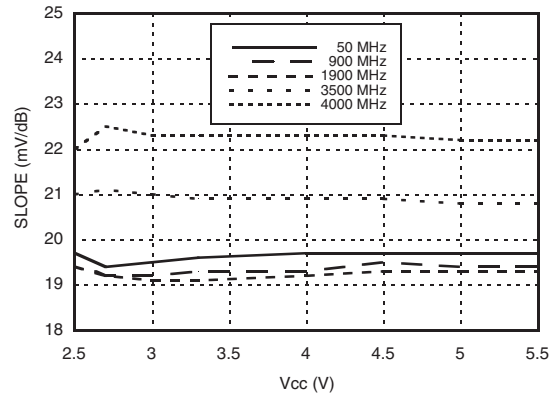


**LOGOUT Intercept vs. Frequency,  $V_{CC} = +3.3V$**

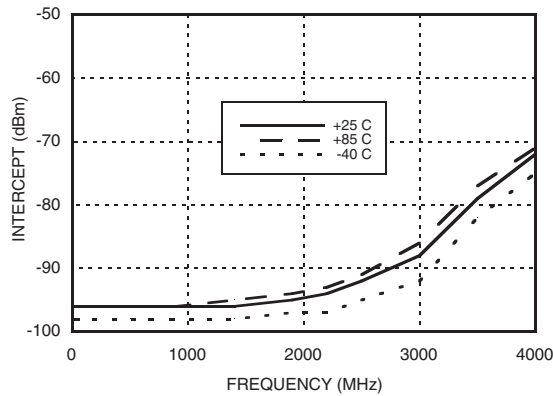


**LOGOUT Intercept vs. Bias Voltage  $T_A = +25C$**

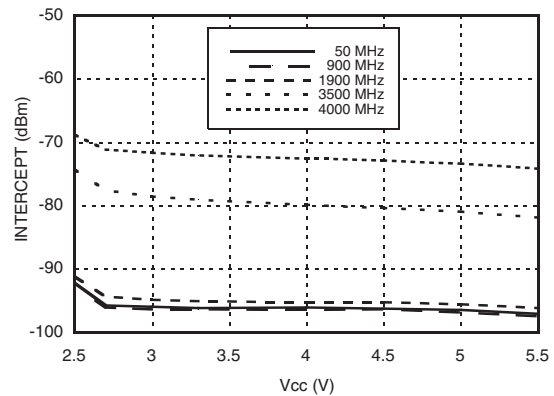

**LOGOUT Error vs. Input Power, Normalized<sup>[2]</sup>,  $F_{in} = 1900 MHz$**

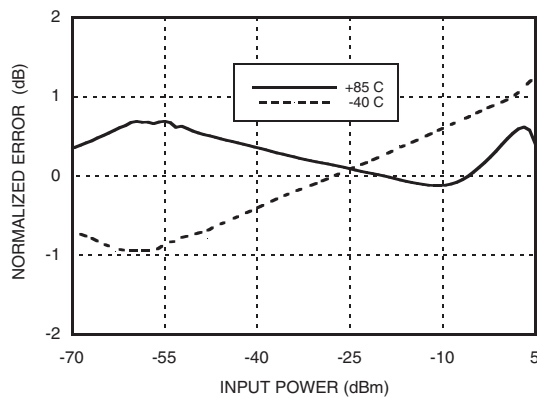

**Input Return Loss**

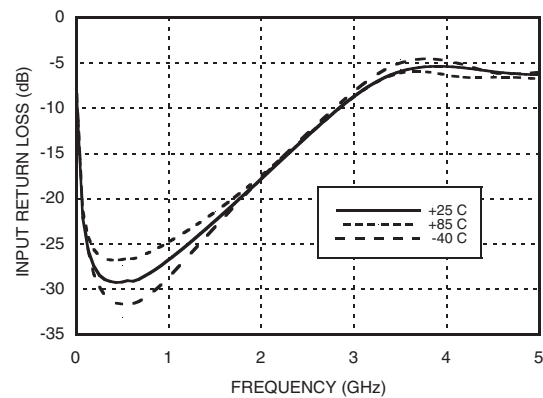


[1] Unless otherwise noted:  $V_{CC1}, V_{CC2} = +3.3V, T_A = +25C$

[2] This data is relative to the room temperature performance of the HMC600LP4



**75 dB LOGARITHMIC DETECTOR / CONTROLLER 50 - 4000 MHz**

**LOGOUT Voltage vs. Input Power and Frequency,  $T_A = +25^\circ\text{C}$**

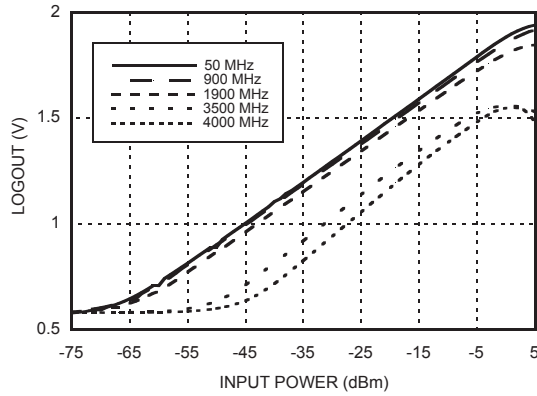


**Absolute Maximum Ratings**

|   |                |
|---|----------------|
| Vcc1, Vcc2  | 0V to +5.5V    |
| PWD   | 0V to +5.5V    |
| VSET Input Voltage  | 0V to +5.5V    |
| LOGOUT Output Current   | 3 mA           |
| RF Input Power  | +12 dBm        |
| Junction Temperature  | 125 °C         |
| Continuous P <sub>diss</sub> (T = 85°C)<br>(Derate 7.95 mW/°C above 85°C) | 0.32 Watts     |
| Thermal Resistance (R <sub>th</sub> )<br>(junction to lead)               | 126 °C/W       |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature   | -40 to +85 °C  |
| ESD Sensitivity (HBM)   | Class 1C       |




**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

**Outline Drawing**

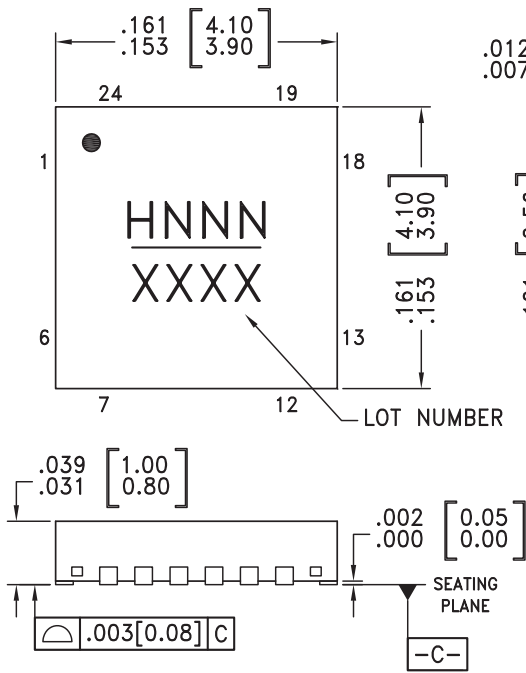

**BOTTOM VIEW**

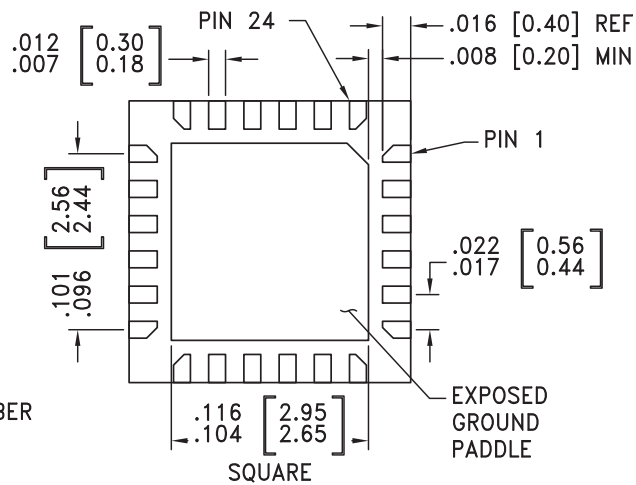

**NOTES:**

- LEADFRAME MATERIAL: COPPER ALLOY
- DIMENSIONS ARE IN INCHES [MILLIMETERS].
- LEAD SPACING TOLERANCE IS NON-CUMULATIVE
- PAD BURR LENGTH SHALL BE 0.15mm MAXIMUM.  
PAD BURR HEIGHT SHALL BE 0.05mm MAXIMUM.
- PACKAGE WARP SHALL NOT EXCEED 0.05mm.
- ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.
- REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED PCB LAND PATTERN.

Unless otherwise noted: Vcc1, Vcc2 = +3.3V, T<sub>A</sub> = +25°C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D

## 75 dB LOGARITHMIC DETECTOR / CONTROLLER 50 - 4000 MHz



### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC600LP4   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H600<br>XXXX                   |
| HMC600LP4E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H600<br>XXXX                   |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

### Pin Descriptions

| Pin Number               | Function   | Description   | Interface Schematic |
|--------------------------|------------|---|---------------------|
| 1, 6, 7-13,<br>15, 18-24 | N/C        | These pins are not connected internally; however, this product is specified with these pins connected to RF/DC ground.  |                     |
| 2, 6                     | Vcc1, Vcc2 | Bias supply. Connect supply voltage to both pins.   |                     |
| 3, 4                     | INP, INN   | RF Input pins. Connect RF to INP, and AC couple INN to ground for single-ended operation.   |                     |
| 14                       | PWD        | Connect to 0V for normal operation. Applying voltage >0.8 x Vcc will initiate a power saving shutdown mode. To ensure proper start-up apply the power-up sequence shown in the "Power-Up Timing Diagram" attached to the application circuit. |                     |
| 16                       | VSET       | VSET input in controller mode. Short this pin to LOGOUT for detector mode.  |                     |
| 17                       | LOGOUT     | Logarithmic output that converts the input power to a DC level in detector mode. Short this pin to VSET for detector mode.  |                     |
| Package Base             | GND        | Exposed paddle must be connected to RF and DC ground.   |                     |


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D



**75 dB LOGARITHMIC DETECTOR / CONTROLLER 50 - 4000 MHz**

**Evaluation PCB**

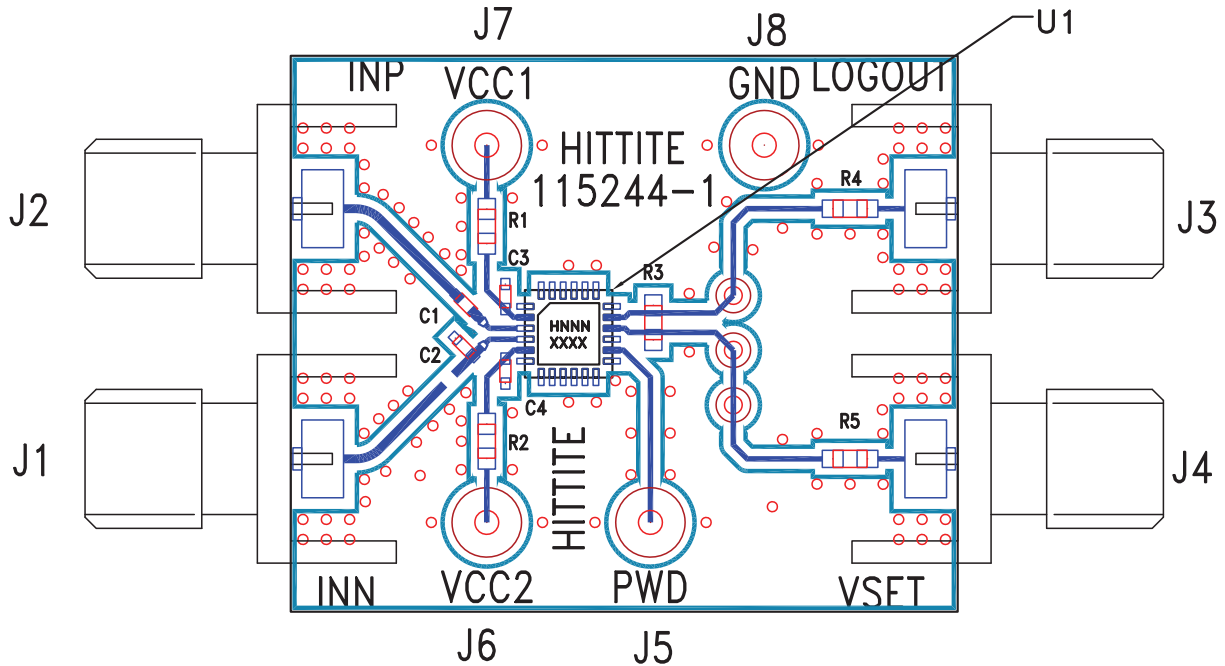


**List of Materials for Evaluation PCB 115242 [1]**

| Item    | Description  |
|---------|--|
| J1 - J4 | PC Mount SMA Connector                                   |
| J5 - J8 | DC Pin   |
| C1, C2  | 1000 pF Capacitor, 0402 Pkg.                             |
| C3, C4  | 0.1µF Capacitor, 0402 Pkg.                               |
| R1, R2  | 5.6Ω Resistor, 0603 Pkg.                                 |
| R3-R5   | 0Ω Resistor, 0603 Pkg.                                   |
| U1      | HMC600LP4 / HMC600LP4E Logarithmic Detector / Controller |
| PCB [2] | 115244 Evaluation PCB                                    |

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

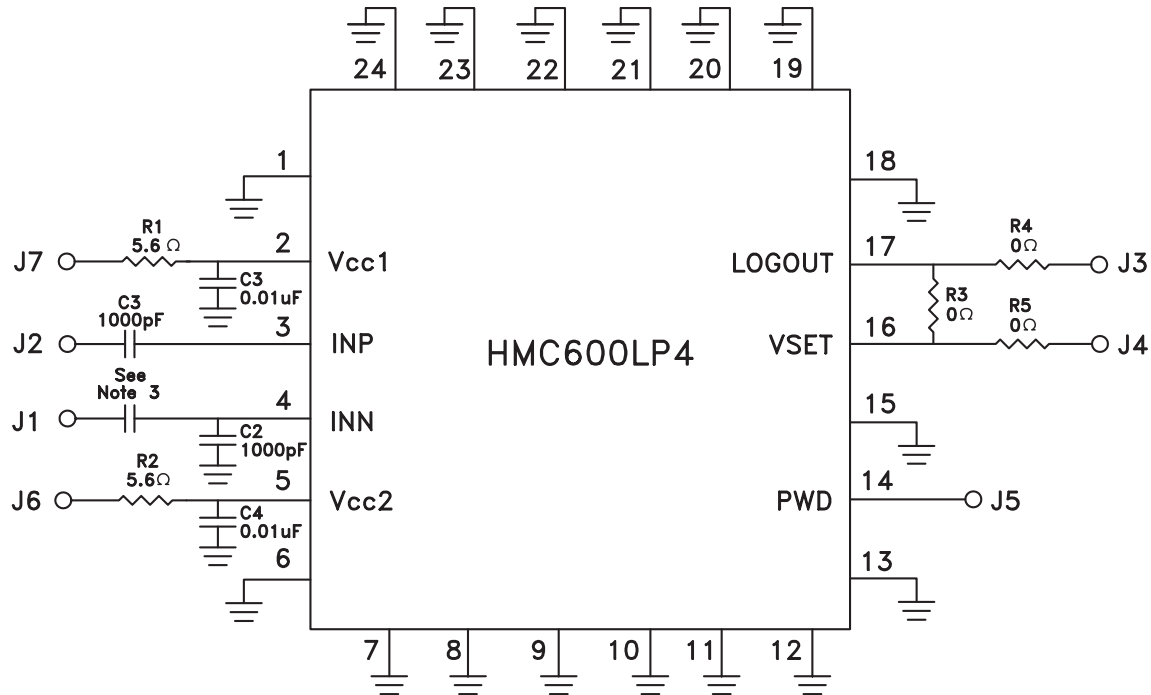
**Application & Evaluation PCB Schematic**

**Notes**


Note 1: The HMC600LP4 & HMC600LP4E evaluation boards are pre-assembled for single-ended input, and detector/RSSI mode.

Note 2: For single-ended input operation, use the INP port and make no connection to INN. INN is AC coupled to ground by C2

Note 3: For differential input, remove C2, and install a 1000pF capacitor in series with INN at location shown.



Note 4: For detector mode, connect high impedance volt meter to the LOGOUT port, and make no connection to VSET. LOGOUT is shorted to VSET by R3, as required for detector mode.

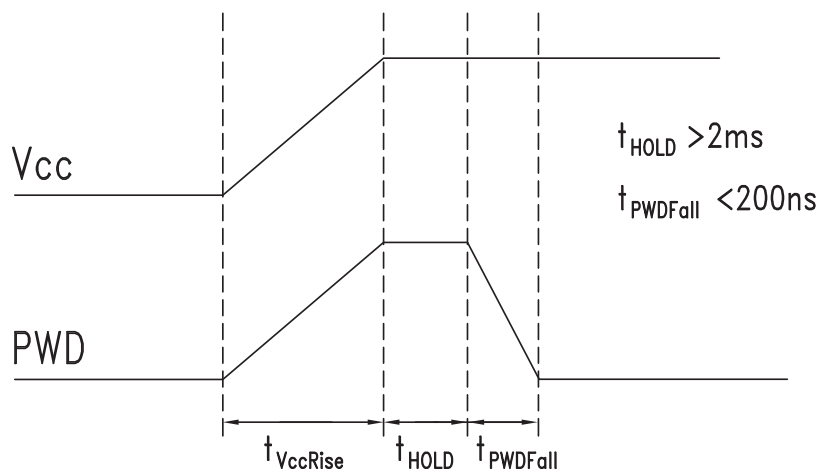Note 5: For controller mode, remove R3 and make appropriate connection to LOGOUT and VSET. In controller mode, the LOGOUT output can be used to drive a variable gain amplifier, or a variable attenuator, either directly or through a buffer or microcontroller. VSET should be connected to an external supply, typically between +0.6 and +1.9V.

**Power-Up Timing Diagram**


## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HMC600LP4 on WIN SOURCE](#)
-  [Analog Devices Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management