



**THE DATASHEET OF
CRD5110-150-5**



Data Stream RS485 Digital Transducer

DIN RAIL / PANEL MOUNT



CRD5110
Single Element - .26" (6.5)
Window 150 to 300 VAC
1 to 25 AAC Input Range



CRD5150
Two Element - .26" (6.5)
Window 150 to 300 VAC
1 to 25 AAC Input Range



CRD5170
Three Element - .26" (6.5)
Window 150 to 300 VAC
1 to 25 AAC Input Range

The **CRD5100** Series Data Stream Digital Transducers are designed for complete monitoring of electrical power systems. The digital technology is used to measure voltage, current, power frequency and energy in single and three phase designs. The data is streamed over an RS485 IEEE bus which enables multiple transducers to communicate through a single master connection. These advanced sensors are ideal for entire plant or zone monitoring. Also, the communication algorithm can be ordered with ASCII based control or modified to MODBUS based control.

Sensing

Voltage, True RMS
Current, True RMS
Active Power, bi-directional
Active Energy, bi-directional
Reactive Power, bi-directional
Reactive Energy, bi-directional
Power Factor
Frequency

Applications

Sub-Metering
Motor Loads
Uninterruptible Power
Systems Remote Monitoring
Load Shedding
Energy Management

Features

35mm DIN Rail or Panel Mount
Red LED - Flashes when Power is Connected
Red & Green LED Flash during Communication
24 VDC powered
Use with external current transformers
Highest precision available
Connection diagram printed on case

Regulatory Agencies



PART NUMBERS

CRD5110	-		-		1 Element, AC Multifunction RS485 Digital Transducer
CRD5150	-		-		3 Phase, 3-Wire AC Multifunction RS485 Digital Transducer
CRD5170	-		-		3 Phase, 4-Wire AC Multifunction RS485 Digital Transducer

Available up to and including 600 VAC

150	-	0-150 VAC
300	-	0-300 VAC

Above 30 AAC must use 5 amp CT

1	-	0-1 AAC
5	-	0-5 AAC
15	-	0-15 AAC
25	-	0-25 AAC

Note: Add an M at the end for MODBUS
CRD5110-150-5-M



3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

13

E-mail: sales@crmagnetics.com







Data Stream

RS485 Digital Transducer


SPECIFICATIONS

Basic Accuracy:0.5%	Torque Specifications:3.0 inch lbs (0.4Nm)
Calibration:True RMS Sensing	Response Time:250 ms. max. 0-90% FS
Thermal Drift:500 PPM/°C	Relative Humidity:5% to 95%, Non-Condensing
Operating Temperature ₁ :0°C to +60°C	Output Resolution:16 bit
Installation Category:CAT II	Transducer fanout on common bus:64 max.
Vibration Tested To:IEC 60068-2-6,1995	Baud Rate ₃ :1200, 2400, 4800, 9600,19.2K .bps
Pollution Degree:2	A/D Conversion Type:4th order Delta Sigma
Insulation Voltage:2500 VDC	Device Address ₃ :00 to FF
Altitude:2000 meter max	Data Format:ASCII
Frequency Range:45Hz ~ 65Hz	Supply Current:.....Typical 30mA Max 30mA
MTBF:Greater than 100K hours	Weight:.....0.5 lbs.
Cleaning:Water-dampened cloth	
Supply Voltage ₂ :24 VDC ±10%	
1) RH 5% to 95%, non-condensing 2) 0.4% max. ripple Vpp	no flow control, 1 stop bit
3) Factory default settings: address 01, baud rate 9600, no parity,	

Data Stream

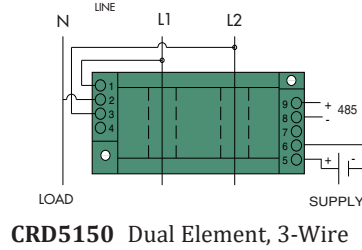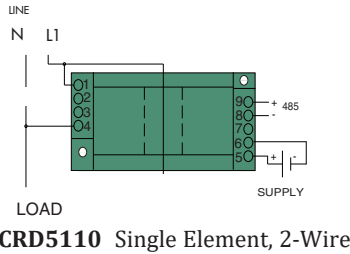


Connection Diagram

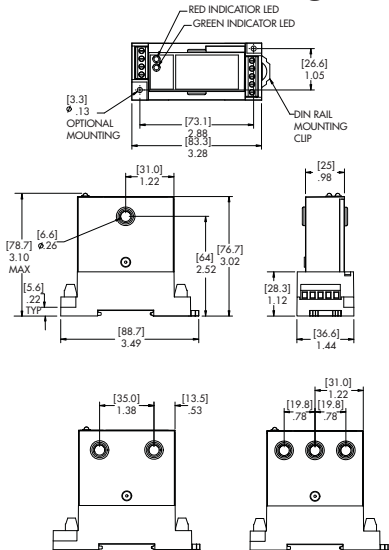

OUTLINE DRAWING

CRD485-232

RS485 to RS232 Converter Accessory
Connect PC to RS485 Bus

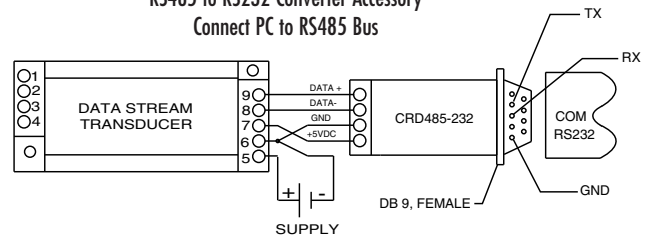

ASCII Simplified Programming Commands

A simplified data structure is used with only 6 commands required for full control of the transducer. Commands are : Read Transducer Name, Read Configuration, Set Configuration, Read Measurements, Read Energy Totalizer and Clear Energy Totalizer. For illustration, the following commands are used to read data from a CRD5170 3 Phase, 4 Wire Transducer with a device address of 00.

Command Transducer to Read Data: #00A<cr>
Transducers Response: >+[% FS Voltage_{L1-N}]+[% FS Current_{L1}]+[% FS Voltage_{L2-N}]+[% FS Current_{L2}]+[% FS Voltage_{L3-N}]+[% FS Current_{L3}],[+/- % FS Power][+/- % FS VARS][+/-Power Factor][Frequency]<cr>
Command Transducer to Read Energy Totalizer: #00W<cr>
Transducer Responds: 01[+/-KWHr][+/-KVHr][check sum]<cr>

Note: This is for illustration purposes only, See Applications Guides (Section I for complete instructions.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View CRD5110-150-5 on WIN SOURCE](#)

 [CR Magnetics Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management