THE DATASHEET OF

EDB8164B4PK-1D-F-D

LPDDR2 SDRAM

EDB8164B4PR, EDB8164B4PK, EDB8164B4PT, EDBA164B2PR

Features

- Ultra-low-voltage core and I/O power supplies
- Frequency range
  - 533 MHz (data rate: 1066 Mb/s/pin)
- 4*n* prefetch DDR architecture
- 8 internal banks for concurrent operation
- Multiplexed, double data rate, command/address inputs; commands entered on each CK_t/CK_c edge
- Bidirectional/differential data strobe per byte of data (DQS_t/DQS_c)
- Programmable READ and WRITE latencies (RL/WL)
- Burst length: 4, 8, and 16
- Per-bank refresh for concurrent operation
- Auto temperature-compensated self refresh (ATCSR) by built-in temperature sensor
- Partial-array self refresh (PASR)
- Deep power-down mode (DPD)
- Selectable output drive strength (DS)
- Clock-stop capability
- Lead-free (RoHS-compliant) and halogen-free packaging

Options	Marking
• Density/Page Size	
– 8Gb/2-CS – dual die	81
– 16Gb/4-CS – quad die	A1
• Organization	
– x64	64
• $V_{DD1}/V_{DD2}/V_{DDQ}$: 1.8V/1.2V/1.2V	B
• Revision	
– Dual die	4
– Quad die	2
• FBGA "green" package	
– 12mm x 12mm x 0.8mm, 216-ball PoP FBGA package, dual die	PR
– 12mm x 12mm x 0.8mm, 216-ball PoP FBGA package, dual die	PT
– 12mm x 12mm x 1.0mm, 216-ball PoP FBGA package, quad die	PR
– 14mm x 14mm x 0.7mm, 220-ball PoP FBGA package, dual die	PK
• Timing – cycle time	
– 1.875ns @ RL = 8	-1D
• Special options	
– Non-Automotive	blank
• Operating temperature range	
– From –30°C to +85°C	blank
– From –40°C to +85°C	IT
– From –40°C to +105°C	AT

Table 1: Key Timing Parameters

Speed Grade	Clock Rate (MHz)	Data Rate (Mb/s/pin)	RL	WL
1D	533	1066	8	4

Table 2: S4 Configuration Addressing

Architecture	128 Meg x 64	256 Meg x 64
Die configuration	16 Meg x 32 x 8 banks x 2 channel	32 Meg x 32 x 8 banks x 2 channel
Row addressing	16K A[13:0]	16K A[13:0]
Column addressing	1K A[9:0]	1K A[9:0]
Number of die	2	4
Die per rank	1	2
Ranks per channel	1	2

Note: 1. A channel is a complete LPDRAM interface, including command/address and data pins.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.
Products and specifications discussed herein are subject to change by Micron without notice.

Figure 1: LPDDR2 Part Numbering

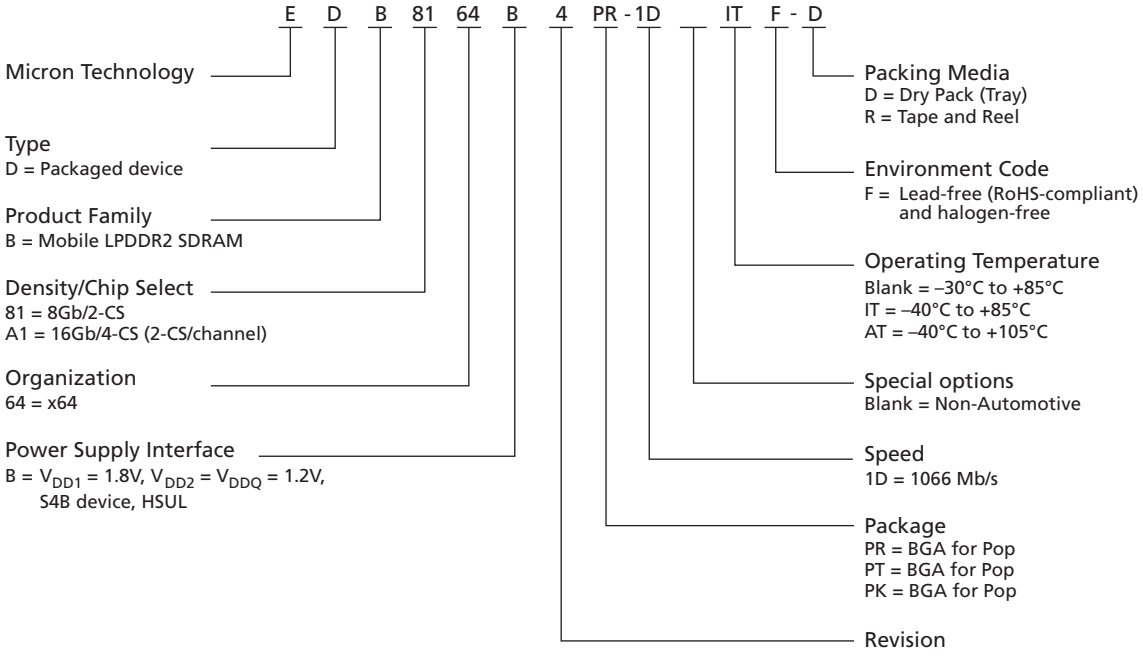

FBGA Part Marking Decoder

Due to space limitations, FBGA-packaged components have an abbreviated part marking that is different from the part number. Micron's FBGA part marking decoder is available at www.micron.com/decoder.

Table 3: Package Codes and Descriptions

Package Code	Ball Count	# Ranks	# Chan-nels	Size (mm)	Die per Package	Solder Ball Composition
PR	216	1	2	12mm x 12mm x 0.80mm, 0.40 pitch	DDP	SAC302
PT	216	1	2	12mm x 12mm x 0.80mm, 0.40 pitch	DDP	SAC302
PR	216	2	2	12mm x 12mm x 1.00mm, 0.40 pitch	QDP	SAC302
PK	220	1	2	14mm x 14mm x 0.70mm, 0.50 pitch	DDP	SAC302

Notes: 1. DDP = dual-die package, QDP = quad-die package
2. Solder ball material: SAC302 (96.8% Sn, 3% Ag, 0.2% Cu).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Contents

LPDDR2 Array Configuration 9
General Notes 9
I_{DD} Specifications 10
Package Block Diagrams 16
Package Dimensions 18
Ball Assignments 21
Ball Descriptions 24
Functional Description 25
Simplified State Diagram 26
Power-Up and Initialization 28
Voltage Ramp and Device Initialization 28
Initialization After RESET (Without Voltage Ramp) 30
Power-Off Sequence 30
Uncontrolled Power-Off Sequence 31
Mode Register Definition 31
Mode Register Assignments and Definitions 31
Commands and Timing 42
ACTIVATE Command 43
8-Bank Device Operation 44
Read and Write Access Modes 45
Burst READ Command 45
READs Interrupted by a READ 52
Burst WRITE Command 52
WRITEs Interrupted by a WRITE 55
BURST TERMINATE Command 55
Write Data Mask 57
PRECHARGE Command 58
READ Burst Followed by PRECHARGE 59
WRITE Burst Followed by PRECHARGE 60
Auto Precharge operation 61
READ Burst with Auto Precharge 61
WRITE Burst with Auto Precharge 62
REFRESH Command 64
REFRESH Requirements 66
SELF REFRESH Operation 73
Partial-Array Self Refresh – Bank Masking 75
Partial-Array Self Refresh – Segment Masking 75
MODE REGISTER READ 76
Temperature Sensor 78
DQ Calibration 80
MODE REGISTER WRITE Command 82
MRW RESET Command 82
MRW ZQ Calibration Commands 83
ZQ External Resistor Value, Tolerance, and Capacitive Loading 85
Power-Down 85
Deep Power-Down 92
Input Clock Frequency Changes and Stop Events 93
Input Clock Frequency Changes and Clock Stop with CKE LOW 93
Input Clock Frequency Changes and Clock Stop with CKE HIGH 94
NO OPERATION Command 94

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Truth Tables 94
Absolute Maximum Ratings 102
Input/Output Capacitance 102
Electrical Specifications – I_{DD} Specifications and Conditions 103
AC and DC Operating Conditions 106
AC and DC Logic Input Measurement Levels for Single-Ended Signals 107
V_{REF} Tolerances 108
Input Signal 110
AC and DC Logic Input Measurement Levels for Differential Signals 112
Single-Ended Requirements for Differential Signals 113
Differential Input Crosspoint Voltage 115
Input Slew Rate 116
Output Characteristics and Operating Conditions 116
Single-Ended Output Slew Rate 117
Differential Output Slew Rate 118
HSUL_12 Driver Output Timing Reference Load 120
Output Driver Impedance 121
Output Driver Impedance Characteristics with ZQ Calibration 122
Output Driver Temperature and Voltage Sensitivity 123
Output Impedance Characteristics Without ZQ Calibration 123
Clock Specification 126
^{t}CK(abs), ^{t}CH(abs), and ^{t}CL(abs) 128
Clock Period Jitter 128
Clock Period Jitter Effects on Core Timing Parameters 128
Cycle Time Derating for Core Timing Parameters 129
Clock Cycle Derating for Core Timing Parameters 129
Clock Jitter Effects on Command/Address Timing Parameters 129
Clock Jitter Effects on READ Timing Parameters 129
Clock Jitter Effects on WRITE Timing Parameters 130
Refresh Requirements Parameters 131
AC Timing 131
CA and CS_n Setup, Hold, and Derating 137
Data Setup, Hold, and Slew Rate Derating 145
Revision History 152
Rev. F – 08/16 152
Rev. E – 05/16 152
Rev. D – 03/16 152
Rev. C – 02/16 152
Rev. B – 01/15 152
Rev. A – 09/14 152

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

List of Figures

Figure 1: LPDDR2 Part Numbering 2
Figure 2: Dual Die Single Rank, Dual Channel Package Block Diagram 16
Figure 3: Quad Die Dual Rank, Dual Channel Package Block Diagram 17
Figure 4: 216-Ball FBGA (12mm x 12mm x 0.8mm) – EDB8164B4PR, EDB8164B4PT 18
Figure 5: 216-Ball FBGA (12mm x 12mm x 1.0mm) – EDBA164B2PR 19
Figure 6: 220-Ball FBGA (14mm x 14mm x 0.7mm) – EDB8164B4PK 20
Figure 7: 216-Ball Dual-Channel FBGA – 2 x 4Gb Die 21
Figure 8: 220-Ball Dual-Channel FBGA – 2 x 4Gb Die 22
Figure 9: 216-Ball Dual-Channel FBGA – 4 x 4Gb Die 23
Figure 10: Functional Block Diagram 26
Figure 11: Simplified State Diagram 27
Figure 12: Voltage Ramp and Initialization Sequence 30
Figure 13: Command and Input Setup and Hold 43
Figure 14: CKE Input Setup and Hold 43
Figure 15: ACTIVATE Command 44
Figure 16: ^{t}FAW Timing (8-Bank Devices) 45
Figure 17: READ Output Timing – ^{t}DQSCK (MAX) 46
Figure 18: READ Output Timing – ^{t}DQSCK (MIN) 46
Figure 19: Burst READ – RL = 5, BL = 4, ^{t}DQSCK > ^{t}CK 47
Figure 20: Burst READ – RL = 3, BL = 8, ^{t}DQSCK < ^{t}CK 47
Figure 21: ^{t}DQSCKDL Timing 48
Figure 22: ^{t}DQSCKDM Timing 49
Figure 23: ^{t}DQSCKDS Timing 50
Figure 24: Burst READ Followed by Burst WRITE – RL = 3, WL = 1, BL = 4 51
Figure 25: Seamless Burst READ – RL = 3, BL = 4, ^{t}CCD = 2 51
Figure 26: READ Burst Interrupt Example – RL = 3, BL = 8, ^{t}CCD = 2 52
Figure 27: Data Input (WRITE) Timing 53
Figure 28: Burst WRITE – WL = 1, BL = 4 53
Figure 29: Burst WRITE Followed by Burst READ – RL = 3, WL = 1, BL = 4 54
Figure 30: Seamless Burst WRITE – WL = 1, BL = 4, ^{t}CCD = 2 54
Figure 31: WRITE Burst Interrupt Timing – WL = 1, BL = 8, ^{t}CCD = 2 55
Figure 32: Burst WRITE Truncated by BST – WL = 1, BL = 16 56
Figure 33: Burst READ Truncated by BST – RL = 3, BL = 16 57
Figure 34: Data Mask Timing 57
Figure 35: Write Data Mask – Second Data Bit Masked 58
Figure 36: READ Burst Followed by PRECHARGE – RL = 3, BL = 8, RU(^{t}RTP(MIN)/^{t}CK) = 2 59
Figure 37: READ Burst Followed by PRECHARGE – RL = 3, BL = 4, RU(^{t}RTP(MIN)/^{t}CK) = 3 60
Figure 38: WRITE Burst Followed by PRECHARGE – WL = 1, BL = 4 61
Figure 39: READ Burst with Auto Precharge – RL = 3, BL = 4, RU(^{t}RTP(MIN)/^{t}CK) = 2 62
Figure 40: WRITE Burst with Auto Precharge – WL = 1, BL = 4 63
Figure 41: ^{t}SRF Definition 67
Figure 42: Regular Distributed Refresh Pattern 69
Figure 43: Supported Transition from Repetitive REFRESH Burst 70
Figure 44: Nonsupported Transition from Repetitive REFRESH Burst 71
Figure 45: Recommended Self Refresh Entry and Exit 72
Figure 46: All-Bank REFRESH Operation 73
Figure 47: Per-Bank REFRESH Operation 73
Figure 48: SELF REFRESH Operation 74
Figure 49: MRR Timing – RL = 3, ^{t}MRR = 2 76
Figure 50: READ to MRR Timing – RL = 3, ^{t}MRR = 2 77

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 51: Burst WRITE Followed by MRR – RL = 3, WL = 1, BL = 4 78
Figure 52: Temperature Sensor Timing 80
Figure 53: MR32 and MR40 DQ Calibration Timing – RL = 3, ^{t}MRR = 2 81
Figure 54: MODE REGISTER WRITE Timing – RL = 3, ^{t}MRW = 5 82
Figure 55: ZQ Timings 84
Figure 56: Power-Down Entry and Exit Timing 86
Figure 57: CKE Intensive Environment 86
Figure 58: REFRESH-to-REFRESH Timing in CKE Intensive Environments 86
Figure 59: READ to Power-Down Entry 87
Figure 60: READ with Auto Precharge to Power-Down Entry 88
Figure 61: WRITE to Power-Down Entry 89
Figure 62: WRITE with Auto Precharge to Power-Down Entry 90
Figure 63: REFRESH Command to Power-Down Entry 91
Figure 64: ACTIVATE Command to Power-Down Entry 91
Figure 65: PRECHARGE Command to Power-Down Entry 91
Figure 66: MRR Command to Power-Down Entry 92
Figure 67: MRW Command to Power-Down Entry 92
Figure 68: Deep Power-Down Entry and Exit Timing 93
Figure 69: V_{REF} DC Tolerance and V_{REF} AC Noise Limits 108
Figure 70: LPDDR2-466 to LPDDR2-1066 Input Signal 110
Figure 71: LPDDR2-200 to LPDDR2-400 Input Signal 111
Figure 72: Differential AC Swing Time and ^{t}DVAC 112
Figure 73: Single-Ended Requirements for Differential Signals 114
Figure 74: V_{IX} Definition 115
Figure 75: Differential Input Slew Rate Definition for CK_t, CK_c, DQS_t, and DQS_c 116
Figure 76: Single-Ended Output Slew Rate Definition 118
Figure 77: Differential Output Slew Rate Definition 119
Figure 78: Overshoot and Undershoot Definition 120
Figure 79: HSUL_12 Driver Output Reference Load for Timing and Slew Rate 121
Figure 80: Output Driver 122
Figure 81: Output Impedance = 240 Ohms, I-V Curves After ZQRESET 125
Figure 82: Output Impedance = 240 Ohms, I-V Curves After Calibration 126
Figure 83: Typical Slew Rate and ^{t}VAC – ^{t}IS for CA and CS_n Relative to Clock 141
Figure 84: Typical Slew Rate – ^{t}IH for CA and CS_n Relative to Clock 142
Figure 85: Tangent Line – ^{t}IS for CA and CS_n Relative to Clock 143
Figure 86: Tangent Line – ^{t}IH for CA and CS_n Relative to Clock 144
Figure 87: Typical Slew Rate and ^{t}VAC – ^{t}DS for DQ Relative to Strobe 148
Figure 88: Typical Slew Rate – ^{t}DH for DQ Relative to Strobe 149
Figure 89: Tangent Line – ^{t}DS for DQ with Respect to Strobe 150
Figure 90: Tangent Line – ^{t}DH for DQ with Respect to Strobe 151

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

List of Tables

Table 1: Key Timing Parameters 1
Table 2: S4 Configuration Addressing 1
Table 3: Package Codes and Descriptions 2
Table 4: I_{DD} Specifications – Dual Die, Dual Channel 10
Table 5: I_{DD6} Full-Array Self Refresh Current at 45°C for Dual die product 12
Table 6: I_{DD6} Partial-Array Self Refresh Current at 85°C for Dual die product 12
Table 7: I_{DD} Specifications – Dual Die, Dual Channel 13
Table 8: I_{DD6} Partial-Array Self Refresh Current at 105°C Dual die for Dual die prodct 15
Table 9: Ball/Pad Descriptions 24
Table 10: Initialization Timing Parameters 30
Table 11: Power-Off Timing 31
Table 12: Mode Register Assignments 32
Table 13: MR0 Device Information (MA[7:0] = 00h) 33
Table 14: MR0 Op-Code Bit Definitions 33
Table 15: MR1 Device Feature 1 (MA[7:0] = 01h) 33
Table 16: MR1 Op-Code Bit Definitions 33
Table 17: Burst Sequence by Burst Length (BL), Burst Type (BT), and Wrap Control (WC) 34
Table 18: No-Wrap Restrictions 35
Table 19: MR2 Device Feature 2 (MA[7:0] = 02h) 35
Table 20: MR2 Op-Code Bit Definitions 36
Table 21: MR3 I/O Configuration 1 (MA[7:0] = 03h) 36
Table 22: MR3 Op-Code Bit Definitions 36
Table 23: MR4 Device Temperature (MA[7:0] = 04h) 36
Table 24: MR4 Op-Code Bit Definitions 37
Table 25: MR5 Basic Configuration 1 (MA[7:0] = 05h) 37
Table 26: MR5 Op-Code Bit Definitions 37
Table 27: MR6 Basic Configuration 2 (MA[7:0] = 06h) 38
Table 28: MR6 Op-Code Bit Definitions 38
Table 29: MR7 Basic Configuration 3 (MA[7:0] = 07h) 38
Table 30: MR7 Op-Code Bit Definitions 38
Table 31: MR8 Basic Configuration 4 (MA[7:0] = 08h) 38
Table 32: MR8 Op-Code Bit Definitions 38
Table 33: MR9 Test Mode (MA[7:0] = 09h) 39
Table 34: MR10 Calibration (MA[7:0] = 0Ah) 39
Table 35: MR10 Op-Code Bit Definitions 39
Table 36: MR[11:15] Reserved (MA[7:0] = 0Bh–0Fh) 40
Table 37: MR16 PASR Bank Mask (MA[7:0] = 010h) 40
Table 38: MR16 Op-Code Bit Definitions 40
Table 39: MR16 Bank and OP corresponding table 40
Table 40: MR17 PASR Segment Mask (MA[7:0] = 011h) 41
Table 41: MR17 PASR Segment Mask Definitions (1Gb - 8Gb only) 41
Table 42: MR17 PASR Row Address Ranges in Masked Segments 41
Table 43: Reserved Mode Registers 42
Table 44: MR32 DQ Calibration Pattern A (MA[7:0] = 20H) 42
Table 45: MR40 DQ Calibration Pattern B (MA[7:0] = 28H) 42
Table 46: MR63 RESET (MA[7:0] = 3Fh) – MRW Only 42
Table 47: Bank Selection for PRECHARGE by Address Bits 59
Table 48: PRECHARGE and Auto Precharge Clarification 63
Table 49: REFRESH Command Scheduling Separation Requirements 65
Table 50: Bank and Segment Masking Example 75

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 51: Temperature Sensor Definitions and Operating Conditions 79
Table 52: Data Calibration Pattern Description 82
Table 53: Truth Table for MRR and MRW 82
Table 54: Command Truth Table 94
Table 55: CKE Truth Table 96
Table 56: Current State Bank *n* to Command to Bank *n* Truth Table 97
Table 57: Current State Bank *n* to Command to Bank *m* Truth Table 99
Table 58: DM Truth Table 101
Table 59: Absolute Maximum DC Ratings 102
Table 60: Input/Output Capacitance 102
Table 61: Switching for CA Input Signals 103
Table 62: Switching for I_{DD4R} 103
Table 63: Switching for I_{DD4W} 104
Table 64: I_{DD} Specification Parameters and Operating Conditions 104
Table 65: Recommended DC Operating Conditions 106
Table 66: Input Leakage Current 106
Table 67: Operating Temperature Range 107
Table 68: Single-Ended AC and DC Input Levels for CA and CS_n Inputs 107
Table 69: Single-Ended AC and DC Input Levels for CKE 107
Table 70: Single-Ended AC and DC Input Levels for DQ and DM 108
Table 71: Differential AC and DC Input Levels 112
Table 72: CK_t/CK_c and DQS_t/DQS_c Time Requirements Before Ringback (^{t}DVAC) 113
Table 73: Single-Ended Levels for CK_t, CK_c, DQS_t, DQS_c 114
Table 74: Crosspoint Voltage for Differential Input Signals (CK_t, CK_c, DQS_t, DQS_c) 115
Table 75: Differential Input Slew Rate Definition 116
Table 76: Single-Ended AC and DC Output Levels 116
Table 77: Differential AC and DC Output Levels 117
Table 78: Single-Ended Output Slew Rate Definition 117
Table 79: Single-Ended Output Slew Rate 118
Table 80: Differential Output Slew Rate Definition 119
Table 81: Differential Output Slew Rate 119
Table 82: AC Overshoot/Undershoot Specification 120
Table 83: Output Driver DC Electrical Characteristics with ZQ Calibration 122
Table 84: Output Driver Sensitivity Definition 123
Table 85: Output Driver Temperature and Voltage Sensitivity 123
Table 86: Output Driver DC Electrical Characteristics Without ZQ Calibration 123
Table 87: I-V Curves 124
Table 88: Definitions and Calculations 127
Table 89: ^{t}CK(abs), ^{t}CH(abs), and ^{t}CL(abs) Definitions 128
Table 90: Refresh Requirement Parameters (Per Density) 131
Table 91: AC Timing 131
Table 92: CA and CS_n Setup and Hold Base Values (>400 MHz, 1 V/ns Slew Rate) 138
Table 93: CA and CS_n Setup and Hold Base Values (<400 MHz, 1 V/ns Slew Rate) 138
Table 94: Derating Values for AC/DC-Based ^{t}IS/^{t}IH (AC220) 139
Table 95: Derating Values for AC/DC-Based ^{t}IS/^{t}IH (AC300) 139
Table 96: Required Time for Valid Transition – ^{t}VAC > $V_{IH(AC)}$ and < $V_{IL(AC)}$ 139
Table 97: Data Setup and Hold Base Values (>400 MHz, 1 V/ns Slew Rate) 145
Table 98: Data Setup and Hold Base Values (<400 MHz, 1 V/ns Slew Rate) 146
Table 99: Derating Values for AC/DC-Based ^{t}DS/^{t}DH (AC220) 146
Table 100: Derating Values for AC/DC-Based ^{t}DS/^{t}DH (AC300) 147
Table 101: Required Time for Valid Transition – ^{t}VAC > $V_{IH(AC)}$ or < $V_{IL(AC)}$ 147

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

LPDDR2 Array Configuration

The 4Gb Mobile Low-Power DDR2 SDRAM (LPDDR2) is a high-speed CMOS, dynamic random-access memory containing 4,294,967,296-bits. The device is internally configured as an eight-bank DRAM. Each of the x16's 536,870,912-bit banks is organized as 16,384 rows by 2048 columns by 16 bits. Each of the x32's 536,870,912-bit banks is organized as 16,384 rows by 1024 columns by 32 bits.

General Notes

Throughout the data sheet, figures and text refer to DQs as "DQ." DQ should be interpreted as any or all DQ collectively, unless specifically stated otherwise.

"DQS" and "CK" should be interpreted as DQS_t, DQS_c and CK_t, CK_c respectively, unless specifically stated otherwise. "BA" includes all BA pins used for a given density.

Complete functionality may be described throughout the entire document. Any page or diagram may have been simplified to convey a topic and may not be inclusive of all requirements.

Any specific requirement takes precedence over a general statement.

Any functionality not specifically stated herein is considered undefined, illegal, is not supported, and will result in unknown operation.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

I_{DD} Specifications

Table 4: I_{DD} Specifications – Dual Die, Dual Channel

V_{DD2}, V_{DDQ} = 1.14–1.30V; V_{DD1} = 1.70–1.95V; T_C = –40°C to +85°C

Symbol	Supply	Speed	Unit	Parameter/Condition
		1066		
I_{DD01}	V_{DD1}	16	mA	All devices in operating one bank active-precharge Conditions for operating devices are: ^tCK = ^tCK(avg) MIN; ^tRC = ^tRC (MIN); CKE is HIGH; CS_n is HIGH between valid commands; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD02}	$V_{DDQ}V_{DDQ}$	100		
I_{DD2P1}	V_{DD1}	0.8	mA	All devices in idle power-down standby current ^tCK = ^tCK(avg) MIN; CKE is LOW; CS_n is HIGH; All banks are idle; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD2P2}	$V_{DDQ}V_{DDQ}$	1.8		
I_{DD2PS1}	V_{DD1}	0.8	mA	All devices in idle power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is LOW; CS_n is HIGH; All banks are idle; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD2PS2}	$V_{DDQ}V_{DDQ}$	1.8		
I_{DD2N1}	V_{DD1}	1.2	mA	All devices in idle non power-down standby current. ^tCK = ^tCK(avg) MIN; CKE is HIGH; CS_n is HIGH; All banks idle; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD2N2}	$V_{DDQ}V_{DDQ}$	26		
I_{DD2NS1}	V_{DD1}	1.2	mA	All devices in idle non power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is HIGH; CS_n is HIGH; All banks are idle; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD2NS2}	$V_{DDQ}V_{DDQ}$	12		
I_{DD3P1}	V_{DD1}	1.6	mA	All devices in active power-down standby current ^tCK = ^tCK(avg) MIN; CKE is LOW; CS_n is HIGH; One bank is active; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD3P2}	$V_{DDQ}V_{DDQ}$	10		
I_{DD3PS1}	V_{DD1}	1.6	mA	All devices in active power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is LOW; CS_n is HIGH; One bank is active; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD3PS2}	$V_{DDQ}V_{DDQ}$	10		

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 4: I_{DD} Specifications – Dual Die, Dual Channel (Continued)

V_{DD2}, V_{DDQ} = 1.14–1.30V; V_{DD1} = 1.70–1.95V; T_C = –40°C to +85°C

Symbol	Supply	Speed 1066	Unit	Parameter/Condition
I_{DD3N1}	V_{DD1}	2.4	mA	All devices in active non power-down standby current ^tCK = ^tCK(avg) MIN; CKE is HIGH; CS_n is HIGH; One bank active; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD3N2}	$V_{DDQ}V_{DDQ}$	38		
I_{DD3NS1}	V_{DD1}	2.4	mA	All devices in active non power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is HIGH; CS_n is HIGH; One bank is active; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD3NS2}	$V_{DDQ}V_{DDQ}$	24		
I_{DD4R1}	V_{DD1}	4	mA	All devices in operating burst read ^tCK = ^tCK(avg) MIN; CS_n is HIGH between valid commands; One bank is active; BL = 4; RL = RL (MIN); CA bus inputs are SWITCHING; 50% data change occurs at each burst transfer
I_{DD4R2}	$V_{DDQ}V_{DDQ}$	840		
I_{DD4W1}	V_{DD1}	4	mA	All devices in operating burst write ^tCK = ^tCK(avg) MIN; CS_n is HIGH between valid commands; One bank is active; BL = 4; WL = WL (MIN); CA bus inputs are SWITCHING; 50% data change occurs at each burst transfer
I_{DD4W2}	$V_{DDQ}V_{DDQ}$	300		
I_{DD51}	V_{DD1}	40	mA	All devices in all bank auto-refresh ^tCK = ^tCK(avg) MIN; CKE is HIGH between valid commands; ^tRC = ^tRFCab (MIN); Burst refresh; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD52}	$V_{DDQ}V_{DDQ}$	240		
I_{DD5AB1}	V_{DD1}	8	mA	All devices in all bank auto-refresh ^tCK = ^tCK(avg) MIN; CKE is HIGH between valid commands; ^tRC = ^tREFI; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD5AB2}	$V_{DDQ}V_{DDQ}$	40		
I_{DD5PB1}	V_{DD1}	8	mA	All devices in per bank auto-refresh ^tCK = ^tCK(avg) MIN; CKE is HIGH between valid commands; ^tRC = ^tREFIpb; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD5PB2}	$V_{DDQ}V_{DDQ}$	40		

Notes:
1. Published I_{DD} values are the maximum of the distribution of the arithmetic mean.
2. I_{DD} current specifications are tested after the device is properly initialized.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

3. V_{DD2} and V_{DDQ} are connected internally in the package.
4. The Quad die product I_{DD} for each channel will be the sum of the I_{DD}'s for the state of operation for each rank (CS) in the channel.

Table 5: I_{DD6} Full-Array Self Refresh Current at 45°C for Dual die product

V_{DD2}, V_{DDQ} = 1.14–1.30V; V_{DD1} = 1.70–1.95V

PASR	Supply	Value	Unit	Parameters/Conditions
Full array	V_{DD1}	400	µA	All devices in self refresh CK_t = LOW, CK_c = HIGH; CKE is LOW; CA bus inputs are STABLE; Data bus inputs are STABLE
	$V_{DDQ}V_{DDQ}$	1600		
1/2 array	V_{DD1}	320		
	$V_{DDQ}V_{DDQ}$	1000		
1/4 array	V_{DD1}	260		
	$V_{DDQ}V_{DDQ}$	600		
1/8 array	V_{DD1}	240		
	$V_{DDQ}V_{DDQ}$	400		

Note: 1. I_{DD6} 45°C is the typical of the distribution of the arithmetic mean, Quad die product will be double these values when all die are in self refresh mode.

Table 6: I_{DD6} Partial-Array Self Refresh Current at 85°C for Dual die product

V_{DD2}, V_{DDQ} = 1.14–1.30V; V_{DD1} = 1.70–1.95V

PASR	Supply	Value	Unit	Parameters/Conditions
Full array	V_{DD1}	1800	µA	All devices in self refresh CK_t = LOW, CK_c = HIGH; CKE is LOW; CA bus inputs are STABLE; Data bus inputs are STABLE
	$V_{DDQ}V_{DDQ}$	6400		
1/2 array	V_{DD1}	1300		
	$V_{DDQ}V_{DDQ}$	4400		
1/4 array	V_{DD1}	1100		
	$V_{DDQ}V_{DDQ}$	3400		
1/8 array	V_{DD1}	1000		
	$V_{DDQ}V_{DDQ}$	2800		

Note: 1. I_{DD6} 85°C is the maximum of the distribution of the arithmetic mean, Quad die product will be double these values when all die are in self refresh mode.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 7: I_{DD} Specifications – Dual Die, Dual Channel

V_{DD2}, V_{DDQ} = 1.14–1.30V; V_{DD1} = 1.70–1.95V; T_C = –40°C to +105°C

Symbol	Supply	Speed	Unit	Parameter/Condition
		1066		
I_{DD01}	V_{DD1}	16	mA	All devices in operating one bank active-precharge Conditions for operating devices are: ^tCK = ^tCK(avg) MIN; ^tRC = ^tRC (MIN); CKE is HIGH; CS_n is HIGH between valid commands; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD02}	V_{DD2}, V_{DDQ}	100		
I_{DD2P1}	V_{DD1}	0.8	mA	All devices in idle power-down standby current ^tCK = ^tCK(avg) MIN; CKE is LOW; CS_n is HIGH; All banks are idle; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD2P2}	V_{DD2}, V_{DDQ}	1.8		
I_{DD2PS1}	V_{DD1}	0.8	mA	All devices in idle power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is LOW; CS_n is HIGH; All banks are idle; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD2PS2}	V_{DD2}, V_{DDQ}	1.8		
I_{DD2N1}	V_{DD1}	1.2	mA	All devices in idle non power-down standby current. ^tCK = ^tCK(avg) MIN; CKE is HIGH; CS_n is HIGH; All banks idle; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD2N2}	V_{DD2}, V_{DDQ}	30		
I_{DD2NS1}	V_{DD1}	1.2	mA	All devices in idle non power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is HIGH; CS_n is HIGH; All banks are idle; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD2NS2}	V_{DD2}, V_{DDQ}	16		
I_{DD3P1}	V_{DD1}	1.8	mA	All devices in active power-down standby current ^tCK = ^tCK(avg) MIN; CKE is LOW; CS_n is HIGH; One bank is active; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD3P2}	V_{DD2}, V_{DDQ}	14		
I_{DD3PS1}	V_{DD1}	1.8	mA	All devices in active power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is LOW; CS_n is HIGH; One bank is active; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD3PS2}	V_{DD2}, V_{DDQ}	14		
I_{DD3N1}	V_{DD1}	2.8	mA	All devices in active non power-down standby current ^tCK = ^tCK(avg) MIN; CKE is HIGH; CS_n is HIGH; One bank active; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD3N2}	V_{DD2}, V_{DDQ}	44		

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 7: I_{DD} Specifications – Dual Die, Dual Channel (Continued)

V_{DD2}, V_{DDQ} = 1.14–1.30V; V_{DD1} = 1.70–1.95V; T_C = –40°C to +105°C

Symbol	Supply	Speed	Unit	Parameter/Condition
		1066		
I_{DD3NS1}	V_{DD1}	2.8	mA	All devices in active non power-down standby current with clock stop CK_t = LOW, CK_c = HIGH; CKE is HIGH; CS_n is HIGH; One bank is active; CA bus inputs are STABLE; Data bus inputs are STABLE
I_{DD3NS2}	V_{DD2}, V_{DDQ}	30		
I_{DD4R1}	V_{DD1}	4	mA	All devices in operating burst read ^{t}CK = ^{t}CK(avg) MIN; CS_n is HIGH between valid commands; One bank is active; BL = 4; RL = RL (MIN); CA bus inputs are SWITCHING; 50% data change occurs at each burst transfer
I_{DD4R2}	V_{DD2}, V_{DDQ}	840		
I_{DD4W1}	V_{DD1}	4	mA	All devices in operating burst write ^{t}CK = ^{t}CK(avg) MIN; CS_n is HIGH between valid commands; One bank is active; BL = 4; WL = WL (MIN); CA bus inputs are SWITCHING; 50% data change occurs at each burst transfer
I_{DD4W2}	V_{DD2}, V_{DDQ}	300		
I_{DD51}	V_{DD1}	40	mA	All devices in all bank auto-refresh ^{t}CK = ^{t}CK(avg) MIN; CKE is HIGH between valid commands; ^{t}RC = $^{t}RFCab$ (MIN); Burst refresh; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD52}	V_{DD2}, V_{DDQ}	240		
I_{DD5AB1}	V_{DD1}	12	mA	All devices in all bank auto-refresh ^{t}CK = ^{t}CK(avg) MIN; CKE is HIGH between valid commands; ^{t}RC = $^{t}REFI$; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD5AB2}	V_{DD2}, V_{DDQ}	56		
I_{DD5PB1}	V_{DD1}	12	mA	All devices in per bank auto-refresh ^{t}CK = ^{t}CK(avg) MIN; CKE is HIGH between valid commands; ^{t}RC = $^{t}REFIpb$; CA bus inputs are SWITCHING; Data bus inputs are STABLE
I_{DD5PB2}	V_{DD2}, V_{DDQ}	56		

Notes:
1. Published I_{DD} values are the maximum of the distribution of the arithmetic mean.
2. I_{DD} current specifications are tested after the device is properly initialized.
3. V_{DD2} and V_{DDQ} are connected internally in the package.
4. The Quad die product I_{DD} for each channel will be the sum of the I_{DD}'s for the state of operation for each rank (CS) in the channel.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 8: I_{DD6} Partial-Array Self Refresh Current at 105°C Dual die for Dual die prodct

V_{DD2}, V_{DDQ} = 1.14–1.30V; V_{DD1} = 1.70–1.95V

PASR	Supply	Value	Unit	Parameters/Conditions
Full array	V_{DD1}	4800	µA	All devices in self refresh CK_t = LOW, CK_c = HIGH; CKE is LOW; CA bus inputs are STABLE; Data bus inputs are STABLE
	$V_{DDQ}V_{DDQ}$	28000		
1/2 array	V_{DD1}	3200		
	$V_{DDQ}V_{DDQ}$	15600		
1/4 array	V_{DD1}	2200		
	$V_{DDQ}V_{DDQ}$	9600		
1/8 array	V_{DD1}	1800		
	$V_{DDQ}V_{DDQ}$	6400		

Note: 1. I_{DD6} 105°C is the maximum of the distribution of the arithmetic mean, Quad die product will be double these values when all die are in self refresh mode.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Package Block Diagrams

Figure 2: Dual Die Single Rank, Dual Channel Package Block Diagram

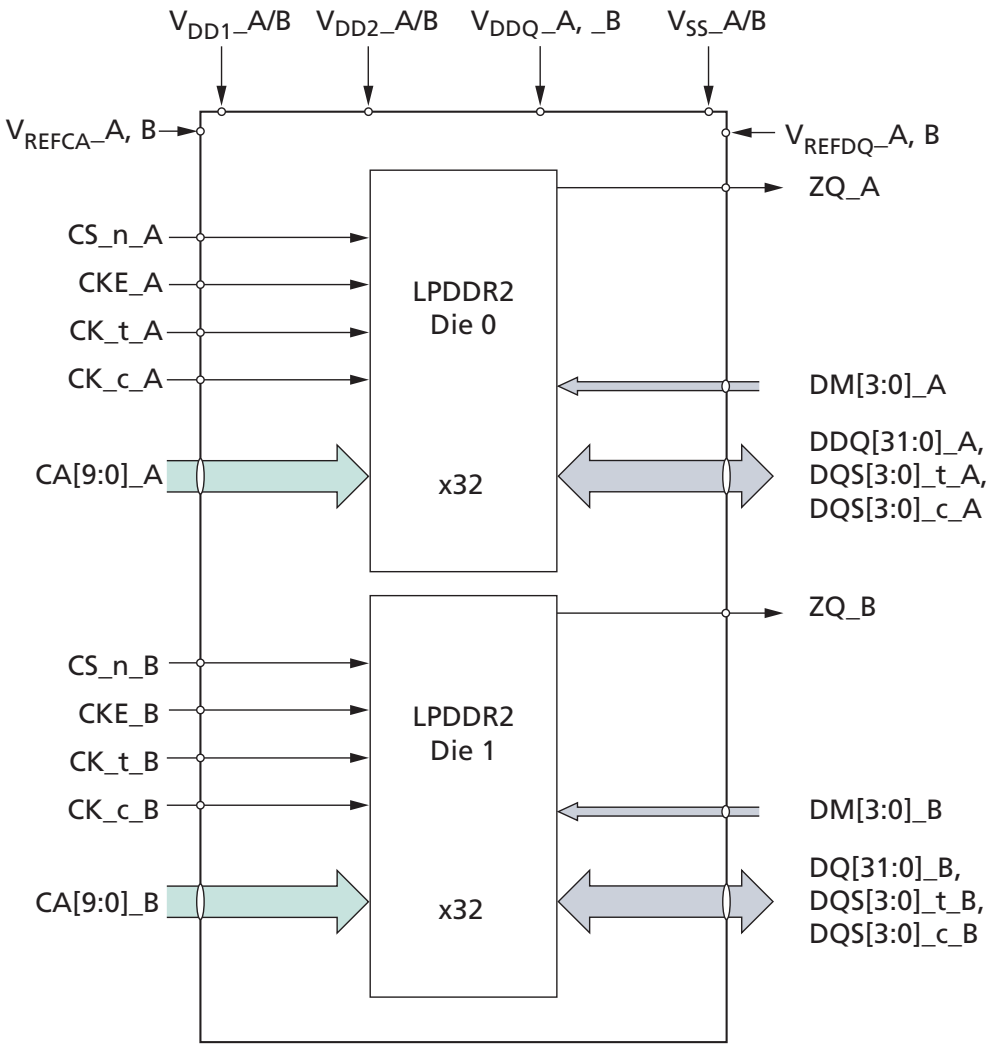

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 3: Quad Die Dual Rank, Dual Channel Package Block Diagram

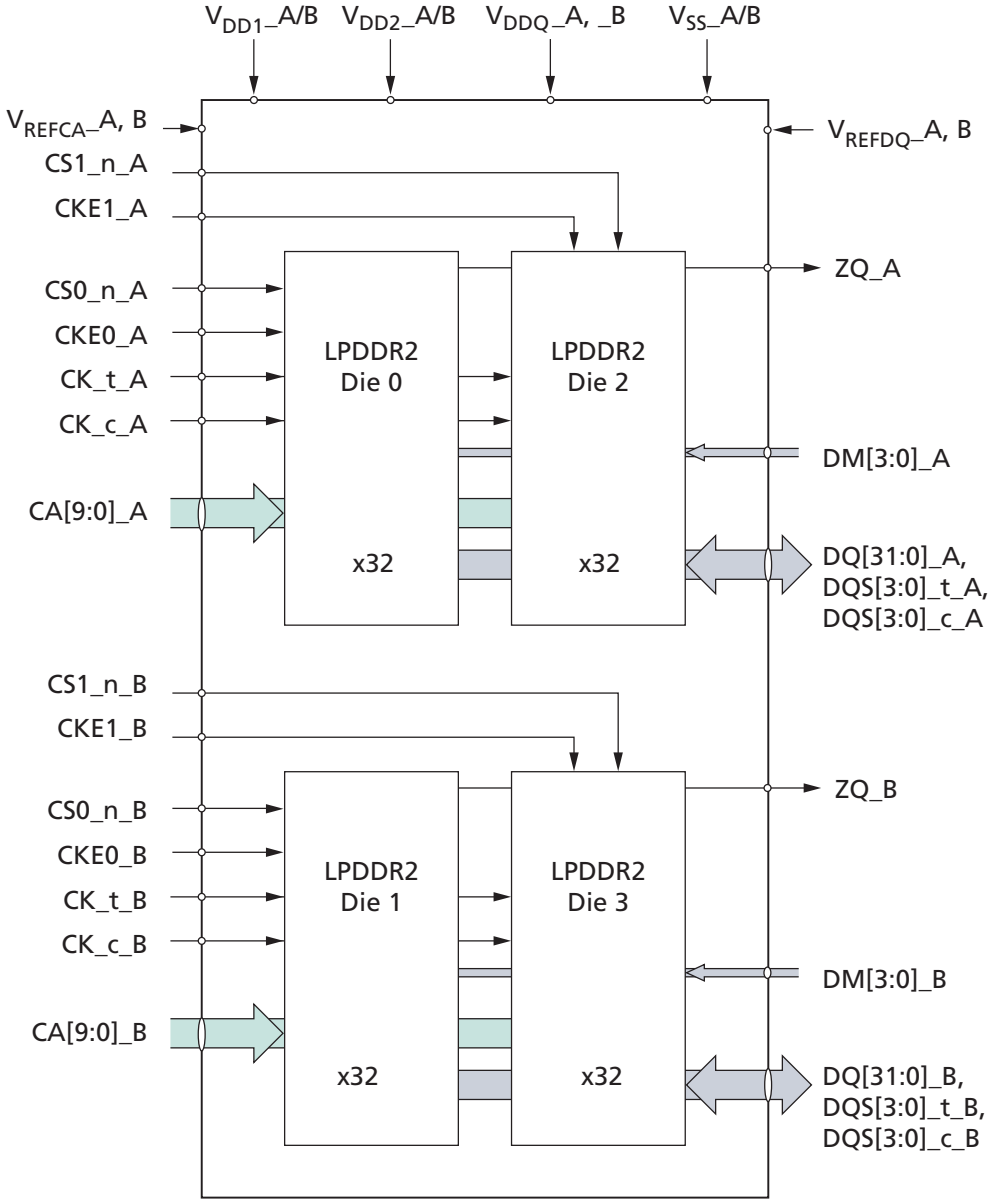

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Package Dimensions

Figure 4: 216-Ball FBGA (12mm x 12mm x 0.8mm) – EDB8164B4PR, EDB8164B4PT

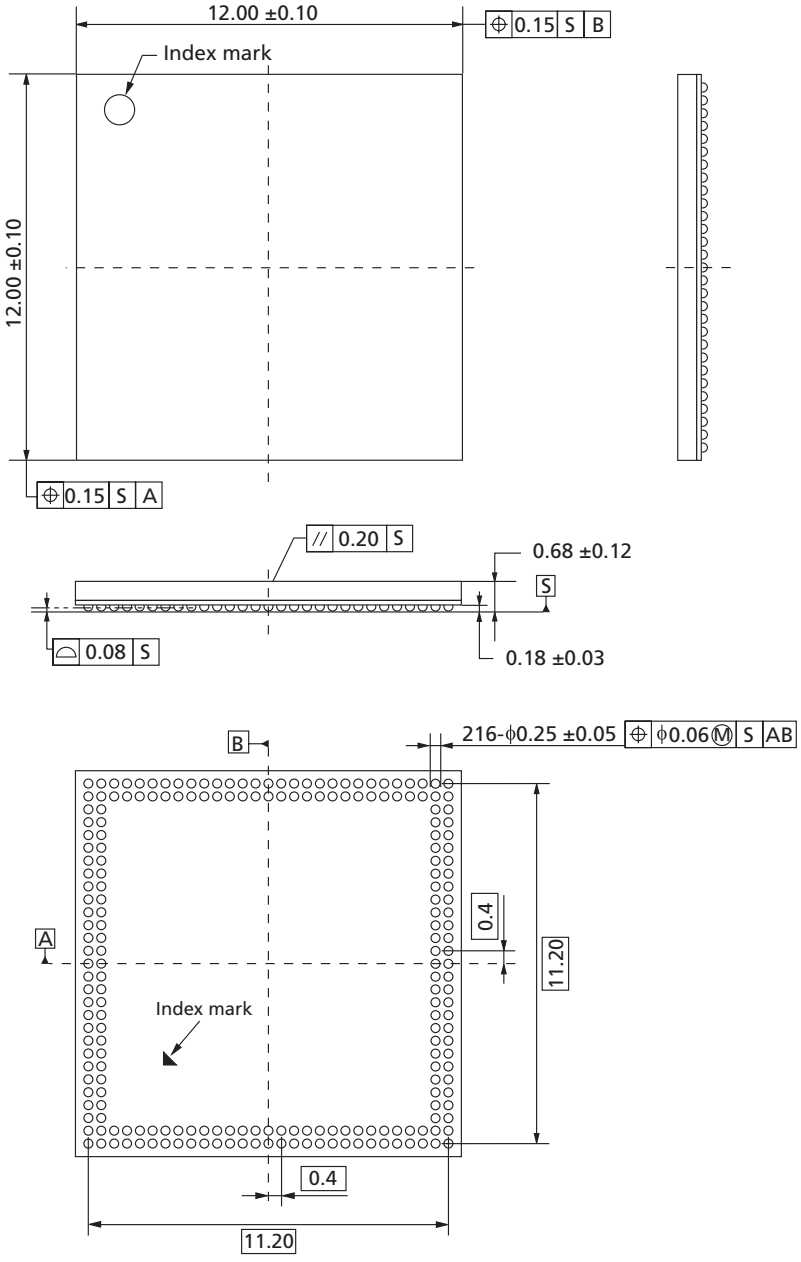

Note: 1. All dimensions are in millimeters.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 5: 216-Ball FBGA (12mm x 12mm x 1.0mm) – EDBA164B2PR

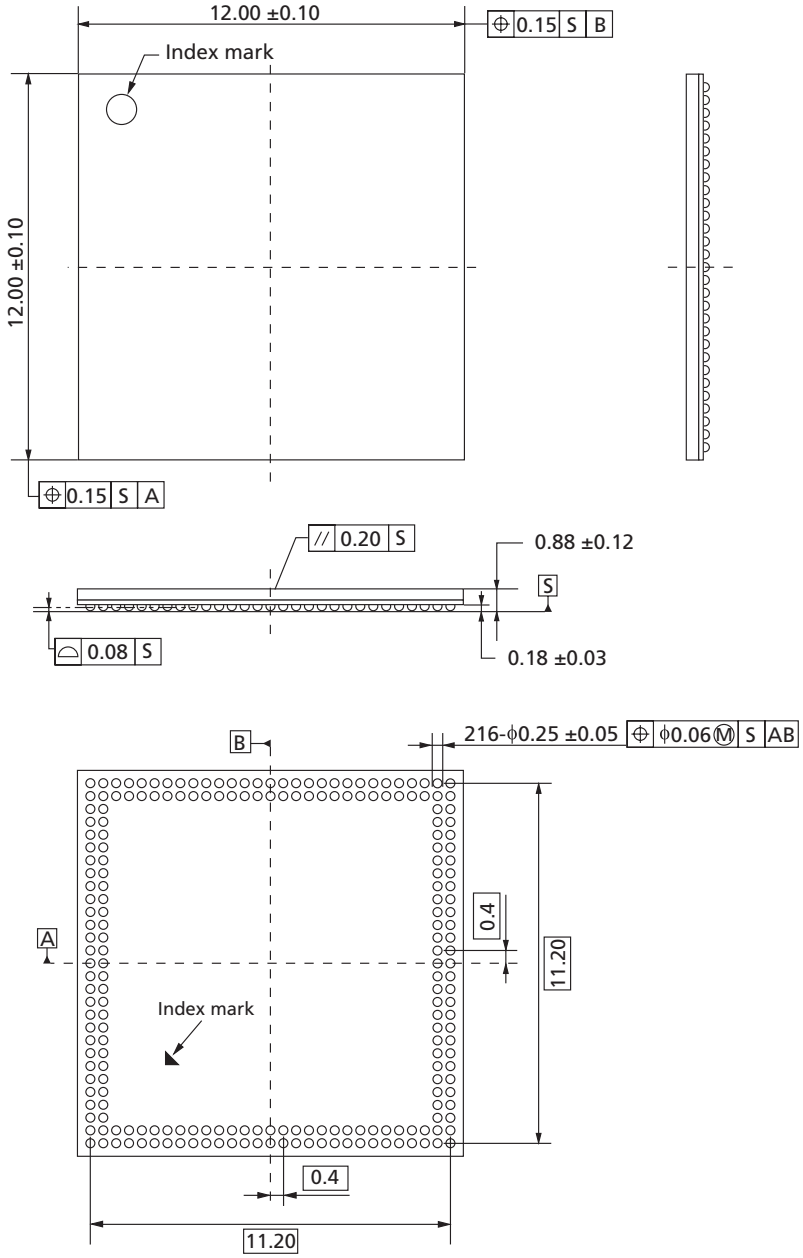

Note: 1. All dimensions are in millimeters.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 6: 220-Ball FBGA (14mm x 14mm x 0.7mm) – EDB8164B4PK

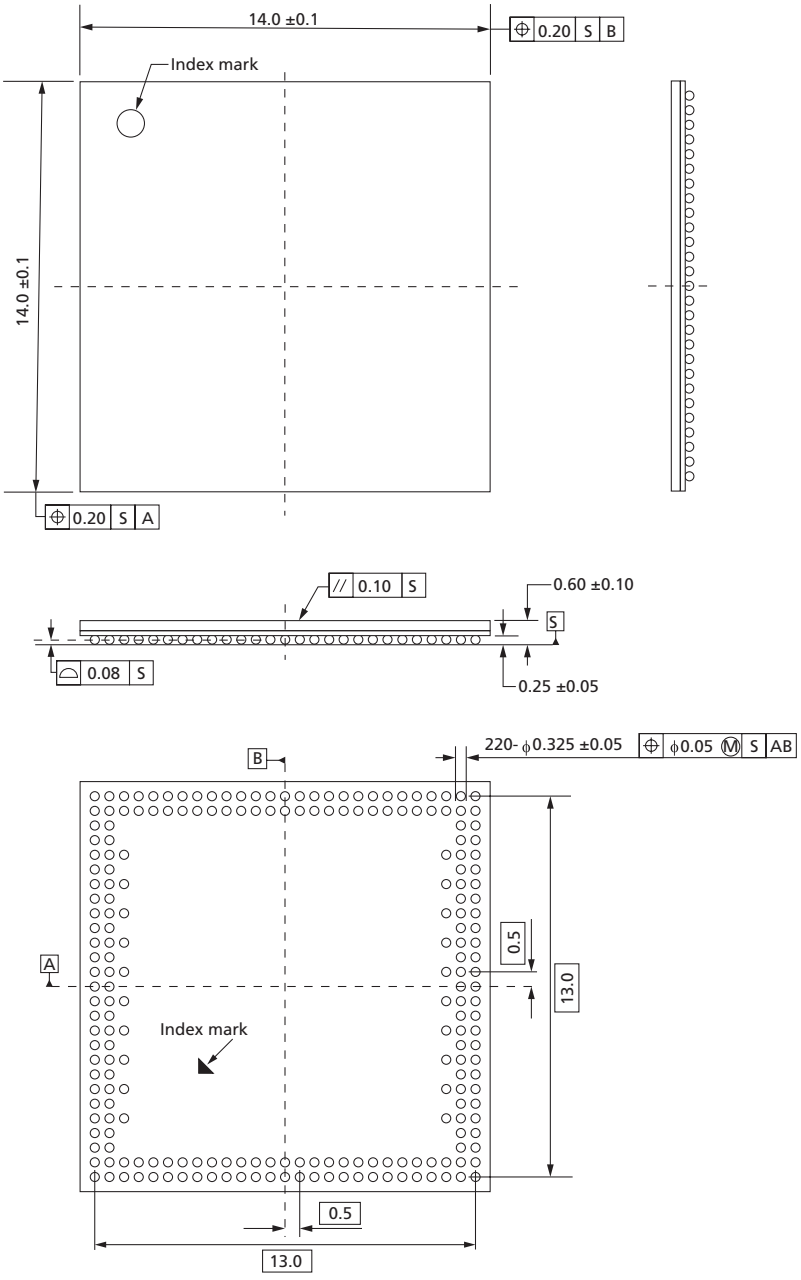

Note: 1. All dimensions are in millimeters.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Ball Assignments

Figure 7: 216-Ball Dual-Channel FBGA – 2 x 4Gb Die

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A	NC	V_{SS}	V_{DD2}	DQ30_A	DQ29_A	V_{SS}	DQ26_A	DQ25_A	V_{SS}	DQS3_c_A	V_{SS}	DQ14_A	DQ13_A	V_{SS}	V_{DD1}	V_{DD2}	DQ11_A	DQ10_A	DQ9_A	DQS1_t_A	DM1_A	V_{DDQ}	DQS0_t_A	DQ7_A	DQ6_A
B	V_{SS}	NC	DQ31_A	V_{DDQ}	DQ28_A	DQ27_A	V_{DDQ}	DQ24_A	V_{DDQ}	DQS3_t_A	DM3_A	DQ15_A	V_{DDQ}	V_{SS}	V_{REFDQ_A}	V_{DD2}	DQ12_A	V_{DDQ}	DQ8_A	DQS1_c_A	V_{SS}	DM0_A	DQS0_c_A	V_{SS}	V_{DDQ}
C	V_{DD1}	DQ16_B																							
D	DQ17_B	V_{DDQ}																							
E	DQ18_B	DQ19_B																							
F	V_{SS}	DQ20_B																							
G	DQ21_B	V_{DDQ}																							
H	DQ22_B	DQ23_B																							
J	V_{SS}	V_{DDQ}																							
K	DQS2_c_B	DQS2_t_B																							
L	DM2_B	DQ0_B																							
M	DQ1_B	V_{SS}																							
N	DQ2_B	V_{DD1}																							
P	V_{SS}	V_{SS}																							
R	V_{DD1}	V_{REFDQ_B}																							
T	V_{DD2}	V_{DD2}																							
U	V_{DDQ}	DQ3_B																							
V	DQ4_B	V_{SS}																							
W	DQ6_B	DQ5_B																							
Y	V_{DDQ}	DQ7_B																							
AA	DQS0_t_B	DQS0_c_B																							
AB	DM0_B	V_{SS}																							
AC	V_{DDQ}	DM1_B																							
AD	DQS1_c_B	DQS1_t_B																							
AE	DQ8_B	V_{SS}																							
AF	DQ9_B	V_{DDQ}																							
AG	DQ10_B	DQ11_B																							
AH	V_{SS}	V_{DD1}	V_{DD2}	DQ13_B	V_{SS}	DQ15_B	DM3_B	DQS3_t_B	V_{DDQ}	DQ26_B	DQ27_B	V_{DDQ}	DQ30_B	V_{SS}	V_{DD2}	V_{REFCA_A}	CA9_A	V_{SS}	CA7_A	CA6_A	CK_c_A	NC	CKE_A	CS_n_A	CA3_A
AJ	NC	V_{SS}	DQ12_B	V_{DDQ}	DQ14_B	V_{DDQ}	V_{SS}	DQS3_c_B	DQ24_B	DQ25_B	V_{SS}	DQ28_B	DQ29_B	DQ31_B	V_{DD1}	V_{SS}	ZQ_A	CA8_A	NC	CA5_A	CK_t_A	V_{SS}	NC	NC	CA4_A
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25

Top View (ball down)

Channel a (_A) Ch

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Ball Assignments

Figure 8: 220-Ball Dual-Channel FBGA – 2 x 4Gb Die

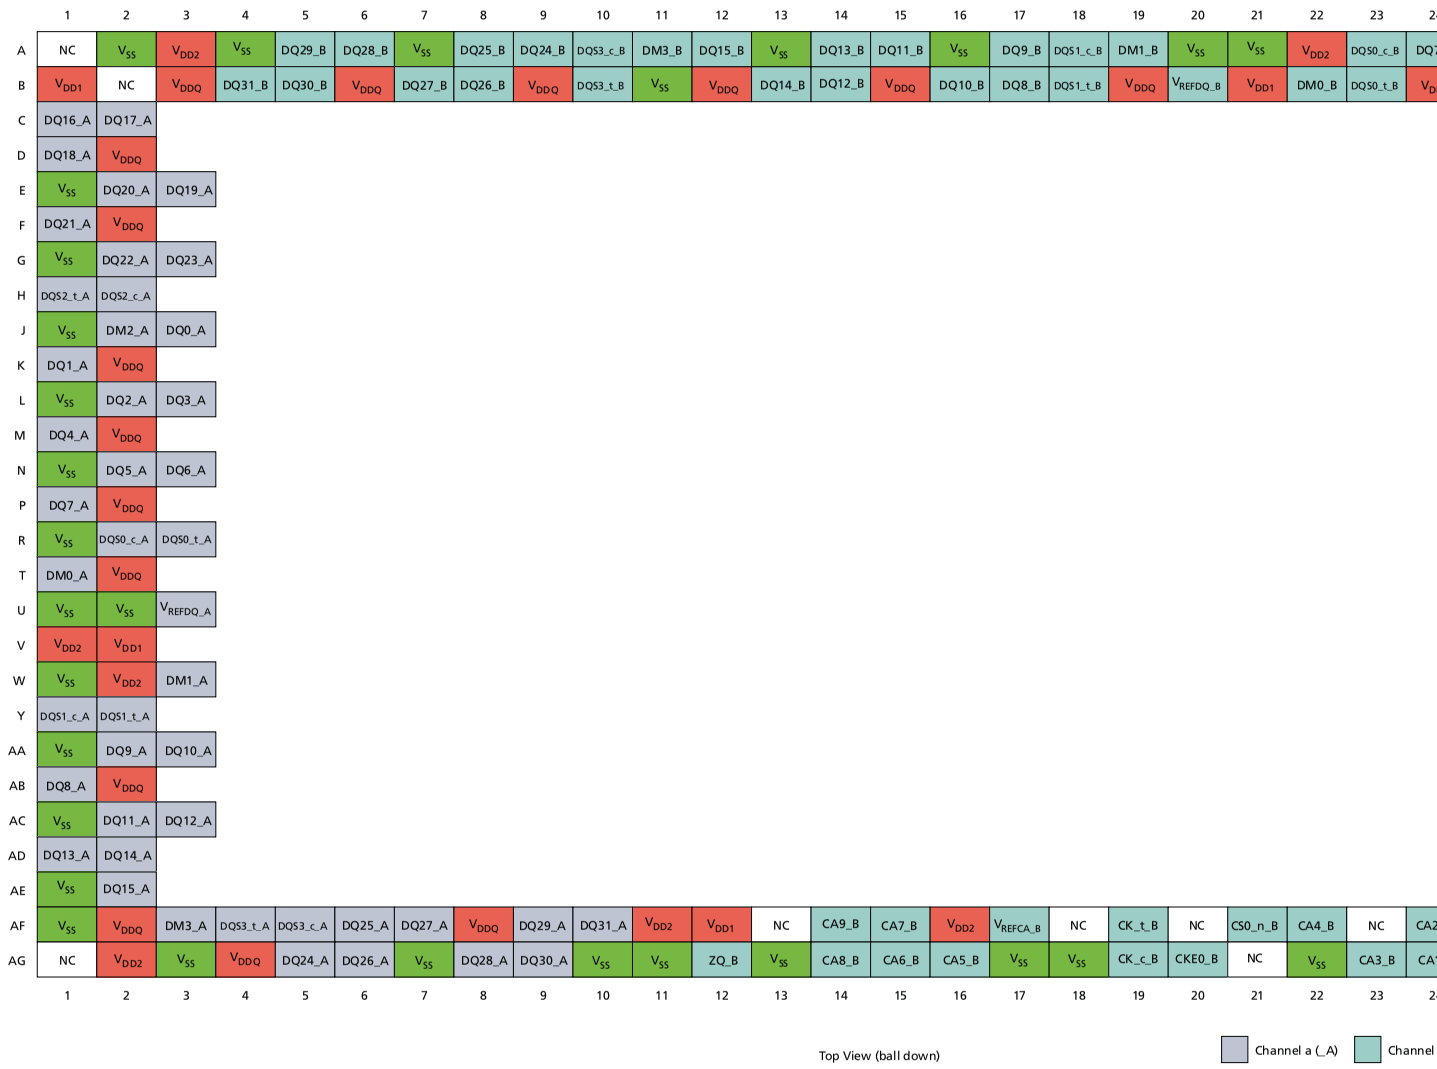

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Ball Assignments

Figure 9: 216-Ball Dual-Channel FBGA – 4 x 4Gb Die

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A	NC	V_{SS}	V_{DD2}	DQ30_A	DQ29_A	V_{SS}	DQ26_A	DQ25_A	V_{SS}	DQS3_c_A	V_{SS}	DQ14_A	DQ13_A	V_{SS}	V_{DD1}	V_{DD2}	DQ11_A	DQ10_A	DQ9_A	DQS1_t_A	DM1_A	V_{DDQ}	DQS0_t_A	DQ7_A	DQ6_A
B	V_{SS}	NC	DQ31_A	V_{DDQ}	DQ28_A	DQ27_A	V_{DDQ}	DQ24_A	V_{DDQ}	DQS3_t_A	DM3_A	DQ15_A	V_{DDQ}	V_{SS}	V_{REFDQ_A}	V_{DD2}	DQ12_A	V_{DDQ}	DQ8_A	DQS1_c_A	V_{SS}	DM0_A	DQS0_c_A	V_{SS}	V_{DDQ}
C	V_{DD1}	DQ16_B																							
D	DQ17_B	V_{DDQ}																							
E	DQ18_B	DQ19_B																							
F	V_{SS}	DQ20_B																							
G	DQ21_B	V_{DDQ}																							
H	DQ22_B	DQ23_B																							
J	V_{SS}	V_{DDQ}																							
K	DQS2_c_B	DQS2_t_B																							
L	DM2_B	DQ0_B																							
M	DQ1_B	V_{SS}																							
N	DQ2_B	V_{DD1}																							
P	V_{SS}	V_{SS}																							
R	V_{DD1}	V_{REFDQ_B}																							
T	V_{DD2}	V_{DD2}																							
U	V_{DDQ}	DQ3_B																							
V	DQ4_B	V_{SS}																							
W	DQ6_B	DQ5_B																							
Y	V_{DDQ}	DQ7_B																							
AA	DQS0_t_B	DQS0_c_B																							
AB	DM0_B	V_{SS}																							
AC	V_{DDQ}	DM1_B																							
AD	DQS1_c_B	DQS1_t_B																							
AE	DQ8_B	V_{SS}																							
AF	DQ9_B	V_{DDQ}																							
AG	DQ10_B	DQ11_B																							
AH	V_{SS}	V_{DD1}	V_{DD2}	DQ13_B	V_{SS}	DQ15_B	DM3_B	DQS3_t_B	V_{DDQ}	DQ26_B	DQ27_B	V_{DDQ}	DQ30_B	V_{SS}	V_{DD2}	V_{REFCA_A}	CA9_A	V_{SS}	CA7_A	CA6_A	CK_c_A	NC	CKE0_A	CS0_n_A	CA3_A
AJ	NC	V_{SS}	DQ12_B	V_{DDQ}	DQ14_B	V_{DDQ}	V_{SS}	DQS3_c_B	DQ24_B	DQ25_B	V_{SS}	DQ28_B	DQ29_B	DQ31_B	V_{DD1}	V_{SS}	ZQ_A	CA8_A	NC	CA5_A	CK_t_A	V_{SS}	CKE1_A	CS1_n_A	CA4_A

Top View (ball down)

Channel a (_A) Ch

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Ball Descriptions

The ball/pad description table below is a comprehensive list of signals for the device family. All signals listed may not be supported on this device. See Ball Assignments for information specific to this device.

Table 9: Ball/Pad Descriptions

Symbol	Type	Description
CA[9:0]_A, CA[9:0]_B	Input	**Command/address inputs:** Provide the command and address inputs according to the command truth table. A separate CA[9:0] is provided for each channel (A and B).
CK_t_A, CK_t_B CK_c_A, CK_c_B	Input	**Clock:** Differential clock inputs. All CA inputs are sampled on both rising and falling edges of CK. CS and CKE inputs are sampled at the rising edge of CK. AC timings are referenced to clock. A separate CK_t/CK_c is provided for each channel (A and B).
CKE[1:0]_A, CKE[1:0]_B	Input	**Clock enable:** CKE HIGH activates and CKE LOW deactivates the internal clock signals, input buffers, and output drivers. Power-saving modes are entered and exited via CKE transitions. CKE is considered part of the command code. CKE is sampled on the rising edge of CK. A separate CKE is provided for each channel (A and B).
CS[1:0]_n_A, CS[1:0]_n_B	Input	**Chip select:** Considered part of the command code and is sampled on the rising edge of CK. A separate CS_n is provided for each channel (A and B).
DM[3:0]_A, DM[3:0]_B	Input	**Input data mask:** Input mask signal for write data. Although DM balls are input-only, the DM loading is designed to match that of DQ and DQS balls. DM[3:0] is DM for each of the four data bytes, respectively. A separate DM[3:0] is provided for each channel (A and B).
DQ[31:0]_A, DQ[31:0]_B	I/O	**Data input/output:** Bidirectional data bus. A separate DQ[11:0] is provided for each channel (A and B).
DQS[3:0]_t_A, DQS[3:0]_t_B, DQS[3:0]_c_A, DQS[3:0]_c_B	I/O	**Data strobe:** Bidirectional (used for read and write data) and complementary (DQS_t and DQS_c). It is edge-aligned output with read data and centered input with write data. DQS[3:0]_t/DQS[3:0]_c is DQS for each of the four data bytes, respectively. A separate DQS[3:0]_t and DQS[3:0]_c is provided for each channel (A and B).
V_{DDQ}_A, V_{DDQ}_B	Supply	**DQ power supply:** Isolated on the die for improved noise immunity.
V_{SSQ}_A/B	Supply	**DQ ground:** Isolated on the die for improved noise immunity.
V_{DD1} _A/B	Supply	**Core power:** Supply 1.
V_{DD2}_A/B	Supply	**Core power:** Supply 2.
V_{SS}_A/B	Supply	**Common ground.**
V_{REFCA}_A, V_{REFCA}_B V_{REFDQ}_A, V_{REFDQ}_B	Supply	**Reference voltage:** V_{REFCA} is reference for command/address input buffers, V_{REFDQ} is reference for DQ input buffers. A separate V_{REFCA} and V_{REFDQ} provided for each channel (A and B).
ZQ_A, ZQ_B	Reference	**External reference ball for output drive calibration:** This ball is tied to an external 240Ω resistor (RZQ), which is tied to V_{SSQ}. A separate ZQ is provided for each channel (A and B).
NU	–	**Not usable:** Do not connect.
NC	–	**No connect:** Not internally connected.
(NC)	–	**No connect:** Balls indicated as (NC) are no connects; however, they could be connected together internally.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Functional Description

Mobile LPDDR2 is a high-speed SDRAM internally configured as a 4- or 8-bank memory device. The device uses a double data rate architecture on the command/address (CA) bus to reduce the number of input pins in the system. The 10-bit CA bus is used to transmit command, address, and bank information. Each command uses one clock cycle, during which command information is transferred on both the rising and falling edges of the clock.

The LPDDR2-S4 device uses a double data rate architecture on the DQ pins to achieve high- speed operation. The double data rate architecture is essentially a 4*n* prefetch architecture with an interface designed to transfer two data bits per DQ every clock cycle at the I/O pins. A single read or write access for the LPDDR2-S4 effectively consists of a single 4*n*-bit-wide, one-clock-cycle data transfer at the internal SDRAM core and four corresponding *n*-bit-wide, one-half-clock-cycle data transfers at the I/O pins.

Read and write access is burst oriented; access starts at a selected location and continues for a programmed number of locations in a programmed sequence.

Access begins with the registration of an ACTIVATE command followed by a READ or WRITE command. Registered address and BA bits that coincide with the ACTIVATE command are used to select the row and bank to be accessed. Registered address bits that coincide with the READ or WRITE command are used to select the bank and the starting column location for the burst access.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 10: Functional Block Diagram

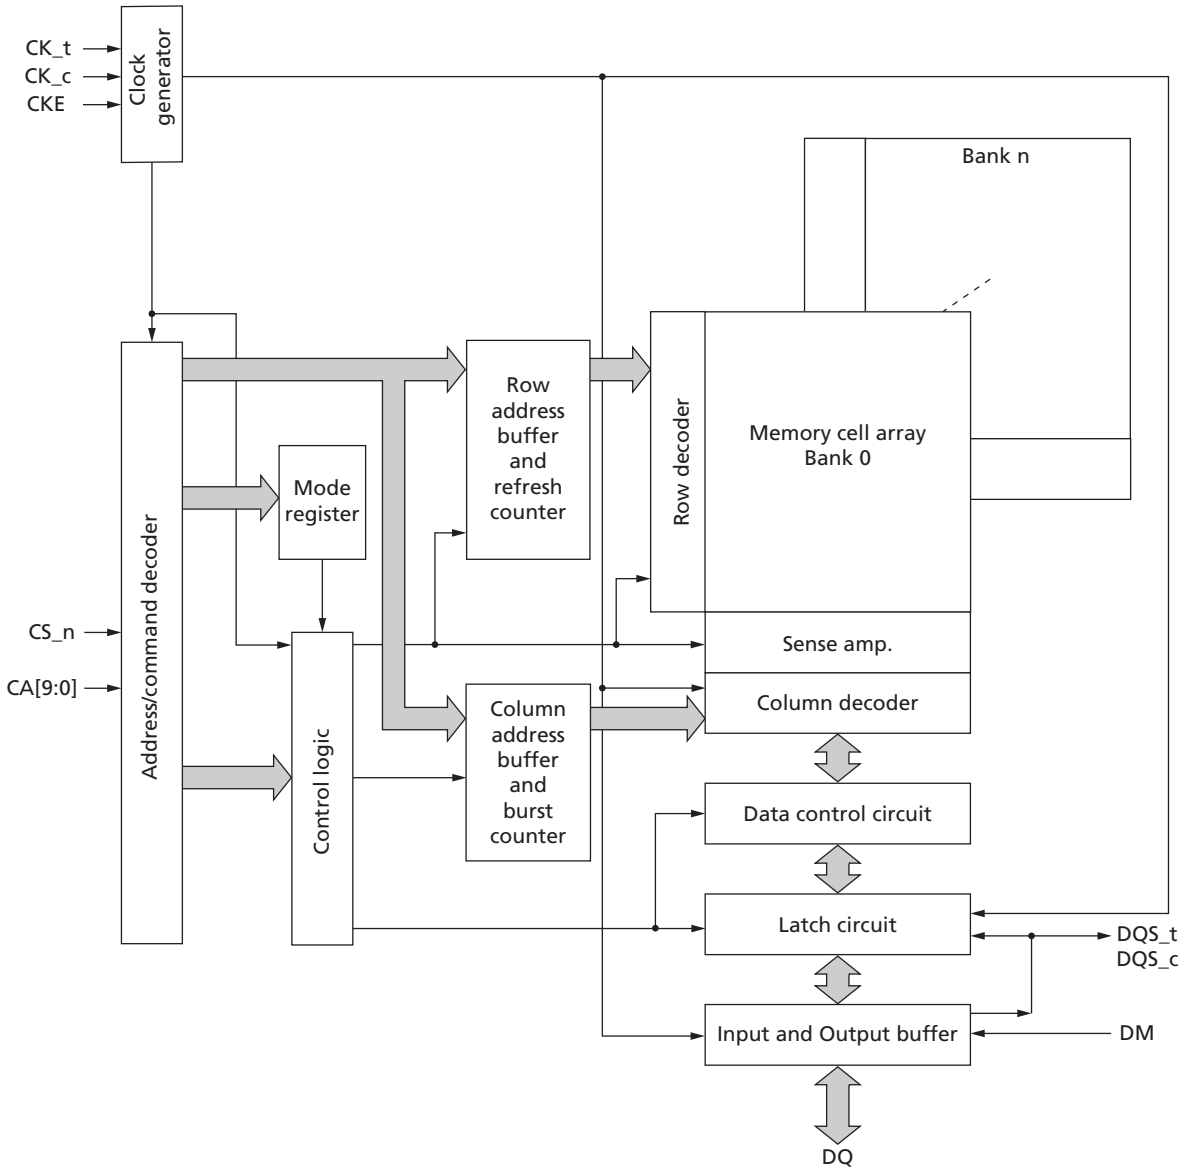

Note: 1. 512Mb is a 4-bank only.

Simplified State Diagram

The state diagram provides a simplified illustration of allowed state transitions and the related commands to control them. For a complete definition of the device behavior, the information provided by the state diagram should be integrated with the truth tables and timing specification. The truth tables provide complementary information to the state diagram, they clarify the device behavior and the applied restrictions when considering the actual state of all the banks.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 11: Simplified State Diagram

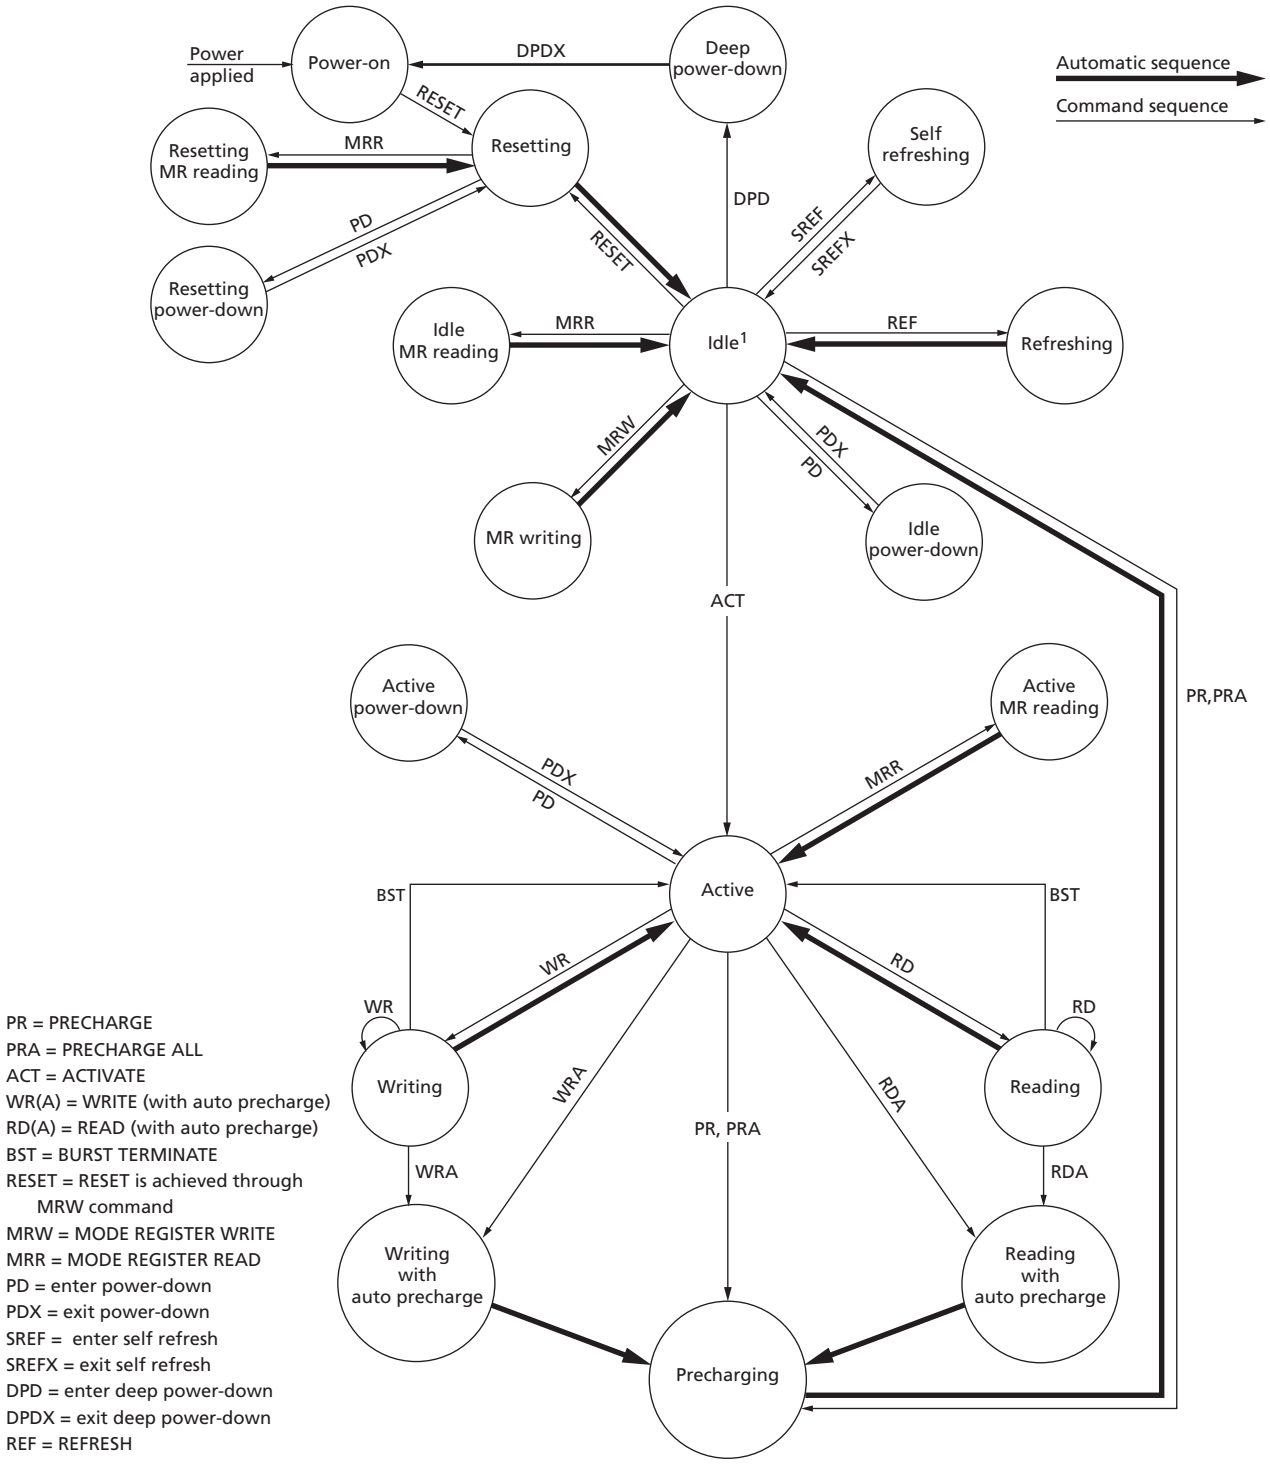

Note: 1. All banks are precharged in the idle state.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Power-Up and Initialization

The device must be powered up and initialized in a predefined manner. Power-up and initialization by means other than those specified will result in undefined operation.

Voltage Ramp and Device Initialization

The following sequence must be used to power up the device. Unless specified otherwise, this procedure is mandatory (see the Voltage Ramp and Initialization Sequence figure). Power-up and initialization by means other than those specified will result in undefined operation.

1. Voltage Ramp Beginning

While applying power (after Ta), CKE must be held LOW ($\leq 0.2 \times V_{DD2}$), and all other inputs must be between V_{ILmin} and V_{IHmax}. The device outputs remain at High-Z while CKE is held LOW.

On or before the completion of the voltage ramp (Tb), CKE must be held LOW. DQ, DM, DQS_t, and DQS_c voltage levels must be between V_{SSQ} and V_{DDQ} during voltage ramp to avoid latchup. CK_t, CK_c, CS_n, and CA input levels must be between V_{SS} and V_{DD2} during voltage ramp to avoid latchup.

The following conditions apply for voltage ramp:

- Ta is the point when any power supply first reaches 300mV.
- Noted conditions apply between Ta and power-down (controlled or uncontrolled).
- Tb is the point at which all supply and reference voltages are within their defined operating ranges.
- Power ramp duration ^{t}INIT0 (Tb - Ta) must not exceed 20ms.
- For supply and reference voltage operating conditions, see the Recommended DC Operating Conditions table.
- The voltage difference between any of V_{SS}, and V_{SSQ} pins must not exceed 100mV.

2. Voltage Ramp Completion

After Ta is reached:

- V_{DD1} must be greater than V_{DD2} - 200mV
- V_{DD1} and V_{DD2} must be greater than V_{DDQ} - 200mV
- V_{REF} must always be less than all other supply voltages

Beginning at Tb, CKE must remain LOW for at least ^{t}INIT1 = 100ns, after which CKE can be asserted HIGH. The clock must be stable at least ^{t}INIT2 = 5 × ^{t}CK prior to the first CKE LOW-to-HIGH transition (Tc). CKE, CS_n, and CA inputs must observe setup and hold requirements (^{t}IS, ^{t}IH) with respect to the first rising clock edge (and to subsequent falling and rising edges).

If any MRRs are issued, the clock period must be within the range defined for ^{t}CKb (18ns to 100ns). MRWs can be issued at normal clock frequencies as long as all AC timings are met. Some AC parameters (for example, ^{t}DQSCK) could have relaxed timings (such as ^{t}DQSCKb) before the system is appropriately configured. While keeping CKE HIGH, NOP commands must be issued for at least ^{t}INIT3 = 200µs (Td).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

3. RESET Command

After ^{t}INIT3 is satisfied, the MRW RESET command must be issued (Td). An optional PRECHARGE ALL command can be issued prior to the MRW RESET command. Wait at least ^{t}INIT4 while keeping CKE asserted and issuing NOP commands.

4. MRRs and Device Auto Initialization (DAI) Polling

After ^{t}INIT4 is satisfied (Te), only MRR commands and power-down entry/exit commands are supported. After Te, CKE can go LOW in alignment with power-down entry and exit specifications (see Power-Down).

The MRR command can be used to poll the DAI bit, which indicates when device auto initialization is complete; otherwise, the controller must wait a minimum of ^{t}INIT5 or until the DAI bit is set before proceeding.

Because the memory output buffers are not properly configured by Te, some AC parameters must use relaxed timing specifications before the system is appropriately configured.

After the memory device sets the DAI bit (MR0, DAI) to zero, indicating DAI complete, the device is in the idle state (Tf). DAI status can be determined by issuing the MRR command to MR0.

The device sets the DAI bit no later than ^{t}INIT5 after the RESET command. The controller must wait at least ^{t}INIT5 or until the DAI bit is set before proceeding.

5. ZQ Calibration

After ^{t}INIT5 (Tf), the MRW initialization calibration (ZQ calibration) command can be issued to the memory (MR10).

This command is used to calibrate output impedance over process, voltage, and temperature. In systems where more than one Mobile LPDDR2 device exists on the same bus, the controller must not overlap MRW ZQ calibration commands. The device is ready for normal operation after ^{t}ZQINIT.

6. Normal Operation

After (Tg), the MRW command must be used to properly configure the memory, including, for example, output buffer drive strength, latencies,and so on. Specifically, MR1, MR2, and MR3 must be set to configure the memory for the target frequency and memory configuration.

After the initialization sequence is complete, the device is ready for any valid command. After Tg, the clock frequency can be changed using the procedure described in Input Clock Frequency Changes and Stop Events.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 12: Voltage Ramp and Initialization Sequence

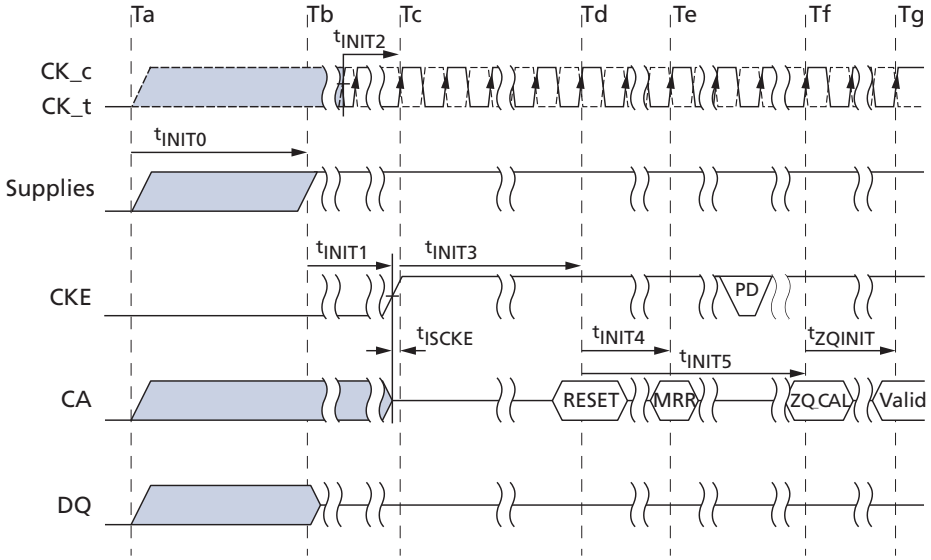

Note: 1. High-Z on the CA bus indicates valid NOP.

Table 10: Initialization Timing Parameters

Parameter	Value		Unit	Comment
	Min	Max		
^{t}INIT0	–	20	ms	Maximum voltage ramp time
^{t}INIT1	100	–	ns	Minimum CKE LOW time after completion of voltage ramp
^{t}INIT2	5	–	^{t}CK	Minimum stable clock before first CKE HIGH
^{t}INIT3	200	–	µs	Minimum idle time after first CKE assertion
^{t}INIT4	1	–	µs	Minimum idle time after RESET command
^{t}INIT5	–	10	µs	Maximum duration of device auto initialization
^{t}ZQINIT	1	–	µs	ZQ initial calibration (S4 devices only)
^{t}CKb	18	100	ns	Clock cycle time during boot

Note: 1. The ^{t}INIT0 maximum specification is not a tested limit and should be used as a general guideline. For voltage ramp times exceeding ^{t}INIT0 MAX, contact the factory.

Initialization After RESET (Without Voltage Ramp)

If the RESET command is issued before or after the power-up initialization sequence, the reinitialization procedure must begin at Td.

Power-Off Sequence

While powering off, CKE must be held LOW ($\leq 0.2 \times V_{DD2}$); all other inputs must be between V_{ILmin} and V_{IHmax}. The device outputs remain at High-Z while CKE is held LOW.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

DQ, DM, DQS_t, and DQS_c voltage levels must be between V_{SSQ} and V_{DDQ} during the power-off sequence to avoid latchup. CK_t, CK_c, CS_n, and CA input levels must be between V_{SS} and V_{DD2} during the power-off sequence to avoid latchup.

Tx is the point where any power supply drops below the minimum value specified in the Recommended DC Operating Conditions table.

Tz is the point where all power supplies are below 300mV. After Tz, the device is powered off.

Required Power Supply Conditions Between Tx and Tz:

- V_{DD1} must be greater than V_{DD2} - 200mV
- V_{DD1} must be greater than V_{DDQ} - 200mV
- V_{REF} must always be less than all other supply voltages

The voltage difference between V_{SS} and V_{SSQ} must not exceed 100mV.

For supply and reference voltage operating conditions, see Recommended DC Operating Conditions table.

Uncontrolled Power-Off Sequence

When an uncontrolled power-off occurs, the following conditions must be met:

- At Tx, when the power supply drops below the minimum values specified in the Recommended DC Operating Conditions table, all power supplies must be turned off and all power-supply current capacity must be at zero, except for any static charge remaining in the system.
- After Tz, the point at which all power supplies first reach 300mV, the device must power off. The time between Tx and Tz must not exceed ^{t}POFF. During this period, the relative voltage between power supplies is uncontrolled. V_{DD1} and V_{DD2} must decrease with a slope lower than 0.5 V/µs between Tx and Tz.

An uncontrolled power-off sequence can occur a maximum of 400 times over the life of the device.

Table 11: Power-Off Timing

Parameter	Symbol	Min	Max	Unit
Maximum power-off ramp time	^{t}POFF	–	2	sec

Mode Register Definition

The LPDDR2 device contains a set of mode registers used for programming device operating parameters, reading device information and status, and for initiating special operations such as DQ calibration, ZQ calibration, and device reset.

Mode Register Assignments and Definitions

The MRR command is used to read from a register. The MRW command is used to write to a register. An “R” in the access column of the mode register assignment table indicates read-only; a “W” indicates write-only; “R/W” indicates read or write capable or enabled.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 12: Mode Register Assignments

Notes 1–5 apply to all parameters and conditions

MR#	MA[7:0]	Function	Access	OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0	Link
0	00h	Device info	R	RFU			RZQI		RFU	DI	DAI	go to MR0
1	01h	Device feature 1	W	*n*WR (for AP)			WC	BT	BL			go to MR1
2	02h	Device feature 2	W	RFU				RL and WL				go to MR2
3	03h	I/O config-1	W	RFU				DS				go to MR3
4	04h	SDRAM refresh rate	R	TUF	RFU			Refresh rate				go to MR4
5	05h	Basic config-1	R	LPDDR2 Manufacturer ID								go to MR5
6	06h	Basic config-2	R	Revision ID1								go to MR6
7	07h	Basic config-3	R	Revision ID2								go to MR7
8	08h	Basic config-4	R	I/O width		Density				Type		go to MR8
9	09h	Test mode	W	Vendor-specific test mode								go to MR9
10	0Ah	I/O calibration	W	Calibration code								go to MR10
11–15	0Bh ≈ 0Fh	Reserved	–	RFU								go to MR11
16	10h	PASR_Bank	W	Bank mask								go to MR16
17	11h	PASR_Seg	W	Segment mask								go to MR17
18–31	12h–1Fh	Reserved	–	RFU								go to MR18
32	20h	DQ calibration pattern A	R	See Data Calibration Pattern Description table								go to MR32
33–39	21h–27h	Do not use										go to MR33
40	28h	DQ calibration pattern B	R	See Data Calibration Pattern Description table								go to MR40
41–47	29h–2Fh	Do not use										go to MR41
48–62	30h–3Eh	Reserved	–	RFU								go to MR48
63	3Fh	RESET	W	X								go to MR63
64–126	40h–7Eh	Reserved	–	RFU								go to MR64
127	7Fh	Do not use										go to MR127
128–190	80h–BEh	Reserved for vendor use		RVU								go to MR128
191	BFh	Do not use										go to MR191
192–254	C0h–FEh	Reserved for vendor use		RVU								go to MR192
255	FFh	Do not use										go to MR255

Notes:
1. RFU bits must be set to 0 during MRW.
2. RFU bits must be read as 0 during MRR.
3. For READs to a write-only or RFU register, DQS will be toggled and undefined data is returned.
4. RFU mode registers must not be written.
5. WRITEs to read-only registers must have no impact on the functionality of the device.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 13: MR0 Device Information (MA[7:0] = 00h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
RFU			RZQI		RFU	DI	DAI

Table 14: MR0 Op-Code Bit Definitions

Notes 1–4 apply to all parameters and conditions

Register Information	Tag	Type	OP	Definition
Device auto initialization status	DAI	Read-only	OP0	0b: DAI complete
				1b: DAI in progress
Device information	DI	Read-only	OP1	0b:DDR2 Mobile RAM (S4 SDRAM)
Built-in self test for RZQ information	RZQI	Read-only	OP[4:3]	01b: ZQ pin might be connected to V_{DD2} or left floating
				10b: ZQ pin might be shorted to ground
				11b: ZQ pin self test complete; no error condition detected(ZQ-pin may not connect to VDD or float nor short to GND)

Notes:
1. If RZQI is supported, it will be set upon completion of the MRW ZQ initialization calibration.
2. If ZQ is connected to V_{DD2} to set default calibration, OP[4:3] must be set to 01. If ZQ is not connected to V_{DD2}, either OP[4:3] = 01 or OP[4:3] = 10 could indicate a ZQ-pin assembly error. It is recommended that the assembly error be corrected.
3. In the case of a possible assembly error (either OP[4:3] = 01 or OP[4:3] = 10, as defined above), the device will default to factory trim settings for R_{ON}(output impedance) and will ignore ZQ calibration commands. In either case, the system might not function as intended.
4. If a ZQ self test returns a value of 11b, this indicates that the device has detected a resistor connection to the ZQ pin. Note that this result cannot be used to validate the ZQ resistor value, nor does it indicate that the ZQ resistor tolerance meets the specified limits (240 ohms ±1%).

Table 15: MR1 Device Feature 1 (MA[7:0] = 01h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
*n*WR (for AP)			WC	BT	BL		

Table 16: MR1 Op-Code Bit Definitions

Feature	Type	OP	Definition	Notes
BL = burst length	Write-only	OP[2:0]	010b: BL4 (default)	1
			011b: BL8	
			100b: BL16	
			All others: Reserved	

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 16: MR1 Op-Code Bit Definitions (Continued)

Feature	Type	OP	Definition	Notes
BT = burst type	Write-only	OP3	0b: Sequential (default)	
			1b: Interleaved	
WC = wrap control	Write-only	OP4	0b: Wrap (default)	
			1b: No wrap (allowed for BL4 only)	
*n*WR = number of ^{t}WR clock cycles	Write-only	OP[7:5]	001b: *n*WR = 3 (default)	2
			010b: *n*WR = 4	
			011b: *n*WR = 5	
			100b: *n*WR = 6	
			101b: *n*WR = 7	
			110b: *n*WR = 8	
			All others: Reserved	

Notes:
1. BL16, interleaved is not an official combination to be supported.
2. The programmed value in *n*WR register is the number of clock cycles that determines when to start internal precharge operation for a WRITE burst with AP enabled. It is determined by RU (^{t}WR/^{t}CK).

Table 17: Burst Sequence by Burst Length (BL), Burst Type (BT), and Wrap Control (WC)

Notes 1–5 apply to all parameters and conditions

							Burst Cycle Number and Burst Address Sequence															
BL	BT	C3	C2	C1	C0	WC	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
4	Any	X	X	0b	0b	Wrap	0	1	2	3												
		X	X	1b	0b		2	3	0	1												
	Any	X	X	X	0b	No wrap	*y*	*y* + 1	*y* + 2	*y* + 3												
8	Seq	X	0b	0b	0b	Wrap	0	1	2	3	4	5	6	7								
		X	0b	1b	0b		2	3	4	5	6	7	0	1								
		X	1b	0b	0b		4	5	6	7	0	1	2	3								
		X	1b	1b	0b		6	7	0	1	2	3	4	5								
	Int	X	0b	0b	0b		0	1	2	3	4	5	6	7								
		X	0b	1b	0b		2	3	0	1	6	7	4	5								
		X	1b	0b	0b		4	5	6	7	0	1	2	3								
		X	1b	1b	0b		6	7	4	5	2	3	0	1								
	Any	X	X	X	0b	No wrap	Illegal (not supported)															

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 17: Burst Sequence by Burst Length (BL), Burst Type (BT), and Wrap Control (WC) (Continued)

Notes 1–5 apply to all parameters and conditions

							Burst Cycle Number and Burst Address Sequence															
BL	BT	C3	C2	C1	C0	WC	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
16	Seq	0b	0b	0b	0b	Wrap	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
		0b	0b	1b	0b		2	3	4	5	6	7	8	9	A	B	C	D	E	F	0	1
		0b	1b	0b	0b		4	5	6	7	8	9	A	B	C	D	E	F	0	1	2	3
		0b	1b	1b	0b		6	7	8	9	A	B	C	D	E	F	0	1	2	3	4	5
		1b	0b	0b	0b		8	9	A	B	C	D	E	F	0	1	2	3	4	5	6	7
		1b	0b	1b	0b		A	B	C	D	E	F	0	1	2	3	4	5	6	7	8	9
		1b	1b	0b	0b		C	D	E	F	0	1	2	3	4	5	6	7	8	9	A	B
		1b	1b	1b	0b		E	F	0	1	2	3	4	5	6	7	8	9	A	B	C	D
	Int	X	X	X	0b		Illegal (not supported)															
	Any	X	X	X	0b	No wrap	Illegal (not supported)															

Notes:
1. C0 input is not present on CA bus. It is implied zero.
2. For BL = 4, the burst address represents C[1:0].
3. For BL = 8, the burst address represents C[2:0].
4. For BL = 16, the burst address represents C[3:0].
5. For no-wrap, BL4, the burst must not cross the page boundary or the sub-page boundary. The variable *y* can start at any address with C0 equal to 0, but must not start at any address shown in the following table.

Table 18: No-Wrap Restrictions

Width	64Mb	128Mb/256Mb	512Mb/1Gb/2Gb	4Gb/8Gb
Cannot cross full-page boundary				
x16	FE, FF, 00, 01	1FE, 1FF, 000, 001	3FE, 3FF, 000, 001	7FE, 7FF, 000, 001
x32	7E, 7F, 00, 01	FE, FF, 00, 01	1FE, 1FF, 000, 001	3FE, 3FF, 000, 001
Cannot cross sub-page boundary				
x16	7E, 7F, 80, 81	0FE, 0FF, 100, 101	1FE, 1FF, 200, 201	3FE, 3FF, 400, 401
x32	None	None	None	None

Note:
1. No-wrap BL = 4 data orders shown are prohibited.

Table 19: MR2 Device Feature 2 (MA[7:0] = 02h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
RFU				RL and WL			

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 20: MR2 Op-Code Bit Definitions

Feature	Type	OP	Definition
RL and WL	Write-only	OP[3:0]	0001b: RL3/WL1 (default)
			0010b: RL4/WL2
			0011b: RL5/WL2
			0100b: RL6/WL3
			0101b: RL7/WL4
			0110b: RL8/WL4
			All others: Reserved

Table 21: MR3 I/O Configuration 1 (MA[7:0] = 03h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
RFU				DS			

Table 22: MR3 Op-Code Bit Definitions

Feature	Type	OP	Definition
DS	Write-only	OP[3:0]	0000b: Reserved
			0001b: 34.3 ohm typical
			0010b: 40 ohm typical (default)
			0011b: 48 ohm typical
			0100b: 60 ohm typical
			0101b: Reserved
			0110b: 80 ohm typical
			0111b: 120 ohm typical
			All others: Reserved

Table 23: MR4 Device Temperature (MA[7:0] = 04h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
TUF	RFU				SDRAM refresh rate		

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 24: MR4 Op-Code Bit Definitions

Notes 1–8 apply to all parameters and conditions

Feature	Type	OP	Definition
SDRAM refresh rate	Read-only	OP[2:0]	000b: SDRAM low temperature operating limit exceeded
			001b: 4 × ^{t}REFI, 4 × ^{t}REFIpb, 4 × ^{t}REFW
			010b: 2 × ^{t}REFI, 2 × ^{t}REFIpb, 2 × ^{t}REFW
			011b: 1 × ^{t}REFI, 1 × ^{t}REFIpb, 1 × ^{t}REFW (≤85°C)
			100b: Reserved
			101b: 0.25 × ^{t}REFI, 0.25 × ^{t}REFIpb, 0.25 × ^{t}REFW, do not derate SDRAM AC timing
			110b: 0.25 × ^{t}REFI, 0.25 × ^{t}REFIpb, 0.25 × ^{t}REFW, derate SDRAM AC timing
			111b: SDRAM high temperature operating limit exceeded
Temperature update flag (TUF)	Read-only	OP7	0b: OP[2:0] value has not changed since last read of MR4
			1b: OP[2:0] value has changed since last read of MR4

Notes:
1. A MODE REGISTER READ from MR4 will reset OP7 to 0.
2. OP7 is reset to 0 at power-up.
3. If OP2 = 1, the device temperature is greater than 85°C.
4. OP7 is set to 1 if OP[2:0] has changed at any time since the last MR4 read.
5. The device might not operate properly when OP[2:0] = 000b or 111b.
6. For specified operating temperature range and maximum operating temperature, refer to the Operating Temperature Range table.
7. LPDDR2 devices must be derated by adding 1.875ns to the following core timing parameters: ^{t}RCD, ^{t}RC, ^{t}RAS, ^{t}RP, and ^{t}RRD. The ^{t}DQSCK parameter must be derated as specified in AC Timing. Prevailing clock frequency specifications and related setup and hold timings remain unchanged.
8. The recommended frequency for reading MR4 is provided in Temperature Sensor.

Table 25: MR5 Basic Configuration 1 (MA[7:0] = 05h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
LPDDR2 Manufacturer ID							

Table 26: MR5 Op-Code Bit Definitions

Feature	Type	OP	Definition
Manufacturer ID	Read-only	OP[7:0]	00000011b
			All others: Reserved

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 27: MR6 Basic Configuration 2 (MA[7:0] = 06h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
Revision ID1 (Die Revision)							

Note: 1. MR6 is vendor-specific.

Table 28: MR6 Op-Code Bit Definitions

Feature	Type	OP	Definition
Revision ID1 (Die Revision)	Read-only	OP[7:0]	0000 0000b: Version A 0000 0001b: Version B 0000 0010b: Version C 0000 0010b: Version D(512Mb only) 0000 0011b: Version D

Table 29: MR7 Basic Configuration 3 (MA[7:0] = 07h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
Revision ID2 (RFU)							

Table 30: MR7 Op-Code Bit Definitions

Feature	Type	OP	Definition
Revision ID2 (RFU)	Read-only	OP[7:0]	0000 0000b: Default Value

Note: 1. MR7 is vendor-specific.

Table 31: MR8 Basic Configuration 4 (MA[7:0] = 08h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
I/O width		Density				Type	

Table 32: MR8 Op-Code Bit Definitions

Feature	Type	OP	Definition
Type	Read-only	OP[1:0]	00b: S4 SDRAM
			01b: S2 SDRAM
			10b: Reserved
			11b: Reserved

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 32: MR8 Op-Code Bit Definitions (Continued)

Feature	Type	OP	Definition
Density	Read-only	OP[5:2]	0000b: 64Mb
			0001b: 128Mb
			0010b: 256Mb
			0011b: 512Mb
			0100b: 1Gb
			0101b: 2Gb
			0110b: 4Gb
			0111b: 8Gb
			1000b: 16Gb
			1001b: 32Gb
			All others: Reserved
I/O width	Read-only	OP[7:6]	00b: x32
			01b: x16
			10b: x8
			11b: not used

Table 33: MR9 Test Mode (MA[7:0] = 09h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
Vendor-specific test mode							

Table 34: MR10 Calibration (MA[7:0] = 0Ah)

	OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
S4	Calibration code							

Table 35: MR10 Op-Code Bit Definitions

Notes 1–6 apply to all parameters and conditions

Feature	Type	OP	Definition
Calibration code	Write-only	OP[7:0]	0xFF: Calibration command after initialization
			0xAB: Long calibration
			0x56: Short calibration
			0xC3: ZQRESET
			All others: Reserved

Notes:
1. Host processor must not write MR10 with reserved values.
2. The device ignores calibration commands when a reserved value is written into MR10.
3. See AC timing table for the calibration latency.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

4. If ZQ is connected to V_{SS} through R_{ZQ}, either the ZQ calibration function (see MODE REGISTER WRITE command) or default calibration (through the ZQRESET command) is supported. If ZQ is connected to V_{DD2}, the device operates with default calibration, and ZQ calibration commands are ignored. In both cases, the ZQ connection must not change after power is supplied to the device.
5. LPDDR2 devices that do not support calibration shall ignore the ZQ Calibration command.
6. Optionally, the MRW ZQ Initialization Calibration command will update MR0 to indicate RZQ pin connection.

Table 36: MR[11:15] Reserved (MA[7:0] = 0Bh–0Fh)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
Reserved							

Table 37: MR16 PASR Bank Mask (MA[7:0] = 010h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
Bank mask (4-bank or 8-bank)							

Table 38: MR16 Op-Code Bit Definitions

Feature	Type	OP	Definition
Bank[7:0] mask	Write-only	OP[7:0]	0b: refresh enable to the bank = unmasked (default)
			1b: refresh blocked = masked

Note: 1. For 4-bank devices, only OP[3:0] are used.

Table 39: MR16 Bank and OP corresponding table

Feature	Type	OP	4-Bank Mask		8-Bank Mask	
			Bank #	Bank Address	Bank #	Bank Address
Bank[7:0] mask	Write-only	0	Bank 0	000b	Bank 0	000b
		1	Bank 1	001b	Bank 1	001b
		2	Bank 2	010b	Bank 2	010b
		3	Bank 3	011b	Bank 3	011b
		4	–	–	Bank 4	100b
		5	–	–	Bank 5	101b
		6	–	–	Bank 6	110b
		7	–	–	Bank 7	111b

Note: 1. Each bank can be masked independently by setting each OP value.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 40: MR17 PASR Segment Mask (MA[7:0] = 011h)

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
Segment mask							

Note: 1. This table applies for 1Gb to 8Gb devices only.

Table 41: MR17 PASR Segment Mask Definitions (1Gb - 8Gb only)

Feature	Type	OP	Definition
Segment[7:0] mask	Write-only	OP[7:0]	0b: refresh enable to the segment: = unmasked (default)
			1b: refresh blocked: = masked

Table 42: MR17 PASR Row Address Ranges in Masked Segments

Segment	OP	Segment Mask	1Gb	2Gb, 4Gb	8Gb
			R[12:10]	R[13:11]	R[14:12]
0	0	XXXXXXX1	000b		
1	1	XXXXXX1X	001b		
2	2	XXXXX1XX	010b		
3	3	XXXX1XXX	011b		
4	4	XXX1XXXX	100b		
5	5	XX1XXXXX	101b		
6	6	X1XXXXXX	110b		
7	7	1XXXXXXX	111b		

Note: 1. X is “Don’t Care” for the designated segment.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 43: Reserved Mode Registers

Mode Register	MA	Address	Restriction	OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
MR[18:19]	MA[7:0]	12h–13h	RFU	Reserved							
MR[20:31]		14h–1Fh	NVM[1]								
MR[33:39]		21h–27h	DNU[1]								
MR[41:47]		29h–2Fh									
MR[48:62]		30h–3Eh	RFU								
MR[64:126]		40h–7Eh	RFU								
MR127		7Fh	DNU								
MR[128:190]		80h–BEh	RVU[1]								
MR191		BFh	DNU								
MR[192:254]		C0h–FEh	RVU								
MR255		FFh	DNU								

Note: 1. NVM = nonvolatile memory use only; DNU = Do not use; RVU = Reserved for vendor use.

Table 44: MR32 DQ Calibration Pattern A (MA[7:0] = 20H)

MR32 Reads
Reads to MR32 return DQ Calibration Pattern A

Table 45: MR40 DQ Calibration Pattern B (MA[7:0] = 28H)

MR40 Reads
Reads to MR40 return DQ Calibration Pattern B

Table 46: MR63 RESET (MA[7:0] = 3Fh) – MRW Only

OP7	OP6	OP5	OP4	OP3	OP2	OP1	OP0
X							

Note: 1. For additional information on MRW RESET see MODE REGISTER WRITE Command.

Commands and Timing

The setup and hold timings shown in the figures below apply for all commands.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 13: Command and Input Setup and Hold

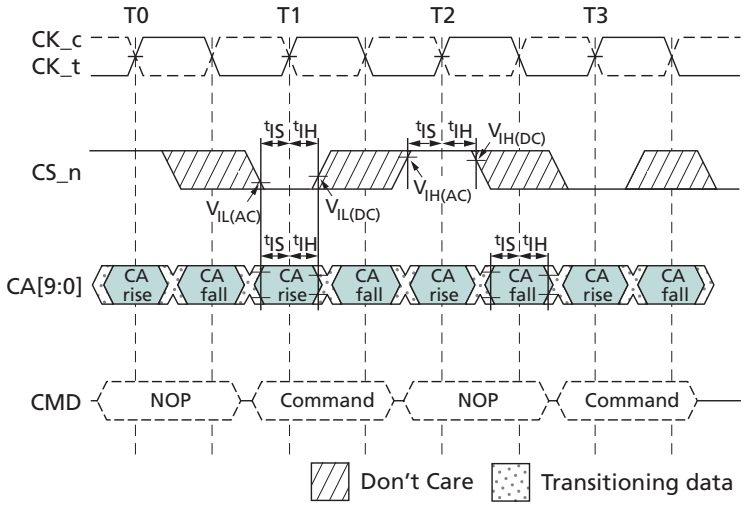

Note: 1. Setup and hold conditions also apply to the CKE pin. For timing diagrams related to the CKE pin, see the Power-Down section.

Figure 14: CKE Input Setup and Hold

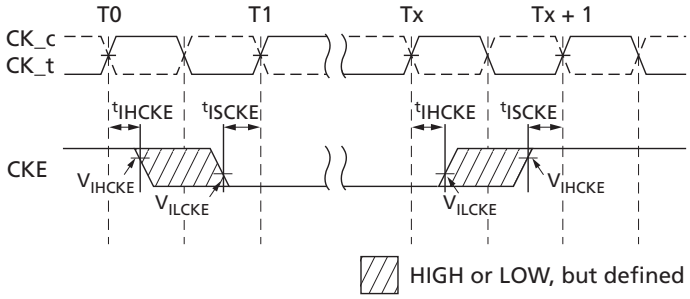

Notes: 1. After CKE is registered LOW, the CKE signal level is maintained below V_{ILCKE} for ^{t}CKE specification (LOW pulse width).
2. After CKE is registered HIGH, the CKE signal level is maintained below V_{IHCKE} for ^{t}CKE specification (HIGH pulse width).

ACTIVATE Command

The ACTIVATE command is issued by holding CS_n LOW, CA0 LOW, and CA1 HIGH at the rising edge of the clock. The bank addresses BA[2:0] are used to select the desired bank. Row addresses are used to determine which row to activate in the selected bank. The ACTIVATE command must be applied before any READ or WRITE operation can be executed. The device can accept a READ or WRITE command at ^{t}RCD after the ACTIVATE command is issued. After a bank has been activated, it must be precharged before another ACTIVATE command can be applied to the same bank. The bank active and precharge times are defined as ^{t}RAS and ^{t}RP, respectively. The minimum time interval between successive ACTIVATE commands to the same bank is determined by the RAS

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

cycle time of the device (tRC). The minimum time interval between ACTIVATE commands to different banks is tRRD.

Figure 15: ACTIVATE Command

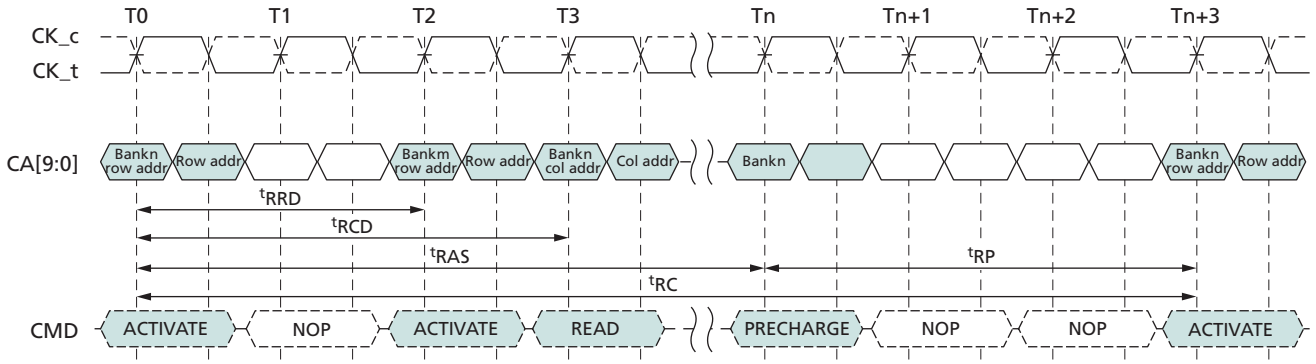

Notes:
1. tRCD = 3, tRP = 3, tRRD = 2.
2. A PRECHARGE ALL command uses tRPab timing, and a single-bank PRECHARGE command uses tRPpb timing. In this figure, tRP is used to denote either an all-bank PRECHARGE or a single-bank PRECHARGE.

8-Bank Device Operation

Two rules regarding 8-bank device operation must be observed: One rule restricts the number of sequential ACTIVATE commands that can be issued; the second rule provides additional RAS precharge time for a PRECHARGE ALL command.

The 8-Bank Device Sequential Bank Activation Restriction: No more than four banks can be activated (or refreshed, in the case of REFpb) in a rolling tFAW window. To convert to clocks, divide tFAW[ns] by tCK[ns], and round up to the next integer value. For example, if RU(tFAW/tCK) is 10 clocks, and an ACTIVATE command is issued in clock *n*, no more than three further ACTIVATE commands can be issued at or between clock *n* + 1 and *n* + 9. REFpb also counts as bank activation for purposes of tFAW.

The 8-Bank Device PRECHARGE ALL Provision: tRP for a PRECHARGE ALL command must equal tRPab, which is greater than tRPpb.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 16: tFAW Timing (8-Bank Devices)

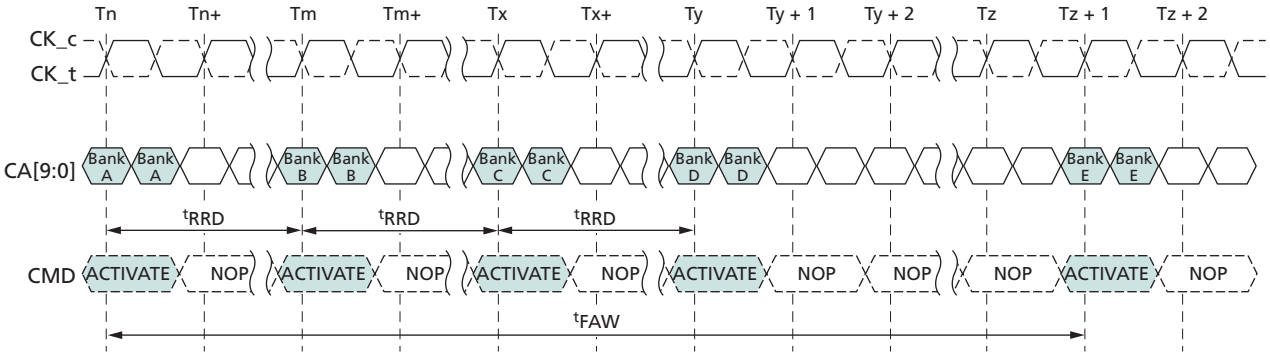

Note: 1. Exclusively for 8-bank devices.

Read and Write Access Modes

After a bank is activated, a READ or WRITE command can be issued with CS_n LOW, CA0 HIGH, and CA1 LOW at the rising edge of the clock. CA2 must also be defined at this time to determine whether the access cycle is a READ operation (CA2 HIGH) or a WRITE operation (CA2 LOW). A single READ or WRITE command initiates a burst READ or burst WRITE operation on successive clock cycles.

A new burst access must not interrupt the previous 4-bit burst operation when BL = 4. When BL = 8 or BL = 16, a READ can be interrupted by a READ and a WRITE can be interrupted by a WRITE, provided that the interrupt occurs on a 4-bit boundary and that tCCD is met.

Burst READ Command

The burst READ command is initiated with CS# LOW, CA0 HIGH, CA1 LOW, and CA2 HIGH at the rising edge of the clock. The command address bus inputs, CA5r–CA6r and CA1f–CA9f, determine the starting column address for the burst. The read latency (RL) is defined from the rising edge of the clock on which the READ command is issued to the rising edge of the clock from which the tDQSCK delay is measured. The first valid data is available RL × tCK + tDQSCK + tDQSQ after the rising edge of the clock when the READ command is issued. The data strobe output is driven LOW tRPRE before the first valid rising strobe edge. The first bit of the burst is synchronized with the first rising edge of the data strobe. Each subsequent data-out appears on each DQ pin, edge-aligned with the data strobe. The RL is programmed in the mode registers.

Pin input timings for the data strobe are measured relative to the crosspoint of DQS and its complement, DQS#.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 17: READ Output Timing – ^{t}DQSCK (MAX)

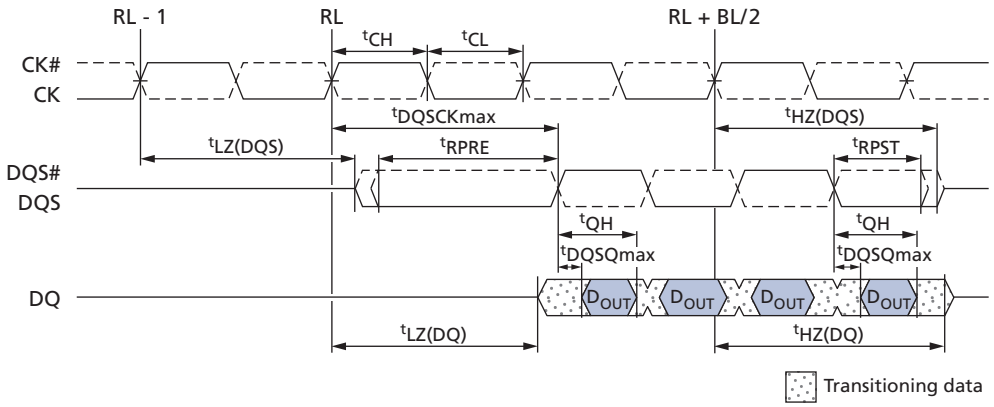

Notes: 1. ^{t}DQSCK can span multiple clock periods.
2. An effective burst length of 4 is shown.

Figure 18: READ Output Timing – ^{t}DQSCK (MIN)

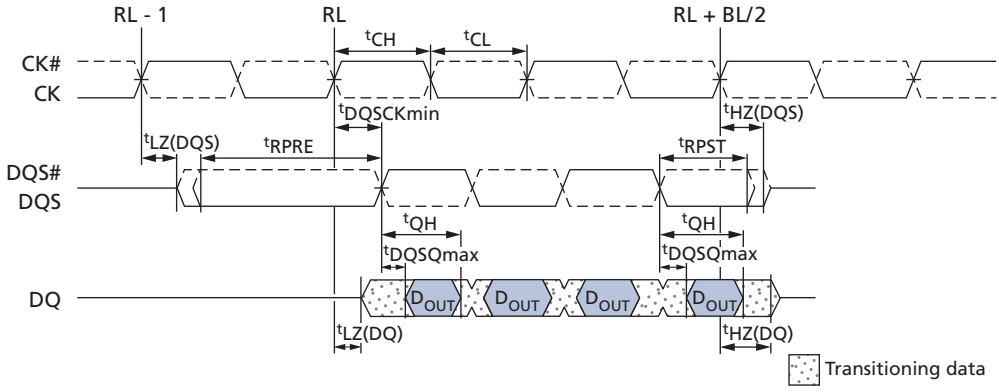

Note: 1. An effective burst length of 4 is shown.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 19: Burst READ – RL = 5, BL = 4, ^{t}DQSCK > ^{t}CK

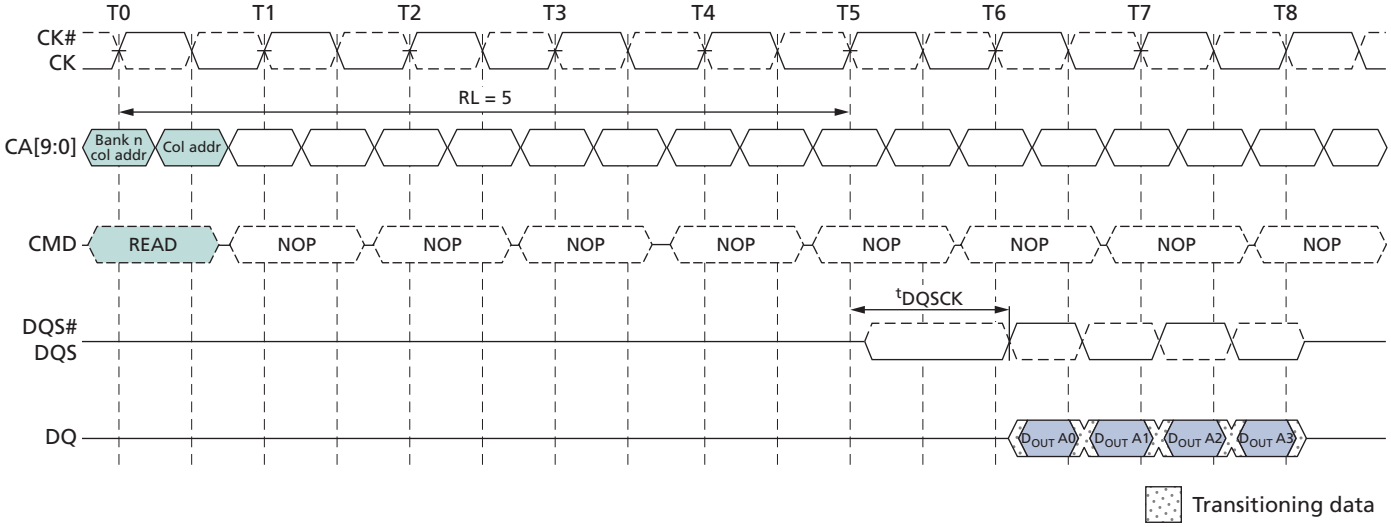

Figure 20: Burst READ – RL = 3, BL = 8, ^{t}DQSCK < ^{t}CK

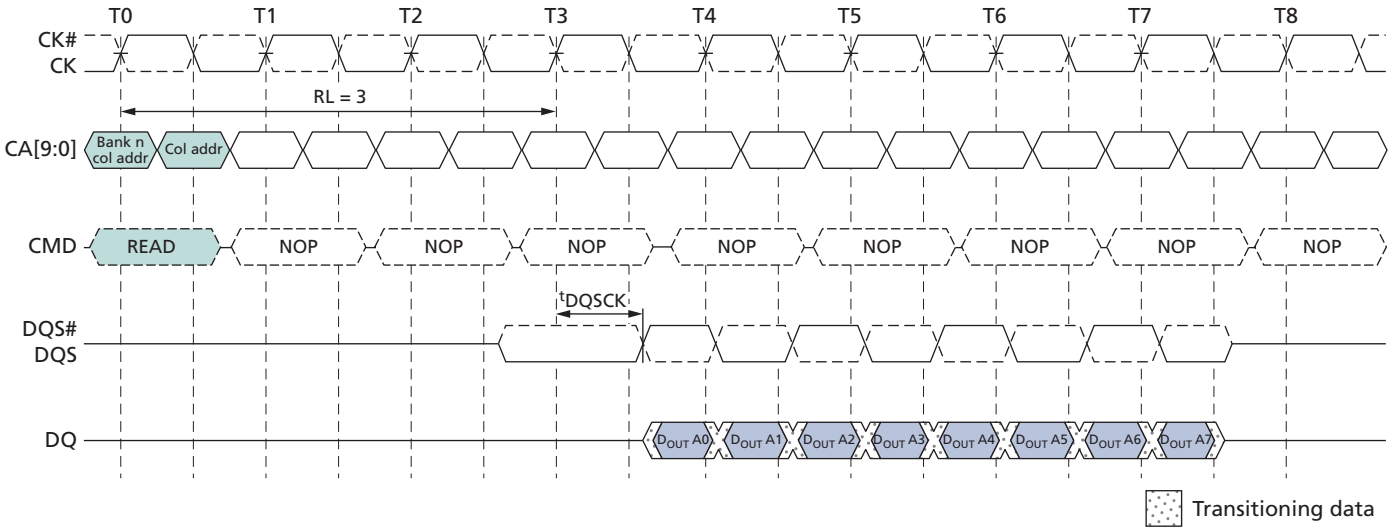

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 21: tDQSCKDL Timing

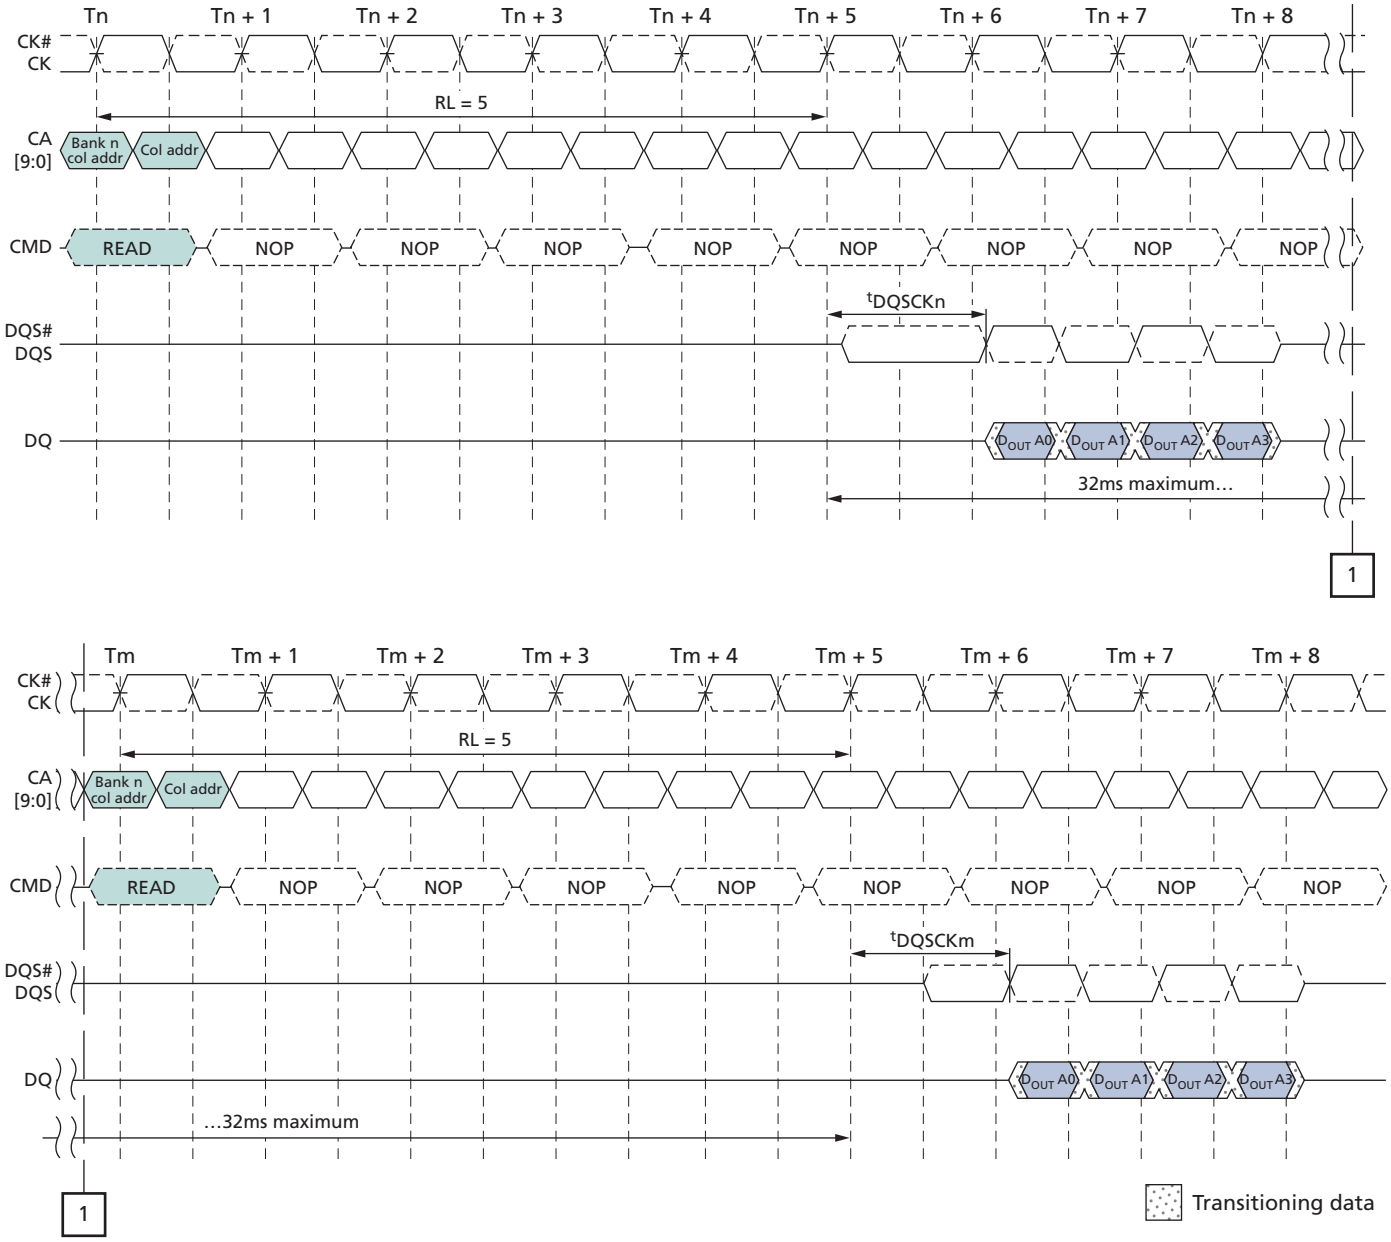

Notes:
1. tDQSCKDL = (tDQSCK*n* - tDQSCK*m*).
2. tDQSCKDL (MAX) is defined as the maximum of ABS (tDQSCK*n* - tDQSCK*m*) for any (tDQSCK*n*, tDQSCK*m*) pair within any 32ms rolling window.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 22: tDQSCKDM Timing

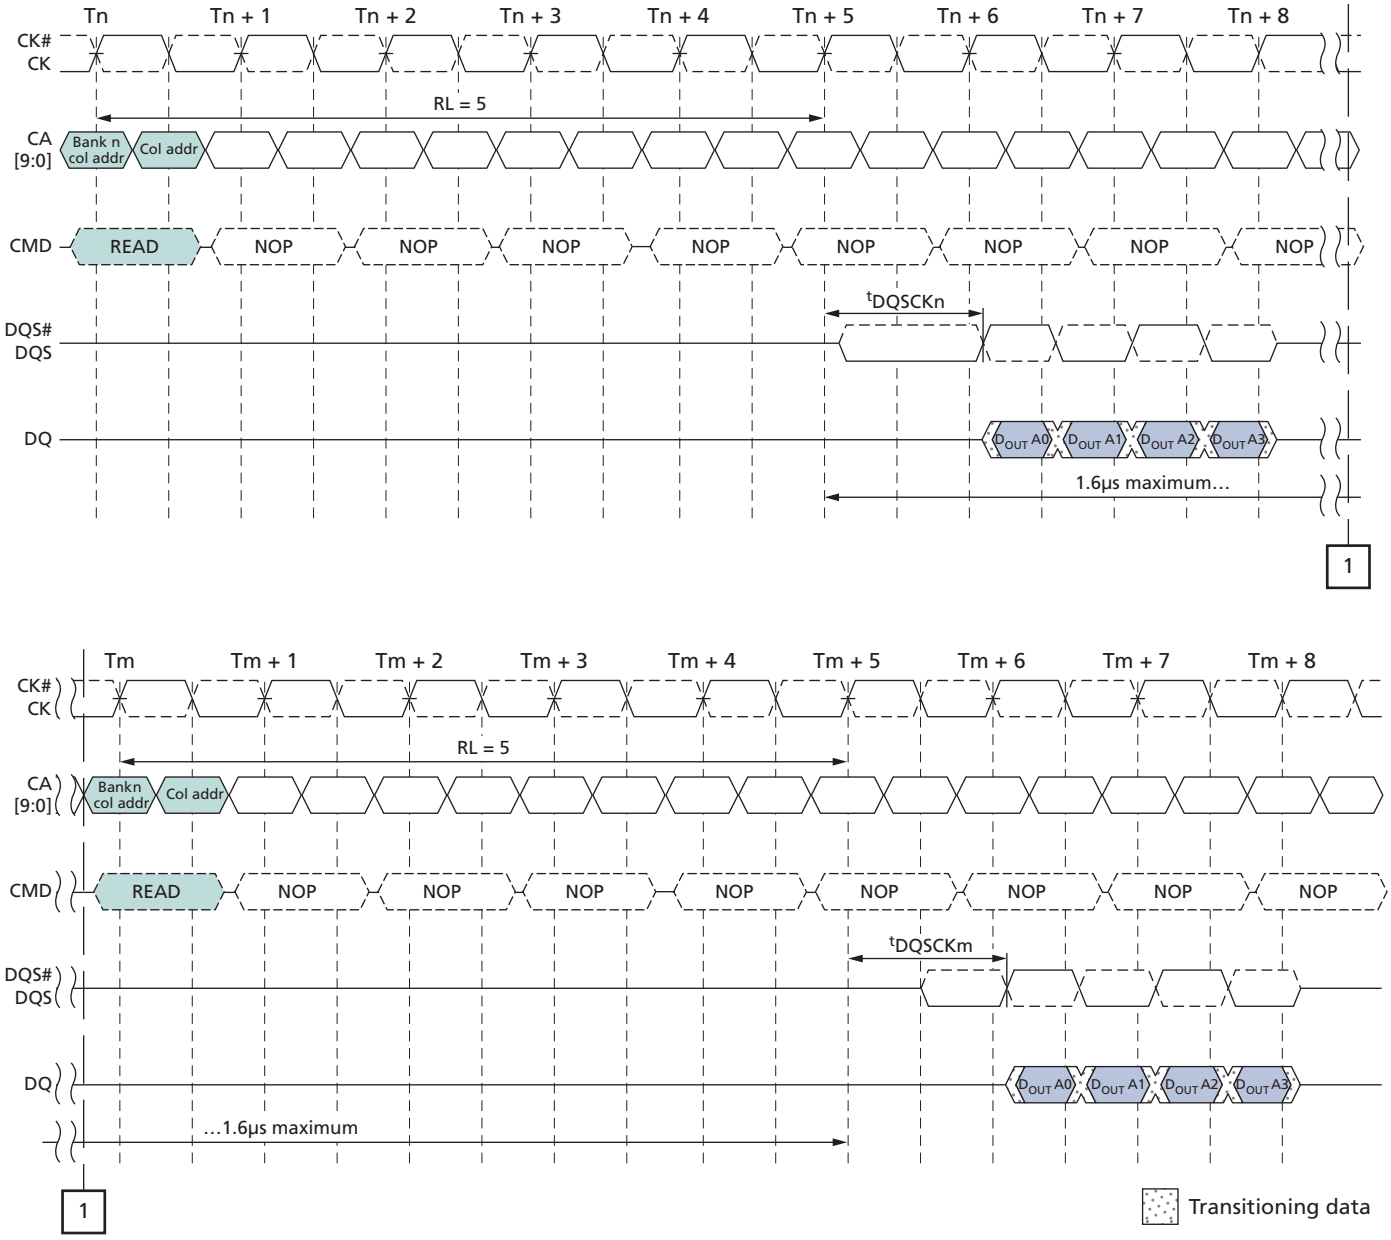

Notes:
1. tDQSCKDM = (tDQSCK*n* - tDQSCK*m*).
2. tDQSCKDM (MAX) is defined as the maximum of ABS (tDQSCK*n* - tDQSCK*m*) for any (tDQSCK*n*, tDQSCK*m*) pair within any 1.6µs rolling window.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 23: tDQSCKDS Timing

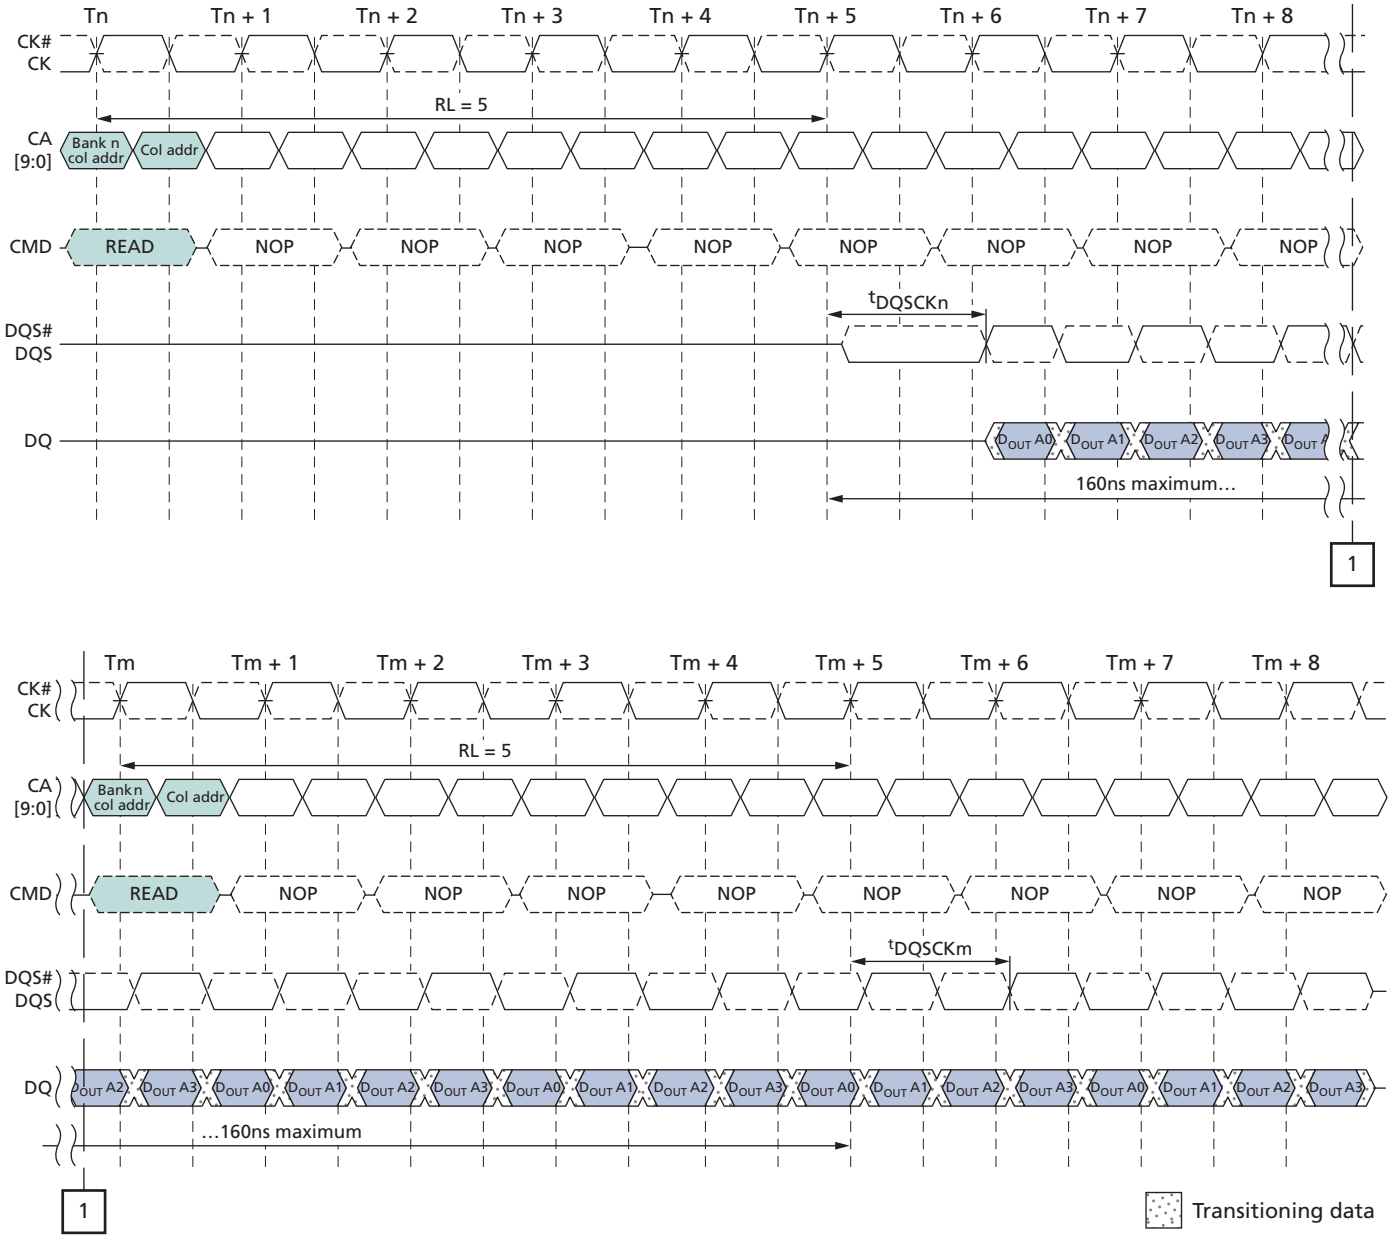

Notes:
1. tDQSCKDS = (tDQSCK*n* - tDQSCK*m*).
2. tDQSCKDS (MAX) is defined as the maximum of ABS (tDQSCK*n* - tDQSCK*m*) for any (tDQSCK*n*, tDQSCK*m*) pair for READs within a consecutive burst, within any 160ns rolling window.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 24: Burst READ Followed by Burst WRITE – RL = 3, WL = 1, BL = 4

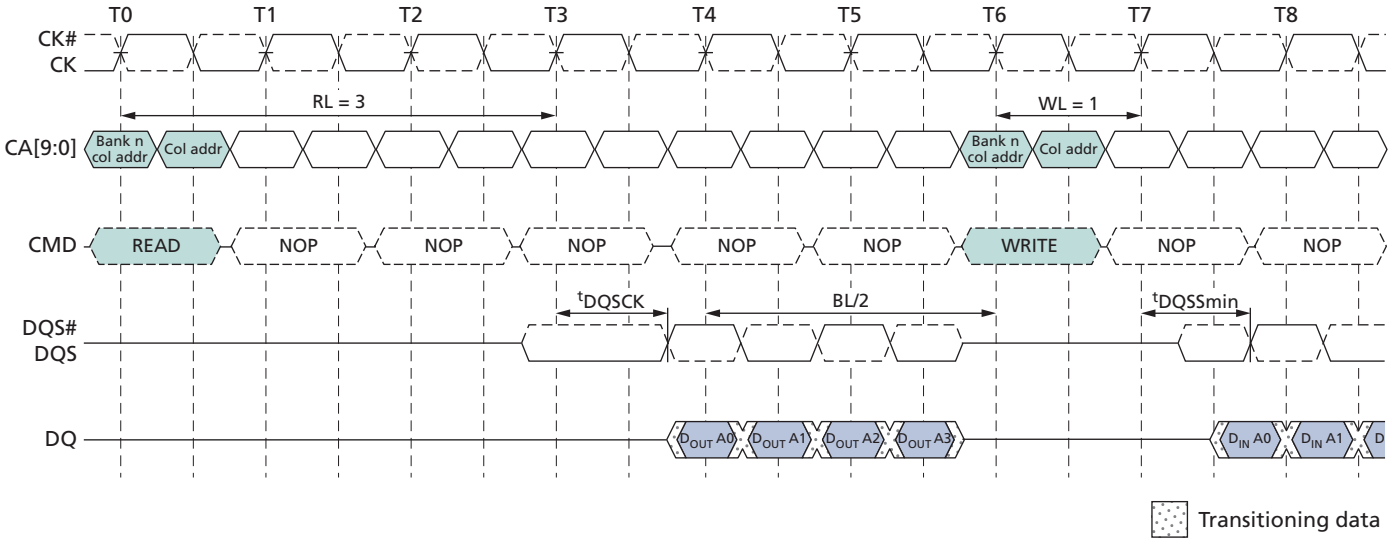

The minimum time from the burst READ command to the burst WRITE command is defined by the read latency (RL) and the burst length (BL). Minimum READ-to-WRITE latency is RL + RU(^{t}DQSCK(MAX)/^{t}CK) + BL/2 + 1 - WL clock cycles. Note that if a READ burst is truncated with a burst TERMINATE (BST) command, the effective burst length of the truncated READ burst should be used for BL when calculating the minimum READ-to-WRITE delay.

Figure 25: Seamless Burst READ – RL = 3, BL = 4, ^{t}CCD = 2

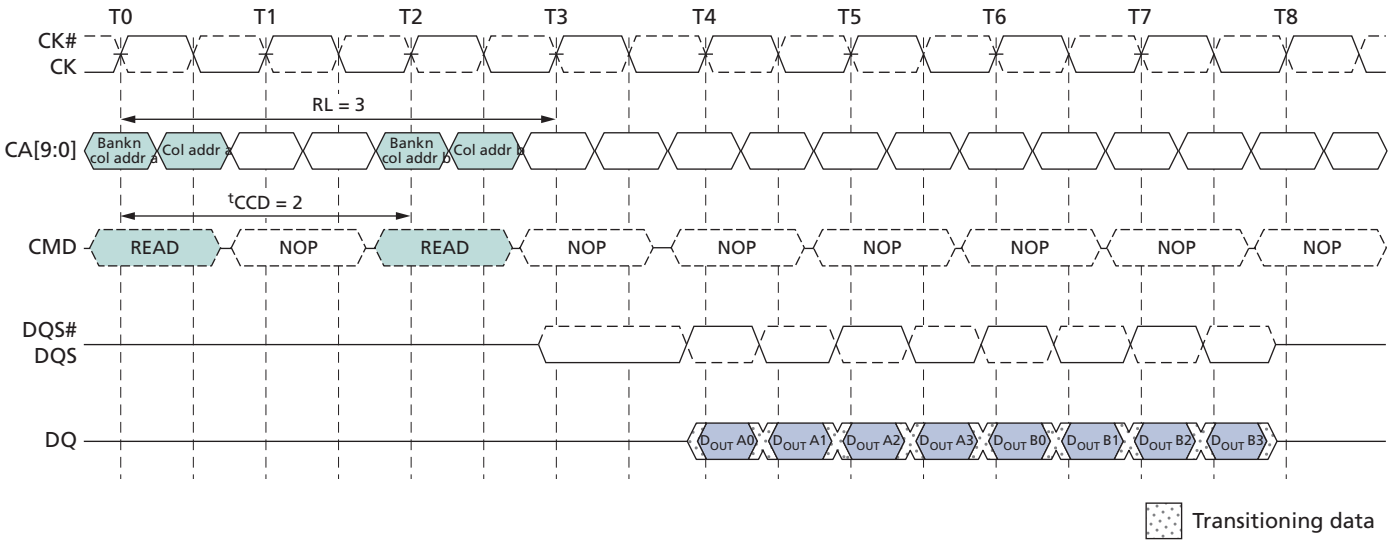

A seamless burst READ operation is supported by enabling a READ command at every other clock cycle for BL = 4 operation, every fourth clock cycle for BL = 8 operation, and every eighth clock cycle for BL = 16 operation. This operation is supported as long as the banks are activated, whether the accesses read the same or different banks.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

READs Interrupted by a READ

A burst READ can be interrupted by another READ with a 4-bit burst boundary, provided that ^{t}CCD is met.

Figure 26: READ Burst Interrupt Example – RL = 3, BL = 8, ^{t}CCD = 2

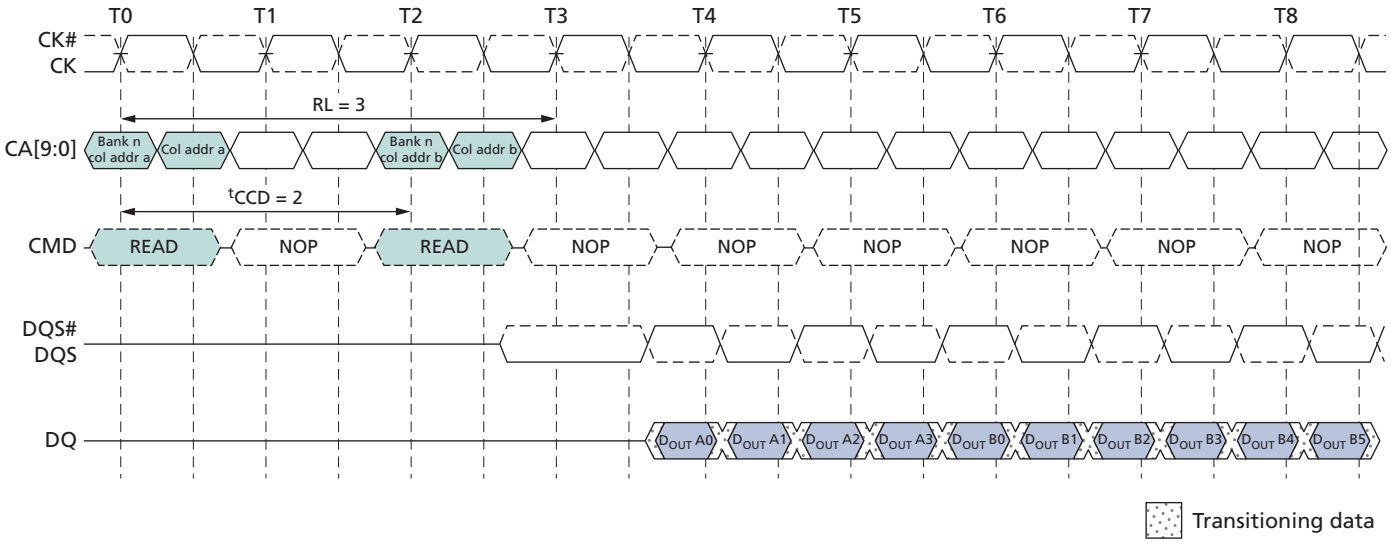

Note: 1. READs can only be interrupted by other READs or the BST command.

Burst WRITE Command

The burst WRITE command is initiated with CS# LOW, CA0 HIGH, CA1 LOW, and CA2 LOW at the rising edge of the clock. The command address bus inputs, CA5r–CA6r and CA1f–CA9f, determine the starting column address for the burst. Write latency (WL) is defined from the rising edge of the clock on which the WRITE command is issued to the rising edge of the clock from which the ^{t}DQSS delay is measured. The first valid data must be driven WL × ^{t}CK + ^{t}DQSS from the rising edge of the clock from which the WRITE command is issued. The data strobe signal (DQS) must be driven LOW ^{t}WPRE prior to data input. The burst cycle data bits must be applied to the DQ pins ^{t}DS prior to the associated edge of the DQS and held valid until ^{t}DH after that edge. Burst data is sampled on successive edges of the DQS until the 4-, 8-, or 16-bit burst length is completed. After a burst WRITE operation, ^{t}WR must be satisfied before a PRECHARGE command to the same bank can be issued.

Pin input timings are measured relative to the crosspoint of DQS and its complement, DQS#.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 27: Data Input (WRITE) Timing

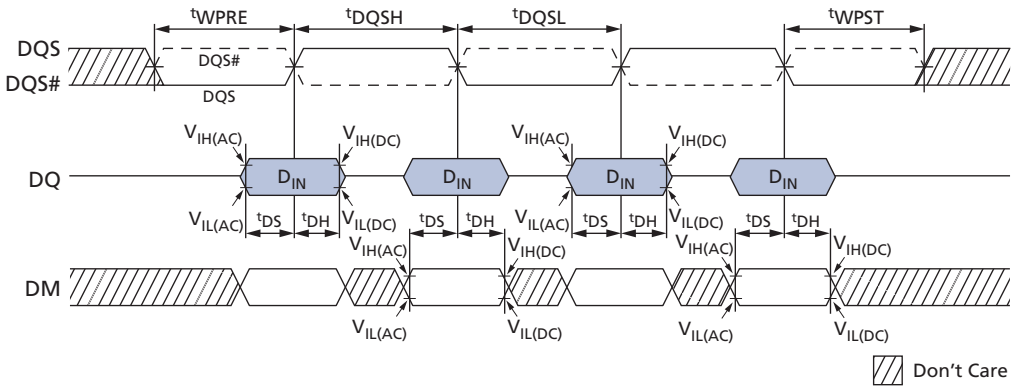

Figure 28: Burst WRITE – WL = 1, BL = 4

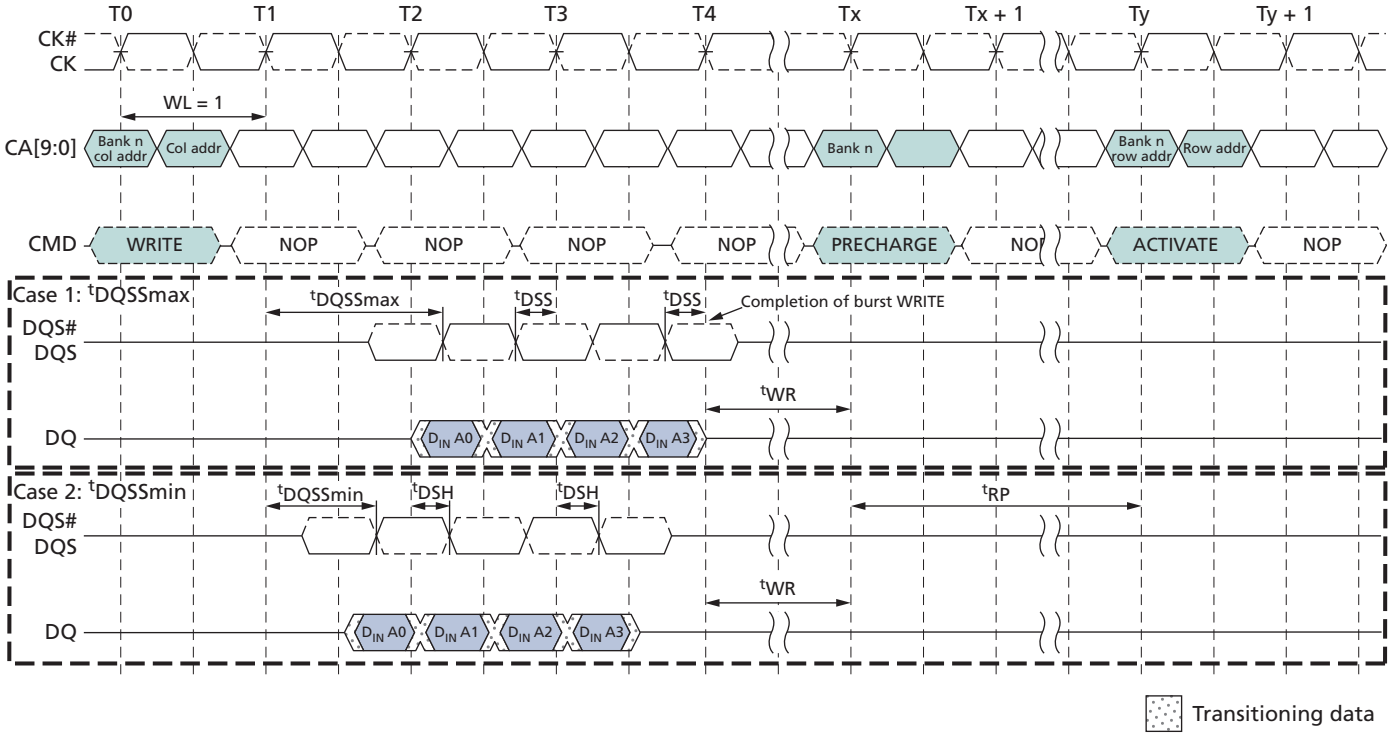

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 29: Burst WRITE Followed by Burst READ – RL = 3, WL = 1, BL = 4

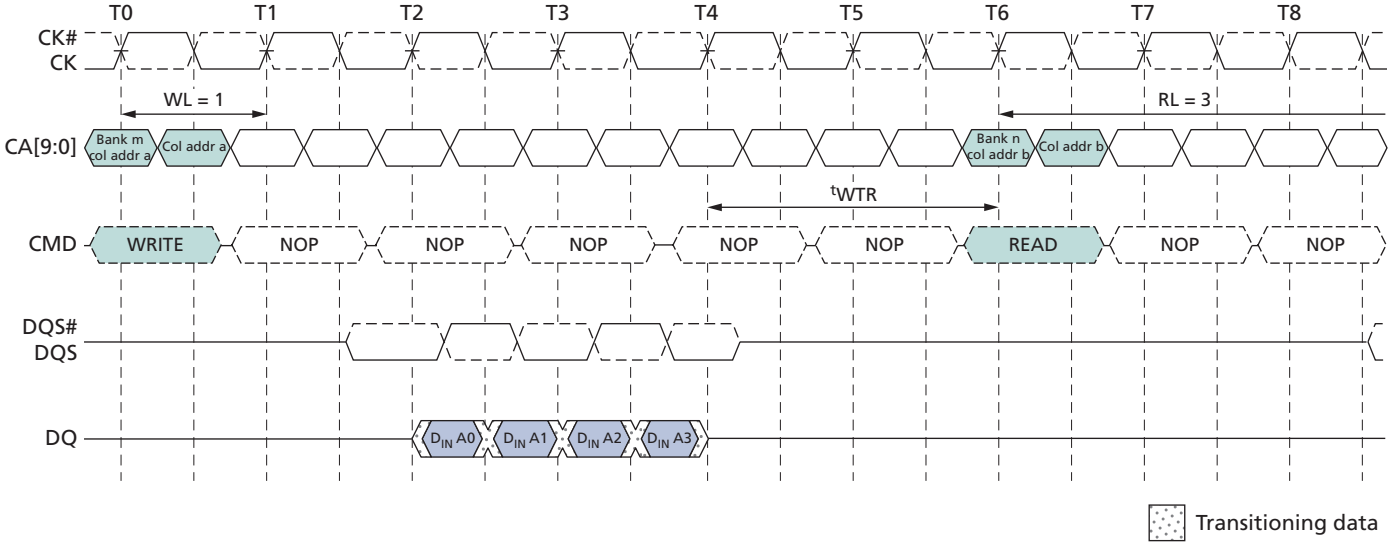

Notes:
1. The minimum number of clock cycles from the burst WRITE command to the burst READ command for any bank is [WL + 1 + BL/2 + RU(^{t}WTR/^{t}CK)].
2. ^{t}WTR starts at the rising edge of the clock after the last valid input data.
3. If a WRITE burst is truncated with a BST command, the effective burst length of the truncated WRITE burst should be used as BL to calculate the minimum WRITE-to-READ delay.

Figure 30: Seamless Burst WRITE – WL = 1, BL = 4, ^{t}CCD = 2

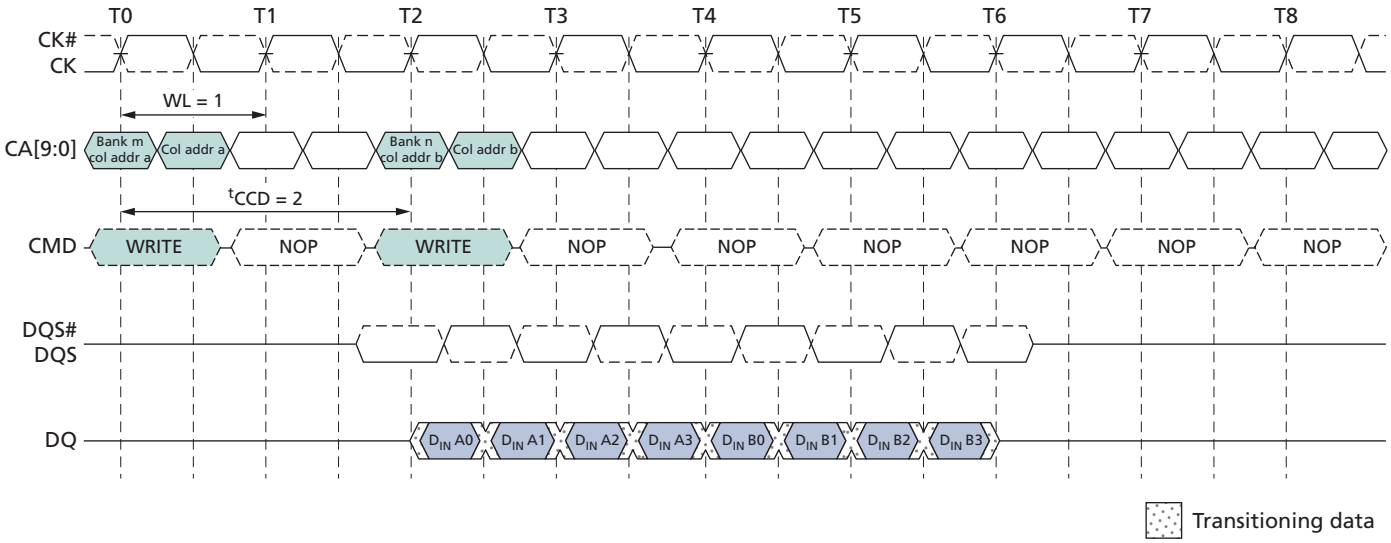

Note:
1. The seamless burst WRITE operation is supported by enabling a WRITE command every other clock for BL = 4 operation, every four clocks for BL = 8 operation, or every eight clocks for BL = 16 operation. This operation is supported for any activated bank.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

WRITEs Interrupted by a WRITE

A burst WRITE can only be interrupted by another WRITE with a 4-bit burst boundary, provided that ^{t}CCD (MIN) is met.

A WRITE burst interrupt can occur on even clock cycles after the initial WRITE command, provided that ^{t}CCD (MIN) is met.

Figure 31: WRITE Burst Interrupt Timing – WL = 1, BL = 8, ^{t}CCD = 2

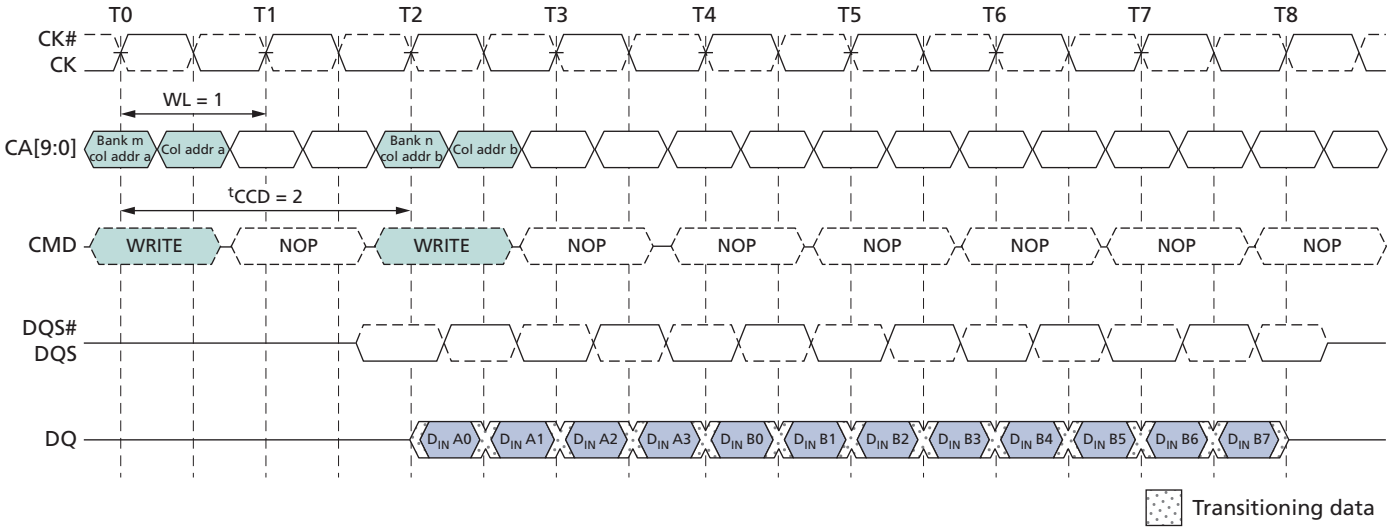

Notes:
1. WRITEs can only be interrupted by other WRITEs or the BST command.
2. The effective burst length of the first WRITE equals two times the number of clock cycles between the first WRITE and the interrupting WRITE.

BURST TERMINATE Command

The BURST TERMINATE (BST) command is initiated with CS_n LOW, CA0 HIGH, CA1 HIGH, CA2 LOW, and CA3 LOW at the rising edge of the clock. A BST command can be issued only to terminate an active READ or WRITE burst. Therefore, a BST command can be issued only up to and including BL/2 - 1 clock cycles after a READ or WRITE command. The effective burst length of a READ or WRITE command truncated by a BST command is as follows:

- Effective burst length = 2 × (number of clock cycles from the READ or WRITE command to the BST command).
- If a READ or WRITE burst is truncated with a BST command, the effective burst length of the truncated burst should be used for BL when calculating the minimum READ-to-WRITE or WRITE-to-READ delay.
- The BST command only affects the most recent READ or WRITE command. The BST command truncates an ongoing READ burst RL × ^{t}CK + ^{t}DQSCK + ^{t}DQSQ after the rising edge of the clock where the BST command is issued. The BST command truncates an ongoing WRITE burst WL × ^{t}CK + ^{t}DQSS after the rising edge of the clock where the BST command is issued.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

- The 4-bit prefetch architecture enables BST command assertion on even clock cycles following a WRITE or READ command. The effective burst length of a READ or WRITE command truncated by a BST command is thus an integer multiple of four.

Figure 32: Burst WRITE Truncated by BST – WL = 1, BL = 16

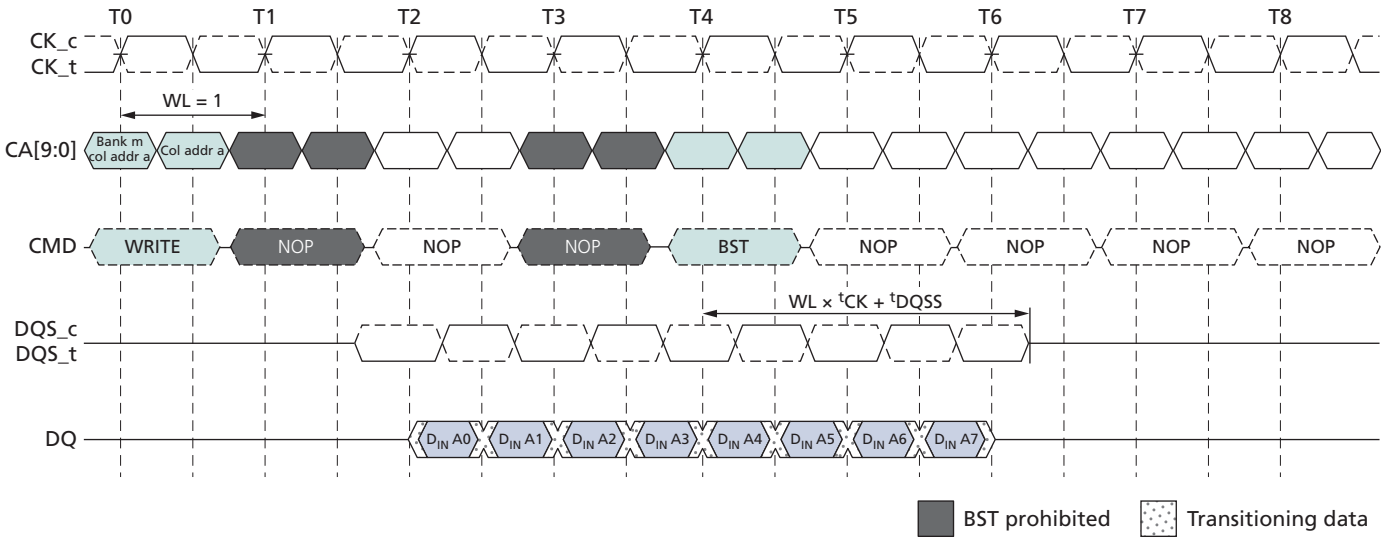

Notes:
1. The BST command truncates an ongoing WRITE burst WL × ^{t}CK + ^{t}DQSS after the rising edge of the clock where the BST command is issued.
2. BST can only be issued an even number of clock cycles after the WRITE command.
3. Additional BST commands are not supported after T4 and must not be issued until after the next READ or WRITE command.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 33: Burst READ Truncated by BST – RL = 3, BL = 16

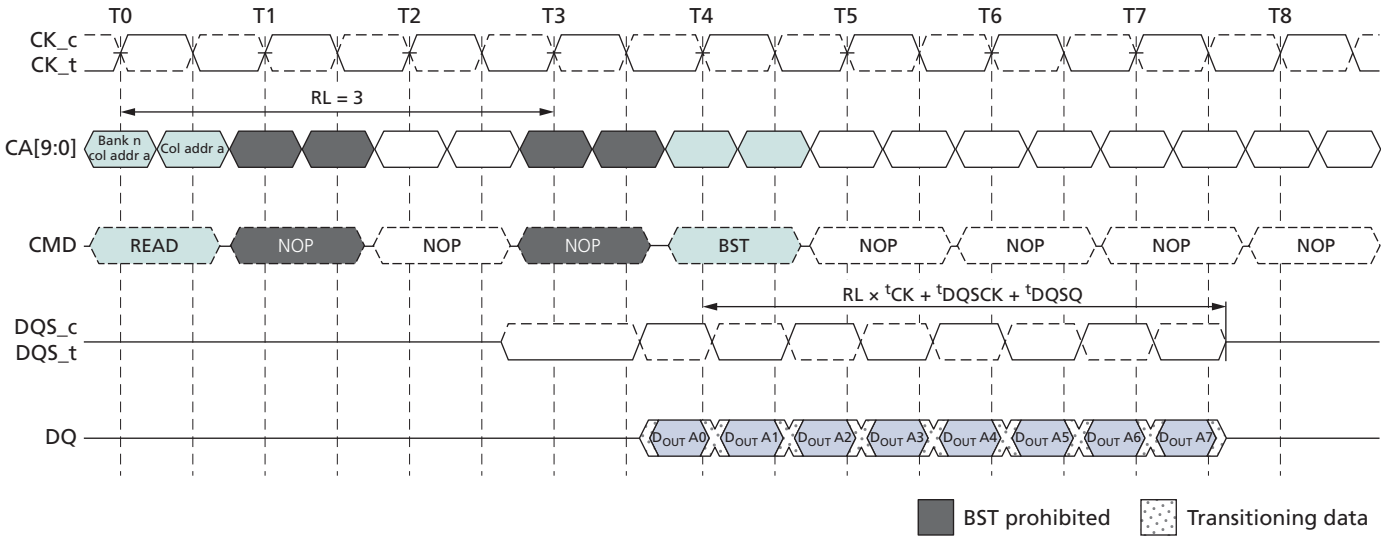

Notes:
1. The BST command truncates an ongoing READ burst (RL × ^{t}CK + ^{t}DQSCK + ^{t}DQSQ) after the rising edge of the clock where the BST command is issued.
2. BST can only be issued an even number of clock cycles after the READ command.
3. Additional BST commands are not supported after T4 and must not be issued until after the next READ or WRITE command.

Write Data Mask

On the LPDDR2 device, one write data mask (DM) pin for each data byte (DQ) is supported, consistent with the implementation on LPDDR SDRAM. Each DM can mask its respective DQ for any given cycle of the burst. Data mask timings match data bit timing, but are inputs only. Internal data mask loading is identical to data bit loading to ensure matched system timing.

Figure 34: Data Mask Timing

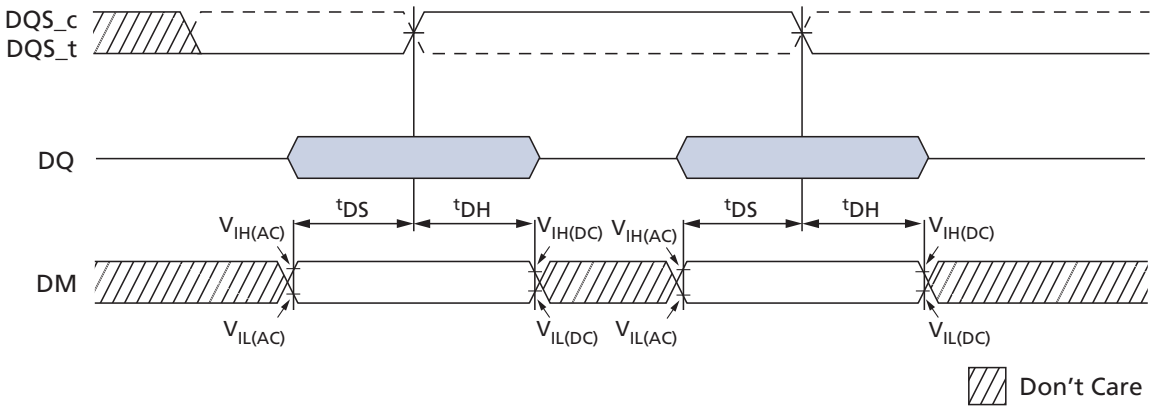

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 35: Write Data Mask – Second Data Bit Masked

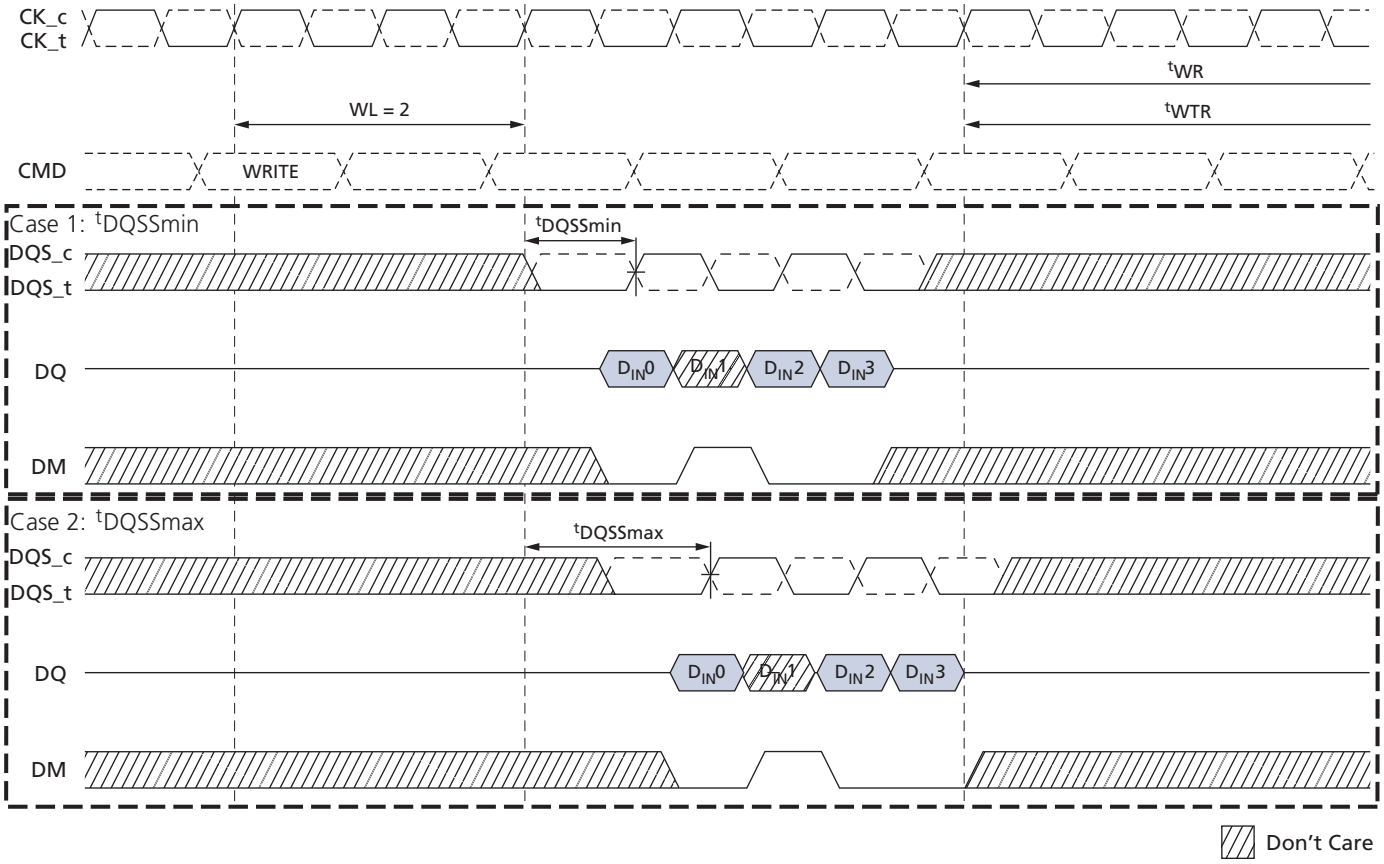

Note: 1. For the data mask function, WL = 2, BL = 4 is shown; the second data bit is masked.

PRECHARGE Command

The PRECHARGE command is used to precharge or close a bank that has been activated. The PRECHARGE command is initiated with CS_n LOW, CA0 HIGH, CA1 HIGH, CA2 LOW, and CA3 HIGH at the rising edge of the clock. The PRECHARGE command can be used to precharge each bank independently or all banks simultaneously. For a 4-bank device, the AB flag and bank address bits BA0 and BA1 are used to determine which bank(s) to precharge. For an 8-bank device, the AB flag and the bank address bits BA0, BA1, and BA2 are used to determine which bank(s) to precharge. The precharged bank(s) will be available for subsequent row access ^{t}RPab after an all bank PRECHARGE command is issued, or ^{t}RPpb after a single-bank PRECHARGE command is issued.

To ensure that an 8-bank device can meet the instantaneous current demand required to operate, the row precharge time (^{t}RP) for an all bank PRECHARGE in an 8-bank device (^{t}RPab) will be longer than the row precharge time for a single-bank PRECHARGE (^{t}RPpb). For a 4-bank device, ^{t}RPab is equal to ^{t}RPpb.

ACTIVATE to PRECHARGE timing is shown in ACTIVATE Command.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 47: Bank Selection for PRECHARGE by Address Bits

AB (CA4r)	BA2 (CA9r)	BA1 (CA8r)	BA0 (CA7r)	Precharged Bank(s) 4-Bank Device	Precharged Bank(s) 8-Bank Device
0	0	0	0	Bank 0 only	Bank 0 only
0	0	0	1	Bank 1 only	Bank 1 only
0	0	1	0	Bank 2 only	Bank 2 only
0	0	1	1	Bank 3 only	Bank 3 only
0	1	0	0	Bank 0 only	Bank 4 only
0	1	0	1	Bank 1 only	Bank 5 only
0	1	1	0	Bank 2 only	Bank 6 only
0	1	1	1	Bank 3 only	Bank 7 only
1	Don't Care	Don't Care	Don't Care	All banks	All banks

READ Burst Followed by PRECHARGE

For the earliest possible precharge, the PRECHARGE command can be issued BL/2 clock cycles after a READ command. A new bank ACTIVATE command can be issued to the same bank after the row precharge time (^{t}RP) has elapsed. A PRECHARGE command cannot be issued until after ^{t}RAS is satisfied.

The minimum READ-to-PRECHARGE time (^{t}RTP) must also satisfy a minimum analog time from the rising clock edge that initiates the last 4-bit prefetch of a READ command. ^{t}RTP begins BL/2 - 2 clock cycles after the READ command.

If the burst is truncated by a BST command, the effective BL value is used to calculate when ^{t}RTP begins.

Figure 36: READ Burst Followed by PRECHARGE – RL = 3, BL = 8, RU(^{t}RTP(MIN)/^{t}CK) = 2

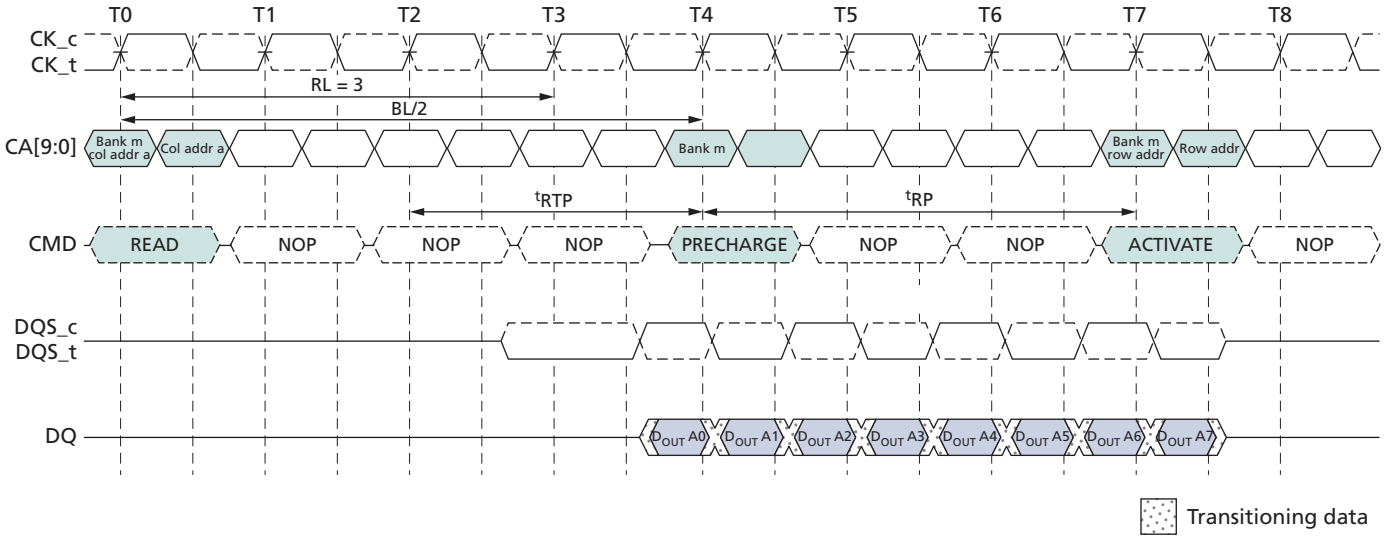

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 37: READ Burst Followed by PRECHARGE – RL = 3, BL = 4, RU(tRTP(MIN)/tCK) = 3

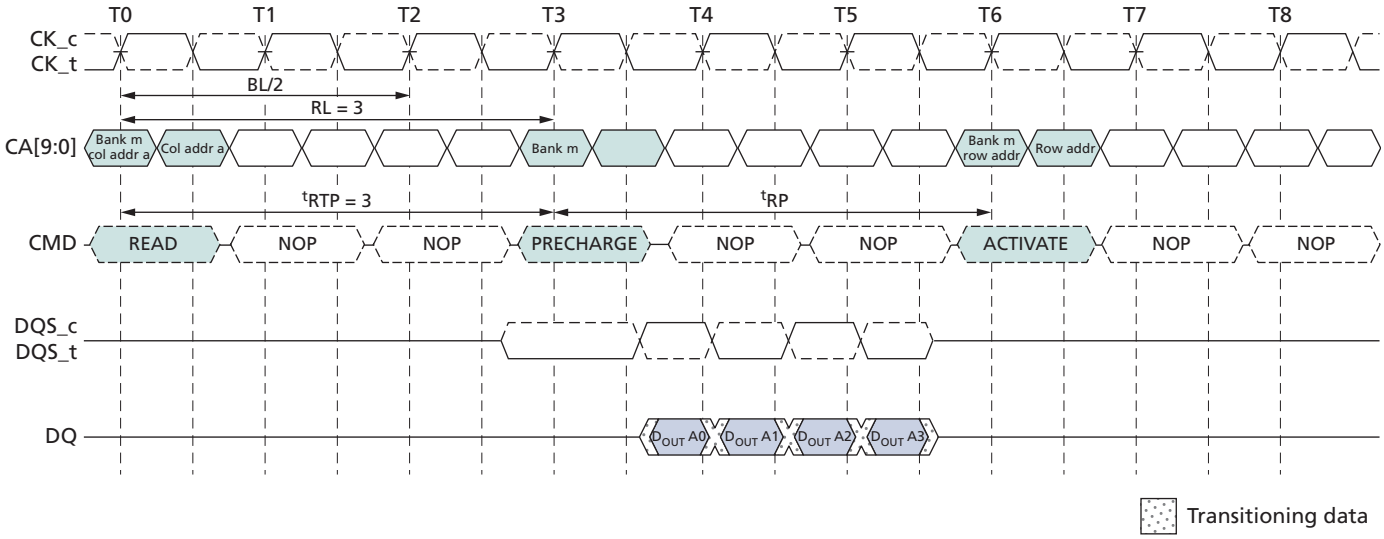

WRITE Burst Followed by PRECHARGE

For WRITE cycles, a WRITE recovery time (tWR) must be provided before a PRECHARGE command can be issued. tWR delay is referenced from the completion of the burst WRITE. The PRECHARGE command must not be issued prior to the tWR delay. For WRITE-to-PRECHARGE timings, see the PRECHARGE and Auto Precharge Clarification table.

These devices write data to the array in prefetch quadruples (prefetch = 4). An internal WRITE operation can only begin after a prefetch group has been completely latched.

The minimum WRITE-to-PRECHARGE time for commands to the same bank is WL + BL/2 + 1 + RU(tWR/tCK) clock cycles. For untruncated bursts, BL is the value set in the mode register. For truncated bursts, BL is the effective burst length.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 38: WRITE Burst Followed by PRECHARGE – WL = 1, BL = 4

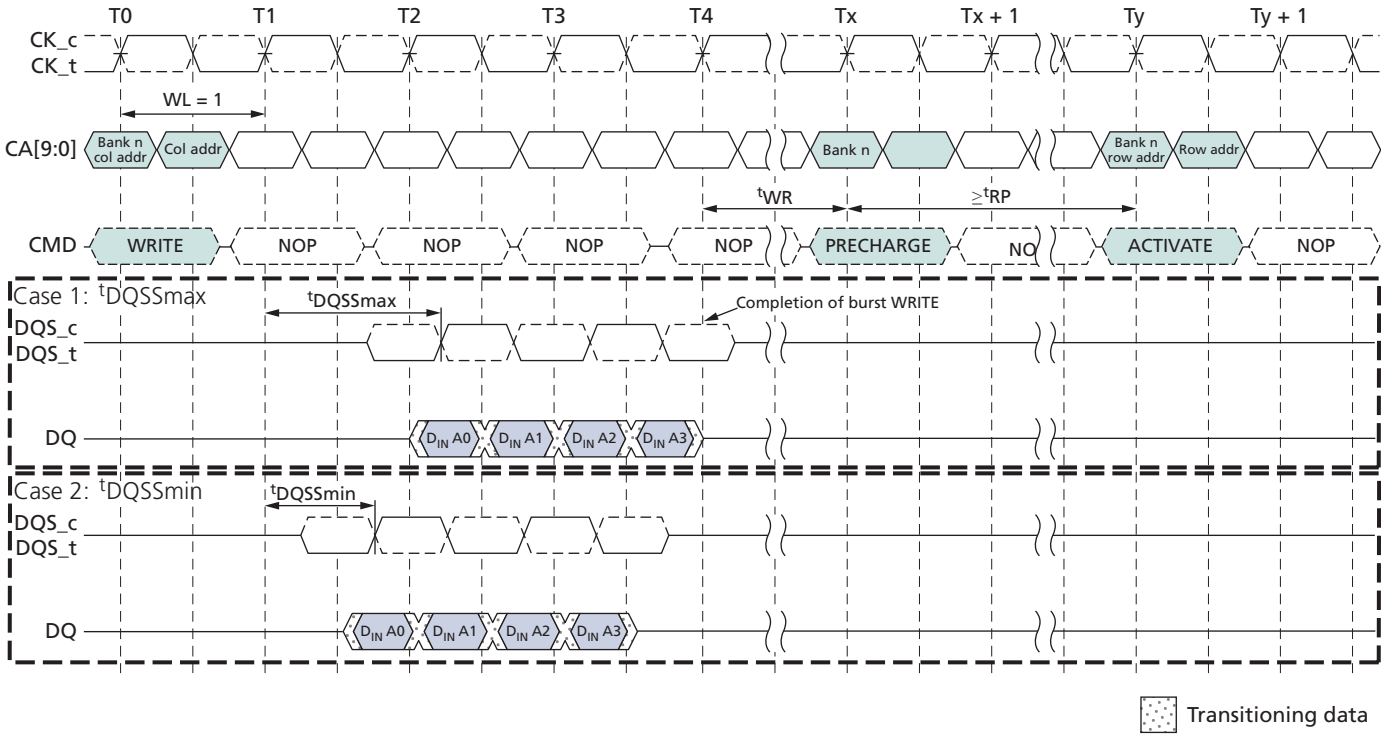

Auto Precharge operation

Before a new row can be opened in an active bank, the active bank must be precharged using either the PRECHARGE command or the auto precharge function. When a READ or WRITE command is issued to the device, the auto precharge bit (AP) can be set to enable the active bank to automatically begin precharge at the earliest possible moment during the burst READ or WRITE cycle.

If AP is LOW when the READ or WRITE command is issued, then normal READ or WRITE burst operation is executed and the bank remains active at the completion of the burst.

If AP is HIGH when the READ or WRITE command is issued, the auto precharge function is engaged. This feature enables the PRECHARGE operation to be partially or completely hidden during burst READ cycles (dependent upon READ or WRITE latency), thus improving system performance for random data access.

READ Burst with Auto Precharge

If AP (CA0f) is HIGH when a READ command is issued, the READ with auto precharge function is engaged.

This device starts an auto precharge on the rising edge of the clock BL/2 or BL/2 - 2 + RU(^{t}RTP/^{t}CK) clock cycles later than the READ with auto precharge command, whichever is greater. For auto precharge calculations, see the PRECHARGE and Auto Precharge Clarification table.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Following an auto precharge operation, an ACTIVATE command can be issued to the same bank if the following two conditions are satisfied simultaneously:

- The RAS precharge time (^{t}RP) has been satisfied from the clock at which the auto precharge begins.
- The RAS cycle time (^{t}RC) from the previous bank activation has been satisfied.

Figure 39: READ Burst with Auto Precharge – RL = 3, BL = 4, RU(^{t}RTP(MIN)/^{t}CK) = 2

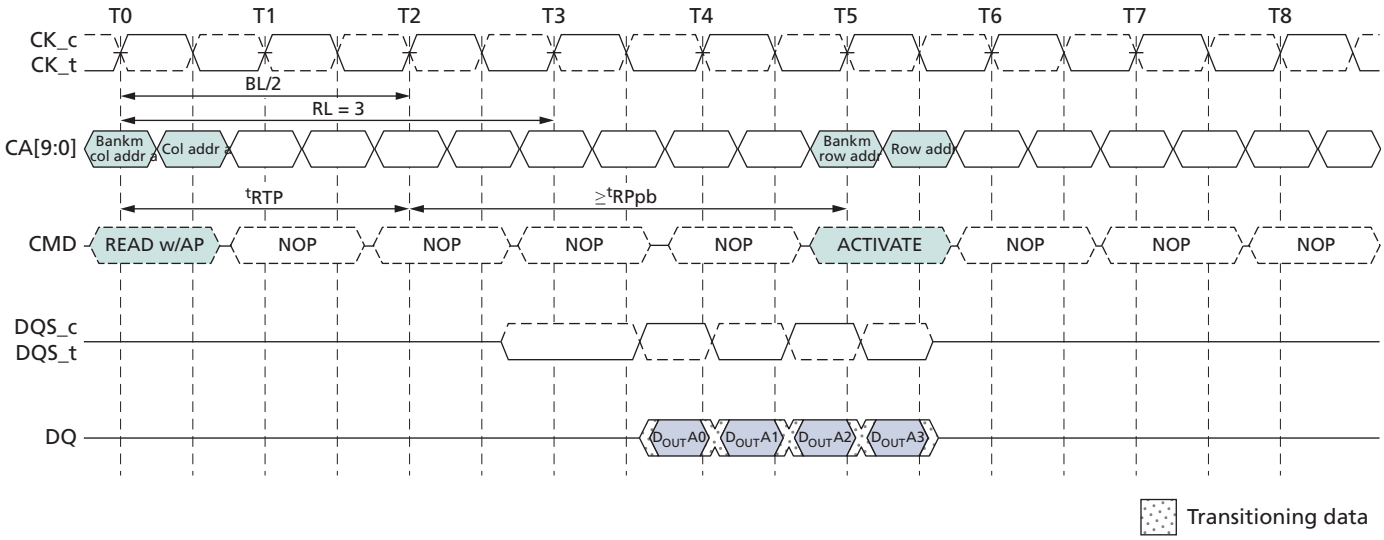

WRITE Burst with Auto Precharge

If AP (CA0f) is HIGH when a WRITE command is issued, the WRITE with auto precharge function is engaged. The device starts an auto precharge at the clock rising edge ^{t}WR cycles after the completion of the burst WRITE.

Following a WRITE with auto precharge, an ACTIVATE command can be issued to the same bank if the following two conditions are met:

- The RAS precharge time (^{t}RP) has been satisfied from the clock at which the auto precharge begins.
- The RAS cycle time (^{t}RC) from the previous bank activation has been satisfied.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 40: WRITE Burst with Auto Precharge – WL = 1, BL = 4

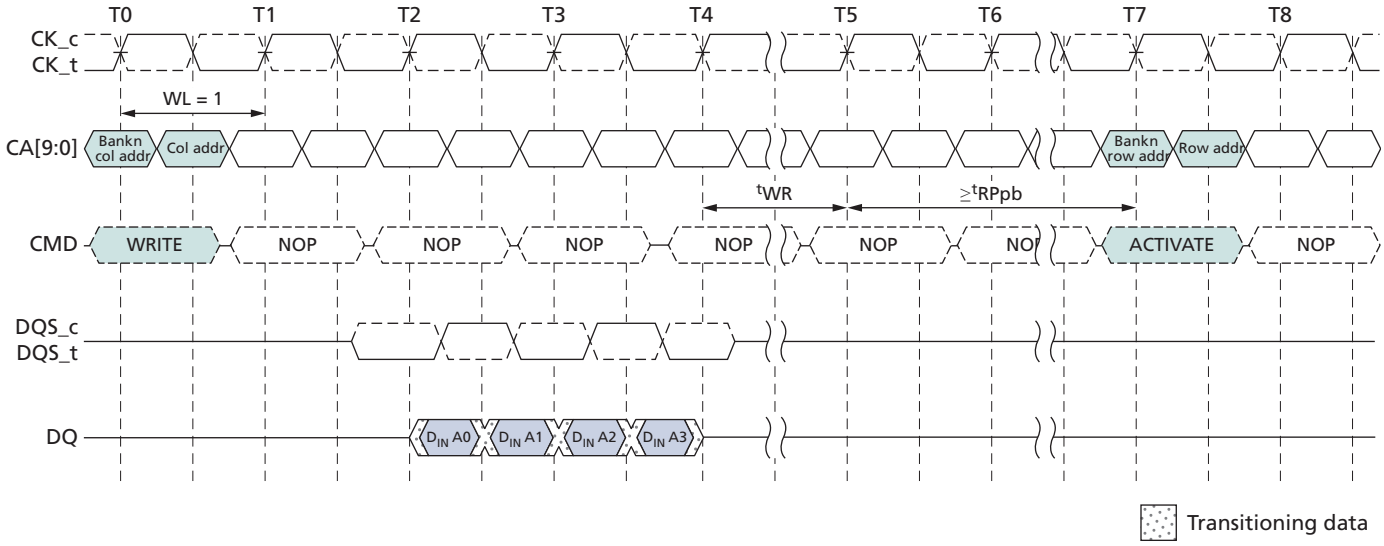

Table 48: PRECHARGE and Auto Precharge Clarification

From Command	To Command	Minimum Delay Between Commands	Unit	Notes
READ	PRECHARGE to same bank as READ	BL/2 + MAX(2, RU(^{t}RTP/^{t}CK)) - 2	CLK	1
	PRECHARGE ALL	BL/2 + MAX(2, RU(^{t}RTP/^{t}CK)) - 2	CLK	1
BST	PRECHARGE to same bank as READ	1	CLK	1
	PRECHARGE ALL	1	CLK	1
READ w/AP	PRECHARGE to same bank as READ w/AP	BL/2 + MAX(2, RU(^{t}RTP/^{t}CK)) - 2	CLK	1, 2
	PRECHARGE ALL	BL/2 + MAX(2, RU(^{t}RTP/^{t}CK)) - 2	CLK	1
	ACTIVATE to same bank as READ w/AP	BL/2 + MAX(2, RU(^{t}RTP/^{t}CK)) - 2 + RU(^{t}RPpb/^{t}CK)	CLK	1
	WRITE or WRITE w/AP (same bank)	Illegal	CLK	3
	WRITE or WRITE w/AP (different bank)	RL + BL/2 + RU(^{t}DQSCKmax/^{t}CK) - WL + 1	CLK	3
	READ or READ w/AP (same bank)	Illegal	CLK	3
	READ or READ w/AP (different bank)	BL/2	CLK	3
WRITE	PRECHARGE to same bank as WRITE	WL + BL/2 + RU(^{t}WR/^{t}CK) + 1	CLK	1
	PRECHARGE ALL	WL + BL/2 + RU(^{t}WR/^{t}CK) + 1	CLK	1
BST	PRECHARGE to same bank as WRITE	WL + RU(^{t}WR/^{t}CK) + 1	CLK	1
	PRECHARGE ALL	WL + RU(^{t}WR/^{t}CK) + 1	CLK	1

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 48: PRECHARGE and Auto Precharge Clarification (Continued)

From Command	To Command	Minimum Delay Between Commands	Unit	Notes
WRITE w/AP	PRECHARGE to same bank as WRITE w/AP	WL + BL/2 + RU(^{t}WR/^{t}CK) + 1	CLK	1, 2
	PRECHARGE ALL	WL + BL/2 + RU(^{t}WR/^{t}CK) + 1	CLK	1
	ACTIVATE to same bank as WRITE w/AP	WL + BL/2 + RU(^{t}WR/^{t}CK) + 1 + RU(^{t}RPpb/^{t}CK)	CLK	1
	WRITE or WRITE w/AP (same bank)	Illegal	CLK	3
	WRITE or WRITE w/AP (different bank)	BL/2	CLK	3
	READ or READ w/AP (same bank)	Illegal	CLK	3
	READ or READ w/AP (different bank)	WL + BL/2 + RU(^{t}WTR/^{t}CK) + 1	CLK	3
PRECHARGE	PRECHARGE to same bank as PRECHARGE	1	CLK	1
	PRECHARGE ALL	1	CLK	1
PRECHARGE ALL	PRECHARGE	1	CLK	1
	PRECHARGE ALL	1	CLK	1

Notes:
1. For a given bank, the PRECHARGE period should be counted from the latest PRECHARGE command—either a one-bank PRECHARGE or PRECHARGE ALL—issued to that bank. The PRECHARGE period is satisfied after ^{t}RP, depending on the latest PRECHARGE command issued to that bank.
2. Any command issued during the specified minimum delay time is illegal.
3. After READ with auto precharge, seamless READ operations to different banks are supported. After WRITE with auto precharge, seamless WRITE operations to different banks are supported. READ with auto precharge and WRITE with auto precharge must not be interrupted or truncated.

REFRESH Command

The REFRESH command is initiated with CS_n LOW, CA0 LOW, CA1 LOW, and CA2 HIGH at the rising edge of the clock. A per-bank REFRESH command is initiated with CA3 LOW at the rising edge of the clock. The all-bank REFRESH command is initiated with CA3 HIGH at the rising edge of the clock. A per-bank REFRESH is only supported in devices with eight banks.

A per-bank REFRESH command (REFpb) performs a per-bank REFRESH operation to the bank scheduled by the bank counter in the memory device. The bank sequence for per-bank REFRESH is fixed to be a sequential round-robin: 0-1-2-3-4-5-6-7-0-1-.... The bank count is synchronized between the controller and the SDRAM by resetting the bank count to zero. Synchronization can occur upon issuing a RESET command or at every exit from self refresh.

A bank must be idle before it can be refreshed. The controller must track the bank being refreshed by the per-bank REFRESH command.

The REFpb command must not be issued to the device until the following conditions have been met:

- ^{t}RFCab has been satisfied after the prior REFab command
- ^{t}RFCpb has been satisfied after the prior REFpb command
- ^{t}RP has been satisfied after the prior PRECHARGE command to that bank

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

tRRD has been satisfied after the prior ACTIVATE command (when applicable, for example after activating a row in a different bank than the one affected by the REFpb command)

The target bank is inaccessible during per-bank REFRESH cycle time (tRFCpb); however, other banks within the device are accessible and can be addressed during the cycle. During the REFpb operation, any of the banks other than the one being refreshed can be maintained in an active state or accessed by a READ or WRITE command.

When the per-bank REFRESH cycle has completed, the affected bank will be in the idle state.

After issuing REFpb, the following conditions must be met:

- tRFCpb must be satisfied before issuing a REFab command
- tRFCpb must be satisfied before issuing an ACTIVATE command to the same bank
- tRRD must be satisfied before issuing an ACTIVATE command to a different bank
- tRFCpb must be satisfied before issuing another REFpb command

An all-bank REFRESH command (REFab) issues a REFRESH command to all banks. All banks must be idle when REFab is issued (for instance, by issuing a PRECHARGE ALL command prior to issuing an all-bank REFRESH command). REFab also synchronizes the bank count between the controller and the SDRAM to zero. The REFab command must not be issued to the device until the following conditions have been met:

- tRFCab has been satisfied following the prior REFab command
- tRFCpb has been satisfied following the prior REFpb command
- tRP has been satisfied following the prior PRECHARGE commands

After an all-bank REFRESH cycle has completed, all banks will be idle. After issuing REFab:

- tRFCab latency must be satisfied before issuing an ACTIVATE command
- tRFCab latency must be satisfied before issuing a REFab or REFpb command

Table 49: REFRESH Command Scheduling Separation Requirements

Symbol	Minimum Delay From	To	Notes
tRFCab	REFab	REFab	
		ACTIVATE command to any bank	
		REFpb	
tRFCpb	REFpb	REFab	
		ACTIVATE command to same bank as REFpb	
		REFpb	

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 49: REFRESH Command Scheduling Separation Requirements (Continued)

Symbol	Minimum Delay From	To	Notes
^{t}RRD	REFpb	ACTIVATE command to a different bank than REFpb	
	ACTIVATE	REFpb affecting an idle bank (different bank than activate)	1
		ACTIVATE command to a different bank than the prior ACTIVATE command	

Note: 1. A bank must be in the idle state before it is refreshed, so REFab is prohibited following an ACTIVATE command. REFpb is supported only if it affects a bank that is in the idle state.

REFRESH Requirements

1. Minimum Number of REFRESH Commands

Mobile LPDDR2 requires a minimum number, R, of REFRESH (REFab) commands within any rolling refresh window (^{t}REFW = 32 ms @ MR4[2:0] = 011 or $T_C \leq 85^{\circ}C$). For actual values per density and the resulting average refresh interval (^{t}REFI), see Refresh Requirements.

For ^{t}REFW and ^{t}REFI refresh multipliers at different MR4 settings, see the MR4 Device Temperature (MA[7:0] = 04h) table.

For devices supporting per-bank REFRESH, a REFab command can be replaced by a full cycle of eight REFpb commands.

2. Burst REFRESH Limitation

To limit current consumption, a maximum of eight REFab commands can be issued in any rolling ^{t}REFBW (^{t}REFBW = 4 × 8 × ^{t}RFCab). This condition does not apply if REFpb commands are used.

3. REFRESH Requirements and Self Refresh

If any time within a refresh window is spent in self refresh mode, the number of required REFRESH commands in that window is reduced to the following:

$$R' = R - RU\left(\frac{t_{SRF}}{t_{REFI}}\right) = R - RU\left(R \times \frac{t_{SRF}}{t_{REFW}}\right)$$

Where RU represents the round-up function

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 41: tSRF Definition

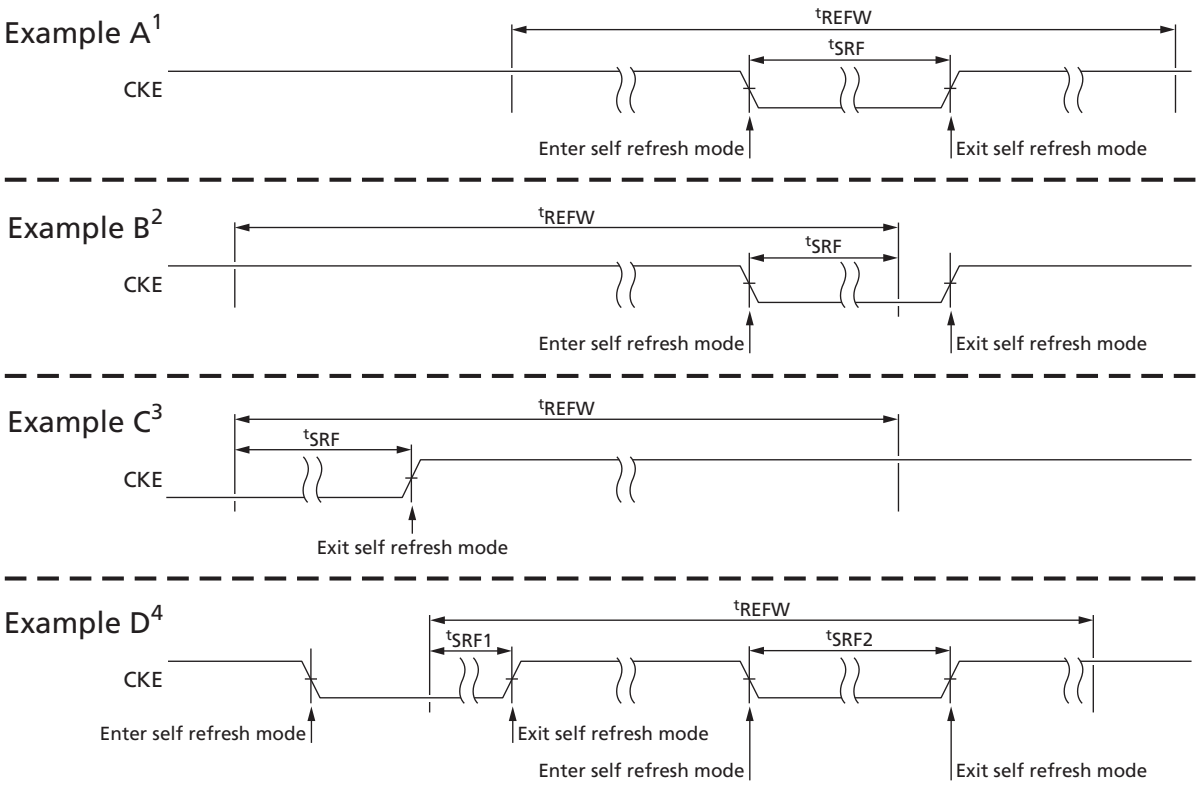

Notes:
1. Time in self refresh mode is fully enclosed in the refresh window (tREFW).
2. At self refresh entry.
3. At self refresh exit.
4. Several intervals in self refresh during one tREFW interval. In this example, tSRF = tSRF1 + tSRF2.

The mobile LPDDR2 device provides significant flexibility in scheduling a REFRESH command as long as the required boundary conditions are met (see the tSRF Definition figure).

In the most straightforward implementations, a REFRESH command should be scheduled every tREFI. In this case, self refresh can be entered at any time.

Users may choose to deviate from this regular refresh pattern, for instance, to enable a period in which no refresh is required. As an example, using a 1Gb LPDDR2 device, the user can choose to issue a refresh burst of 4096 REFRESH commands at the maximum supported rate (limited by tREFBW), followed by an extended period without issuing any REFRESH commands, until the refresh window is complete. The maximum supported time without REFRESH commands is calculated as follows: tREFW - (R/8) × tREFBW = tREFW - R × 4 × tRFCab.

For example, a 1Gb device at $T_C \leq 85^\circ C$ can be operated without a refresh for up to 32ms - 4096 × 4 × 130ns ≈ 30ms.

Both the regular and the burst/pause patterns can satisfy refresh requirements if they are repeated in every 32ms window. It is critical to satisfy the refresh requirement in

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

every rolling refresh window during refresh pattern transitions. The supported transition from a burst pattern to a regular distributed pattern is shown in the Supported Transition from Repetitive REFRESH Burst figure. If this transition occurs immediately after the burst refresh phase, all rolling ^{t}REFW intervals will meet the minimum required number of REFRESH commands.

A nonsupported transition is shown below. In this example, the regular refresh pattern starts after the completion of the pause phase of the burst/pause refresh pattern. For several rolling ^{t}REFW intervals, the minimum number of REFRESH commands is not satisfied.

Understanding this pattern transition is extremely important, even when only one pattern is employed. In self refresh mode, a regular distributed refresh pattern must be assumed. Micron recommends entering self refresh mode immediately following the burst phase of a burst/pause refresh pattern; upon exiting self refresh, begin with the burst phase (see the Recommended Self Refresh Entry and Exit figure).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 42: Regular Distributed Refresh Pattern

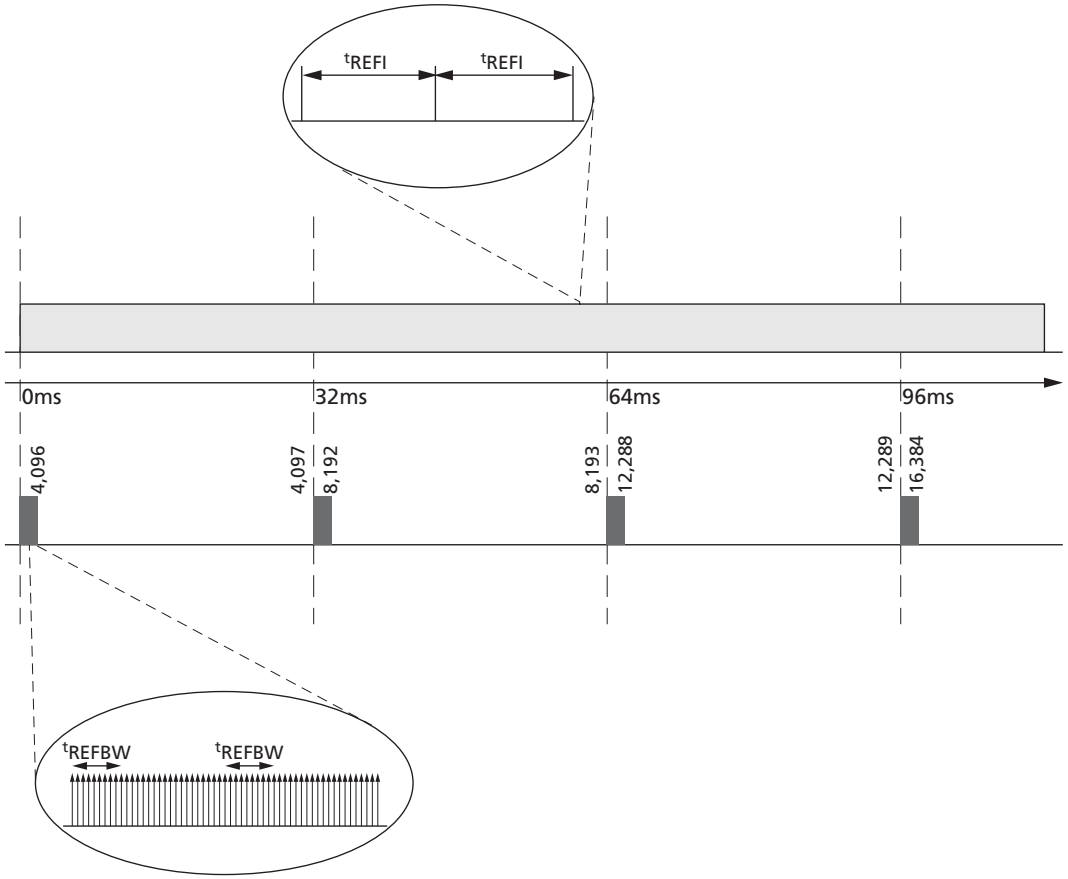

Notes:
1. Compared to repetitive burst REFRESH with subsequent REFRESH pause.
2. As an example, in a 1Gb LPDDR2 device at $T_C \leq 85^{\circ}C$, the distributed refresh pattern has one REFRESH command per 7.8µs; the burst refresh pattern has one REFRESH command per 0.52µs, followed by ≈ 30ms without any REFRESH command.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 43: Supported Transition from Repetitive REFRESH Burst

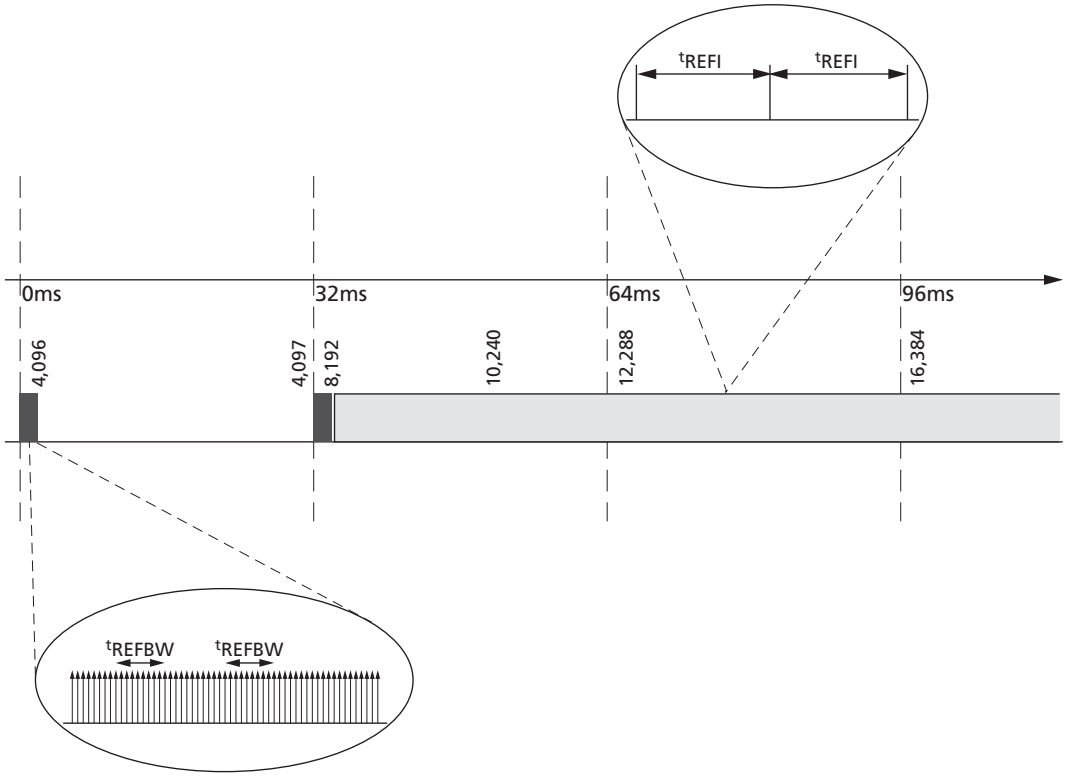

Notes:
1. Shown with subsequent REFRESH pause to regular distributed refresh pattern.
2. As an example, in a 1Gb LPDDR2 device at $T_C \leq 85^{\circ}C$, the distributed refresh pattern has one REFRESH command per 7.8µs; the burst refresh pattern has one REFRESH command per 0.52µs, followed by ≈ 30ms without any REFRESH command.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 44: Nonsupported Transition from Repetitive REFRESH Burst

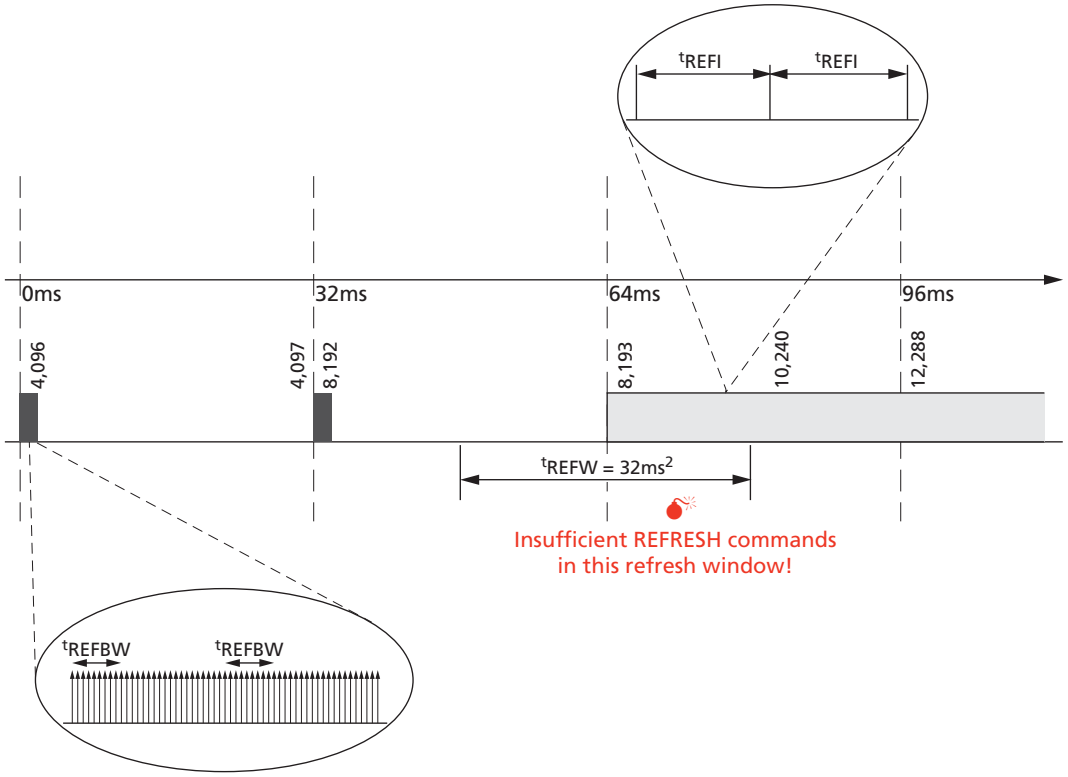

Notes:
1. Shown with subsequent REFRESH pause to regular distributed refresh pattern.
2. There are only ≈ 2048 REFRESH commands in the indicated tREFW window. This does not provide the required minimum number of REFRESH commands (R).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 45: Recommended Self Refresh Entry and Exit

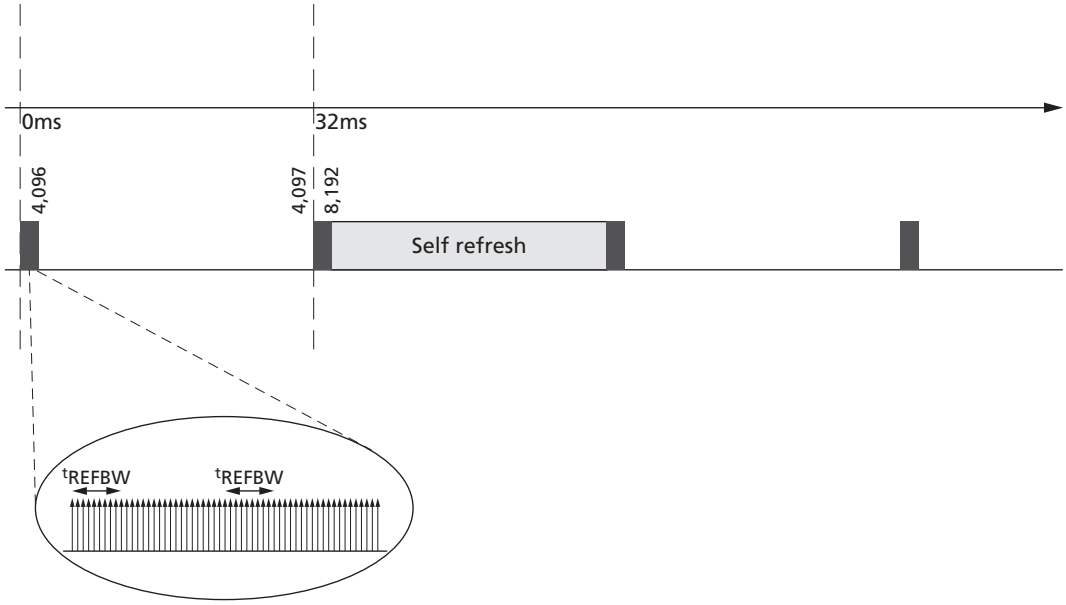

Note: 1. In conjunction with a burst/pause refresh pattern.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 46: All-Bank REFRESH Operation

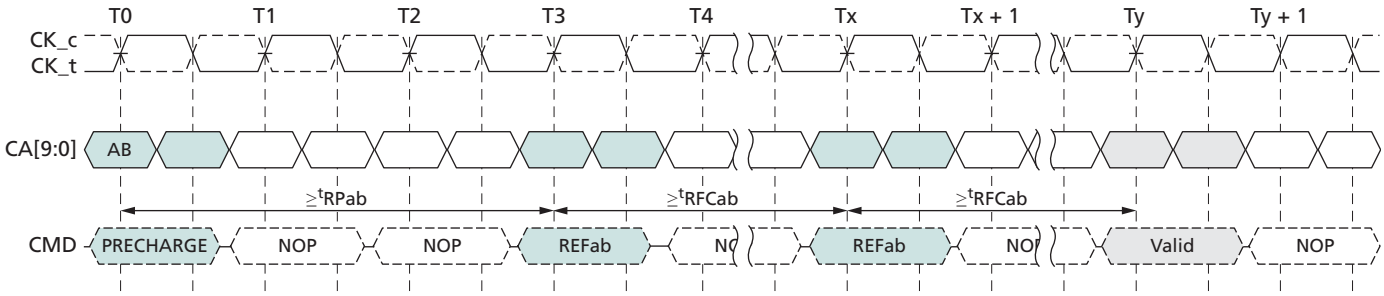

Figure 47: Per-Bank REFRESH Operation

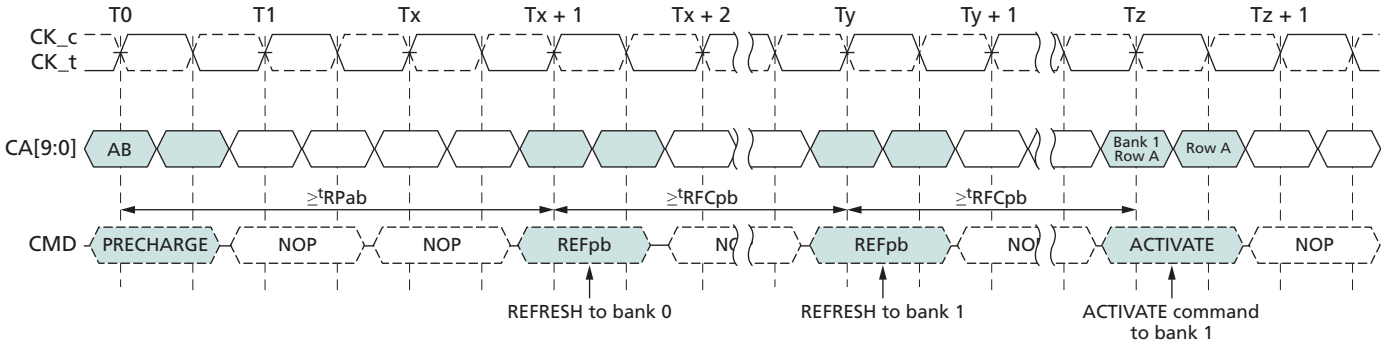

Notes:
1. Prior to T0, the REFpb bank counter points to bank 0.
2. Operations to banks other than the bank being refreshed are supported during the ^{t}RFCpb period.

SELF REFRESH Operation

The SELF REFRESH command can be used to retain data in the array, even if the rest of the system is powered down. When in the self refresh mode, the device retains data without external clocking. The device has a built-in timer to accommodate the SELF REFRESH operation.

The SELF REFRESH command is executed by taking CKE LOW, CS_n LOW, CA0 LOW, CA1 LOW, and CA2 HIGH at the rising edge of the clock. CKE must be HIGH during the previous clock cycle. A NOP command must be driven in the clock cycle following the POWER-DOWN command. Once the command is registered, CKE must be held LOW to keep the device in self-refresh mode.

The mobile LPDDR2 device can operate in self refresh mode in both the standard and extended temperature ranges. The device also manages self refresh power consumption when the operating temperature changes, resulting in the lowest possible power consumption across the operating temperature range (See IDD Specifications for details).

After the device has entered self refresh mode, all external signals other than CKE are "Don't Care." For proper self refresh operation, power supply pins (V_{DD1}, V_{DD2}, and V_{DDQ}) must be at valid levels. V_{DDQ} can be turned off during self refresh. If V_{DDQ} is turned off, V_{REFDQ} must also be turned off. Prior to exiting self refresh, both V_{DDQ} and

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

V_{REFDQ} must be within their respective minimum/maximum operating ranges (see the Single-Ended AC and DC Input Levels for DQ and DM table). V_{REFDQ} can be at any level between 0 and V_{DDQ}; V_{REFCA} can be at any level between 0 and V_{DD2} during self refresh.

Before exiting self refresh, V_{REFDQ} and V_{REFCA} must be within specified limits (See AC and DC Logic Input Measurement Levels for Single-Ended Signals for details). After entering self refresh mode, the device initiates at least one all-bank REFRESH command internally during ^{t}CKESR. The clock is internally disabled during SELF REFRESH operation to save power. The device must remain in self refresh mode for at least ^{t}CKESR. The user can change the external clock frequency or halt the external clock one clock after self refresh entry is registered; however, the clock must be restarted and stable before the device can exit SELF REFRESH operation.

Exiting self refresh requires a series of commands. First, the clock must be stable prior to CKE returning HIGH. After the self refresh exit is registered, a minimum delay, at least equal to the self refresh exit interval (^{t}XSR), must be satisfied before a valid command can be issued to the device. This provides completion time for any internal refresh in progress. For proper operation, CKE must remain HIGH throughout ^{t}XSR. NOP commands must be registered on each rising clock edge during ^{t}XSR.

Using self refresh mode introduces the possibility that an internally timed refresh event could be missed when CKE is driven HIGH for exit from self refresh mode. Upon exiting self refresh, at least one REFRESH command (one all-bank command or eight per-bank commands) must be issued before issuing a subsequent SELF REFRESH command.

Figure 48: SELF REFRESH Operation

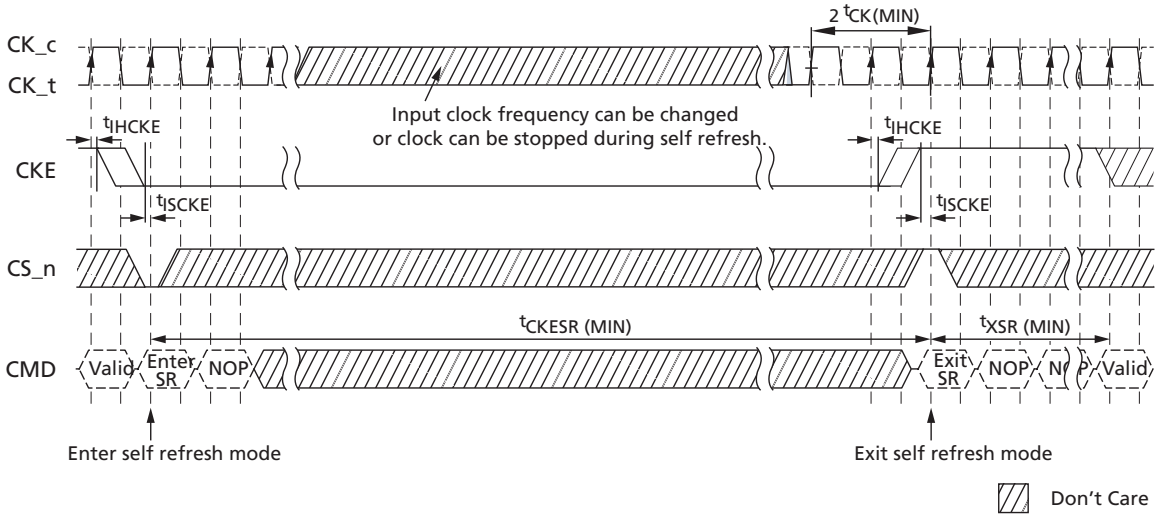

Notes:
1. Input clock frequency can be changed or stopped during self refresh, provided that upon exiting self-refresh, a minimum of two cycles of stable clocks are provided, and the clock frequency is between the minimum and maximum frequencies for the particular speed grade.
2. The device must be in the all banks idle state prior to entering self refresh mode.
3. ^{t}XSR begins at the rising edge of the clock after CKE is driven HIGH.
4. A valid command can be issued only after ^{t}XSR is satisfied. NOPs must be issued during ^{t}XSR.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Partial-Array Self Refresh – Bank Masking

Any device of densities of 64Mb–512Mb is comprised of four banks; a device of 1Gb density or higher is comprised of eight banks. Each bank can be configured independently whether or not a SELF REFRESH operation will occur in that bank. One 8-bit mode register (accessible via the MRW command) is assigned to program the bank-masking status of each bank up to eight banks. For bank masking bit assignments, see the MR16 PASR Bank Mask (MA[7:0] = 010h) and MR16 Op-Code Bit Definitions tables.

The mask bit to the bank enables or disables a refresh operation of the entire memory space within the bank. If a bank is masked using the bank mask register, a REFRESH operation to the entire bank is blocked and bank data retention is not guaranteed in self refresh mode. To enable a REFRESH operation to a bank, the corresponding bank mask bit must be programmed as "unmasked." When a bank mask bit is unmasked, the array space being refreshed within that bank is determined by the programmed status of the segment mask bits.

Partial-Array Self Refresh – Segment Masking

Programming segment mask bits is similar to programming bank mask bits. For a density of 1Gb or higher, eight segments are used for masking (see the MR17 PASR Segment Mask (MA[7:0] = 011h) and MR17 PASR Segment Mask Definitions tables). A mode register is used for programming segment mask bits up to eight bits. For a density of less than 1Gb, segment masking is not supported.

When the mask bit to an address range (represented as a segment) is programmed as "masked," a REFRESH operation to that segment is blocked. Conversely, when a segment mask bit to an address range is unmasked, refresh to that segment is enabled.

A segment masking scheme can be used in place of or in combination with a bank masking scheme. Each segment mask bit setting is applied across all banks. For segment masking bit assignments, see the tables noted above.

Table 50: Bank and Segment Masking Example

	Segment Mask (MR17)	Bank 0	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5	Bank 6	Bank 7
Bank Mask (MR16)		**0**	**1**	**0**	**0**	**0**	**0**	**0**	**1**
Segment 0	0	–	M	–	–	–	–	–	M
Segment 1	0	–	M	–	–	–	–	–	M
Segment 2	1	M	M	M	M	M	M	M	M
Segment 3	0	–	M	–	–	–	–	–	M
Segment 4	0	–	M	–	–	–	–	–	M
Segment 5	0	–	M	–	–	–	–	–	M
Segment 6	0	–	M	–	–	–	–	–	M
Segment 7	1	M	M	M	M	M	M	M	M

Note: 1. This table provides values for an 8-bank device with REFRESH operations masked to banks 1 and 7, and segments 2 and 7.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

MODE REGISTER READ

The MODE REGISTER READ (MRR) command is used to read configuration and status data from SDRAM mode registers. The MRR command is initiated with CS_n LOW, CA0 LOW, CA1 LOW, CA2 LOW, and CA3 HIGH at the rising edge of the clock. The mode register is selected by CA1f–CA0f and CA9r–CA4r. The mode register contents are available on the first data beat of DQ[7:0] after RL × ^{t}CK + ^{t}DQSCK + ^{t}DQSQ and following the rising edge of the clock where MRR is issued. Subsequent data beats contain valid but undefined content, except in the case of the DQ calibration function, where subsequent data beats contain valid content as described in the Data Calibration Pattern Description table. All DQS_t,DQS_c are toggled for the duration of the mode register READ burst.

The MRR command has a burst length of four. MRR operation (consisting of the MRR command and the corresponding data traffic) must not be interrupted. The MRR command period (^{t}MRR) is two clock cycles. The MRR command issued to reserved and write-only registers should returns valid but undefined content on all data beats, and DQS_t, DQS_c should be toggled.

Figure 49: MRR Timing – RL = 3, ^{t}MRR = 2

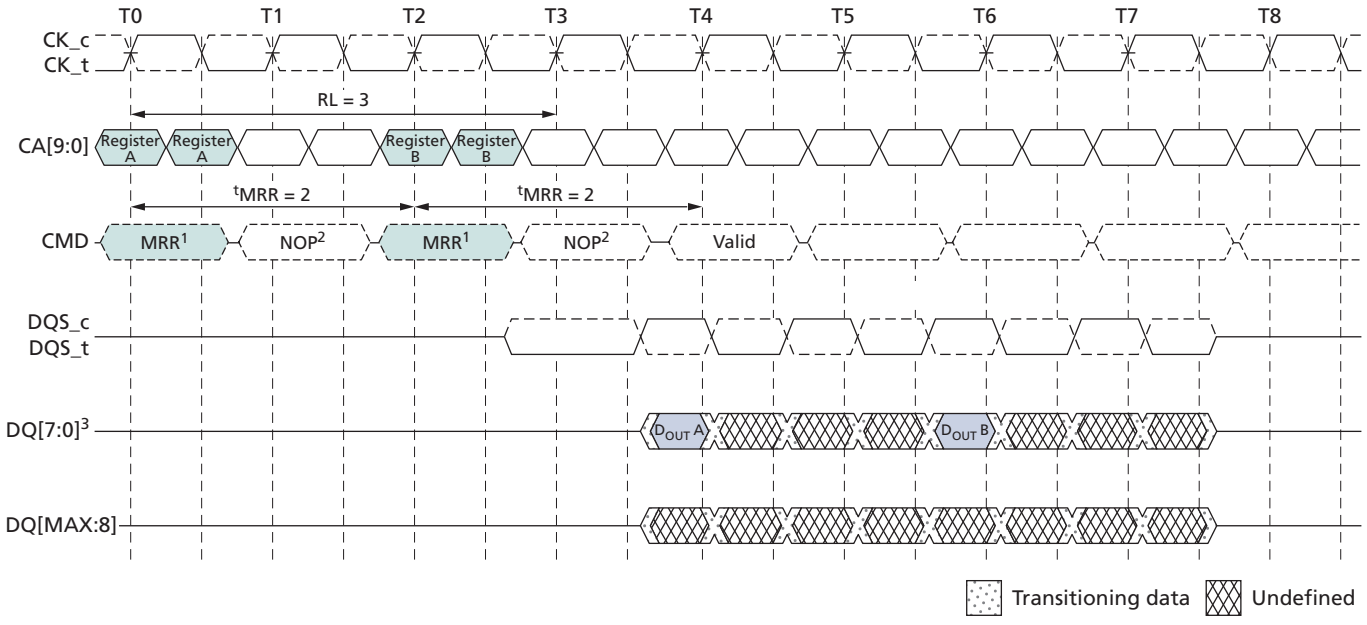

Notes:
1. MRRs to DQ calibration registers MR32 and MR40 are described in the Data Calibration Pattern Description table.
2. Only the NOP command is supported during ^{t}MRR.
3. Mode register data is valid only on DQ[7:0] on the first beat. Subsequent beats contain valid but undefined data. DQ[MAX:8] contain valid but undefined data for the duration of the MRR burst.
4. Minimum MRR to write latency is RL + RU(^{t}DQSCKmax/^{t}CK) + 4/2 + 1 - WL clock cycles.
5. Minimum MRR to MRW latency is RL + RU(^{t}DQSCKmax/^{t}CK) + 4/2 + 1 clock cycles.

READ bursts and WRITE bursts cannot be truncated by MRR. Following a READ command, the MRR command must not be issued before BL/2 clock cycles have completed.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Following a WRITE command, the MRR command must not be issued before WL + 1 + BL/2 + RU(^{t}WTR/^{t}CK) clock cycles have completed. If a READ or WRITE burst is truncated with a BST command, the effective burst length of the truncated burst should be used for the BL value.

Figure 50: READ to MRR Timing – RL = 3, ^{t}MRR = 2

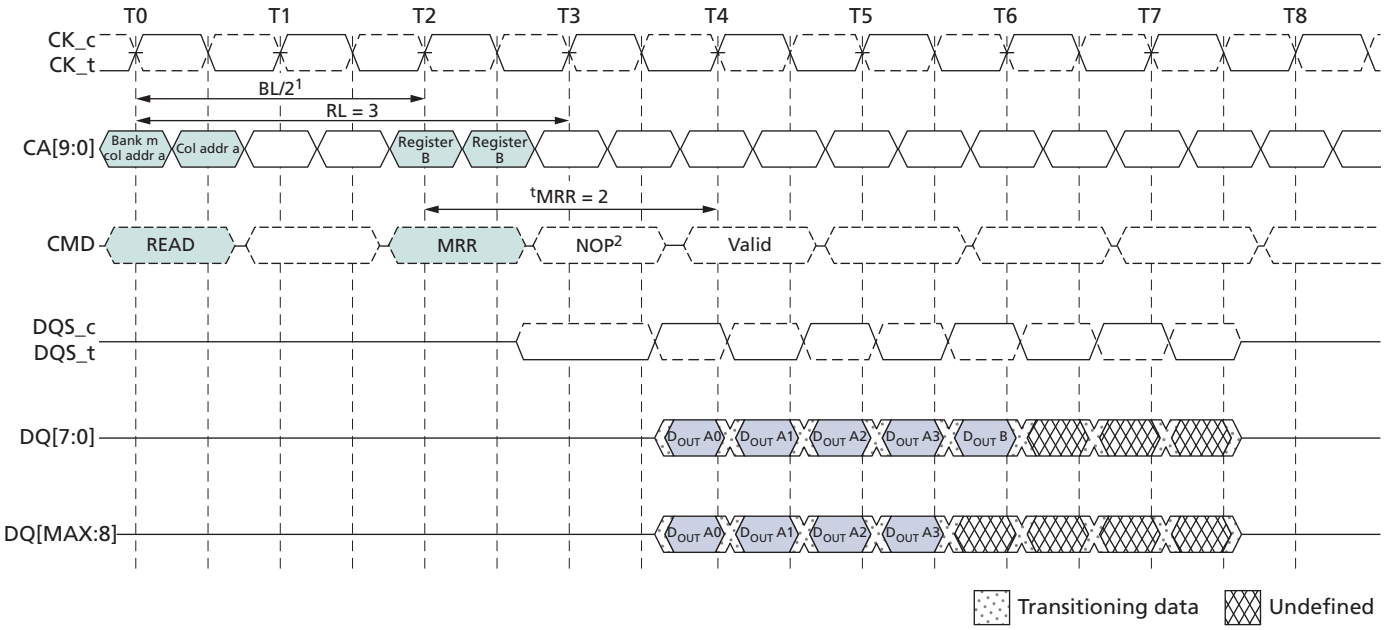

Notes:
1. The minimum number of clock cycles from the burst READ command to the MRR command is BL/2.
2. Only the NOP command is supported during ^{t}MRR.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 51: Burst WRITE Followed by MRR – RL = 3, WL = 1, BL = 4

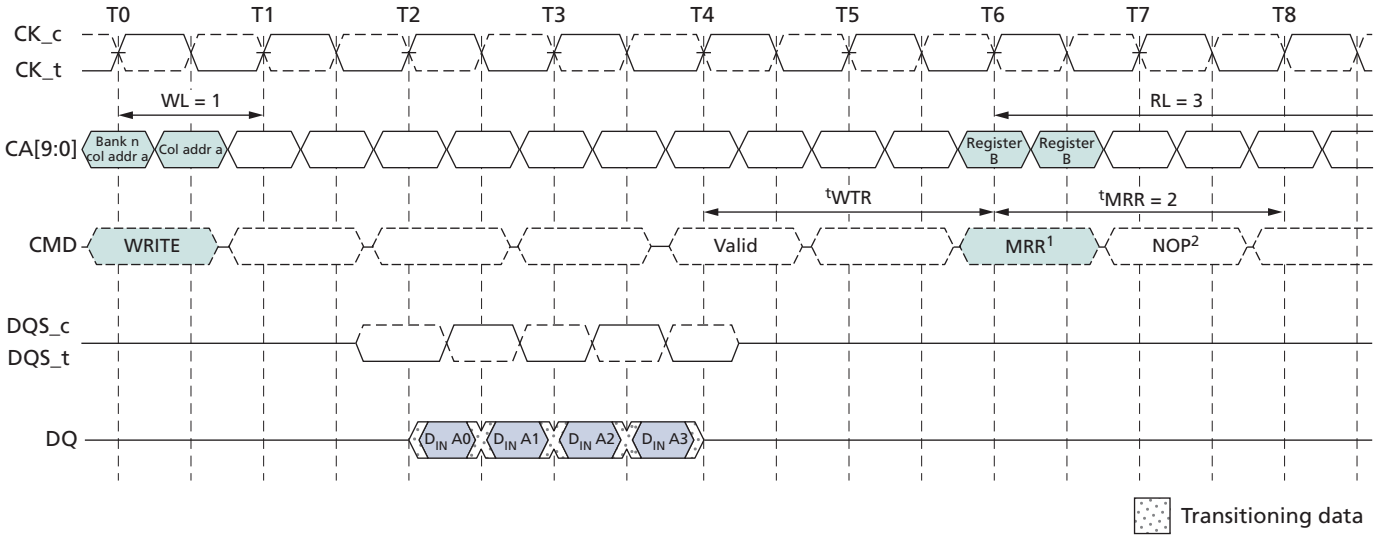

Notes:
1. The minimum number of clock cycles from the burst WRITE command to the MRR command is [WL + 1 + BL/2 + RU(^{t}WTR/^{t}CK)].
2. Only the NOP command is supported during ^{t}MRR.

Temperature Sensor

The mobile LPDDR2 device features a temperature sensor whose status can be read from MR4. This sensor can be used to determine an appropriate refresh rate, determine whether AC timing derating is required in the extended temperature range, and/or monitor the operating temperature. Either the temperature sensor or the device operating temperature can be used to determine whether operating temperature requirements are being met (see Operating Temperature Range table).

Temperature sensor data can be read from MR4 using the mode register read protocol. Upon exiting self-refresh or power-down, the device temperature status bits will be no older than ^{t}TSI.

When using the temperature sensor, the actual device case temperature may be higher than the operating temperature specification that applies for the standard or extended temperature ranges (see table noted above). For example, T_{CASE} could be above 85˚C when MR4[2:0] equals 011b.

To ensure proper operation using the temperature sensor, applications must accommodate the parameters in the temperature sensor definitions table.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 51: Temperature Sensor Definitions and Operating Conditions

Parameter	Description	Symbol	Min/Max	Value	Unit
System temperature gradient	Maximum temperature gradient experienced by the memory device at the temperature of interest over a range of 2˚C	TempGradient	MAX	System-dependent	˚C/s
MR4 READ interval	Time period between MR4 READs from the system	ReadInterval	MAX	System-dependent	ms
Temperature sensor interval	Maximum delay between internal updates of MR4	^{t}TSI	MAX	32	ms
System response delay	Maximum response time from an MR4 READ to the system response	SysRespDelay	MAX	System-dependent	ms
Device temperature margin	Margin above maximum temperature to support controller response	TempMargin	MAX	2	˚C

The mobile LPDDR2 device accommodates the temperature margin between the point at which the device temperature enters the extended temperature range and the point at which the controller reconfigures the system accordingly. To determine the required MR4 polling frequency, the system must use the maximum TempGradient and the maximum response time of the system according to the following equation:

$$\text{TempGradient} \times (\text{ReadInterval} + {}^{t}\text{TSI} + \text{SysRespDelay}) \leq 2°\text{C}$$

For example, if TempGradient is 10˚C/s and the SysRespDelay is 1ms:

$$\frac{10°\text{C}}{\text{s}} \times (\text{ReadInterval} + 32\text{ms} + 1\text{ms}) \leq 2°\text{C}$$

In this case, ReadInterval must not exceed 167ms.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 52: Temperature Sensor Timing

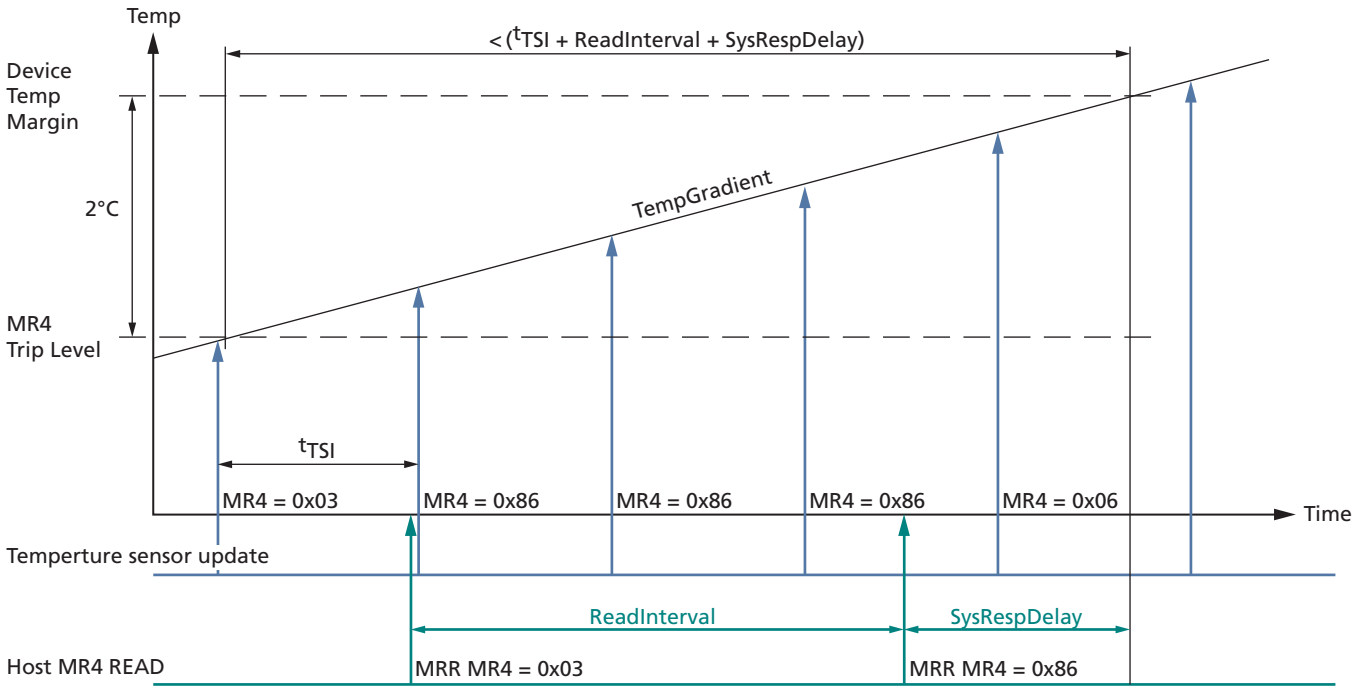

DQ Calibration

The mobile LPDDR2 device features a DQ calibration function that outputs one of two predefined system timing calibration patterns. For a x16 device, pattern A (MRR to MRR32), and pattern B (MRR to MRR40), will return the specified pattern on DQ0 and DQ8; a x32 device returns the specified pattern on DQ0, DQ8, DQ16, and DQ24.

For a x16 device, DQ[7:1] and DQ[15:9] drive the same information as DQ0 during the MRR burst. For a x32 device, DQ[7:1], DQ[15:9], DQ[23:17], and DQ[31:25] drive the same information as DQ0 during the MRR burst. MRR DQ calibration commands can occur only in the idle state.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 53: MR32 and MR40 DQ Calibration Timing – RL = 3, ^{t}MRR = 2

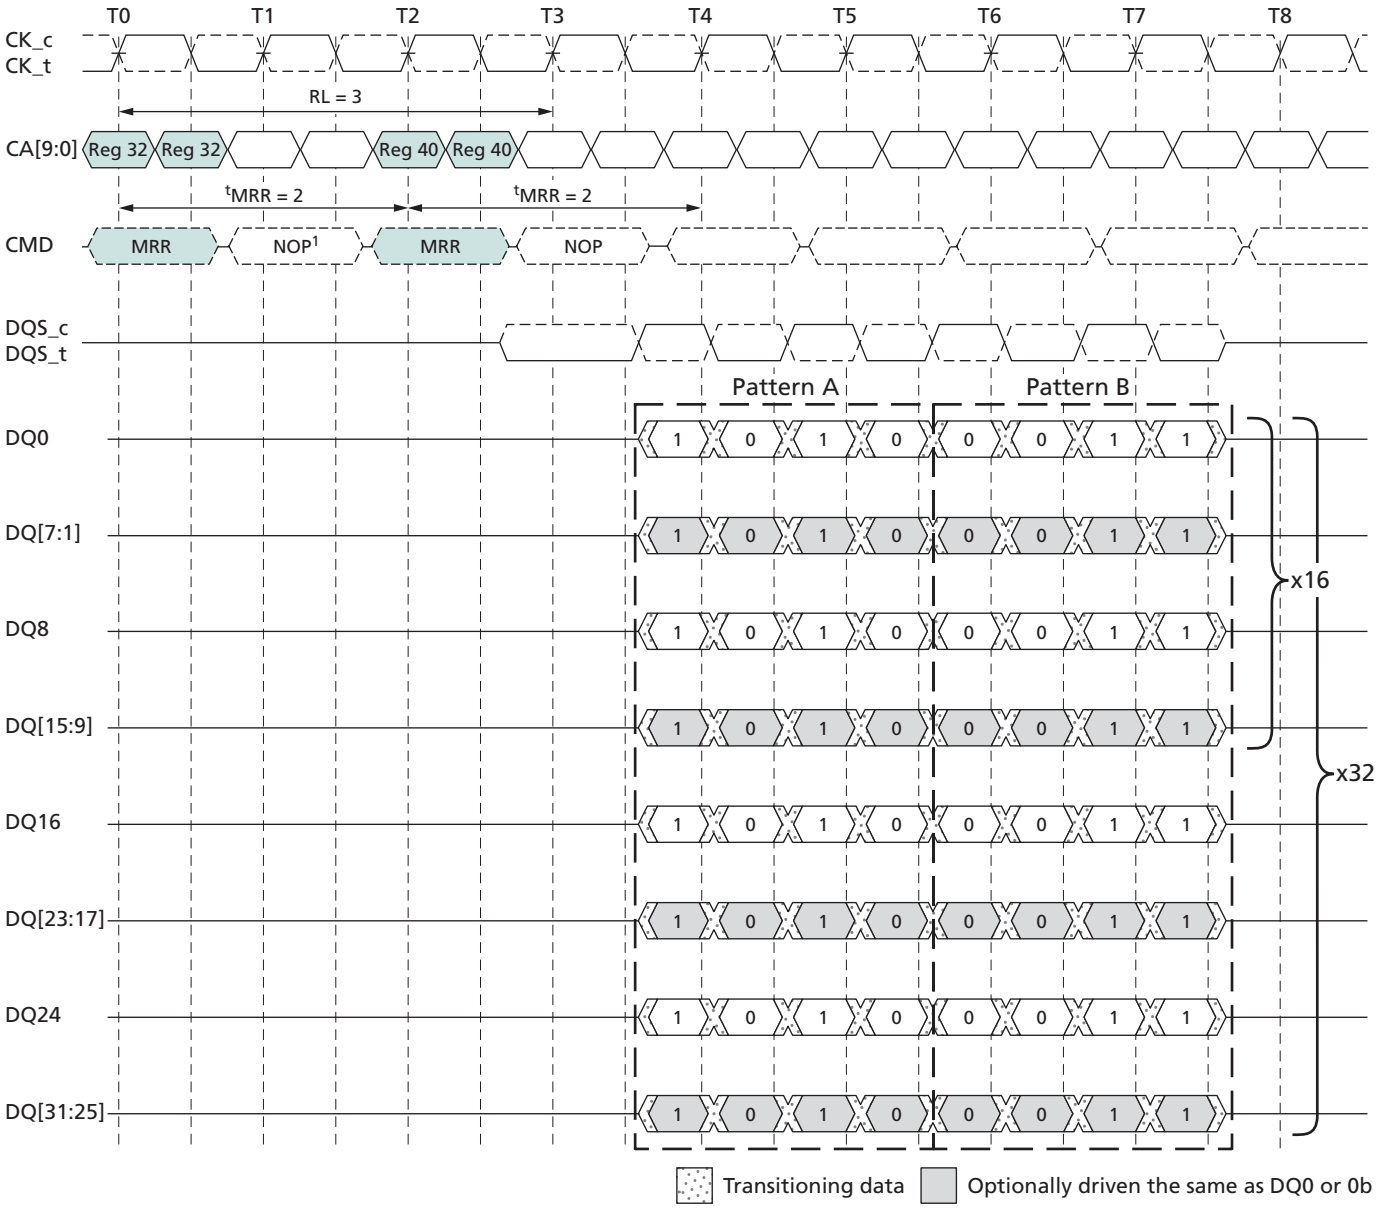

Notes:
1. The MRR command has a burst length of four.
2. The MRR operation must not be interrupted.
3. A MRR to MR32 and MR40 drives valid data on DQ[0] during the entire burst. For a x16 device, DQ[8] drives the same information as DQ[0] during the burst. For a x32 device, DQ[8], DQ[16], and DQ[24] drive the same information as DQ[0] during the burst.
4. For a x16 device, DQ[7:1] and DQ[15:9] may optionally drive the same information as DQ[0], or they may drive 0b during the burst. For a x32 device, DQ[7:1], DQ[15:9], DQ[23:17], and DQ[31:25] may optionally drive the same information as DQ[0], or they may drive 0b during the burst.
5. The MODE REGISTER command period is ^{t}MRR. No command (other than NOP) is allowed during this period.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 52: Data Calibration Pattern Description

Pattern	MR#	Bit Time 0	Bit Time 1	Bit Time 2	Bit Time 3	Description
Pattern A	MR32	1	0	1	0	Reads to MR32 return DQ calibration pattern A
Pattern B	MR40	0	0	1	1	Reads to MR40 return DQ calibration pattern B

MODE REGISTER WRITE Command

The MODE REGISTER WRITE (MRW) command is used to write configuration data to the mode registers. The MRW command is initiated with CS_n LOW, CA0 LOW, CA1 LOW, CA2 LOW, and CA3 LOW at the rising edge of the clock. The mode register is selected by CA1f–CA0f, CA9r–CA4r. The data to be written to the mode register is contained in CA9f–CA2f. The MRW command period is defined by ^{t}MRW. A MRW command to read-only registers has no impact on the functionality of the device.

MRW can be issued only when all banks are in the idle precharge state. One method of ensuring that the banks are in this state is to issue a PRECHARGE ALL command.

Figure 54: MODE REGISTER WRITE Timing – RL = 3, ^{t}MRW = 5

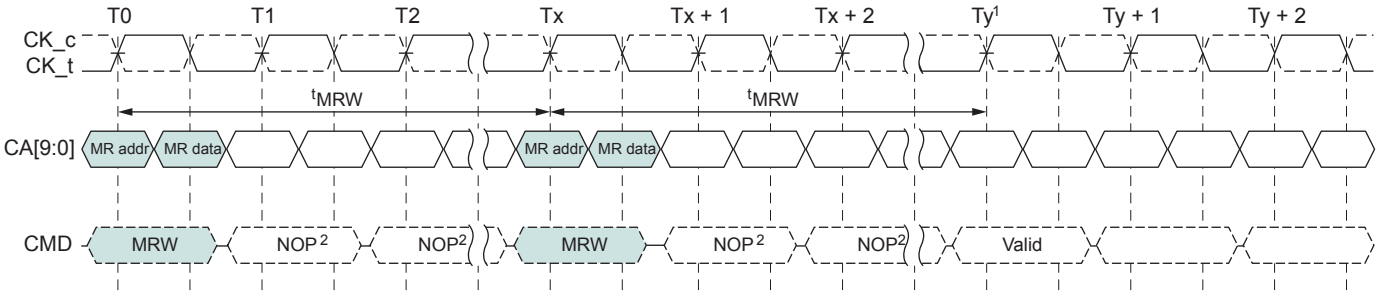

Notes:
1. At time Ty, the device is in the idle state.
2. Only the NOP command is supported during ^{t}MRW.

Table 53: Truth Table for MRR and MRW

Current State	Command	Intermediate State	Next State
All banks idle	MRR	Reading mode register, all banks idle	All banks idle
	MRW	Writing mode register, all banks idle	All banks idle
	MRW (RESET)	Resetting, device auto initialization	All banks idle
Bank(s) active	MRR	Reading mode register, bank(s) active	Bank(s) active
	MRW	Not allowed	Not allowed
	MRW (RESET)	Not allowed	Not allowed

MRW RESET Command

The MRW RESET command brings the device to the device auto initialization (resetting) state in the power-on initialization sequence (see step 2. of the RESET Command

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

under Voltage Ramp and Initialization Sequence). The MRW RESET command can be issued from the idle state. This command resets all mode registers to their default values. Only the NOP command is supported during ^{t}INIT4. After MRW RESET, boot timings must be observed until the device initialization sequence is complete and the device is in the idle state. Array data is undefined after the MRW RESET command has completed. For MRW RESET timing, see Voltage Ramp and Initialization Sequence.

MRW ZQ Calibration Commands

The MRW command is used to initiate a ZQ calibration command that calibrates output driver impedance across process, temperature, and voltage. LPDDR2-S4 devices support ZQ calibration. To achieve tighter tolerances, proper ZQ calibration must be performed.

There are four ZQ calibration commands and related timings: ^{t}ZQINIT, ^{t}ZQRESET, ^{t}ZQCL, and ^{t}ZQCS. ^{t}ZQINIT is used for initialization calibration; ^{t}ZQRESET is used for resetting ZQ to the default output impedance; ^{t}ZQCL is used for long calibration(s); and ^{t}ZQCS is used for short calibration(s). See the MR10 Calibration (MA[7:0] = 0Ah) table for ZQ calibration command code definitions.

ZQINIT must be performed for LPDDR2 devices. ZQINIT provides an output impedance accuracy of ±15%. After initialization, the ZQ calibration long (ZQCL) can be used to recalibrate the system to an output impedance accuracy of ±15%. A ZQ calibration short (ZQCS) can be used periodically to compensate for temperature and voltage drift in the system.

ZQRESET resets the output impedance calibration to a default accuracy of ±30% across process, voltage, and temperature. This command is used to ensure output impedance accuracy to ±30% when ZQCS and ZQCL commands are not used.

One ZQCS command can effectively correct at least 1.5% (ZQ correction) of output impedance errors within ^{t}ZQCS for all speed bins if maximum sensitivities are met as specified in Output Driver Sensitivity Definition and Output Driver Temperature and Voltage Sensitivity. The appropriate interval between ZQCS commands can be determined using these tables and system-specific parameters.

Mobile LPDDR2 devices are subject to temperature drift rate ($T_{driftrate}$) and voltage drift rate ($V_{driftrate}$) in various applications. To accommodate drift rates and calculate the necessary interval between ZQCS commands, apply the following formula:

$$\frac{ZQ_{correction}}{(T_{sens} \times T_{driftrate}) + (V_{sens} \times V_{driftrate})}$$

Where T_{sens} = MAX ($dR_{ON}dT$) and V_{sens} = MAX ($dR_{ON}dV$) define temperature and voltage sensitivities.

For example, if T_{sens} = 0.75%/°C, V_{sens} = 0.20%/mV, $T_{driftrate}$ = 1°C/sec, and $V_{driftrate}$ = 15 mV/sec, then the interval between ZQCS commands is calculated as:

$$\frac{1.5}{(0.75 \times 1) + (0.20 \times 15)} = 0.4s$$

A ZQ calibration command can only be issued when the device is in the idle state with all banks precharged.

No other activities can be performed on the data bus during calibration periods

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

(^{t}ZQINIT, ^{t}ZQCL, or ^{t}ZQCS). The quiet time on the data bus helps to calibrate output impedance accurately. There is no required quiet time after the ZQRESET command. If multiple devices share a single ZQ resistor, only one device can be calibrating at any given time. After calibration is complete, the ZQ ball circuitry is disabled to reduce power consumption.

In systems sharing a ZQ resistor between devices, the controller must prevent ^{t}ZQINIT, ^{t}ZQCS, and ^{t}ZQCL overlap between the devices. ZQRESET overlap is acceptable. If the ZQ resistor is absent from the system, ZQ must be connected to V_{DD2}. In this situation, the device must ignore ZQ calibration commands and the device will use the default calibration settings.

Figure 55: ZQ Timings

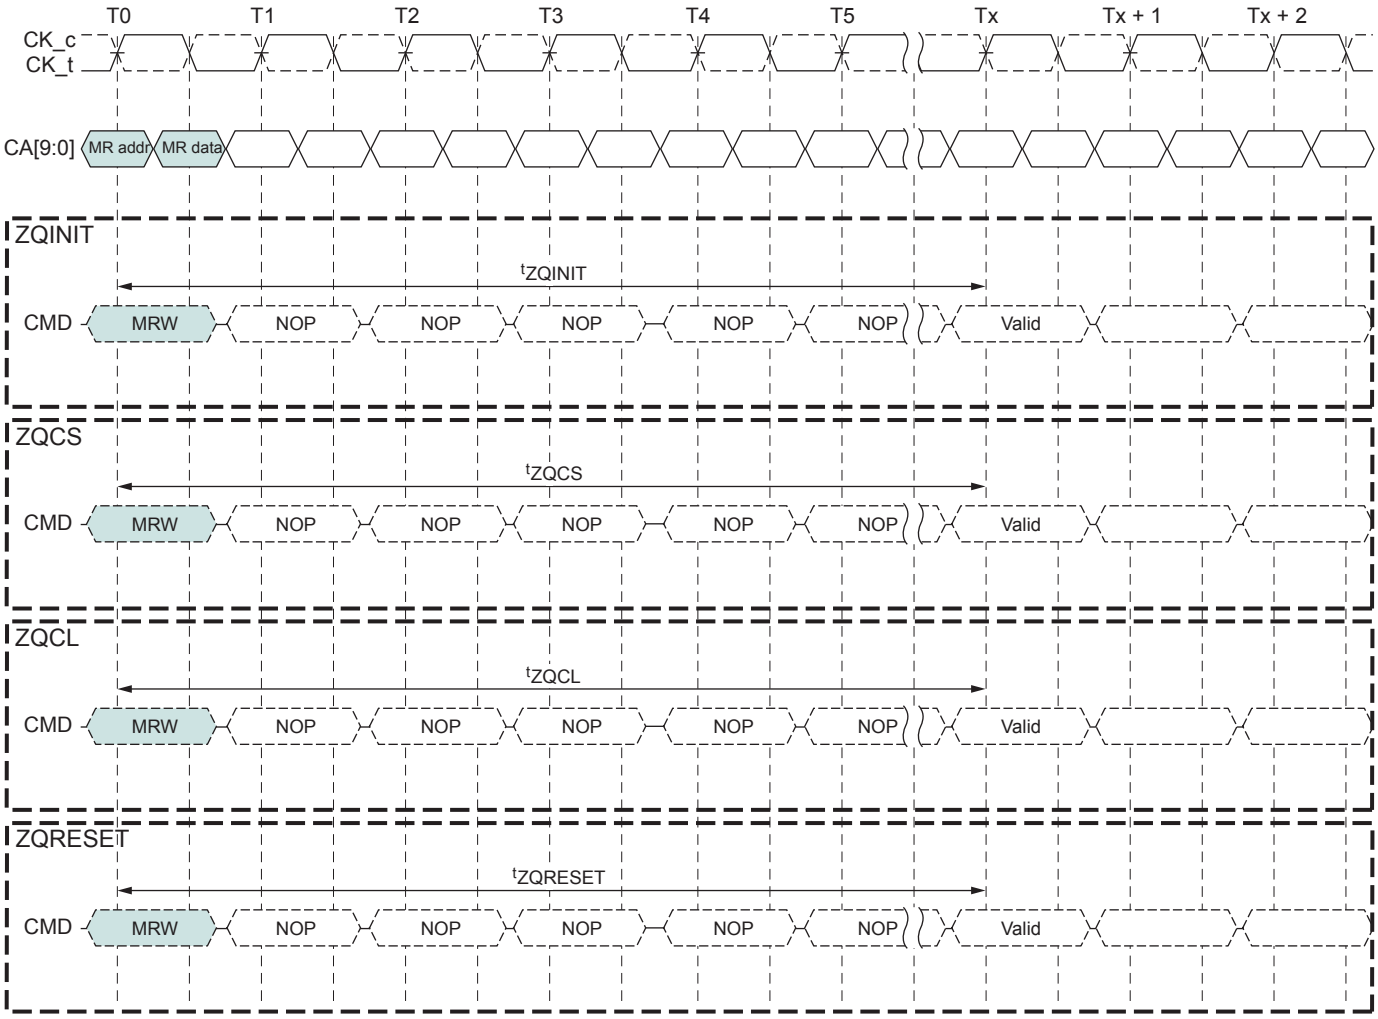

Notes: 1. Only the NOP command is supported during ZQ calibrations
^{t}ZQINIT: ZQ calibration initialization period
^{t}ZQCS: ZQ calibration short period
^{t} ZQCL: ZQ calibration long period
^{t}ZQRESET: ZQ calibration reset period

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

2. CKE must be registered HIGH continuously during the calibration period.
3. All devices connected to the DQ bus should be High-Z during the calibration process.

ZQ External Resistor Value, Tolerance, and Capacitive Loading

To use the ZQ calibration function, a 240 ohm (±1% tolerance) external resistor must be connected between the ZQ pin and ground. A single resistor can be used for each device or one resistor can be shared between multiple devices if the ZQ calibration timings for each device do not overlap. The total capacitive loading on the ZQ pin must be limited (see the Input/Output Capacitance table).

Power-Down

Power-down is entered synchronously when CKE is registered LOW and CS_n is HIGH at the rising edge of clock. A NOP command must be driven in the clock cycle following power-down entry. CKE must not go LOW while MRR, MRW, READ, or WRITE operations are in progress. CKE can go LOW while any other operation such as ACTIVATE, PRECHARGE, auto precharge, or REFRESH are in progress, but the power-down I_{DD} specification will not be applied until such operations are complete.

If power-down occurs when all banks are idle, this mode is referred to as idle power-down; if power-down occurs when there is a row active in any bank, this mode is referred to as active power-down.

Entering power-down deactivates the input and output buffers, excluding CK_t, CK_c, and CKE. In power-down mode, CKE must be held LOW; all other input signals are "Don't Care." CKE LOW must be maintained until ^{t}CKE is satisfied. V_{REFCA} must be maintained at a valid level during power-down.

V_{DDQ} can be turned off during power-down. If V_{DDQ} is turned off, V_{REFDQ} must also be turned off. Prior to exiting power-down, both V_{DDQ} and V_{REFDQ} must be within their respective minimum/maximum operating ranges (see AC and DC Operating Conditions).

No refresh operations are performed in power-down mode. The maximum duration in power-down mode is limited only by the refresh requirements outlined in REFRESH Command.

The power-down state is exited when CKE is registered HIGH. The controller must drive CS_n HIGH in conjunction with CKE HIGH when exiting the power-down state. CKE HIGH must be maintained until ^{t}CKE is satisfied. A valid, executable command can be applied with power-down exit latency ^{t}XP after CKE goes HIGH. Power-down exit latency is defined in the AC Timing section.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 56: Power-Down Entry and Exit Timing

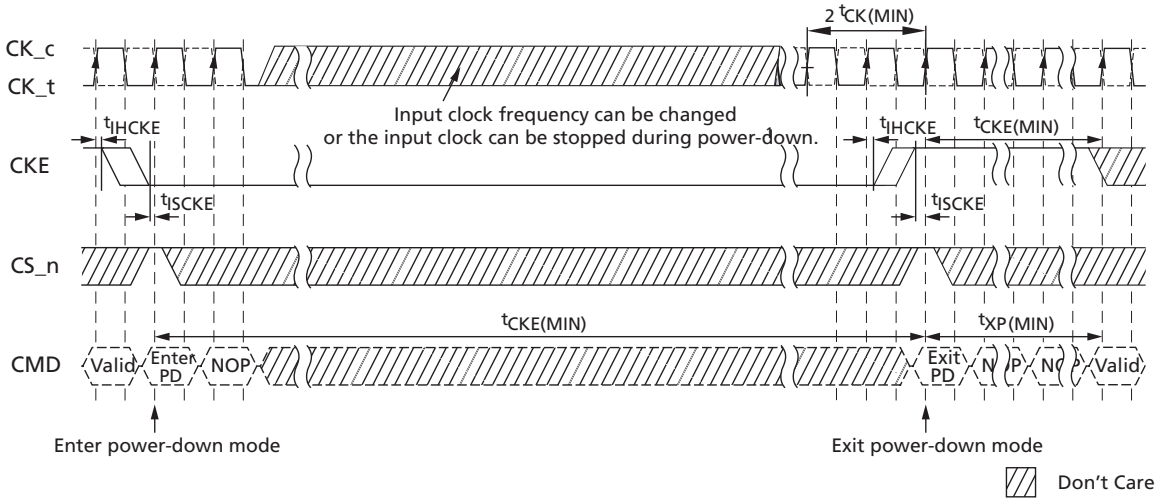

Note: 1. Input clock frequency can be changed or the input clock stopped during power-down, provided that the clock frequency is between the minimum and maximum specified frequencies for the speed grade in use, and that prior to power-down exit, a minimum of two stable clocks complete.

Figure 57: CKE Intensive Environment

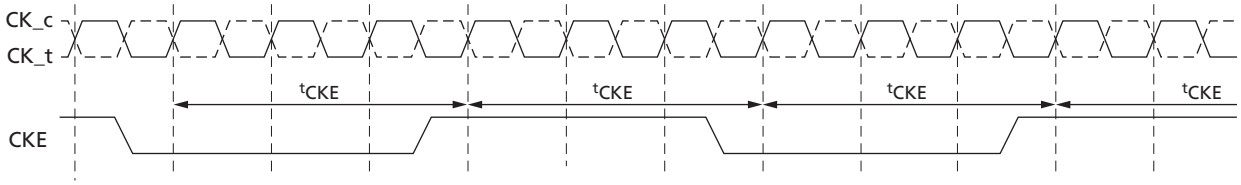

Figure 58: REFRESH-to-REFRESH Timing in CKE Intensive Environments

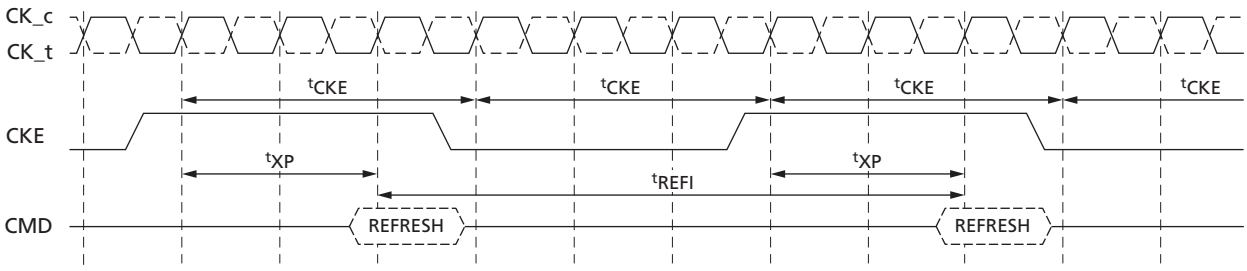

Note: 1. The pattern shown can repeat over an extended period of time. With this pattern, all AC and DC timing and voltage specifications with temperature and voltage drift are ensured.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 59: READ to Power-Down Entry

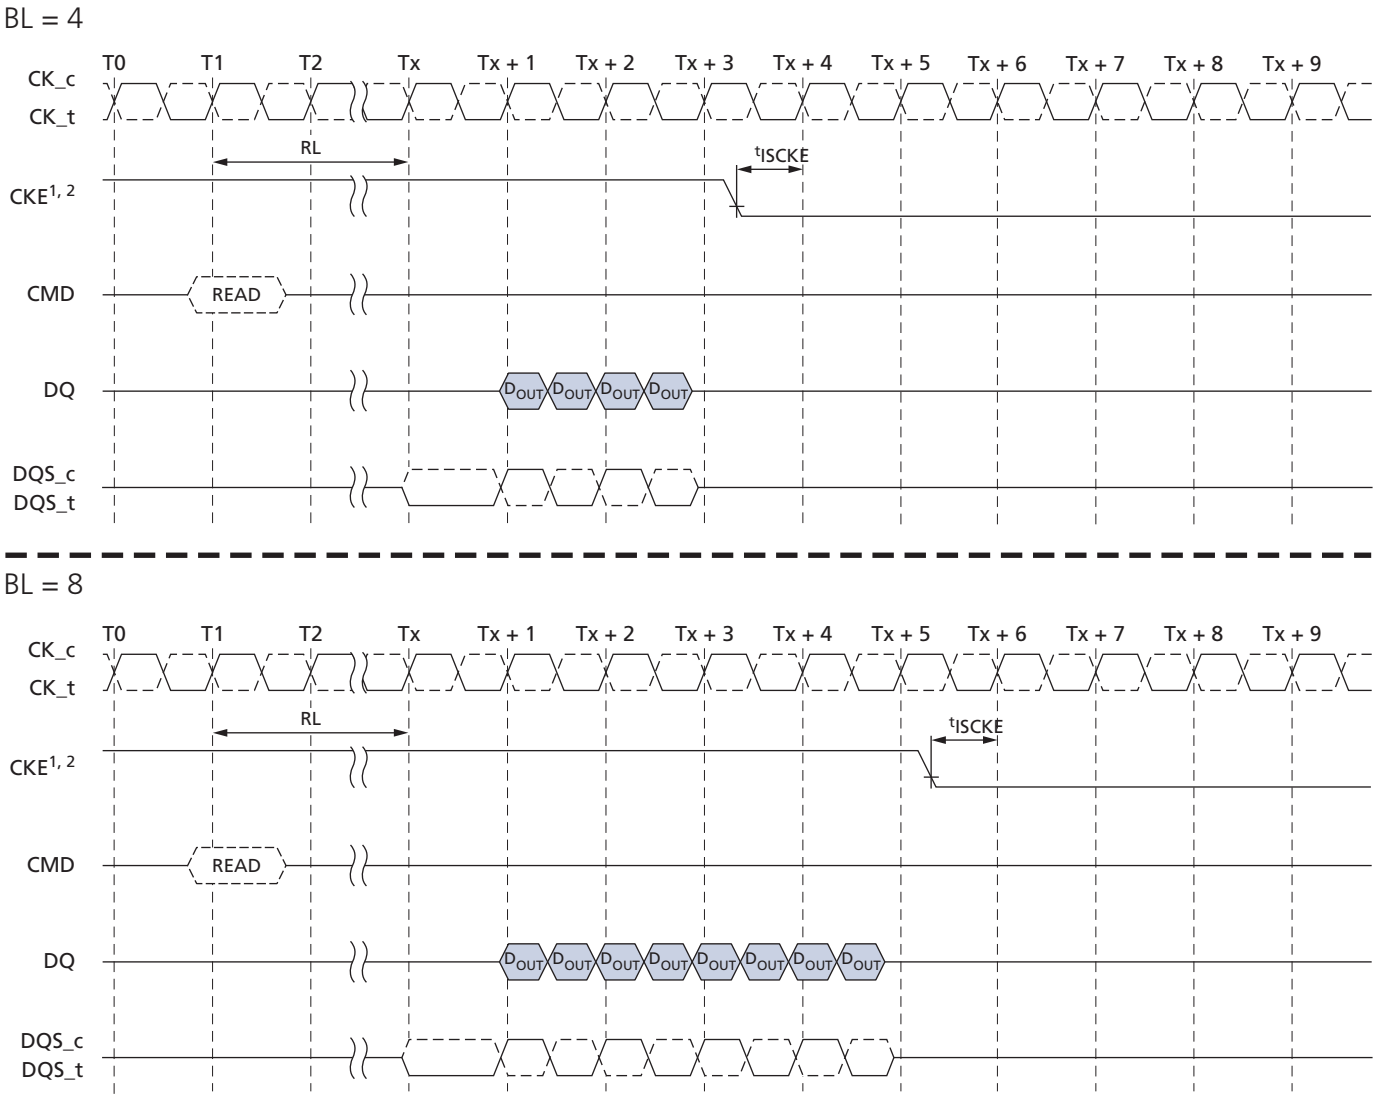

Notes:
1. CKE must be held HIGH until the end of the burst operation.
2. CKE can be registered LOW at (RL + RU(^{t}DQSCK(MAX)/^{t}CK) + BL/2 + 1) clock cycles after the clock on which the READ command is registered.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 60: READ with Auto Precharge to Power-Down Entry

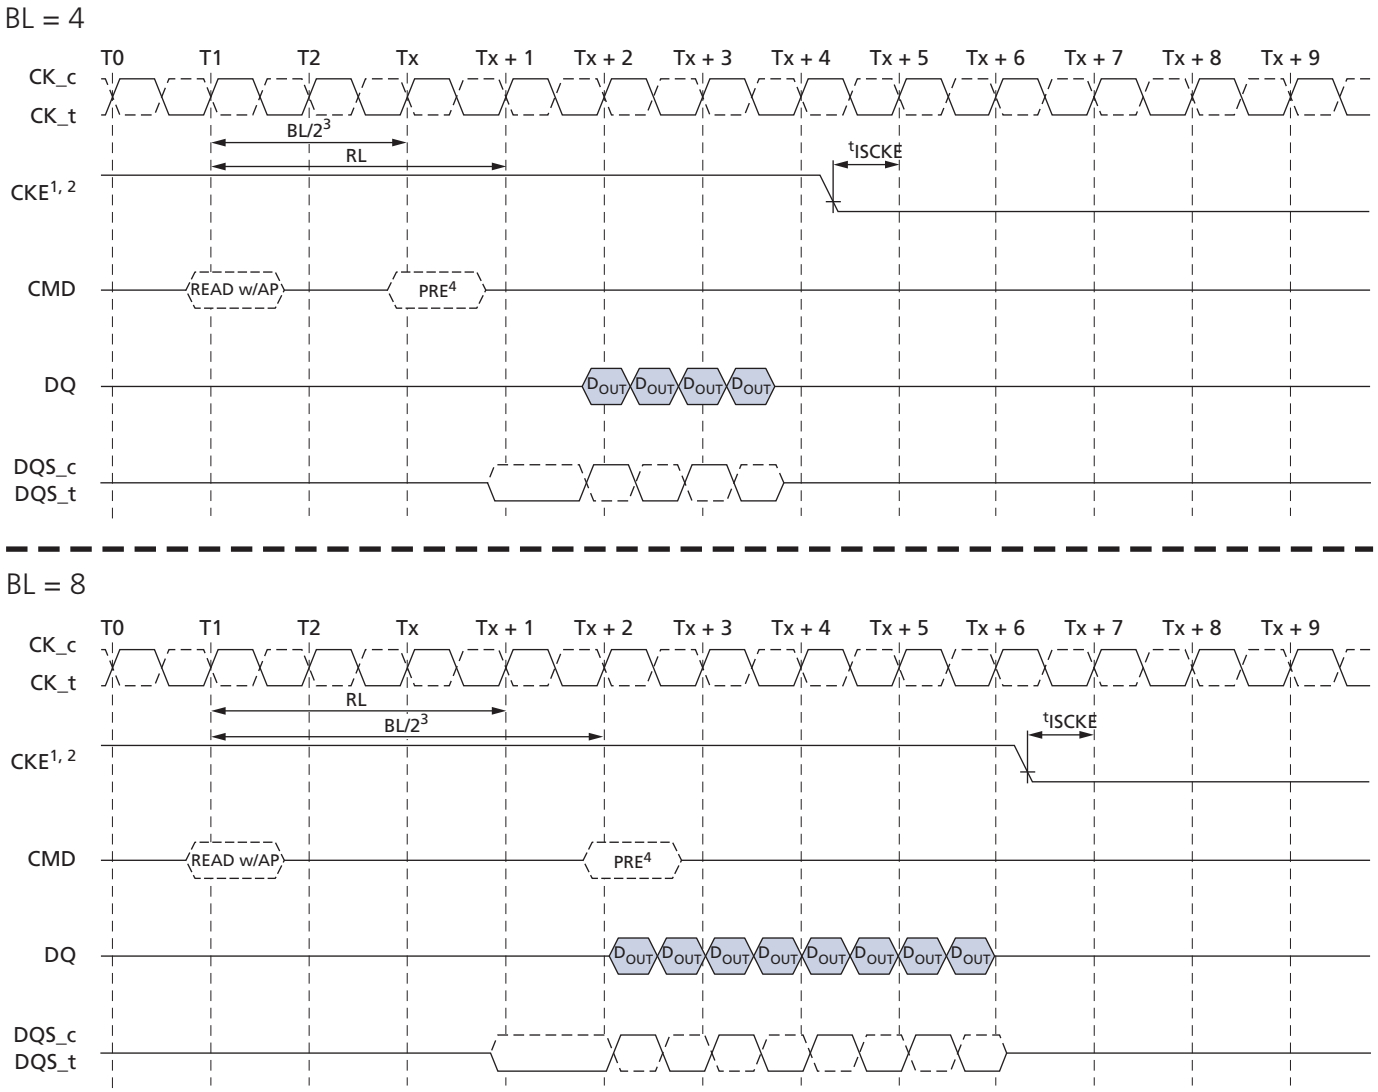

Notes:
1. CKE must be held HIGH until the end of the burst operation.
2. CKE can be registered LOW at (RL + RU(^{t}DQSCK/^{t}CK)+ BL/2 + 1) clock cycles after the clock on which the READ command is registered.
3. BL/2 with ^{t}RTP = 7.5ns and ^{t}RAS (MIN) is satisfied.
4. Start internal PRECHARGE.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 61: WRITE to Power-Down Entry

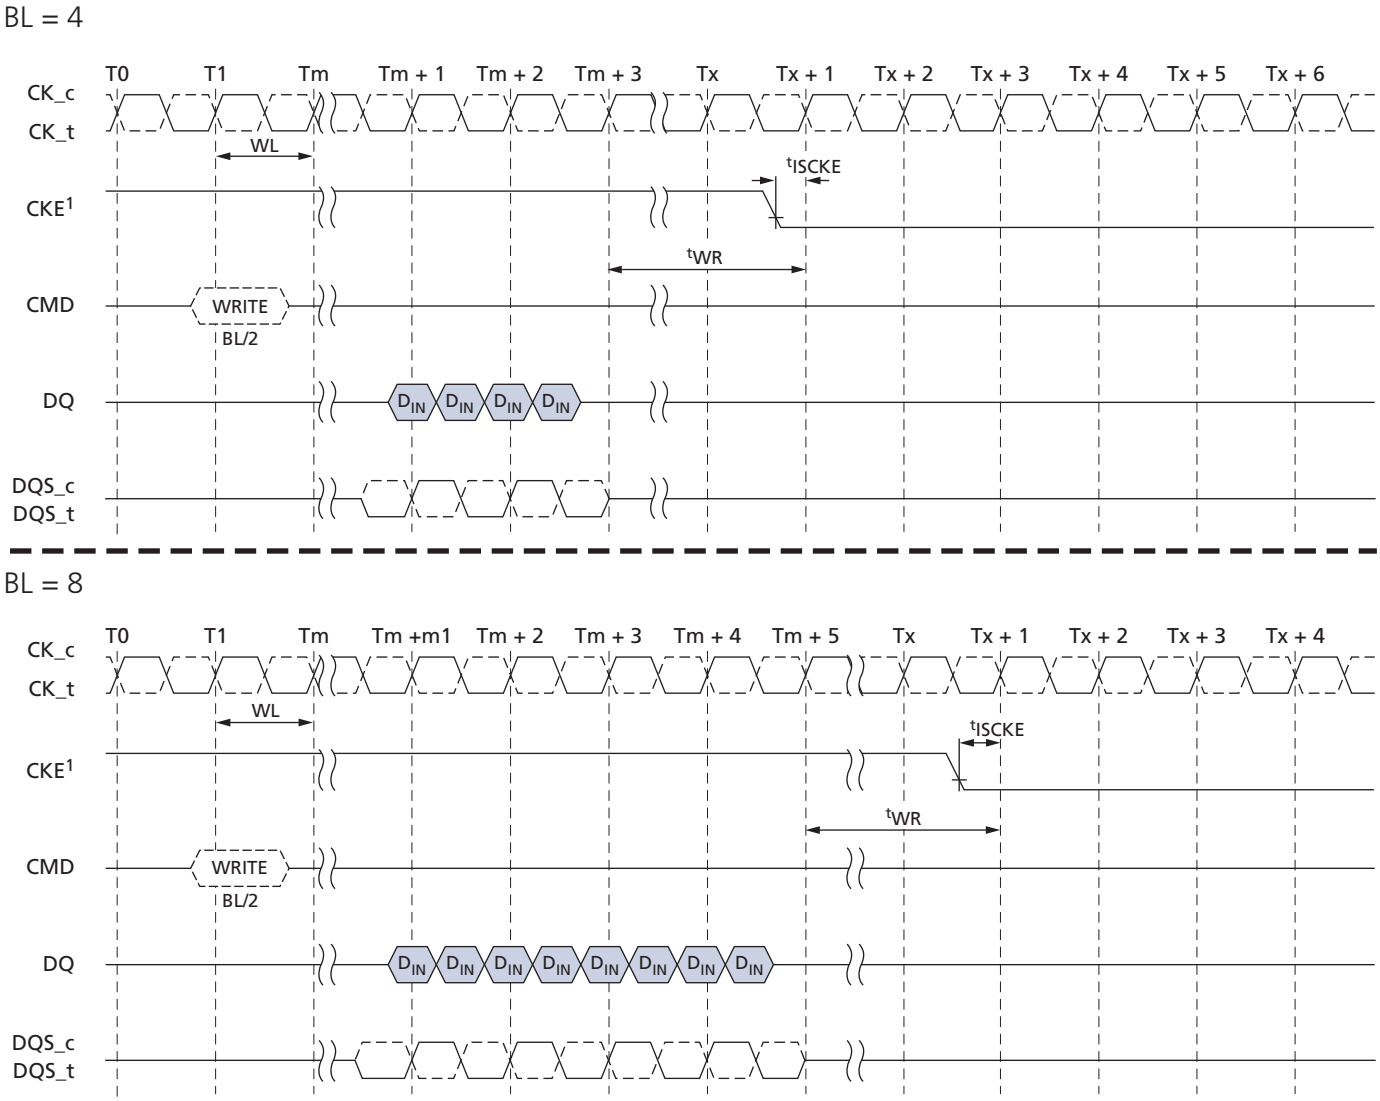

Note: 1. CKE can be registered LOW at (WL + 1 + BL/2 + RU(^{t}WR/^{t}CK)) clock cycles after the clock on which the WRITE command is registered.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 62: WRITE with Auto Precharge to Power-Down Entry

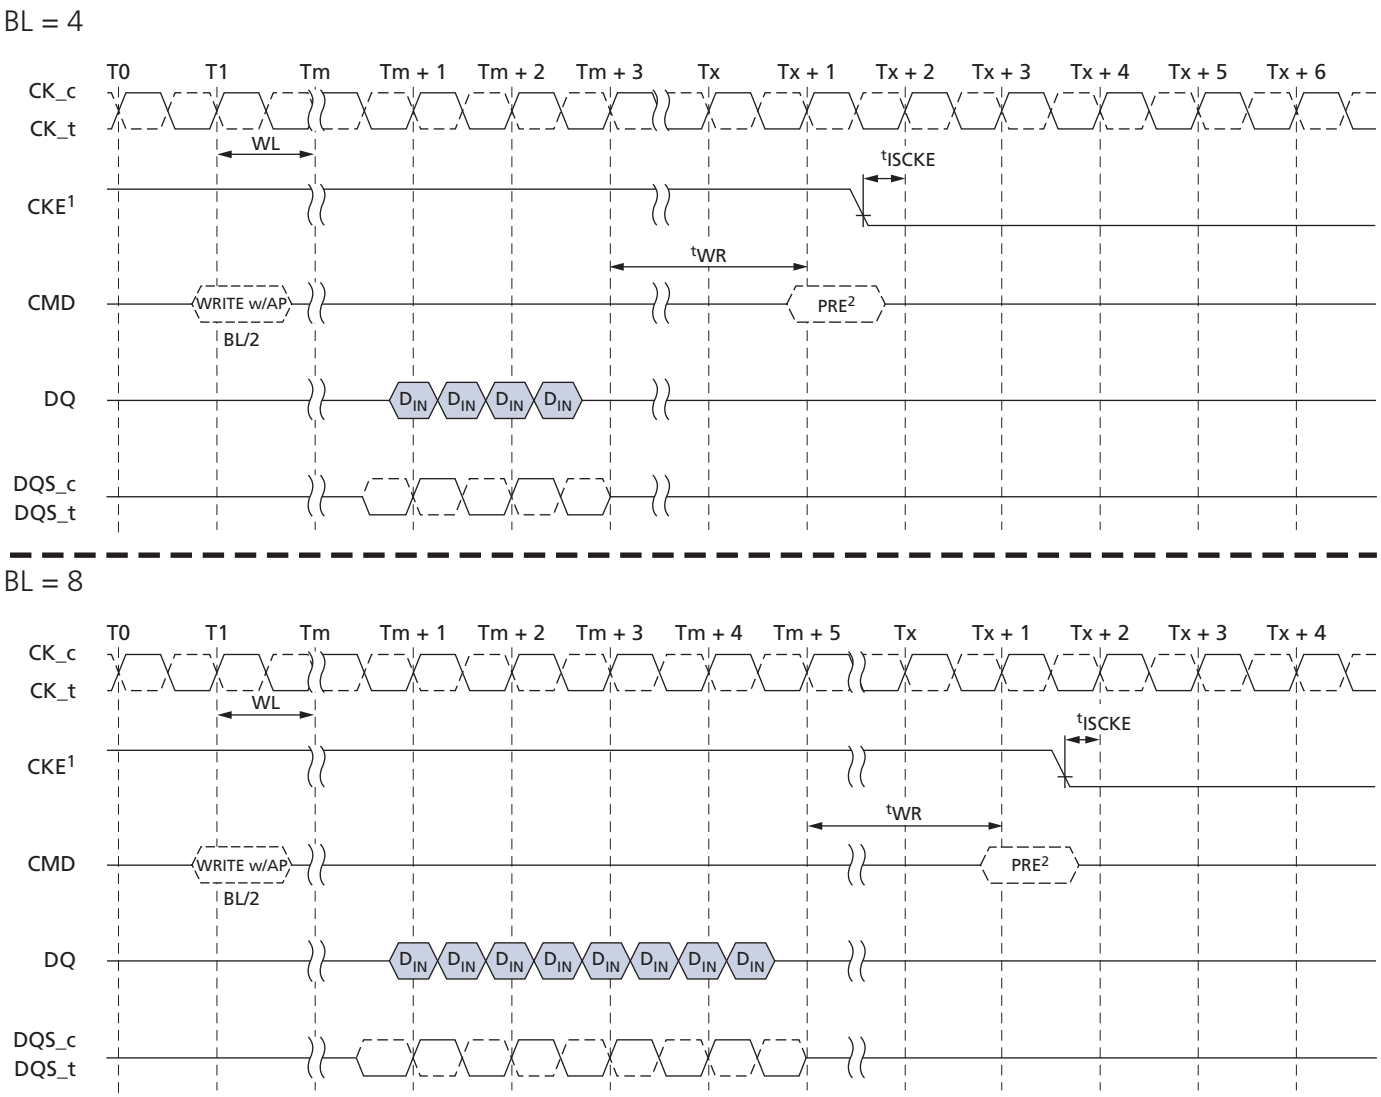

Notes:
1. CKE can be registered LOW at (WL + 1 + BL/2 + RU(^{t}WR/^{t}CK + 1) clock cycles after the WRITE command is registered.
2. Start internal PRECHARGE.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 63: REFRESH Command to Power-Down Entry

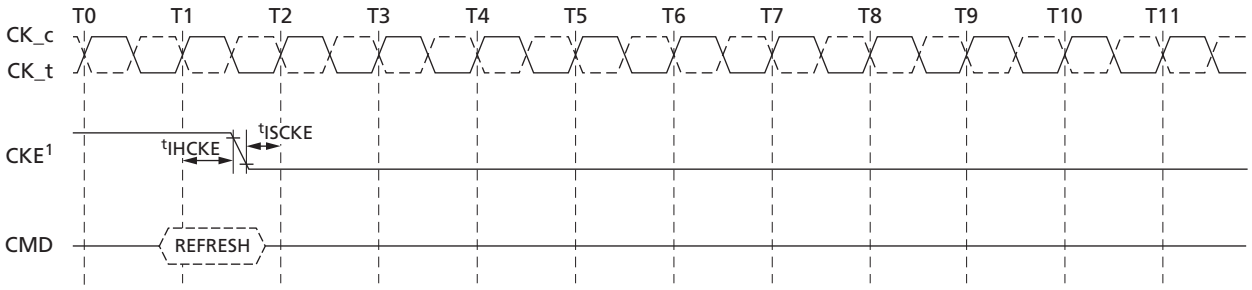

Note: 1. CKE can go LOW ^{t}IHCKE after the clock on which the REFRESH command is registered.

Figure 64: ACTIVATE Command to Power-Down Entry

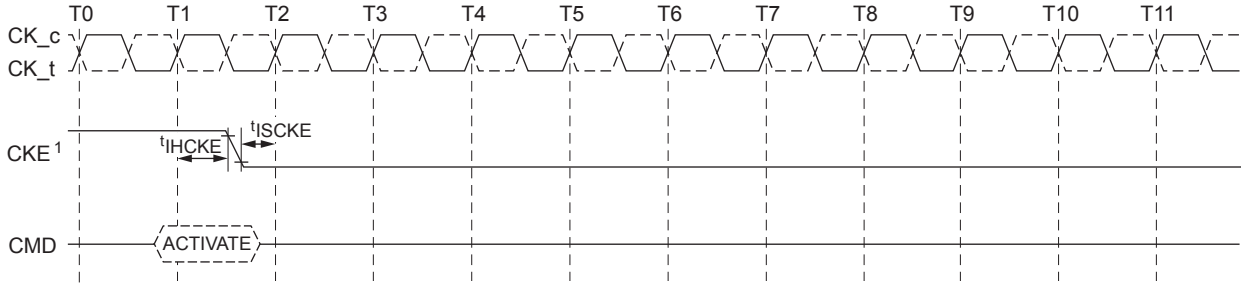

Note: 1. CKE can go LOW at ^{t}IHCKE after the clock on which the ACTIVATE command is registered.

Figure 65: PRECHARGE Command to Power-Down Entry

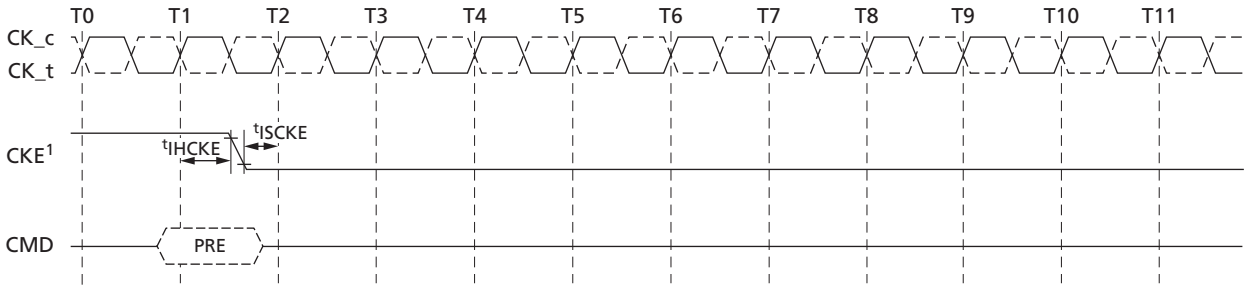

Note: 1. CKE can go LOW ^{t}IHCKE after the clock on which the PRECHARGE command is registered.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 66: MRR Command to Power-Down Entry

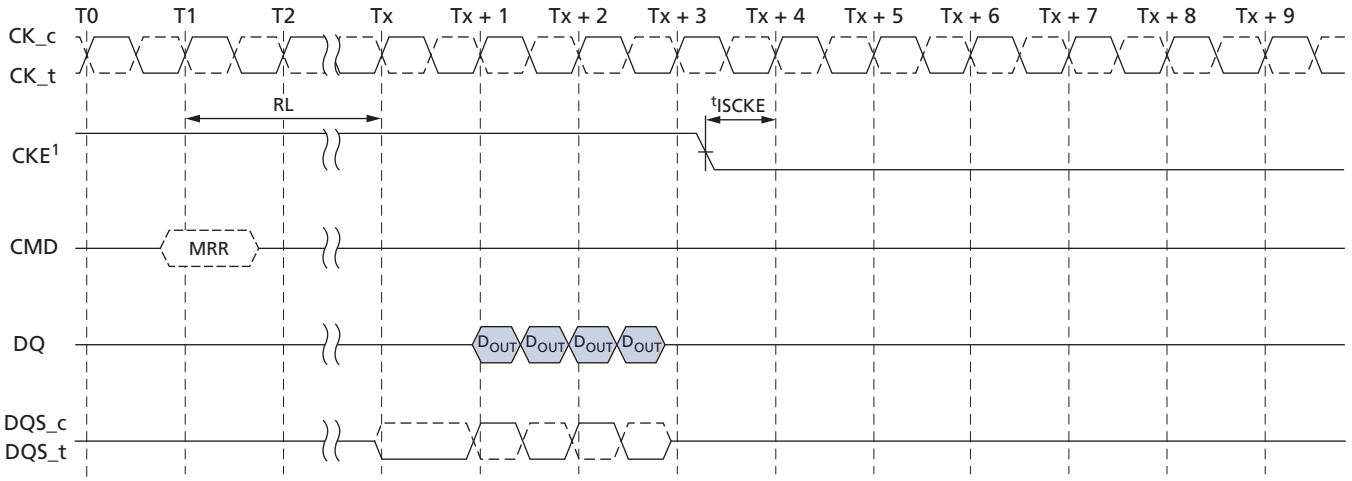

Note: 1. CKE can be registered LOW at (RL + RU(^{t}DQSCK/^{t}CK)+ BL/2 + 1) clock cycles after the clock on which the MRR command is registered.

Figure 67: MRW Command to Power-Down Entry

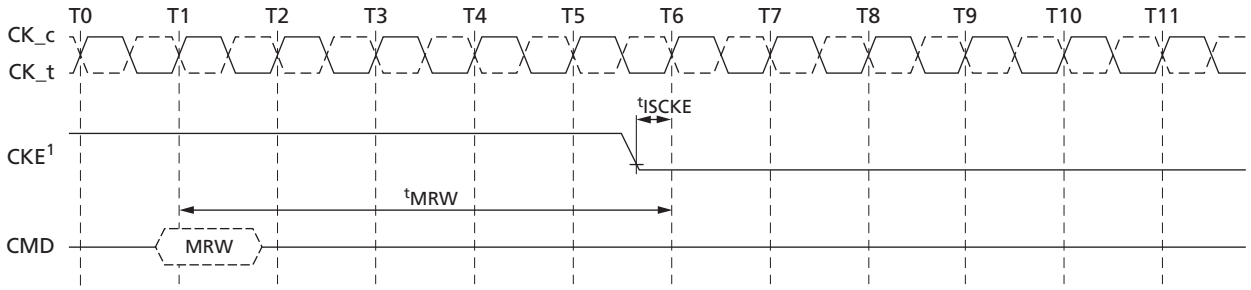

Note: 1. CKE can be registered LOW ^{t}MRW after the clock on which the MRW command is registered.

Deep Power-Down

Deep power-down (DPD) is entered when CKE is registered LOW with CS_n LOW, CA0 HIGH, CA1 HIGH, and CA2 LOW at the rising edge of the clock. The NOP command must be driven in the clock cycle following power-down entry. CKE must not go LOW while MRR or MRW operations are in progress. CKE can go LOW while other operations such as ACTIVATE, auto precharge, PRECHARGE, or REFRESH are in progress; however, deep power-down I_{DD} specifications will not be applied until those operations complete. The contents of the array will be lost upon entering DPD mode.

In DPD mode, all input buffers except CKE, all output buffers, and the power supply to internal circuitry are disabled within the device. V_{REFDQ} can be at any level between 0 and V_{DDQ}, and V_{REFCA} can be at any level between 0 and V_{DD2} during DPD. All power supplies (including V_{REF}) must be within the specified limits prior to exiting DPD (see AC and DC Operating Conditions).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

To exit DPD, CKE must be HIGH, tISCKE must be complete, and the clock must be stable. To resume operation, the device must be fully reinitialized using the power-up initialization sequence.

Figure 68: Deep Power-Down Entry and Exit Timing

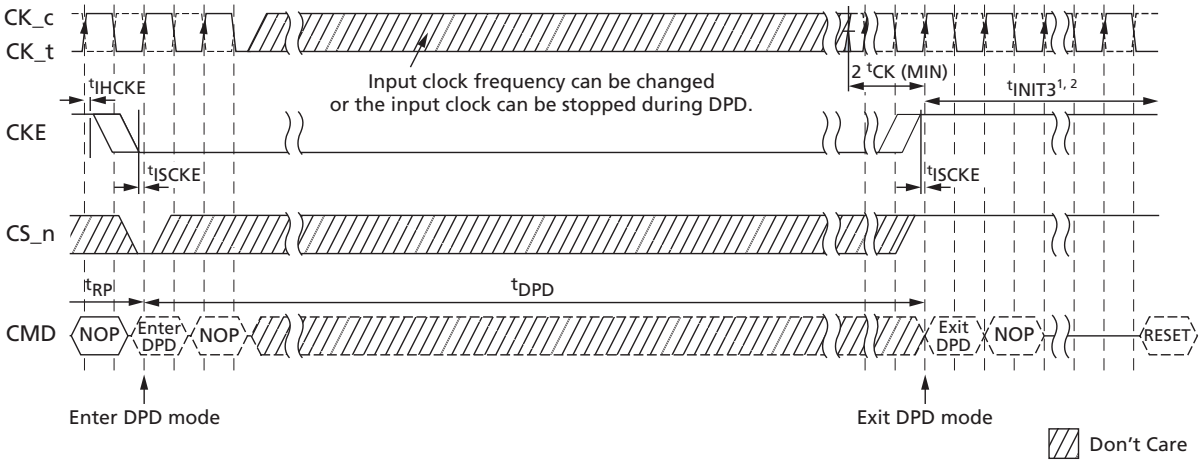

Notes:
1. The initialization sequence can start at any time after Tx + 1.
2. tINIT3 and Tx + 1 refer to timings in the initialization sequence. For details, see Mode Register Definition.

Input Clock Frequency Changes and Stop Events

Input Clock Frequency Changes and Clock Stop with CKE LOW

During CKE LOW, the mobile LPDDR2 device supports input clock frequency changes and clock stop under the following conditions:

- Refresh requirements are met
- Only REFab or REFpb commands can be in process
- Any ACTIVATE or PRECHARGE commands have completed prior to changing the frequency
- Related timing conditions, tRCD and tRP, have been met prior to changing the frequency
- The initial clock frequency must be maintained for a minimum of two clock cycles after CKE goes LOW
- The clock satisfies tCH(abs) and tCL(abs) for a minimum of two clock cycles prior to CKE going HIGH

For input clock frequency changes, tCK(MIN) and tCK(MAX) must be met for each clock cycle.

After the input clock frequency is changed and CKE is held HIGH, additional MRW commands may be required to set the WR, RL, etc. These settings may require adjustment to meet minimum timing requirements at the target clock frequency.

For clock stop, CK_t is held LOW and CK_c is held HIGH.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Input Clock Frequency Changes and Clock Stop with CKE HIGH

During CKE HIGH, the LPDDR2 device supports input clock frequency changes and clock stop under the following conditions:

- REFRESH requirements are met
- Any ACTIVATE, READ, WRITE, PRECHARGE, MRW, or MRR commands must have completed, including any associated data bursts, prior to changing the frequency
- Related timing conditions, ^{t}RCD, ^{t}WR, ^{t}RP, ^{t}MRW, and ^{t}MRR, etc., are met
- CS_n must be held HIGH
- Only REFab or REFpb commands can be in process

The device is ready for normal operation after the clock satisfies ^{t}CH(abs) and ^{t}CL(abs) for a minimum of 2 × ^{t}CK + ^{t}XP.

For input clock frequency changes, ^{t}CK(MIN) and ^{t}CK(MAX) must be met for each clock cycle.

After the input clock frequency is changed, additional MRW commands may be required to set the WR, RL, etc. These settings may require adjustment to meet minimum timing requirements at the target clock frequency.

For clock stop, CK_t is held LOW and CK_c is held HIGH.

NO OPERATION Command

The NO OPERATION (NOP) command prevents the device from registering any unwanted commands issued between operations. A NOP command can be issued only at clock cycle N when the CKE level is constant for clock cycle N-1 and clock cycle N. The NOP command has two possible encodings: CS_n HIGH at the clock rising edge N; and CS_n LOW with CA0, CA1, CA2 HIGH at the clock rising edge N.

The NOP command will not terminate a previous operation that is still in process, such as a READ burst or WRITE burst cycle.

Truth Tables

Truth tables provide complementary information to the state diagram. They also clarify device behavior and applicable restrictions when considering the actual state of the banks.

Unspecified operations and timings are illegal. To ensure proper operation after an illegal event, the device must be powered down and then restarted using the specified initialization sequence before normal operation can continue.

Table 54: Command Truth Table

Notes 1–13 apply to all parameters conditions

Command	Command Pins			CA Pins										CK Edge
	CKE													
	CK(*n*-1)	CK(*n*)	CS_n	CA0	CA1	CA2	CA3	CA4	CA5	CA6	CA7	CA8	CA9	
MRW	H	H	L	L	L	L	L	MA0	MA1	MA2	MA3	MA4	MA5	↑
	H	H	X	MA6	MA7	OP0	OP1	OP2	OP3	OP4	OP5	OP6	OP7	↓

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 54: Command Truth Table (Continued)

Notes 1–13 apply to all parameters conditions

Command	Command Pins			CA Pins										CK Edge
	CKE													
	CK(*n*-1)	CK(*n*)	CS_n	CA0	CA1	CA2	CA3	CA4	CA5	CA6	CA7	CA8	CA9	
MRR	H	H	L	L	L	L	H	MA0	MA1	MA2	MA3	MA4	MA5	↓
	H	H	X	MA6	MA7	X								↓
REFRESH (per bank)	H	H	L	L	L	H	L	X						↓
	H	H	X	X										↓
REFRESH (all banks)	H	H	L	L	L	H	H	X						↓
	H	H	X	X										↓
Enter self refresh	H	L	L	L	L	H	X							↓
	X	L	X	X										↓
ACTIVATE (bank)	H	H	L	L	H	R8	R9	R10	R11	R12	BA0	BA1	BA2	↓
	H	H	X	R0	R1	R2	R3	R4	R5	R6	R7	R13	R14	↓
WRITE (bank)	H	H	L	H	L	L	RFU	RFU	C1	C2	BA0	BA1	BA2	↓
	H	H	X	AP	C3	C4	C5	C6	C7	C8	C9	C10	C11	↓
READ (bank)	H	H	L	H	L	H	RFU	RFU	C1	C2	BA0	BA1	BA2	↓
	H	H	X	AP	C3	C4	C5	C6	C7	C8	C9	C10	C11	↓
PRECHARGE (bank)	H	H	L	H	H	L	H	AB	X	X	BA0	BA1	BA2	↓
	H	H	X	X										↓
BST	H	H	L	H	H	L	L	X						↓
	H	H	X	X										↓
Enter DPD	H	L	L	H	H	L	X							↓
	X	L	X	X										↓
NOP	H	H	L	H	H	H	X							↓
	H	H	X	X										↓
Maintain PD, SREF, DPD, (NOP)	L	L	L	H	H	H	X							↓
	L	L	X	X										↓
NOP	H	H	H	X										↓
	H	H	X	X										↓
Maintain PD, SREF, DPD, (NOP)	L	L	H	X										↓
	L	L	X	X										↓
Enter power-down	H	L	H	X										↓
	X	L	X	X										↓

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 54: Command Truth Table (Continued)

Notes 1–13 apply to all parameters conditions

Command	Command Pins			CA Pins										CK Edge
	CKE													
	CK(*n*-1)	CK(*n*)	CS_n	CA0	CA1	CA2	CA3	CA4	CA5	CA6	CA7	CA8	CA9	
Exit PD, SREF, DPD	L	H	H	X										↑
	X	H	X	X										↓

Notes:
1. All commands are defined by the current state of CS_n, CA0, CA1, CA2, CA3, and CKE at the rising edge of the clock.
2. Bank addresses (BA) determine which bank will be operated upon.
3. AP HIGH during a READ or WRITE command indicates that an auto precharge will occur to the bank associated with the READ or WRITE command.
4. X indicates a "Don't Care" state, with a defined logic level, either HIGH (H) or LOW (L).
5. Self refresh exit and DPD exit are asynchronous.
6. V_{REF} must be between 0 and V_{DDQ} during self refresh and DPD operation.
7. CAxr refers to command/address bit "x" on the rising edge of clock.
8. CAxf refers to command/address bit "x" on the falling edge of clock.
9. CS_n and CKE are sampled on the rising edge of the clock.
10. Per-bank refresh is supported only in devices with eight banks.
11. The least-significant column address C0 is not transmitted on the CA bus, and is inferred to be zero.
12. RFU needs to input "H" or "L" (but a defined logic level).
13. AB "high"during Precharge command indicates that all bank Precharge will occur. In this case, Bank Address is don't care.

Table 55: CKE Truth Table

Notes 1–5 apply to all parameters and conditions; L = LOW, H = HIGH, X = "Don't Care"

Current State	CKE*n*-1	CKE*n*	CS_n	Command *n*	Operation *n*	Next State	Notes
Active power-down	L	L	X	X	Maintain active power-down	Active power-down	
	L	H	H	NOP	Exit active power-down	Active	6, 7
Idle power-down	L	L	X	X	Maintain idle power-down	Idle power-down	
	L	H	H	NOP	Exit idle power-down	Idle	6, 7
Resetting idle power-down	L	L	X	X	Maintain resetting power-down	Resetting power-down	
	L	H	H	NOP	Exit resetting power-down	Idle or resetting	6, 7, 8
Deep power-down	L	L	X	X	Maintain deep power-down	Deep power-down	
	L	H	H	NOP	Exit deep power-down	Power-on	9
Self refresh	L	L	X	X	Maintain self refresh	Self refresh	
	L	H	H	NOP	Exit self refresh	Idle	10, 11
Bank(s) active	H	L	H	NOP	Enter active power-down	Active power-down	

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 55: CKE Truth Table (Continued)

Notes 1–5 apply to all parameters and conditions; L = LOW, H = HIGH, X = "Don't Care"

Current State	CKE*n*-1	CKE*n*	CS_n	Command *n*	Operation *n*	Next State	Notes
All banks idle	H	L	H	NOP	Enter idle power-down	Idle power-down	
	H	L	L	Enter self refresh	Enter self refresh	Self refresh	
	H	L	L	DPD	Enter deep power-down	Deep power-down	
Resetting	H	L	H	NOP	Enter resetting power-down	Resetting power-down	
Other states	H	H	Refer to the command truth table				

Notes:
1. Current state = the state of the device immediately prior to the clock rising edge *n*.
2. All states and sequences not shown are illegal or reserved unless explicitly described elsewhere in this document.
3. CKE*n* = the logic state of CKE at clock rising edge *n*; CKE*n*-1 was the state of CKE at the previous clock edge.
4. CS_n= the logic state of CS_n at the clock rising edge *n*.
5. Command *n* = the command registered at clock edge *n*, and operation *n* is a result of command *n*.
6. Power-down exit time (^{t}XP) must elapse before any command other than NOP is issued.
7. The clock must toggle at least twice prior to the ^{t}XP period.
8. Upon exiting the resetting power-down state, the device will return to the idle state if ^{t}INIT5 has expired.
9. The DPD exit procedure must be followed as described in Deep Power Down.
10. Self refresh exit time (^{t}XSR) must elapse before any command other than NOP is issued.
11. The clock must toggle at least twice prior to the ^{t}XSR time.

Table 56: Current State Bank *n* to Command to Bank *n* Truth Table

Notes 1–5 apply to all parameters and conditions

Current State	Command	Operation	Next State	Notes
Any	NOP	Continue previous operation	Current state	
Idle	ACTIVATE	Select and activate row	Active	
	Refresh (per bank)	Begin to refresh	Refreshing (per bank)	6
	Refresh (all banks)	Begin to refresh	Refreshing (all banks)	7
	MRW	Load value to mode register	MR writing	7
	MRR	Read value from mode register	Idle, MR reading	
	RESET	Begin device auto initialization	Resetting	7, 8
	PRECHARGE	Deactivate row(s) in bank or banks	Precharging	9, 10
Row active	READ	Select column and start read burst	Reading	
	WRITE	Select column and start write burst	Writing	
	MRR	Read value from mode register	Active MR reading	
	PRECHARGE	Deactivate row(s) in bank or banks	Precharging	9

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 56: Current State Bank *n* to Command to Bank *n* Truth Table (Continued)

Notes 1–5 apply to all parameters and conditions

Current State	Command	Operation	Next State	Notes
Reading	READ	Select column and start new read burst	Reading	11, 12
	WRITE	Select column and start write burst	Writing	11, 12, 13
	BST	Read burst terminate	Active	14
Writing	WRITE	Select column and start new write burst	Writing	11, 12
	READ	Select column and start read burst	Reading	11, 12, 15
	BST	Write burst terminate	Active	14
Power-on	RESET	Begin device auto initialization	Resetting	7, 9
Resetting	MRR	Read value from mode register	Resetting MR reading	

Notes:

1. Values in this table apply when both CKE*n* -1 and CKE*n* are HIGH, and after ^{t}XSR or ^{t}XP has been met, if the previous state was power-down.
2. All states and sequences not shown are illegal or reserved.
3. Current state definitions:

   Idle: The bank or banks have been precharged, and ^{t}RP has been met.

   Active: A row in the bank has been activated, and ^{t}RCD has been met. No data bursts or accesses and no register accesses are in progress.

   Reading: A READ burst has been initiated with auto precharge disabled and has not yet terminated or been terminated.

   Writing: A WRITE burst has been initiated with auto precharge disabled and has not yet terminated or been terminated.
4. These states must not be interrupted by a command issued to the same bank. NOP commands or supported commands to the other bank must be issued on any clock edge occurring during these states. Supported commands to the other banks are determined by that bank's current state and the definitions given here.

   Precharge: Starts with registration of a PRECHARGE command and ends when ^{t}RP is met. After ^{t}RP is met, the bank is in the idle state.

   Row activate: Starts with registration of an ACTIVATE command and ends when ^{t}RCD is met. After ^{t}RCD is met, the bank is in the active state.

   READ with AP enabled: Starts with registration of a READ command with auto precharge enabled and ends when ^{t}RP is met. After ^{t}RP is met, the bank is in the idle state.

   WRITE with AP enabled: Starts with registration of a WRITE command with auto precharge enabled and ends when ^{t}RP is met. After ^{t}RP is met, the bank is in the idle state.
5. These states must not be interrupted by any executable command. NOP commands must be applied to each rising clock edge during these states.

   Refresh (per bank): Starts with registration of a REFRESH (per bank) command and ends when ^{t}RFCpb is met. After ^{t}RFCpb is met, the bank is in the idle state.

   Refresh (all banks): Starts with registration of a REFRESH (all banks) command and ends when ^{t}RFCab is met. After ^{t}RFCab is met, the device is in the all banks idle state.

   Idle MR reading: Starts with registration of the MRR command and ends when ^{t}MRR is met. After ^{t}MRR is met, the device is in the all banks idle state.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Resetting MR reading: Starts with registration of the MRR command and ends when ^{t}MRR is met. After ^{t}MRR is met, the device is in the all banks idle state.

Active MR reading: Starts with registration of the MRR command and ends when ^{t}MRR is met. After ^{t}MRR is met, the bank is in the active state.

MR writing: Starts with registration of the MRW command and ends when ^{t}MRW is met. After ^{t}MRW is met, the device is in the all banks idle state.

Precharging all: Starts with registration of a PRECHARGE ALL command and ends when ^{t}RP is met. After ^{t}RP is met, the device is in the all banks idle state.

6. Bank-specific; requires that the bank is idle and no bursts are in progress.
7. Not bank-specific; requires that all banks are idle and no bursts are in progress.
8. Not bank-specific.
9. This command may or may not be bank specific. If all banks are being precharged, they must be in a valid state for precharging.
10. If a PRECHARGE command is issued to a bank in the idle state, ^{t}RP still applies.
11. A command other than NOP should not be issued to the same bank while a burst READ or burst WRITE with auto precharge is enabled.
12. The new READ or WRITE command could be auto precharge enabled or auto precharge disabled.
13. A WRITE command can be issued after the completion of the READ burst; otherwise, a BST must be issued to end the READ prior to asserting a WRITE command.
14. Not bank-specific. The BST command affects the most recent READ/WRITE burst started by the most recent READ/WRITE command, regardless of bank.
15. A READ command can be issued after completion of the WRITE burst; otherwise, a BST must be used to end the WRITE prior to asserting another READ command.

Table 57: Current State Bank *n* to Command to Bank *m* Truth Table

Notes 1–6 apply to all parameters and conditions

Current State of Bank *n*	Command to Bank *m*	Operation	Next State for Bank *m*	Notes
Any	NOP	Continue previous operation	Current state of bank *m*	
Idle	Any	Any command supported to bank *m*	–	7
Row activating, active, or pre-charging	ACTIVATE	Select and activate row in bank *m*	Active	8
	READ	Select column and start READ burst from bank *m*	Reading	9
	WRITE	Select column and start WRITE burst to bank *m*	Writing	9
	PRECHARGE	Deactivate row(s) in bank or banks	Precharging	10
	MRR	READ value from mode register	Idle MR reading or active MR reading	11, 12, 13
	BST	READ or WRITE burst terminates an on-going READ/WRITE from/to bank *m*	Active	7

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 57: Current State Bank *n* to Command to Bank *m* Truth Table (Continued)

Notes 1–6 apply to all parameters and conditions

Current State of Bank *n*	Command to Bank *m*	Operation	Next State for Bank *m*	Notes
Reading (auto precharge disabled)	READ	Select column and start READ burst from bank *m*	Reading	9
	WRITE	Select column and start WRITE burst to bank *m*	Writing	9, 14
	ACTIVATE	Select and activate row in bank *m*	Active	
	PRECHARGE	Deactivate row(s) in bank or banks	Precharging	10
Writing (auto precharge disabled)	READ	Select column and start READ burst from bank *m*	Reading	9, 15
	WRITE	Select column and start WRITE burst to bank *m*	Writing	9
	ACTIVATE	Select and activate row in bank *m*	Active	
	PRECHARGE	Deactivate row(s) in bank or banks	Precharging	10
Reading with auto precharge	READ	Select column and start READ burst from bank *m*	Reading	9, 16
	WRITE	Select column and start WRITE burst to bank *m*	Writing	9, 14, 16
	ACTIVATE	Select and activate row in bank *m*	Active	
	PRECHARGE	Deactivate row(s) in bank or banks	Precharging	10
Writing with auto precharge	READ	Select column and start READ burst from bank *m*	Reading	9, 15, 16
	WRITE	Select column and start WRITE burst to bank *m*	Writing	9, 16
	ACTIVATE	Select and activate row in bank *m*	Active	
	PRECHARGE	Deactivate row(s) in bank or banks	Precharging	10
Power-on	RESET	Begin device auto initialization	Resetting	17, 18
Resetting	MRR	Read value from mode register	Resetting MR reading	

Notes:
1. This table applies when: the previous state was self refresh or power-down; after ^{t}XSR or ^{t}XP has been met; *and* both CKE*n* -1 and CKE*n* are HIGH.
2. All states and sequences not shown are illegal or reserved.
3. Current state definitions:

   Idle: The bank has been precharged and ^{t}RP has been met.

   Active: A row in the bank has been activated, ^{t}RCD has been met, no data bursts or accesses and no register accesses are in progress.

   Read: A READ burst has been initiated with auto precharge disabled and the READ has not yet terminated or been terminated.

   Write: A WRITE burst has been initiated with auto precharge disabled and the WRITE has not yet terminated or been terminated.
4. Refresh, self refresh, and MRW commands can be issued only when all banks are idle.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

5. A BST command cannot be issued to another bank; it applies only to the bank represented by the current state.
6. These states must not be interrupted by any executable command. NOP commands must be applied during each clock cycle while in these states:

   Idle MRR: Starts with registration of the MRR command and ends when ^{t}MRR has been met. After ^{t}MRR is met, the device is in the all banks idle state.

   Reset MRR: Starts with registration of the MRR command and ends when ^{t}MRR has been met. After ^{t}MRR is met, the device is in the all banks idle state.

   Active MRR: Starts with registration of the MRR command and ends when ^{t}MRR has been met. After ^{t}MRR is met, the bank is in the active state.

   MRW: Starts with registration of the MRW command and ends when ^{t}MRW has been met. After ^{t}MRW is met, the device is in the all banks idle state.
7. BST is supported only if a READ or WRITE burst is ongoing.
8. ^{t}RRD must be met between the ACTIVATE command to bank *n* and any subsequent ACTIVATE command to bank *m*.
9. READs or WRITEs listed in the command column include READs and WRITEs with or without auto precharge enabled.
10. This command may or may not be bank-specific. If all banks are being precharged, they must be in a valid state for precharging.
11. MRR is supported in the row-activating state.
12. MRR is supported in the precharging state.
13. The next state for bank *m* depends on the current state of bank *m* (idle, row-activating, precharging, or active).
14. A WRITE command can be issued after the completion of the READ burst; otherwise a BST must be issued to end the READ prior to asserting a WRITE command.
15. A READ command can be issued after the completion of the WRITE burst; otherwise, a BST must be issued to end the WRITE prior to asserting another READ command.
16. A READ with auto precharge enabled or a WRITE with auto precharge enabled can be followed by any valid command to other banks provided that the timing restrictions in the PRECHARGE and Auto Precharge Clarification table are met.
17. Not bank-specific; requires that all banks are idle and no bursts are in progress.
18. RESET command is achieved through MODE REGISTER WRITE command.

Table 58: DM Truth Table

Functional Name	DM	DQ	Notes
Write enable	L	Valid	1
Write inhibit	H	X	1

Note: 1. Used to mask write data, and is provided simultaneously with the corresponding input data.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Absolute Maximum Ratings

Stresses greater than those listed below may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this document is not implied. Exposure to absolute maximum rating conditions for extended periods may adversely affect reliability.

Table 59: Absolute Maximum DC Ratings

Parameter	Symbol	Min	Max	Unit	Notes
V_{DD1} supply voltage relative to V_{SS}	V_{DD1}	–0.4	+2.3	V	1
V_{DD2} supply voltage relative to V_{SS}	V_{DD2} (1.2V)	–0.4	+1.6	V	1
V_{DDQ} supply voltage relative to V_{SSQ}	V_{DDQ}	–0.4	+1.6	V	1, 3
Voltage on any ball relative to V_{SS}	V_{IN}, V_{OUT}	–0.4	+1.6	V	
Storage temperature	T_{STG}	–55	+125	°C	4

Notes:
1. See 1. Voltage Ramp under Power Up.
2. V_{REFCA} 0.6 ≤ V_{DD2}; however, V_{REFCA} may be ≥ V_{DD2} provided that V_{REFCA} ≤ 300mV.
3. V_{REFDQ} 0.6 ≤ V_{DDQ}; however, V_{REFDQ} may be ≥ V_{DDQ} provided that V_{REFDQ} ≤ 300mV.
4. Storage temperature is the case surface temperature on the center/top side of the device. For measurement conditions, refer to the JESD51-2 standard.

Input/Output Capacitance

Table 60: Input/Output Capacitance

Note 1 applies to all parameters and conditions

Parameter	Symbol	MIN	MAX	Unit	Notes
Input capacitance, CK and CK#	C_{L1}	1.0	3.0	pF	2
Input capacitance, all other LPDDR2 input only balls	C_{L2}	1.0	3.0	pF	2
Input/output capacitance, DQ, DM, DQS, DQS#	$C_{I/O}$	2.0	3.5	pF	2, 3
Input/output capacitance, ZQ	C_{ZQ}	2.0	3.0	pF	2, 3

Notes:
1. This parameter is not subject to production testing. It is verified by design and characterization. The capacitance is measured according to JEP147 (procedure for measuring input capacitance using a vector network analyzer), with V_{DD1}, V_{DD2}, V_{DDQ}, V_{SS}, and V_{SSQ} applied; all other pins are left floating.
2. These parameters are measured on f = 100 MHz, V_{OUT} = V_{DDQ2}, T_A = 25°C.
3. D_{OUT} circuits are disabled.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Electrical Specifications – I_{DD} Specifications and Conditions

The following definitions and conditions are used in the I_{DD} measurement tables unless stated otherwise:

- LOW: $V_{IN} \leq V_{IL(DC)max}$
- HIGH: $V_{IN} \geq V_{IH(DC)min}$
- STABLE: Inputs are stable at a HIGH or LOW level
- SWITCHING: See the following three tables

Table 61: Switching for CA Input Signals

Notes 1–3 apply to all parameters and conditions

	CK_t Rising/ CK_c Falling	CK_t Falling/ CK_c Rising	CK_t Rising/ CK_c Falling	CK_t Falling/ CK_c Rising	CK_t Rising/ CK_c Falling	CK_t Falling/ CK_c Rising	CK_t Rising/ CK_c Falling	CK_t Falling/ CK_c Rising
Cycle	**N**		**N + 1**		**N + 2**		**N + 3**	
CS_n	HIGH		HIGH		HIGH		HIGH	
CA0	H	L	L	L	L	H	H	H
CA1	H	H	H	L	L	L	L	H
CA2	H	L	L	L	L	H	H	H
CA3	H	H	H	L	L	L	L	H
CA4	H	L	L	L	L	H	H	H
CA5	H	H	H	L	L	L	L	H
CA6	H	L	L	L	L	H	H	H
CA7	H	H	H	L	L	L	L	H
CA8	H	L	L	L	L	H	H	H
CA9	H	H	H	L	L	L	L	H

Notes:
1. CS# must always be driven HIGH.
2. For each clock cycle, 50% of the CA bus is changing between HIGH and LOW.
3. The noted pattern (N, N + 1, N + 2, N + 3...) is used continuously during I_{DD} measurement for I_{DD} values that require switching on the CA bus.

Table 62: Switching for I_{DD4R}

Clock	CKE	CS_n	Clock Cycle Number	Command	CA[2:0]	CA[9:3]	All DQ
Rising	H	L	N	Read_Rising	HLH	LHLHLHL	L
Falling	H	L	N	Read_Falling	LLL	LLLLLLL	L
Rising	H	H	N +1	NOP	LLL	LLLLLLL	H
Falling	H	H	N + 1	NOP	HLH	HLHLLHL	L
Rising	H	L	N + 2	Read_Rising	HLH	HLHLLHL	H
Falling	H	L	N + 2	Read_Falling	LLL	HHHHHHH	H
Rising	H	H	N + 3	NOP	LLL	HHHHHHH	H

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 62: Switching for I_{DD4R} (Continued)

Clock	CKE	CS_n	Clock Cycle Number	Command	CA[2:0]	CA[9:3]	All DQ
Falling	H	H	N + 3	NOP	HLH	LHLHLHL	L

Notes: 1. Data strobe (DQS) is changing between HIGH and LOW with every clock cycle.
2. The noted pattern (N, N + 1...) is used continuously during I_{DD} measurement for I_{DD4R}.

Table 63: Switching for I_{DD4W}

Clock	CKE	CS_n	Clock Cycle Number	Command	CA[2:0]	CA[9:3]	All DQ
Rising	H	L	N	Write_Rising	HLL	LHLHLHL	L
Falling	H	L	N	Write_Falling	LLL	LLLLLLL	L
Rising	H	H	N +1	NOP	LLL	LLLLLLL	H
Falling	H	H	N + 1	NOP	HLH	HLHLLHL	L
Rising	H	L	N + 2	Write_Rising	HLL	HLHLLHL	H
Falling	H	L	N + 2	Write_Falling	LLL	HHHHHHH	H
Rising	H	H	N + 3	NOP	LLL	HHHHHHH	H
Falling	H	H	N + 3	NOP	HLH	LHLHLHL	L

Notes: 1. Data strobe (DQS) is changing between HIGH and LOW with every clock cycle.
2. Data masking (DM) must always be driven LOW.
3. The noted pattern (N, N + 1...) is used continuously during I_{DD} measurement for I_{DD4W}.

Table 64: I_{DD} Specification Parameters and Operating Conditions

Notes 1–3 apply to all parameters and conditions

Parameter/Condition	Symbol	Power Supply	Notes
Operating one bank active-precharge current (SDRAM): $^{t}CK = {}^{t}CKmin$; $^{t}RC = {}^{t}RCmin$; CKE is HIGH; CS_n is HIGH between valid commands; CA bus inputs are switching; Data bus inputs are stable	I_{DD01}	V_{DD1}	
	I_{DD02}	V_{DD2}	
	I_{DD0in}	V_{DDQ}	4
Idle power-down standby current: $^{t}CK = {}^{t}CKmin$; CKE is LOW; CS_n is HIGH; All banks are idle; CA bus inputs are switching; Data bus inputs are stable	I_{DD2P1}	V_{DD1}	
	I_{DD2P2}	V_{DD2}	
	$I_{DD2P,in}$	V_{DDQ}	4
Idle power-down standby current with clock stop: CK_t = LOW, CK_c = HIGH; CKE is LOW; CS_n is HIGH; All banks are idle; CA bus inputs are stable; Data bus inputs are stable	I_{DD2PS1}	V_{DD1}	
	I_{DD2PS2}	V_{DD2}	
	$I_{DD2PS,in}$	V_{DDQ}	4
Idle non-power-down standby current: $^{t}CK = {}^{t}CKmin$; CKE is HIGH; CS_n is HIGH; All banks are idle; CA bus inputs are switching; Data bus inputs are stable	I_{DD2N1}	V_{DD1}	
	I_{DD2N2}	V_{DD2}	
	$I_{DD2N,in}$	V_{DDQ}	4

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 64: I_{DD} Specification Parameters and Operating Conditions (Continued)

Notes 1–3 apply to all parameters and conditions

Parameter/Condition	Symbol	Power Supply	Notes
Idle non-power-down standby current with clock stopped: CK_t = LOW; CK_c = HIGH; CKE is HIGH; CS_n is HIGH; All banks are idle; CA bus inputs are stable; Data bus inputs are stable	I_{DD2NS1}	V_{DD1}	
	I_{DD2NS2}	V_{DD2}	
	$I_{DD2NS,in}$	V_{DDQ}	4
Active power-down standby current: ^{t}CK = ^{t}CKmin; CKE is LOW; CS_n is HIGH; One bank is active; CA bus inputs are switching; Data bus inputs are stable	I_{DD3P1}	V_{DD1}	
	I_{DD3P2}	V_{DD2}	
	$I_{DD3P,in}$	V_{DDQ}	4
Active power-down standby current with clock stop: CK_t = LOW, CK_c = HIGH; CKE is LOW; CS_n is HIGH; One bank is active; CA bus inputs are stable; Data bus inputs are stable	I_{DD3PS1}	V_{DD1}	
	I_{DD3PS2}	V_{DD2}	
	$I_{DD3PS,in}$	V_{DDQ}	4
Active non-power-down standby current: ^{t}CK = ^{t}CKmin; CKE is HIGH; CS_n is HIGH; One bank is active; CA bus inputs are switching; Data bus inputs are stable	I_{DD3N1}	V_{DD1}	
	I_{DD3N2}	V_{DD2}	
	$I_{DD3N,in}$	V_{DDQ}	4
Active non-power-down standby current with clock stopped: CK_t = LOW, CK_c = HIGH CKE is HIGH; CS_n is HIGH; One bank is active; CA bus inputs are stable; Data bus inputs are stable	I_{DD3NS1}	V_{DD1}	
	I_{DD3NS2}	V_{DD2}	
	$I_{DD3NS,in}$	V_{DDQ}	4
Operating burst READ current: ^{t}CK = ^{t}CKmin; CS_n is HIGH between valid commands; One bank is active; BL = 4; RL = RL (MIN); CA bus inputs are switching; 50% data change each burst transfer	I_{DD4R1}	V_{DD1}	
	I_{DD4R2}	V_{DD2}	
Operating burst WRITE current: ^{t}CK = ^{t}CKmin; CS_n is HIGH between valid commands; One bank is active; BL = 4; WL = WLmin; CA bus inputs are switching; 50% data change each burst transfer	I_{DD4W1}	V_{DD1}	
	I_{DD4W2}	V_{DD2}	
	$I_{DD4W,in}$	V_{DDQ}	4
All-bank REFRESH burst current: ^{t}CK = ^{t}CKmin; CKE is HIGH between valid commands; ^{t}RC = ^{t}RFCabmin; Burst refresh; CA bus inputs are switching; Data bus inputs are stable	I_{DD51}	V_{DD1}	
	I_{DD52}	V_{DD2}	
	I_{DD5IN}	V_{DDQ}	4
All-bank REFRESH average current: ^{t}CK = ^{t}CKmin; CKE is HIGH between valid commands; ^{t}RC = ^{t}REFI; CA bus inputs are switching; Data bus inputs are stable	I_{DD5AB1}	V_{DD1}	
	I_{DD5AB2}	V_{DD2}	
	$I_{DD5AB,in}$	V_{DDQ}	4
Per-bank REFRESH average current: ^{t}CK = ^{t}CKmin; CKE is HIGH between valid commands; ^{t}RC = ^{t}REFI/8; CA bus inputs are switching; Data bus inputs are stable	I_{DD5PB1}	V_{DD1}	5
	I_{DD5PB2}	V_{DD2}	5
	$I_{DD5PB,in}$	V_{DDQ}	4, 5
Self refresh current (–30˚C to +85˚C): CK_t = LOW, CK_c = HIGH; CKE is LOW; CA bus inputs are stable; Data bus inputs are stable; Maximum 1x self refresh rate	I_{DD61}	V_{DD1}	6
	I_{DD62}	V_{DD2}	6
	I_{DD6IN}	V_{DDQ}	4, 6
Self refresh current (+85˚C to +105˚C): CK_t = LOW, CK_c = HIGH; CKE is LOW; CA bus inputs are stable; Data bus inputs are stable	I_{DD6ET1}	V_{DD1}	6, 7
	I_{DD6ET2}	V_{DD2}	6, 7
	$I_{DD6ET,in}$	V_{DDQ}	4, 6, 7

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 64: I_{DD} Specification Parameters and Operating Conditions (Continued)

Notes 1–3 apply to all parameters and conditions

Parameter/Condition	Symbol	Power Supply	Notes
Deep power-down current: CK_t = LOW, CK_c = HIGH; CKE is LOW; CA bus inputs are stable; Data bus inputs are stable	I_{DD81}	V_{DD1}	7
	I_{DD82}	V_{DD2}	7
	I_{DD8IN}	V_{DDQ}	4, 7

Notes:
1. I_{DD} values are the maximum of the distribution of the arithmetic mean.
2. I_{DD} current specifications are tested after the device is properly initialized.
3. The 1x self refresh rate is the rate at which the device is refreshed internally during self refresh before going into the extended temperature range.
4. Measured currents are the sum of V_{DDQ} and V_{DD2}.
5. Per-bank REFRESH is only applicable for LPDDR2-S4 device densities 1Gb or higher.
6. This is the general definition that applies to full-array self refresh. Refer to "IDD6 Full and Partial Array Self-Refresh Current" for details of Partial Array Self Refresh IDD6 specification.
7. I_{DD6ET} and I_{DD8} are typical values, sampled only and not tested.

AC and DC Operating Conditions

An operation or timing that is not specified is illegal. To ensure proper operation, the device must be initialized properly.

Table 65: Recommended DC Operating Conditions

Symbol	LPDDR2-S4B			Power Supply	Unit
	Min	Typ	Max		
V_{DD1}[1]	1.70	1.80	1.95	Core power 1	V
V_{DD2}	1.14	1.20	1.30	Core power 2	V
V_{DDQ}	1.14	1.20	1.30	I/O buffer power	V

Note:
1. V_{DD1} uses significantly less power than V_{DD2}.

Table 66: Input Leakage Current

Parameter/Condition	Symbol	Min	Max	Unit	Notes
Input leakage current: For CA, CKE, CS_n, CK_t, CK_c; Any input 0V ≤ V_{IN} ≤ V_{DD2}; (All other pins not under test = 0V)	I_L	–2	2	µA	1
V_{REF} supply leakage current: V_{REFDQ} = V_{DDQ}/2, or V_{REFCA} = V_{DD2}/2; (All other pins not under test = 0V)	I_{VREF}	–1	1	µA	2

Notes:
1. Although DM is for input only, the DM leakage must match the DQ and DQS_t/DQS_c output leakage specification.
2. The minimum limit requirement is for testing purposes. The leakage current on V_{REFCA} and V_{REFDQ} pins should be minimal.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 67: Operating Temperature Range

Parameter/Condition	Symbol	Min	Max	Unit
Standard (WT) temperature range	T_{CASE}[1]	–30	+85	°C
Industrial (IT) temperature range		–40	+85	°C
Automotive (AT) temperature range		–40	+105	°C

Notes:
1. Operating temperature is the case surface temperature at the center of the top side of the device. For measurement conditions, refer to the JESD51-2 standard.
2. Some applications require operation in the maximum case temperature range, between 85°C and 105°C. For some LPDDR2 devices, derating may be necessary to operate in this range (see the MR4 Device Temperature (MA[7:0] = 04h) table).
3. Either the device operating temperature or the temperature sensor can be used to set an appropriate refresh rate, determine the need for AC timing derating, and/or monitor the operating temperature (see Temperature Sensor). When using the temperature sensor, the actual device case temperature may be higher than the T_{CASE} rating that applies for the operating temperature range. For example, T_{CASE} could be above 85°C when the temperature sensor indicates a temperature of less than 85°C.

AC and DC Logic Input Measurement Levels for Single-Ended Signals

Table 68: Single-Ended AC and DC Input Levels for CA and CS_n Inputs

Symbol	Parameter	LPDDR2-1066 to LPDDR2-466		LPDDR2-400 to LPDDR2-200		Unit	Notes
		Min	Max	Min	Max		
$V_{IHCA(AC)}$	AC input logic HIGH	V_{REF} + 0.220	Note 2	V_{REF} + 0.300	Note 2	V	1, 2
$V_{ILCA(AC)}$	AC input logic LOW	Note 2	V_{REF} - 0.220	Note 2	V_{REF} - 0.300	V	1, 2
$V_{IHCA(DC)}$	DC input logic HIGH	V_{REF} + 0.130	V_{DD2}	V_{REF} + 0.200	V_{DD2}	V	1
$V_{ILCA(DC)}$	DC input logic LOW	V_{SS}	V_{REF} - 0.130	V_{SS}	V_{REF} - 0.200	V	1
$V_{REFCA(DC)}$	Reference voltage for CA and CS_n inputs	0.49 × V_{DD2}	0.51 × V_{DD2}	0.49 × V_{DD2}	0.51 × V_{DD2}	V	3, 4

Notes:
1. For CA and CS_n input-only pins. V_{REF} = $V_{REFCA(DC)}$.
2. See Overshoot and Undershoot Definition.
3. The AC peak noise on V_{REFCA} could prevent V_{REFCA} from deviating more than ±1% V_{DD2} from $V_{REFCA(DC)}$ (for reference, approximately ±12mV).
4. For reference, approximately V_{DD2}/2 ±12mV.

Table 69: Single-Ended AC and DC Input Levels for CKE

Symbol	Parameter	Min	Max	Unit	Notes
V_{IHCKE}	CKE input HIGH level	0.8 × V_{DD2}	Note 1	V	1
V_{ILCKE}	CKE input LOW level	Note 1	0.2 × V_{DD2}	V	1

Note:
1. See Overshoot and Undershoot Definition.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 70: Single-Ended AC and DC Input Levels for DQ and DM

Symbol	Parameter	LPDDR2-1066 to LPDDR2-466		LPDDR2-400 to LPDDR2-200		Unit	Notes
		Min	Max	Min	Max		
$V_{IHDQ(AC)}$	AC input logic HIGH	V_{REF} + 0.220	Note 2	V_{REF} + 0.300	Note 2	V	1, 2
$V_{ILDQ(AC)}$	AC input logic LOW	Note 2	V_{REF} - 0.220	Note 2	V_{REF} - 0.300	V	1, 2
$V_{IHDQ(DC)}$	DC input logic HIGH	V_{REF} + 0.130	V_{DDQ}	V_{REF} + 0.200	V_{DDQ}	V	1
$V_{ILDQ(DC)}$	DC input logic LOW	V_{SS}	V_{REF} - 0.130	V_{SS}	V_{REF} - 0.200	V	1
$V_{REFDQ(DC)}$	Reference voltage for DQ and DM inputs	0.49 × V_{DDQ}	0.51 × V_{DDQ}	0.49 × V_{DDQ}	0.51 × V_{DDQ}	V	3, 4

Notes:
1. For DQ input-only pins. $V_{REF} = V_{REFDQ(DC)}$.
2. See Overshoot and Undershoot Definition.
3. The AC peak noise on V_{REFDQ} could prevent V_{REFDQ} from deviating more than ±1% V_{DDQ} from $V_{REFDQ(DC)}$ (for reference, approximately ±12mV).
4. For reference, approximately. $V_{DDQ}/2$ ±12mV.

V_{REF} Tolerances

The DC tolerance limits and AC noise limits for the reference voltages V_{REFCA} and V_{REFDQ} are illustrated below. This figure shows a valid reference voltage $V_{REF}(t)$ as a function of time. V_{DD} is used in place of V_{DD2} for V_{REFCA}, and V_{DDQ} for V_{REFDQ}. $V_{REF(DC)}$ is the linear average of $V_{REF}(t)$ over a very long period of time (for example, 1 second) and is specified as a fraction of the linear average of V_{DDQ} or V_{DD2}, also over a very long period of time (for example, 1 second). This average must meet the MIN/MAX requirements in the Single-Ended AC and DC Input Levels for CA and CS_n Inputs table. Additionally, $V_{REF}(t)$ can temporarily deviate from $V_{REF(DC)}$ by no more than ±1% V_{DD}. $V_{REF}(t)$ cannot track noise on V_{DDQ} or V_{DD2} if doing so would force V_{REF} outside these specifications.

Figure 69: V_{REF} DC Tolerance and V_{REF} AC Noise Limits

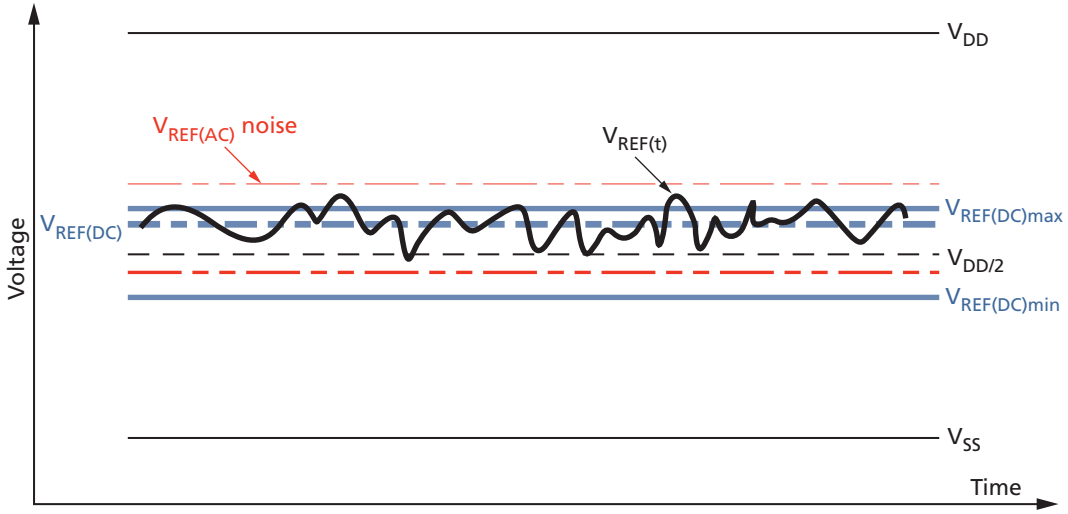

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

The voltage levels for setup and hold time measurements $V_{IH(AC)}$, $V_{IH(DC)}$, $V_{IL(AC)}$, and $V_{IL(DC)}$ are dependent on V_{REF}.

V_{REF} DC variations affect the absolute voltage a signal must reach to achieve a valid HIGH or LOW, as well as the time from which setup and hold times are measured. When V_{REF} is outside the specified levels, devices will function correctly with appropriate timing deratings as long as:

- V_{REF} is maintained between 0.44 x V_{DDQ} (or V_{DD2}) and 0.56 x V_{DDQ} (or V_{DD2}), *and*
- the controller achieves the required single-ended AC and DC input levels from instantaneous V_{REF} (see the Single-Ended AC and DC Input Levels for CA and CS_n Inputs table).

System timing and voltage budgets must account for V_{REF} deviations outside this range.

The setup/hold specification and derating values must include time and voltage associated with V_{REF} AC noise. Timing and voltage effects due to AC noise on V_{REF} up to the specified limit (±1% V_{DD}) are included in LPDDR2 timings and their associated deratings.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Input Signal

Figure 70: LPDDR2-466 to LPDDR2-1066 Input Signal

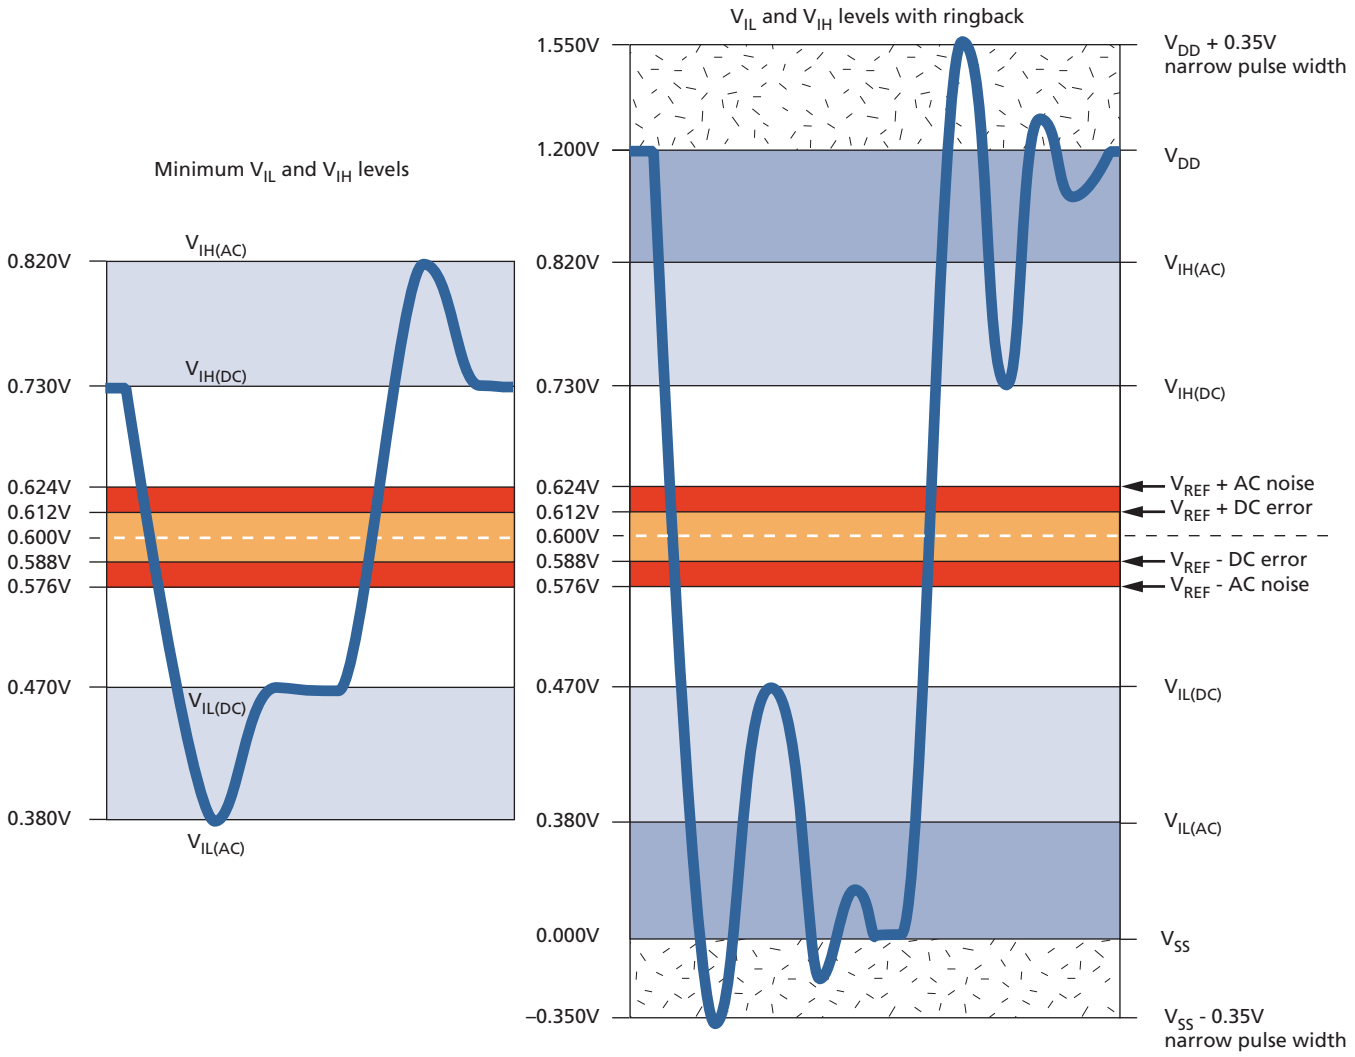

Notes:
1. Numbers reflect typical values.
2. For CA[9:0], CK_t, CK_c, and CS_n V_{DD} stands for V_{DD2}. For DQ, DM, DQS_t, and DQS_c, V_{DD} stands for V_{DDQ}.
3. For CA[9:0], CK_t, CK_c, and CS_n are V_{SS} . For DQ, DM, DQS_t, and DQS_c, V_{SS} stands for V_{SSQ}.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 71: LPDDR2-200 to LPDDR2-400 Input Signal

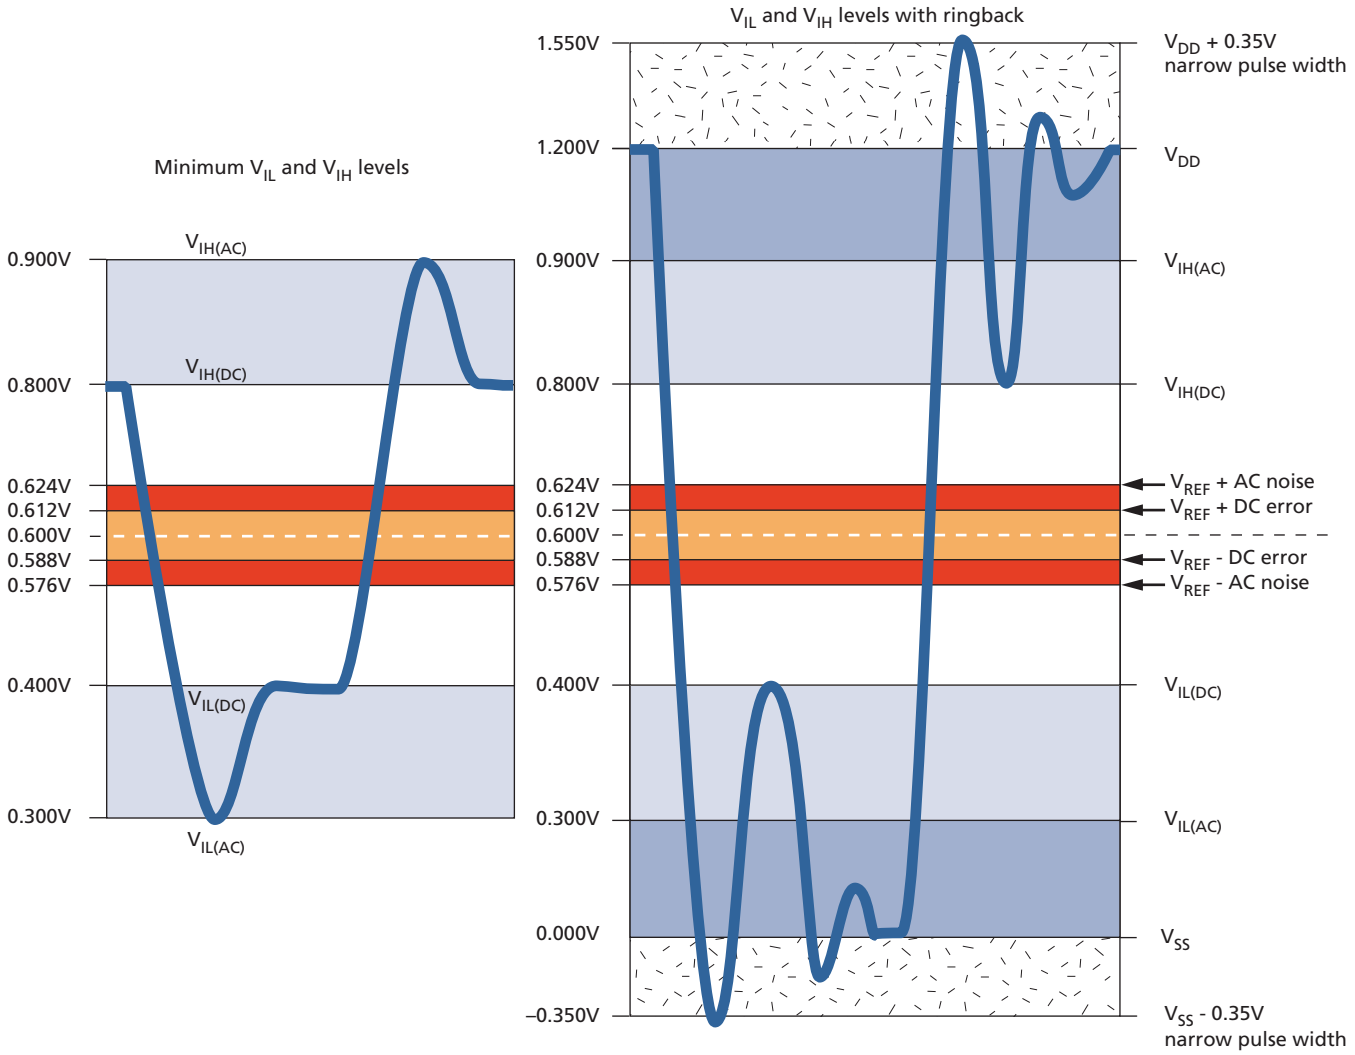

Notes:
1. Numbers reflect typical values.
2. For CA[9:0], CK_t, CK_c, and CS_n V_{DD} stands for V_{DD2}. For DQ, DM, DQS_t, and DQS_c, V_{DD} stands for V_{DDQ}.
3. For CA[9:0], CK_t, CK_c, and CS_n are V_{SS}. For DQ, DM, DQS_t, and DQS_c, V_{SS} stands for V_{SSQ}.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

AC and DC Logic Input Measurement Levels for Differential Signals

Figure 72: Differential AC Swing Time and ^{t}DVAC

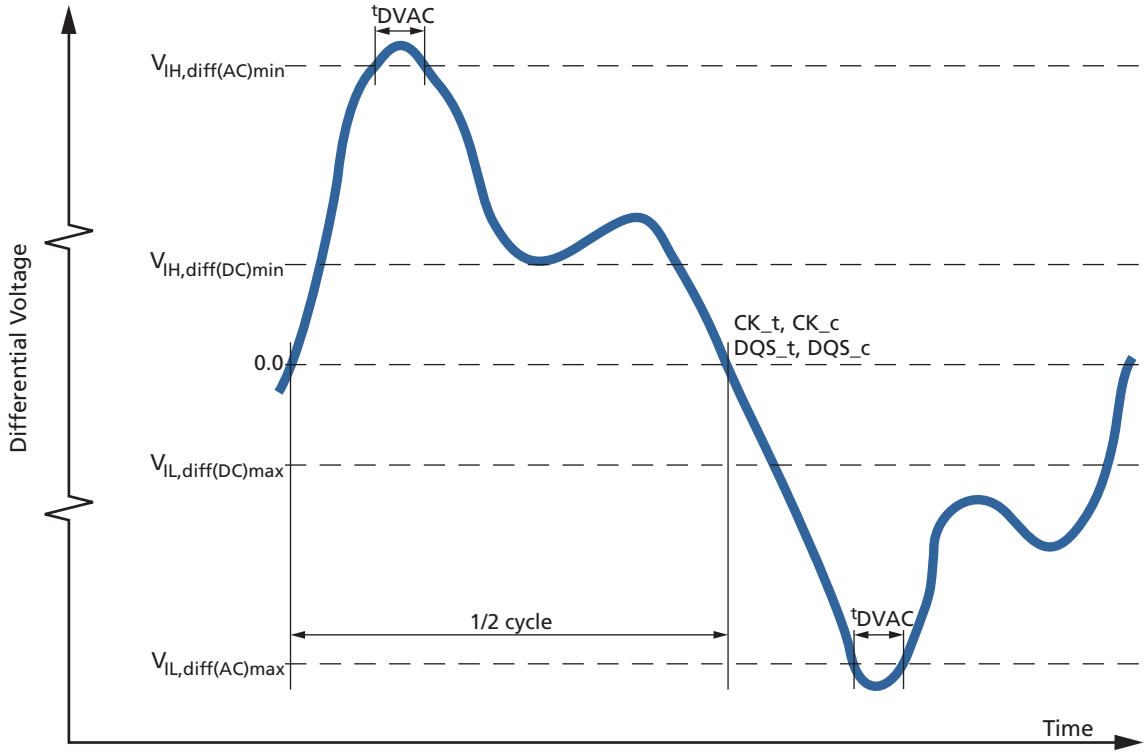

Table 71: Differential AC and DC Input Levels

For CK_t and CK_c, $V_{REF} = V_{REFCA(DC)}$; For DQS_t and DQS_c $V_{REF} = V_{REFDQ(DC)}$

Symbol	Parameter	LPDDR2-1066 to LPDDR2-466		LPDDR2-400 to LPDDR2-200		Unit	Notes
		Min	Max	Min	Max		
$V_{IH,diff(AC)}$	Differential input HIGH AC	$2 \times (V_{IH(AC)} - V_{REF})$	Note 1	$2 \times (V_{IH(AC)} - V_{REF})$	Note 1	V	2
$V_{IL,diff(AC)}$	Differential input LOW AC	Note 1	$2 \times (V_{IL(AC)} - V_{REF})$	Note 1	$2 \times (V_{IL(AC)} - V_{REF})$	V	2
$V_{IH,diff(DC)}$	Differential input HIGH	$2 \times (V_{IH(DC)} - V_{REF})$	Note 1	$2 \times (V_{IH(DC)} - V_{REF})$	Note 1	V	3
$V_{IL,diff(DC)}$	Differential input LOW	Note 1	$2 \times (V_{IL(DC)} - V_{REF})$	Note 1	$2 \times (V_{IL(DC)} - V_{REF})$	V	3

Notes: 1. These values are not defined, however the single-ended signals CK_t, CK_c, DQS_t, and DQS_c must be within the respective limits ($V_{IH(DC)max}$, $V_{IL(DC)min}$) for single-ended signals and must comply with the specified limitations for overshoot and undershoot (see Overshoot and Undershoot Definitions).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

2. For CK_t and CK_c, use $V_{IH}/V_{IL(AC)}$ of CA and V_{REFCA}; for DQS_t and DQS_c, use $V_{IH}/V_{IL(AC)}$ of DQ and V_{REFDQ}. If a reduced AC HIGH or AC LOW is used for a signal group, the reduced voltage level also applies.
3. Used to define a differential signal slew rate. For CK_t - CK_c use VIH/VIL(dc) of CA and VREFCA; for DQS_t - DQS_c, use VIH/VIL(dc) of DQs and VREFDQ; if a reduced dc-high or dc-low level is used for a signal group,then the reduced level applies also here.

Table 72: CK_t/CK_c and DQS_t/DQS_c Time Requirements Before Ringback (^{t}DVAC)

Slew Rate (V/ns)	^{t}DVAC (ps) at $V_{IH}/V_{ILdiff(AC)}$ = 440mV	^{t}DVAC (ps) at $V_{IH}/V_{ILdiff(AC)}$ = 600mV
	Min	Min
> 4.0	175	75
4.0	170	57
3.0	167	50
2.0	163	38
1.8	162	34
1.6	161	29
1.4	159	22
1.2	155	13
1.0	150	0
< 1.0	150	0

Single-Ended Requirements for Differential Signals

Each individual component of a differential signal (CK_t, CK_c, DQS_t, and DQS_c) must also comply with certain requirements for single-ended signals.

CK_t and CK_c must meet $V_{SEH(AC)min}/V_{SEL(AC)max}$ in every half cycle. DQS_t, DQS_c must meet $V_{SEH(AC)min}/V_{SEL(AC)max}$ in every half cycle preceding and following a valid transition.

The applicable AC levels for CA and DQ differ by speed bin.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 73: Single-Ended Requirements for Differential Signals

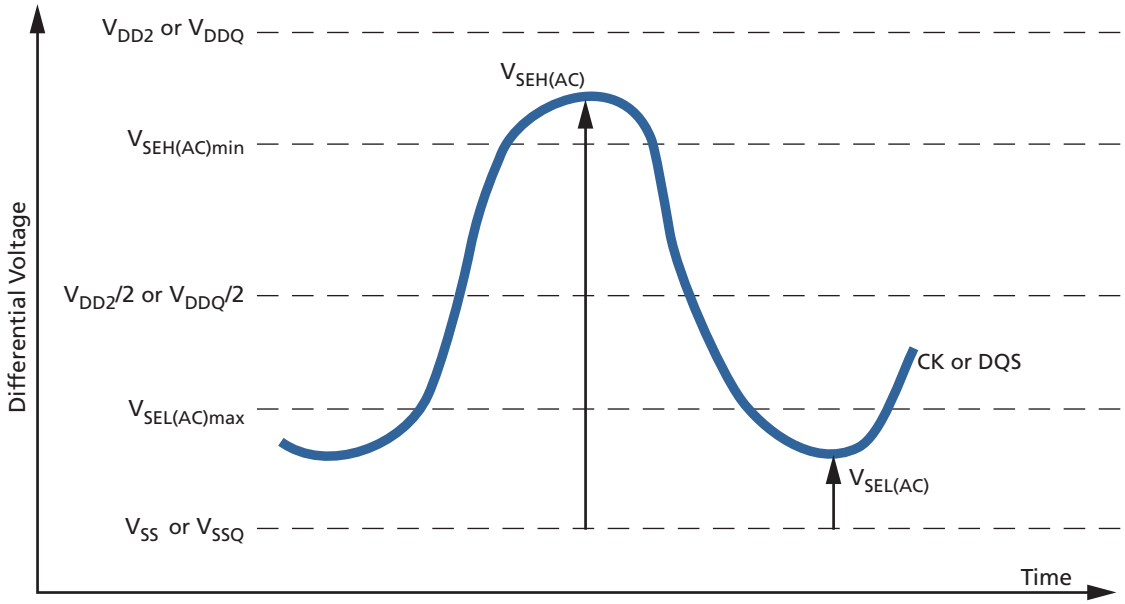

While CA and DQ signal requirements are referenced to V_{REF}, the single-ended components of differential signals also have a requirement with respect to $V_{DDQ}/2$ for DQS, and $V_{DD2}/2$ for CK.

The transition of single-ended signals through the AC levels is used to measure setup time. For single-ended components of differential signals, the requirement to reach $V_{SEL(AC)max}$ or $V_{SEH(AC)min}$ has no bearing on timing. This requirement does, however, add a restriction on the common mode characteristics of these signals (see Single-Ended AC and DC Input Levels for CA and CS_n Inputs for CK_t/CK_c single-ended requirements, and Single-Ended AC and DC Input Levels for DQ and DM for DQ and DQM single-ended requirements).

Table 73: Single-Ended Levels for CK_t, CK_c, DQS_t, DQS_c

Symbol	Parameter	LPDDR2-1066 to LPDDR2-466		LPDDR2-400 to LPDDR2-200		Unit	Notes
		Min	Max	Min	Max		
$V_{SEH(AC)}$	Single-ended HIGH level for strobes	$(V_{DDQ}/2) + 0.220$	Note 1	$(V_{DDQ}/2) + 0.300$	Note 1	V	2, 3
	Single-ended HIGH level for CK_t, CK_c	$(V_{DD2}/2) + 0.220$	Note 1	$(V_{DD2}/2) + 0.300$	Note 1	V	2, 3
$V_{SEL(AC)}$	Single-ended LOW level for strobes	Note 1	$(V_{DDQ}/2) - 0.220$	Note 1	$(V_{DDQ}/2) + 0.300$	V	2, 3
	Single-ended LOW level for CK_t, CK_c	Note 1	$(V_{DD2}/2) - 0.220$	Note 1	$(V_{DD2}/2) + 0.300$	V	2, 3

Notes: 1. These values are not defined; however, the single-ended signals CK_t, CK_c, DQS0_t, DQS0_c, DQS1_t, DQS1_c, DQS2_t, DQS2_c, DQS3_t, DQS3_c must be within the respective limits ($V_{IH(DC)max}$/ $V_{IL(DC)min}$) for single-ended signals, and must comply with the

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

specified limitations for overshoot and undershoot (see Overshoot and Undershoot Definition).

2. For CK_t and CK_c, use $V_{SEH}/V_{SEL(AC)}$ of CA; for strobes (DQS[3:0]_t and DQS[3:0]_c), use $V_{IH}/V_{IL(AC)}$ of DQ.
3. $V_{IH(AC)}$ and $V_{IL(AC)}$ for DQ are based on V_{REFDQ}; $V_{SEH(AC)}$ and $V_{SEL(AC)}$ for CA are based on V_{REFCA}. If a reduced AC HIGH or AC LOW is used for a signal group, the reduced level applies.

Differential Input Crosspoint Voltage

To ensure tight setup and hold times as well as output skew parameters with respect to clock and strobe, each crosspoint voltage of differential input signals (CK_t, CK_c, DQS_t, and DQS_c) must meet the specifications listed in the Single-Ended Levels for CK_t, CK_c, DQS_t, DQS_c table. The differential input crosspoint voltage (V_{IX}) is measured from the actual crosspoint of the true signal and its and complement to the midlevel between V_{DD} and V_{SS}.

Figure 74: V_{IX} Definition

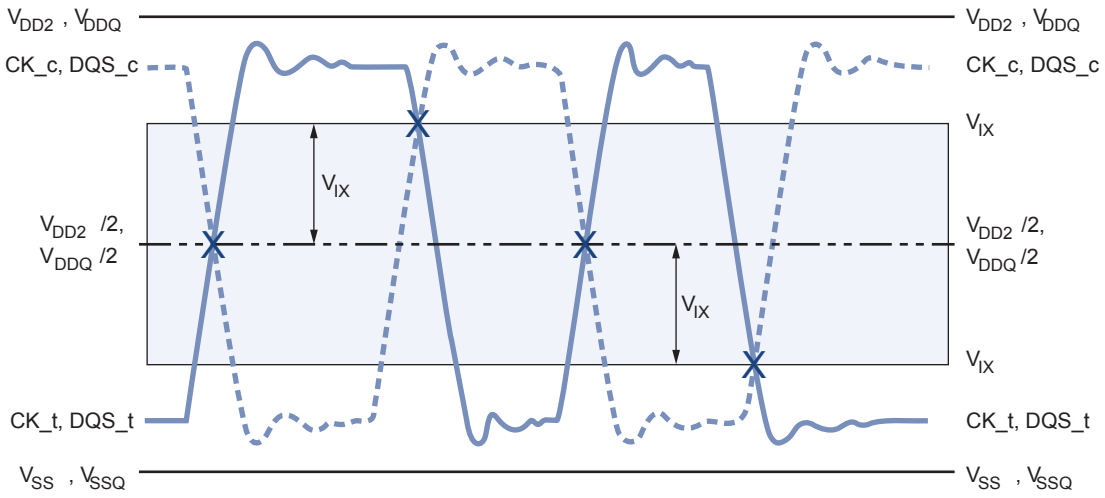

Table 74: Crosspoint Voltage for Differential Input Signals (CK_t, CK_c, DQS_t, DQS_c)

Symbol	Parameter	LPDDR2-1066 to LPDDR2-200		Unit	Notes
		Min	Max		
$V_{IXCA(AC)}$	Differential input crosspoint voltage relative to $V_{DD2}/2$ for CK_t and CK_c	–120	120	mV	1, 2
$V_{IXDQ(AC)}$	Differential input crosspoint voltage relative to $V_{DDQ}/2$ for DQS_t and DQS_c	–120	120	mV	1, 2

Notes:
1. The typical value of $V_{IX(AC)}$ is expected to be about 0.5 × V_{DD} of the transmitting device, and it is expected to track variations in V_{DD}. $V_{IX(AC)}$ indicates the voltage at which differential input signals must cross.
2. For CK_t and CK_c, $V_{REF} = V_{REFCA(DC)}$. For DQS_t and DQS_c, $V_{REF} = V_{REFDQ(DC)}$.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Input Slew Rate

Table 75: Differential Input Slew Rate Definition

Description	Measured[1]		Defined by
	From	To	
Differential input slew rate for rising edge (CK_t/CK_c and DQS_t/DQS_c)	$V_{IL,diff,max}$	$V_{IH,diff,min}$	$[V_{IH,diff,min} - V_{IL,diff,max}] / \Delta TR_{diff}$
Differential input slew rate for falling edge (CK_t/CK_c and DQS_t/DQS_c)	$V_{IH,diff,min}$	$V_{IL,diff,max}$	$[V_{IH,diff,min} - V_{IL,diff,max}] / \Delta TF_{diff}$

Note: 1. The differential signals (CK_t/CK_c and DQS_t/DQS_c) must be linear between these thresholds.

Figure 75: Differential Input Slew Rate Definition for CK_t, CK_c, DQS_t, and DQS_c

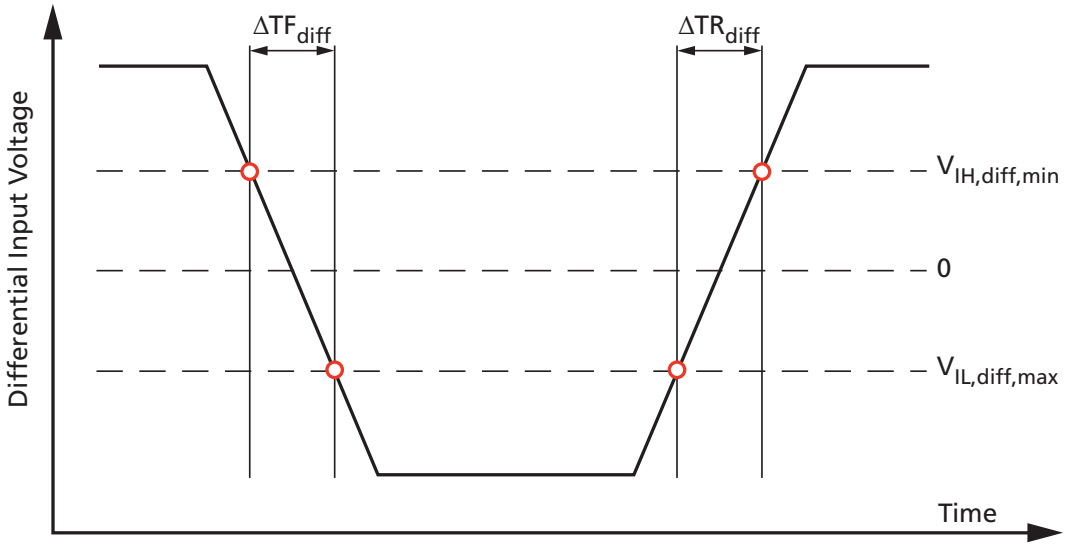

Output Characteristics and Operating Conditions

Table 76: Single-Ended AC and DC Output Levels

Symbol	Parameter		Value	Unit	Notes
$V_{OH(AC)}$	AC output HIGH measurement level (for output slew rate)		V_{REF} + 0.12	V	
$V_{OL(AC)}$	AC output LOW measurement level (for output slew rate)		V_{REF} - 0.12	V	
$V_{OH(DC)}$	DC output HIGH measurement level (for I-V curve linearity)		0.9 x V_{DDQ}	V	1
$V_{OL(DC)}$	DC output LOW measurement level (for I-V curve linearity)		0.1 x V_{DDQ}	V	2
I_{OZ}	Output leakage current (DQ, DM, DQS_t, DQS_c); DQ, DQS_t, DQS_c are disabled; 0V ≤ V_{OUT} ≤ V_{DDQ}	MIN	–5	µA	
		MAX	+5	µA	

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 76: Single-Ended AC and DC Output Levels (Continued)

Symbol	Parameter		Value	Unit	Notes
MMpupd	Delta output impedance between pull-up and pull-down for DQ/DM	MIN	–15	%	
		MAX	+15	%	

Notes: 1. I_{OH} = –0.1mA.
2. I_{OL} = 0.1mA.

Table 77: Differential AC and DC Output Levels

Symbol	Parameter	Value	Unit
$V_{OHdiff(AC)}$	AC differential output HIGH measurement level (for output SR)	+ 0.2 x V_{DDQ}	V
$V_{OLdiff(AC)}$	AC differential output LOW measurement level (for output SR)	- 0.2 x V_{DDQ}	V

Single-Ended Output Slew Rate

With the reference load for timing measurements, the output slew rate for falling and rising edges is defined and measured between $V_{OL(AC)}$ and $V_{OH(AC)}$ for single-ended signals.

Table 78: Single-Ended Output Slew Rate Definition

Description	Measured		Defined by
	From	To	
Single-ended output slew rate for rising edge	$V_{OL(AC)}$	$V_{OH(AC)}$	$[V_{OH(AC)} - V_{OL(AC)}] / \Delta TR_{SE}$
Single-ended output slew rate for falling edge	$V_{OH(AC)}$	$V_{OL(AC)}$	$[V_{OH(AC)} - V_{OL(AC)}] / \Delta TF_{SE}$

Note: 1. Output slew rate is verified by design and characterization and may not be subject to production testing.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 76: Single-Ended Output Slew Rate Definition

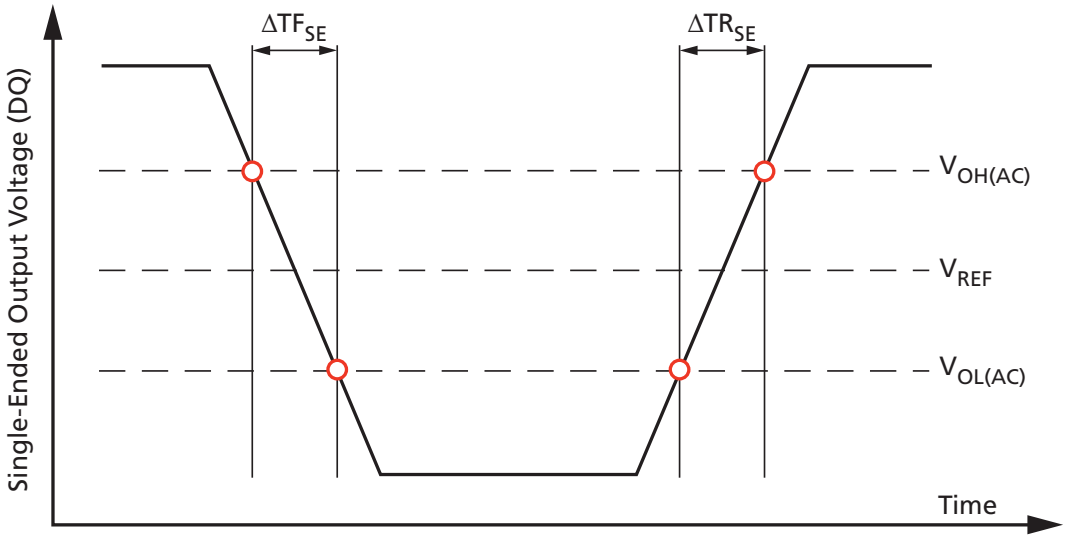

Table 79: Single-Ended Output Slew Rate

Notes 1–5 apply to all parameters conditions

Parameter	Symbol	Value		Unit
		Min	Max	
Single-ended output slew rate (output impedance = 40Ω ±30%)	SRQ_{SE}	1.5	3.5	V/ns
Single-ended output slew rate (output impedance = 60Ω ±30%)	SRQ_{SE}	1.0	2.5	V/ns
Output slew-rate-matching ratio (pull-up to pull-down)		0.7	1.4	–

Notes:
1. Definitions: SR = slew rate; Q = output (similar to DQ = data-in, data-out); SE = single-ended signals.
2. Measured with output reference load.
3. The ratio of pull-up to pull-down slew rate is specified for the same temperature and voltage over the entire temperature and voltage range. For a given output, the ratio represents the maximum difference between pull-up and pull-down drivers due to process variation.
4. The output slew rate for falling and rising edges is defined and measured between $V_{OL(AC)}$ and $V_{OH(AC)}$.
5. Slew rates are measured under typical simultaneous switching output (SSO) conditions, with one-half of DQ signals per data byte driving HIGH and one-half of DQ signals per data byte driving LOW.

Differential Output Slew Rate

With the reference load for timing measurements, the output slew rate for falling and rising edges is defined and measured between $V_{OL,diff(AC)}$ and $V_{OH,diff(AC)}$ for differential signals.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 80: Differential Output Slew Rate Definition

Description	Measured		Defined by
	From	To	
Differential output slew rate for rising edge	$V_{OL,diff(AC)}$	$V_{OH,diff(AC)}$	$[V_{OH,diff(AC)} - V_{OL,diff(AC)}] / \Delta TR_{diff}$
Differential output slew rate for falling edge	$V_{OH,diff(AC)}$	$V_{OL,diff(AC)}$	$[V_{OH,diff(AC)} - V_{OL,diff(AC)}] / \Delta TF_{diff}$

Note: 1. Output slew rate is verified by design and characterization and may not be subject to production testing.

Figure 77: Differential Output Slew Rate Definition

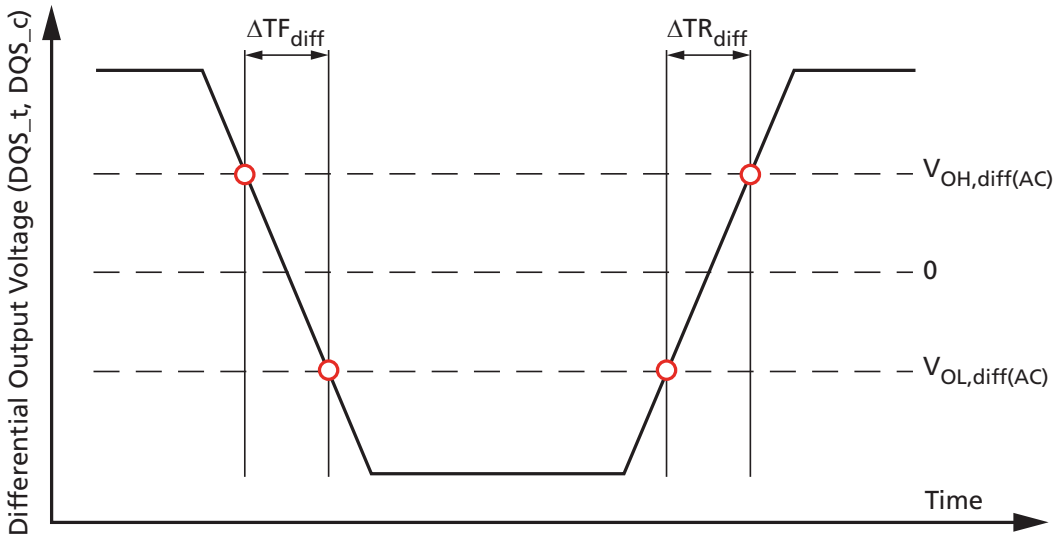

Table 81: Differential Output Slew Rate

Parameter	Symbol	Value		Unit
		Min	Max	
Differential output slew rate (output impedance = 40Ω ±30%)	SRQ_{diff}	3.0	7.0	V/ns
Differential output slew rate (output impedance = 60Ω ±30%)	SRQ_{diff}	2.0	5.0	V/ns

Notes:
1. Definitions: SR = slew rate; Q = output (similar to DQ = data-in, data-out); SE = single-ended signals.
2. Measured with output reference load.
3. The output slew rate for falling and rising edges is defined and measured between $V_{OL(AC)}$ and $V_{OH(AC)}$.
4. Slew rates are measured under typical simultaneous switching output (SSO) conditions, with one-half of DQ signals per data byte driving HIGH and one-half of DQ signals per data byte driving LOW.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 82: AC Overshoot/Undershoot Specification

Applies for CA[9:0], CS_n, CKE, CK_t, CK_c, DQ, DQS_t, DQS_c, DM

Parameter	1066	933	800	667	533	466	400	333	266	200	Unit
Maximum peak amplitude provided for overshoot area	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	V
Maximum peak amplitude provided for undershoot area	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	V
Maximum area above V_{DD}[1]	0.15	0.17	0.20	0.24	0.30	0.35	0.40	0.48	0.60	0.80	V-ns
Maximum area below V_{SS}[2]	0.15	0.17	0.20	0.24	0.30	0.35	0.40	0.48	0.60	0.80	V-ns

Notes:
1. V_{DD} stands for V_{DD2} for CA[9:0], CK_t, CK_c, CS_n, and CKE. V_{DD} stands for V_{DDQ} for DQ, DM, DQS_t, and DQS_c.
2. V_{SS} is for CA[9:0], CK_t, CK_c, CS_n, and CKE. V_{SS} stands for V_{SSQ} for DQ, DM, DQS_t, and DQS_c.

Figure 78: Overshoot and Undershoot Definition

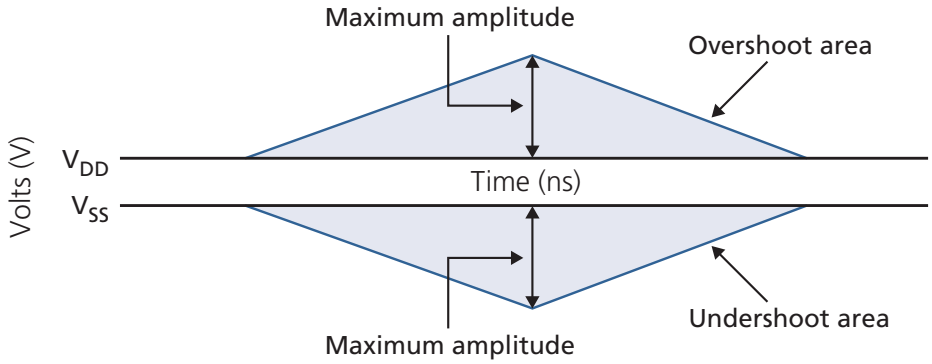

Notes:
1. V_{DD} stands for V_{DD2} for CA[9:0], CK_t, CK_c, CS_n, and CKE. V_{DD} stands for V_{DDQ} for DQ, DM, DQS_t, and DQS_c.
2. V_{SS} is for CA[9:0], CK_t, CK_c, CS_n, and CKE. V_{SS} stands for V_{SSQ} for DQ, DM, DQS_t, and DQS_c.

HSUL_12 Driver Output Timing Reference Load

The timing reference loads are not intended as a precise representation of any particular system environment or a depiction of the actual load presented by a production tester. System designers should use IBIS or other simulation tools to correlate the timing reference load to a system environment. Manufacturers correlate to their production test conditions, generally with one or more coaxial transmission lines terminated at the tester electronics.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 79: HSUL_12 Driver Output Reference Load for Timing and Slew Rate

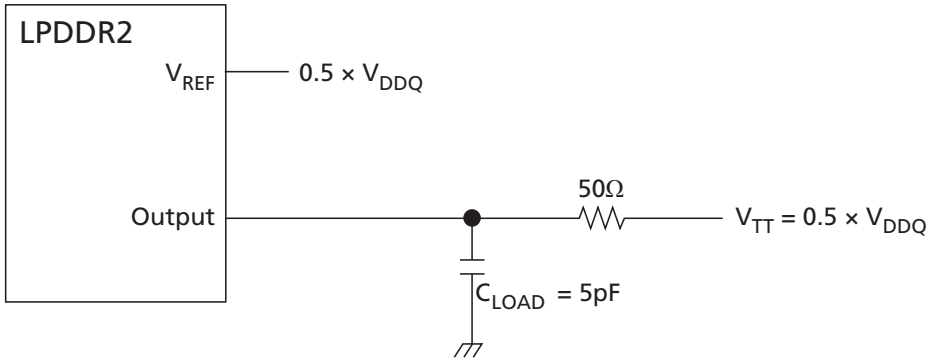

Note: 1. All output timing parameter values (^{t}DQSCK, ^{t}DQSQ, ^{t}QHS, ^{t}HZ, ^{t}RPRE etc.) are reported with respect to this reference load. This reference load is also used to report slew rate.

Output Driver Impedance

Output driver impedance is selected by a mode register during initialization. To achieve tighter tolerances, ZQ calibration is required. Output specifications refer to the default output drive unless specifically stated otherwise. The output driver impedance R_{ON} is defined by the value of the external reference resistor R_{ZQ} as follows:

$$R_{ONPU} = \frac{V_{DDQ} - V_{OUT}}{ABS(I_{OUT})}$$

When R_{ONPD} is turned off.

$$R_{ONPD} = \frac{V_{OUT}}{ABS(I_{OUT})}$$

When R_{ONPU} is turned off.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 80: Output Driver

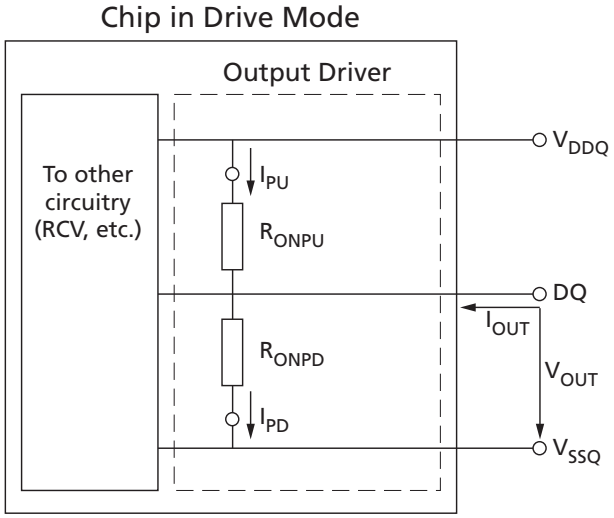

Output Driver Impedance Characteristics with ZQ Calibration

Output driver impedance is defined by the value of the external reference resistor R_{ZQ}. Typical R_{ZQ} is 240 ohms.

Table 83: Output Driver DC Electrical Characteristics with ZQ Calibration

Notes 1–4 apply to all parameters and conditions

R_{ONnom}	Resistor	V_{OUT}	Min	Typ	Max	Unit	Notes
34.3Ω	R_{ON34PD}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/7$	
	R_{ON34PU}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/7$	
40.0Ω	R_{ON40PD}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/6$	
	R_{ON40PU}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/6$	
48.0Ω	R_{ON48PD}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/5$	
	R_{ON48PU}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/5$	
60.0Ω	R_{ON60PD}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/4$	
	R_{ON60PU}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/4$	
80.0Ω	R_{ON80PD}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/3$	
	R_{ON80PU}	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/3$	
120.0Ω (optional)	$R_{ON120PD}$	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/2$	
	$R_{ON120PU}$	0.5 × V_{DDQ}	0.85	1.00	1.15	$R_{ZQ}/2$	
Mismatch between pull-up and pull-down	MM_{PUPD}		–15.00		+15.00	%	5

Notes:
1. Applies across entire operating temperature range after calibration.
2. $R_{ZQ} = 240Ω$.
3. The tolerance limits are specified after calibration, with fixed voltage and temperature. For behavior of the tolerance limits if temperature or voltage changes after calibration, see Output Driver Temperature and Voltage Sensitivity.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

4. Pull-down and pull-up output driver impedances should be calibrated at 0.5 x V_{DDQ}.
5. Measurement definition for mismatch between pull-up and pull-down, MM_{PUPD}: Measure R_{ONPU} and R_{ONPD}, both at 0.5 × V_{DDQ}:

$$MM_{PUPD} = \frac{R_{ONPU} - R_{ONPD}}{R_{ON,nom}} \times 100$$

For example, with MM_{PUPD} (MAX) = 15% and R_{ONPD} = 0.85, RON_{PU} must be less than 1.0.

Output Driver Temperature and Voltage Sensitivity

If temperature and/or voltage change after calibration, the tolerance limits widen.

Table 84: Output Driver Sensitivity Definition

Resistor	V_{OUT}	Min	Max	Unit
R_{ONPD}	0.5 × V_{DDQ}	$85 - (dR_{ON}dT \cdot \lvert\Delta T\rvert) - (dR_{ON}dV \cdot \lvert\Delta V\rvert)$	$115 + (dR_{ON}dT \cdot \lvert\Delta T\rvert) + (dR_{ON}dV \cdot \lvert\Delta V\rvert)$	%
R_{ONPU}				

Notes:
1. $\Delta T = T - T$ (at calibration). $\Delta V = V - V$ (at calibration).
2. $dR_{ON}dT$ and $dR_{ON}dV$ are not subject to production testing; they are verified by design and characterization.

Table 85: Output Driver Temperature and Voltage Sensitivity

Symbol	Parameter	Min	Max	Unit
R_{ONdT}	R_{ON} temperature sensitivity	0.00	0.75	%/°C
R_{ONdV}	R_{ON} voltage sensitivity	0.00	0.20	%/mV

Output Impedance Characteristics Without ZQ Calibration

Output driver impedance is defined by design and characterization as the default setting.

Table 86: Output Driver DC Electrical Characteristics Without ZQ Calibration

RON_{nom}	Resistor	V_{OUT}	Min	Typ	Max	Unit
34.3Ω	R_{ON34PD}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/7$
	R_{ON34PU}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/7$
40.0Ω	R_{ON40PD}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/6$
	R_{ON40PU}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/6$
48.0Ω	R_{ON48PD}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/5$
	R_{ON48PU}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/5$
60.0Ω	R_{ON60PD}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/4$
	R_{ON60PU}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/4$
80.0Ω	R_{ON80PD}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/3$
	R_{ON80PU}	0.5 × V_{DDQ}	0.70	1.00	1.30	$R_{ZQ}/3$

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 86: Output Driver DC Electrical Characteristics Without ZQ Calibration (Continued)

RON_{nom}	Resistor	V_{OUT}	Min	Typ	Max	Unit
120.0Ω (optional)	$R_{ON120PD}$	$0.5 \times V_{DDQ}$	0.70	1.00	1.30	$R_{ZQ}/2$
	$R_{ON120PU}$	$0.5 \times V_{DDQ}$	0.70	1.00	1.30	$R_{ZQ}/2$

Notes: 1. Applies across entire operating temperature range without calibration.
2. $R_{ZQ} = 240\Omega$.

Table 87: I-V Curves

	$R_{ON} = 240\Omega$ (R_{ZQ})							
	Pull-Down				Pull-Up			
	Current (mA) / R_{ON} (ohms)				Current (mA) / R_{ON} (ohms)			
	Default Value after ZQRESET		With Calibration		Default Value after ZQRESET		With Calibration	
Voltage (V)	Min (mA)	Max (mA)	Min (mA)	Max (mA)	Min (mA)	Max (mA)	Min (mA)	Max (mA)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0.05	0.19	0.32	0.21	0.26	–0.19	–0.32	–0.21	–0.26
0.10	0.38	0.64	0.40	0.53	–0.38	–0.64	–0.40	–0.53
0.15	0.56	0.94	0.60	0.78	–0.56	–0.94	–0.60	–0.78
0.20	0.74	1.26	0.79	1.04	–0.74	–1.26	–0.79	–1.04
0.25	0.92	1.57	0.98	1.29	–0.92	–1.57	–0.98	–1.29
0.30	1.08	1.86	1.17	1.53	–1.08	–1.86	–1.17	–1.53
0.35	1.25	2.17	1.35	1.79	–1.25	–2.17	–1.35	–1.79
0.40	1.40	2.46	1.52	2.03	–1.40	–2.46	–1.52	–2.03
0.45	1.54	2.74	1.69	2.26	–1.54	–2.74	–1.69	–2.26
0.50	1.68	3.02	1.86	2.49	–1.68	–3.02	–1.86	–2.49
0.55	1.81	3.30	2.02	2.72	–1.81	–3.30	–2.02	–2.72
0.60	1.92	3.57	2.17	2.94	–1.92	–3.57	–2.17	–2.94
0.65	2.02	3.83	2.32	3.15	–2.02	–3.83	–2.32	–3.15
0.70	2.11	4.08	2.46	3.36	–2.11	–4.08	–2.46	–3.36
0.75	2.19	4.31	2.58	3.55	–2.19	–4.31	–2.58	–3.55
0.80	2.25	4.54	2.70	3.74	–2.25	–4.54	–2.70	–3.74
0.85	2.30	4.74	2.81	3.91	–2.30	–4.74	–2.81	–3.91
0.90	2.34	4.92	2.89	4.05	–2.34	–4.92	–2.89	–4.05
0.95	2.37	5.08	2.97	4.23	–2.37	–5.08	–2.97	–4.23
1.00	2.41	5.20	3.04	4.33	–2.41	–5.20	–3.04	–4.33
1.05	2.43	5.31	3.09	4.44	–2.43	–5.31	–3.09	–4.44
1.10	2.46	5.41	3.14	4.52	–2.46	–5.41	–3.14	–4.52
1.15	2.48	5.48	3.19	4.59	–2.48	–5.48	–3.19	–4.59
1.20	2.50	5.55	3.23	4.65	–2.50	–5.55	–3.23	–4.65

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 81: Output Impedance = 240 Ohms, I-V Curves After ZQRESET

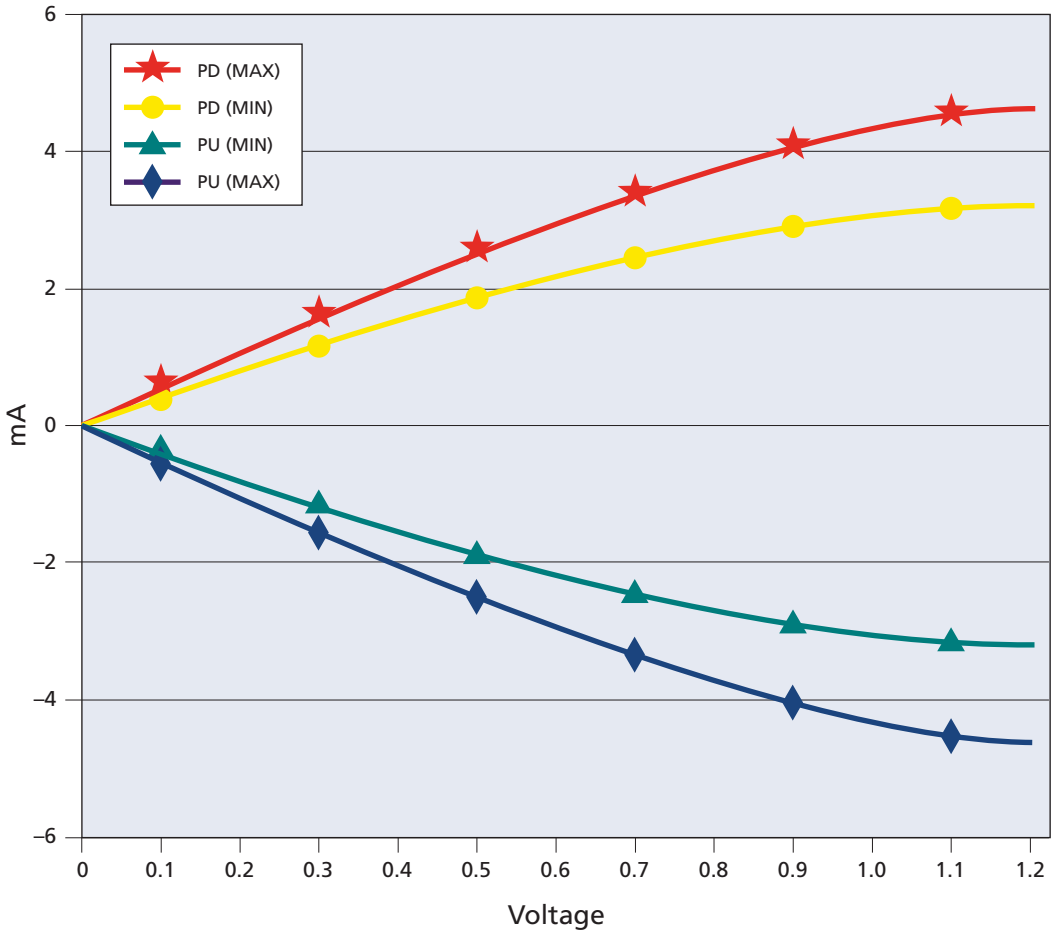

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 82: Output Impedance = 240 Ohms, I-V Curves After Calibration

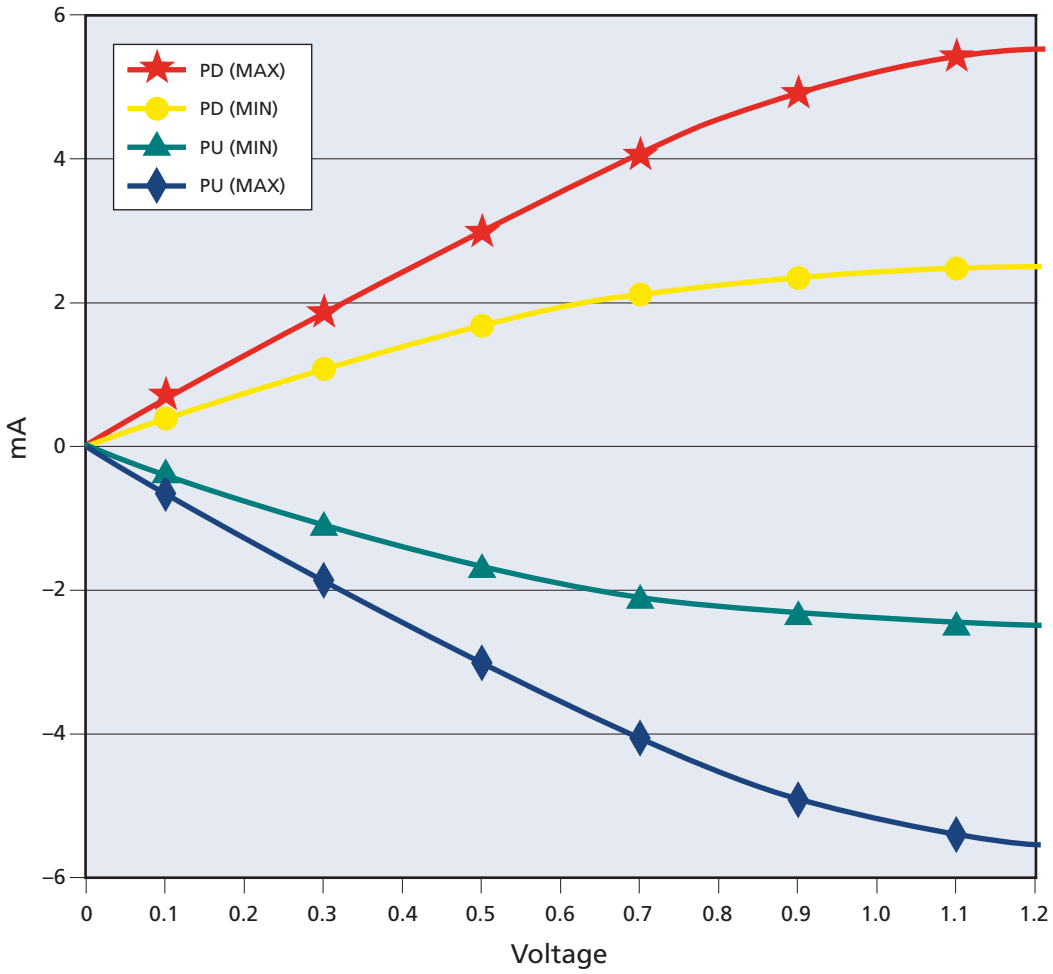

Clock Specification

The specified clock jitter is a random jitter with Gaussian distribution. Input clocks violating minimum or maximum values may result in device malfunction.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 88: Definitions and Calculations

Symbol	Description	Calculation	Notes
^{t}CK(avg) and *n*CK	The average clock period across any consecutive 200-cycle window. Each clock period is calculated from rising clock edge to rising clock edge. Unit ^{t}CK(avg) represents the actual clock average ^{t}CK(avg)of the input clock under operation. Unit *n*CK represents one clock cycle of the input clock, counting from actual clock edge to actual clock edge. ^{t}CK(avg)can change no more than ±1% within a 100-clock-cycle window, provided that all jitter and timing specifications are met.	$^{t}CK(avg) = \left(\sum_{j=1}^{N} {}^{t}CK_{j}\right)/N$ Where N = 200	
^{t}CK(abs)	The absolute clock period, as measured from one rising clock edge to the next consecutive rising clock edge.		1
^{t}CH(avg)	The average HIGH pulse width, as calculated across any 200 consecutive HIGH pulses.	$^{t}CH(avg) = \left(\sum_{j=1}^{N} {}^{t}CH_{j}\right)/(N \times {}^{t}CK(avg))$ Where N = 200	
^{t}CL(avg)	The average LOW pulse width, as calculated across any 200 consecutive LOW pulses.	$^{t}CL(avg) = \left(\sum_{j=1}^{N} {}^{t}CL_{j}\right)/(N \times {}^{t}CK(avg))$ Where N = 200	
^{t}JIT(per)	The single-period jitter defined as the largest deviation of any signal ^{t}CK from ^{t}CK(avg).	$^{t}JIT(per) = \text{min/max of } \left({}^{t}CK_{i} - {}^{t}CK(avg)\right)$ Where i = 1 to 200	1
^{t}JIT(per),act	The actual clock jitter for a given system.		
^{t}JIT(per), allowed	The specified clock period jitter allowance.		
^{t}JIT(cc)	The absolute difference in clock periods between two consecutive clock cycles. ^{t}JIT(cc) defines the cycle-to-cycle jitter.	$^{t}JIT(cc) = \text{max of } \left({}^{t}CK_{i+1} - {}^{t}CK_{i}\right)$	1
^{t}ERR(nper)	The cumulative error across *n* multiple consecutive cycles from ^{t}CK(avg).	$^{t}ERR(nper) = \left(\sum_{j=i}^{i+n-1} {}^{t}CK_{j}\right) - (n \times {}^{t}CK(avg))$	1
^{t}ERR(nper),act	The actual cumulative error over *n* cycles for a given system.		
^{t}ERR(nper), allowed	The specified cumulative error allowance over *n* cycles.		
^{t}ERR(nper),min	The minimum ^{t}ERR(nper).	$^{t}ERR(nper),min = (1 + 0.68LN(n)) \times {}^{t}JIT(per),min$	2
^{t}ERR(nper),max	The maximum ^{t}ERR(nper).	$^{t}ERR(nper),max = (1 + 0.68LN(n)) \times {}^{t}JIT(per),max$	2

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 88: Definitions and Calculations (Continued)

Symbol	Description	Calculation	Notes
^{t}JIT(duty)	Defined with absolute and average specifications for ^{t}CH and ^{t}CL, respectively.	^{t}JIT(duty),min = MIN((^{t}CH(abs),min – ^{t}CH(avg),min), (^{t}CL(abs),min – ^{t}CL(avg),min)) × ^{t}CK(avg) ^{t}JIT(duty),max = MAX((^{t}CH(abs),max – ^{t}CH(avg),max), (^{t}CL(abs),max – ^{t}CL(avg),max)) × ^{t}CK(avg)	

Notes: 1. Not subject to production testing.
2. Using these equations, ^{t}ERR(nper) tables can be generated for each ^{t}JIT(per),act value.

^{t}CK(abs), ^{t}CH(abs), and ^{t}CL(abs)

These parameters are specified with their average values; however, the relationship between the average timing and the absolute instantaneous timing (defined in the following table) is applicable at all times.

Table 89: ^{t}CK(abs), ^{t}CH(abs), and ^{t}CL(abs) Definitions

Parameter	Symbol	Minimum	Unit
Absolute clock period	^{t}CK(abs)	^{t}CK(avg),min + ^{t}JIT(per),min	ps[1]
Absolute clock HIGH pulse width	^{t}CH(abs)	^{t}CH(avg),min + ^{t}JIT(duty),min[2]/^{t}CK(avg)min	^{t}CK(avg)
Absolute clock LOW pulse width	^{t}CL(abs)	^{t}CL(avg),min + ^{t}JIT(duty),min[2]/^{t}CK(avg)min	^{t}CK(avg)

Notes: 1. ^{t}CK(avg),min is expressed in ps for this table.
2. ^{t}JIT(duty),min is a negative value.

Clock Period Jitter

The LPDDR2 device can tolerate some clock period jitter without core timing parameter derating. This section describes device timing requirements with clock period jitter (^{t}JIT(per)) in excess of the values found in the AC Timing section. Calculating cycle time derating and clock cycle derating are also described.

Clock Period Jitter Effects on Core Timing Parameters

Core timing parameters (^{t}RCD, ^{t}RP, ^{t}RTP, ^{t}WR, ^{t}WRA, ^{t}WTR, ^{t}RC, ^{t}RAS, ^{t}RRD, ^{t}FAW) extend across multiple clock cycles. Clock period jitter impacts these parameters when measured in numbers of clock cycles. Within the specification limits, the device is characterized and verified to support ^{t}nPARAM = RU[^{t}PARAM/^{t}CK(avg)]. During device operation where clock jitter is outside specification limits, the number of clocks or ^{t}CK(avg), may need to be increased based on the values for each core timing parameter.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Cycle Time Derating for Core Timing Parameters

For a given number of clocks (^{t}nPARAM), when ^{t}CK(avg) and ^{t}ERR(^{t}nPARAM),act exceed ^{t}ERR(^{t}nPARAM),allowed, cycle time derating may be required for core timing parameters.

$$\text{CycleTimeDerating} = \max\left\{\left(\frac{^{t}\text{PARAM} + ^{t}\text{ERR}(^{t}\text{nPARAM}),\text{act} - ^{t}\text{ERR}(^{t}\text{nPARAM}),\text{allowed}}{^{t}\text{nPARAM}} - ^{t}\text{CK(avg)}\right), 0\right\}$$

Cycle time derating analysis should be conducted for each core timing parameter. The amount of cycle time derating required is the maximum of the cycle time deratings determined for each individual core timing parameter.

Clock Cycle Derating for Core Timing Parameters

For each core timing parameter and a given number of clocks (^{t}nPARAM), clock cycle derating should be specified with ^{t}JIT(per).

For a given number of clocks (^{t}nPARAM), when ^{t}CK(avg) plus (^{t}ERR(^{t}nPARAM),act) exceed the supported cumulative ^{t}ERR(^{t}nPARAM),allowed, derating is required. If the equation below results in a positive value for a core timing parameter (^{t}CORE), the required clock cycle derating will be that positive value (in clocks).

$$\text{ClockCycleDerating} = \text{RU}\left\{\frac{^{t}\text{PARAM} + ^{t}\text{ERR}(^{t}\text{nPARAM}),\text{act} - ^{t}\text{ERR}(^{t}\text{nPARAM}),\text{allowed}}{^{t}\text{CK(avg)}}\right\} - ^{t}\text{nPARAM}$$

Cycle-time derating analysis should be conducted for each core timing parameter.

Clock Jitter Effects on Command/Address Timing Parameters

Command/address timing parameters (^{t}IS, ^{t}IH, ^{t}ISCKE, ^{t}IHCKE, ^{t}ISb, ^{t}IHb, ^{t}ISCKEb, ^{t}IHCKEb) are measured from a command/address signal (CKE, CS_n, or CA[9:0]) transition edge to its respective clock signal (CK_t/CK_c) crossing. The specification values are not affected by the ^{t}JIT(per) applied, because the setup and hold times are relative to the clock signal crossing that latches the command/address. Regardless of clock jitter values, these values must be met.

Clock Jitter Effects on READ Timing Parameters

^{t}RPRE

When the device is operated with input clock jitter, ^{t}RPRE must be derated by the ^{t}JIT(per),act,max of the input clock that exceeds ^{t}JIT(per),allowed,max. Output deratings are relative to the input clock:

$$^{t}\text{RPRE(min,derated)} = 0.9 - \left(\frac{^{t}\text{JIT(per)},\text{act,max} - ^{t}\text{JIT(per)},\text{allowed,max}}{^{t}\text{CK(avg)}}\right)$$

For example, if the measured jitter into a LPDDR2-800 device has ^{t}CK(avg) = 2500ps, ^{t}JIT(per),act,min = –172ps, and ^{t}JIT(per),act,max = +193ps, then ^{t}RPRE,min,derated = 0.9 - (^{t}JIT(per),act,max - ^{t}JIT(per),allowed,max)/^{t}CK(avg) = 0.9 - (193 - 100)/2500 = 0.8628 ^{t}CK(avg).

^{t}LZ(DQ), ^{t}HZ(DQ), ^{t}DQSCK, ^{t}LZ(DQS), ^{t}HZ(DQS)

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

These parameters are measured from a specific clock edge to a data signal transition (DM*n* or DQ*m*, where: *n* = 0, 1, 2, or 3; and *m* = DQ[31:0]), and specified timings must be met with respect to that clock edge. Therefore, they are not affected by ^{t}JIT(per).

^{t}QSH, ^{t}QSL

These parameters are affected by duty cycle jitter, represented by ^{t}CH(abs)min and ^{t}CL(abs)min. These parameters determine the absolute data valid window at the device pin. The absolute minimum data valid window at the device pin = min [(^{t}QSH(abs)min × ^{t}CK(avg)min - ^{t}DQSQmax - ^{t}QHSmax), (^{t}QSL(abs)min × ^{t}CK(avg)min - ^{t}DQSQmax - ^{t}QHSmax)]. This minimum data valid window must be met at the target frequency regardless of clock jitter.

^{t}RPST

^{t}RPST is affected by duty cycle jitter, represented by ^{t}CL(abs). Therefore, ^{t}RPST(abs)min can be specified by ^{t}CL(abs)min. ^{t}RPST(abs)min = ^{t}CL(abs)min - 0.05 = ^{t}QSL(abs)min.

Clock Jitter Effects on WRITE Timing Parameters

^{t}DS, ^{t}DH

These parameters are measured from a data signal (DM*n* *or* DQ*m*, where *n* = 0, 1, 2, 3; and *m* = DQ[31:0]) transition edge to its respective data strobe signal (DQS*n*_t, DQS*n*_c: *n* = 0,1,2,3) crossing. The specification values are not affected by the amount of ^{t}JIT(per) applied, because the setup and hold times are relative to the clock signal crossing that latches the command/address. Regardless of clock jitter values, these values must be met.

^{t}DSS, ^{t}DSH

These parameters are measured from a data strobe signal crossing (DQS*x*_t, DQS*x*_c) to its clock signal crossing (CK_t/CK_c). The specification values are not affected by the amount of ^{t}JIT(per)) applied, because the setup and hold times are relative to the clock signal crossing that latches the command/address. Regardless of clock jitter values, these values must be met.

^{t}DQSS

^{t}DQSS is measured from the clock signal crossing (CK_t/CK_c) to the first latching data strobe signal crossing (DQS*x*_t, DQS*x*_c). When the device is operated with input clock jitter, this parameter must be derated by the actual ^{t}JIT(per),act of the input clock in excess of ^{t}JIT(per),allowed.

$$^{t}\text{DQSS(min,derated)} = 0.75 - \left(\frac{^{t}\text{JIT(per),act,min} - {}^{t}\text{JIT(per),allowed, min}}{^{t}\text{CK(avg)}}\right)$$

$$^{t}\text{DQSS(max,derated)} = 1.25 - \left(\frac{^{t}\text{JIT(per),act,max} - {}^{t}\text{JIT(per),allowed, max}}{^{t}\text{CK(avg)}}\right)$$

For example, if the measured jitter into an LPDDR2-800 device has ^{t}CK(avg) = 2500ps, ^{t}JIT(per),act,min = -172ps, and ^{t}JIT(per),act,max = +193ps, then:

^{t}DQSS,(min,derated) = 0.75 - (^{t}JIT(per),act,min - ^{t}JIT(per),allowed,min)/^{t}CK(avg) = 0.75 - (-172 + 100)/2500 = 0.7788 ^{t}CK(avg), *and*

^{t}DQSS,(max,derated) = 1.25 - (^{t}JIT(per),act,max - ^{t}JIT(per),allowed,max)/^{t}CK(avg) = 1.25 - (193 - 100)/2500 = 1.2128 ^{t}CK(avg).

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Refresh Requirements Parameters

Table 90: Refresh Requirement Parameters (Per Density)

Parameter		Symbol	64Mb	128Mb	256Mb	512Mb	1Gb	2Gb	4Gb	8Gb	Unit
Number of banks			4	4	4	4	8	8	8	8	
Refresh window: $T_{CASE} \leq 85^{\circ}$		tREFW	32	32	32	32	32	32	32	32	ms
Refresh window: $85^{\circ}C < T_{CASE} \leq 105^{\circ}C$		tREFW	8	8	8	8	8	8	8	8	ms
Required number of REFRESH commands (MIN)		R	2048	2048	4096	4096	4096	8192	8192	8192	
Average time between REFRESH commands (for reference only) $T_{CASE} \leq 85^{\circ}C$	REFab	tREFI	15.6	15.6	7.8	7.8	7.8	3.9	3.9	3.9	µs
	REFpb	tREFIpb	(REFpb not supported below 1Gb)				0.975	0.4875	0.4875	0.4875	µs
Refresh cycle time		tRFCab	90	90	90	90	130	130	130	210	ns
Per-bank REFRESH cycle time		tRFCpb	na				60	60	60	90	ns
Burst REFRESH window = 4 × 8 × tRFCab		tREFBW	2.88	2.88	2.88	2.88	4.16	4.16	4.16	6.72	µs

AC Timing

Table 91: AC Timing

Notes 1–2 apply to all parameters and conditions. AC timing parameters must satisfy the tCK minimum conditions (in multiples of tCK) as well as the timing specifications when values for both are indicated.

Parameter	Symbol	Min/ Max	tCK Min	Data Rate 1066	933	800	667	533	400	333	Unit	Notes
Maximum frequency		–	–	533	466	400	333	266	200	166	MHz	
Clock Timing												
Average clock period	tCK(avg)	MIN	–	1.875	2.15	2.5	3	3.75	5	6	ns	
		MAX	–	100	100	100	100	100	100	100		
Average HIGH pulse width	tCH(avg)	MIN	–	0.45	0.45	0.45	0.45	0.45	0.45	0.45	tCK (avg)	
		MAX	–	0.55	0.55	0.55	0.55	0.55	0.55	0.55		
Average LOW pulse width	tCL(avg)	MIN	–	0.45	0.45	0.45	0.45	0.45	0.45	0.45	tCK (avg)	
		MAX	–	0.55	0.55	0.55	0.55	0.55	0.55	0.55		
Absolute clock period	tCK(abs)	MIN	–	tCK(avg)min ± tJIT(per)min							ps	
Absolute clock HIGH pulse width (with allowed jitter)	tCH(abs), allowed	MIN	–	0.43	0.43	0.43	0.43	0.43	0.43	0.43	tCK (avg)	
		MAX	–	0.57	0.57	0.57	0.57	0.57	0.57	0.57		
Absolute clock LOW pulse width (with allowed jitter)	tCL(abs), allowed	MIN	–	0.43	0.43	0.43	0.43	0.43	0.43	0.43	tCK (avg)	
		MAX	–	0.57	0.57	0.57	0.57	0.57	0.57	0.57		
Clock period jitter (with supported jitter)	tJIT(per), allowed	MIN	–	-90	-95	-100	-110	-120	-140	-150	ps	
		MAX	–	90	95	100	110	120	140	150		

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 91: AC Timing (Continued)

Notes 1–2 apply to all parameters and conditions. AC timing parameters must satisfy the ^{t}CK minimum conditions (in multiples of ^{t}CK) as well as the timing specifications when values for both are indicated.

Parameter	Symbol	Min/ Max	^{t}CK Min	Data Rate							Unit	Notes
				1066	933	800	667	533	400	333		
Maximum clock jitter between two consecutive clock cycles (with allowed jitter)	^{t}JIT(cc), allowed	MAX	–	180	190	200	220	240	280	300	ps	
Duty cycle jitter (with allowed jitter)	^{t}JIT(duty), allowed	MIN	–	MIN ((^{t}CH(abs),min - ^{t}CH(avg),min), (^{t}CL(abs),min - ^{t}CL(avg),min)) × ^{t}CK(avg)							ps	
		MAX	–	MAX ((^{t}CH(abs),max - ^{t}CH(avg),max), (^{t}CL(abs),max - ^{t}CL(avg),max)) × ^{t}CK(avg)								
Cumulative errors across 2 cycles	^{t}ERR(2per), allowed	MIN	–	-132	-140	-147	-162	-177	-206	-221	ps	
		MAX	–	132	140	147	162	177	206	221		
Cumulative errors across 3 cycles	^{t}ERR(3per), allowed	MIN	–	-157	-166	-175	-192	-210	-245	-262	ps	
		MAX	–	157	166	175	192	210	245	262		
Cumulative errors across 4 cycles	^{t}ERR(4per), allowed	MIN	–	-175	-185	-194	-214	-233	-272	-291	ps	
		MAX	–	175	185	194	214	233	272	291		
Cumulative errors across 5 cycles	^{t}ERR(5per), allowed	MIN	–	-188	-199	-209	-230	-251	-293	-314	ps	
		MAX	–	188	199	209	230	251	293	314		
Cumulative errors across 6 cycles	^{t}ERR(6per), allowed	MIN	–	-200	-211	-222	-244	-266	-311	-333	ps	
		MAX	–	200	211	222	244	266	311	333		
Cumulative errors across 7 cycles	^{t}ERR(7per), allowed	MIN	–	-209	-221	-232	-256	-279	-325	-348	ps	
		MAX	–	209	221	232	256	279	325	348		
Cumulative errors across 8 cycles	^{t}ERR(8per), allowed	MIN	–	-217	-229	-241	-266	-290	-338	-362	ps	
		MAX	–	217	229	241	266	290	338	362		
Cumulative errors across 9 cycles	^{t}ERR(9per), allowed	MIN	–	-224	-237	-249	-274	-299	-349	-374	ps	
		MAX	–	224	237	249	274	299	349	374		
Cumulative errors across 10 cycles	^{t}ERR(10per), allowed	MIN	–	-231	-244	-257	-282	-308	-359	-385	ps	
		MAX	–	231	244	257	282	308	359	385		
Cumulative errors across 11 cycles	^{t}ERR(11per), allowed	MIN	–	-237	-250	-263	-289	-316	-368	-395	ps	
		MAX	–	237	250	263	289	316	368	395		
Cumulative errors across 12 cycles	^{t}ERR(12per), allowed	MIN	–	-242	-256	-269	-296	-323	-377	-403	ps	
		MAX	–	242	256	269	296	323	377	403		
Cumulative errors across *n* = 13, 14, 15…, 49, 50 cycles	^{t}ERR(nper), allowed	MIN	^{t}ERR(nper),allowed,min = (1 + 0.68ln(n)) × ^{t}JIT(per),allowed,min								ps	
		MAX	^{t}ERR(nper), allowed,max = (1 + 0.68ln(n)) × ^{t}JIT(per),allowed,max									
ZQ Calibration Parameters												
Initialization calibration time	^{t}ZQINIT	MIN	–	1	1	1	1	1	1	1	µs	
Long calibration time	^{t}ZQCL	MIN	6	360	360	360	360	360	360	360	ns	
Short calibration time	^{t}ZQCS	MIN	6	90	90	90	90	90	90	90	ns	

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 91: AC Timing (Continued)

Notes 1–2 apply to all parameters and conditions. AC timing parameters must satisfy the ^{t}CK minimum conditions (in multiples of ^{t}CK) as well as the timing specifications when values for both are indicated.

Parameter	Symbol	Min/ Max	^{t}CK Min	Data Rate							Unit	Notes
				1066	933	800	667	533	400	333		
Calibration RESET time	^{t}ZQRESET	MIN	3	50	50	50	50	50	50	50	ns	
READ Parameters[3]												
DQS output access time from CK_t/CK_c	^{t}DQSCK	MIN	–	2500	2500	2500	2500	2500	2500	2500	ps	
		MAX	–	5500	5500	5500	5500	5500	5500	5500		
DQSCK delta short	^{t}DQSCKDS	MAX	–	330	380	450	540	670	900	1080	ps	4
DQSCK delta medium	^{t}DQSCKDM	MAX	–	680	780	900	1050	1350	1800	1900	ps	5
DQSCK delta long	^{t}DQSCKDL	MAX	–	920	1050	1200	1400	1800	2400	–	ps	6
DQS-DQ skew	^{t}DQSQ	MAX	–	200	220	240	280	340	400	500	ps	
Data-hold skew factor	^{t}QHS	MAX	–	230	260	280	340	400	480	600	ps	
DQS output HIGH pulse width	^{t}QSH	MIN	–	^{t}CH(abs) - 0.05							^{t}CK (avg)	
DQS output LOW pulse width	^{t}QSL	MIN	–	^{t}CL(abs) - 0.05							^{t}CK (avg)	
Data half period	^{t}QHP	MIN	–	MIN (^{t}QSH, ^{t}QSL)							^{t}CK (avg)	
DQ/DQS output hold time from DQS	^{t}QH	MIN	–	^{t}QHP - ^{t}QHS							ps	
READ preamble	^{t}RPRE	MIN	–	0.9	0.9	0.9	0.9	0.9	0.9	0.9	^{t}CK (avg)	7
READ postamble	^{t}RPST	MIN	–	^{t}CL(abs) - 0.05							^{t}CK (avg)	8
DQS Low-Z from clock	^{t}LZ(DQS)	MIN	–	^{t}DQSCK (MIN) - 300							ps	
DQ Low-Z from clock	^{t}LZ(DQ)	MIN	–	^{t}DQSCK(MIN) - (1.4 × ^{t}QHS(MAX))							ps	
DQS High-Z from clock	^{t}HZ(DQS)	MAX	–	^{t}DQSCK (MAX) - 100							ps	
DQ High-Z from clock	^{t}HZ(DQ)	MAX	–	^{t}DQSCK(MAX) + (1.4 × ^{t}DQSQ(MAX))							ps	
WRITE Parameters[3]												
DQ and DM input hold time (V_{REF} based)	^{t}DH	MIN	–	210	235	270	350	430	480	600	ps	
DQ and DM input setup time (V_{REF} based)	^{t}DS	MIN	–	210	235	270	350	430	480	600	ps	
DQ and DM input pulse width	^{t}DIPW	MIN	–	0.35	0.35	0.35	0.35	0.35	0.35	0.35	^{t}CK (avg)	
Write command to first DQS latching transition	^{t}DQSS	MIN	–	0.75	0.75	0.75	0.75	0.75	0.75	0.75	^{t}CK (avg)	
		MAX	–	1.25	1.25	1.25	1.25	1.25	1.25	1.25	^{t}CK (avg)	
DQS input high-level width	^{t}DQSH	MIN	–	0.4	0.4	0.4	0.4	0.4	0.4	0.4	^{t}CK (avg)	

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 91: AC Timing (Continued)

Notes 1–2 apply to all parameters and conditions. AC timing parameters must satisfy the tCK minimum conditions (in multiples of tCK) as well as the timing specifications when values for both are indicated.

Parameter	Symbol	Min/ Max	tCK Min	Data Rate							Unit	Notes
				1066	933	800	667	533	400	333		
DQS input low-level width	tDQSL	MIN	–	0.4	0.4	0.4	0.4	0.4	0.4	0.4	tCK (avg)	
DQS falling edge to CK setup time	tDSS	MIN	–	0.2	0.2	0.2	0.2	0.2	0.2	0.2	tCK (avg)	
DQS falling edge hold time from CK	tDSH	MIN	–	0.2	0.2	0.2	0.2	0.2	0.2	0.2	tCK (avg)	
Write postamble	tWPST	MIN	–	0.4	0.4	0.4	0.4	0.4	0.4	0.4	tCK (avg)	
Write preamble	tWPRE	MIN	–	0.35	0.35	0.35	0.35	0.35	0.35	0.35	tCK (avg)	
CKE Input Parameters												
CKE minimum pulse width (HIGH and LOW pulse width)	tCKE	MIN	3	3	3	3	3	3	3	3	tCK (avg)	
CKE input setup time	tISCKE	MIN	–	0.25	0.25	0.25	0.25	0.25	0.25	0.25	tCK (avg)	9
CKE input hold time	tIHCKE	MIN	–	0.25	0.25	0.25	0.25	0.25	0.25	0.25	tCK (avg)	10
Command Address Input Parameters[3]												
Address and control input setup time (Vref based)	tIS	MIN	–	220	250	290	370	460	600	740	ps	11
Address and control input hold time (Vref based)	tIH	MIN	–	220	250	290	370	460	600	740	ps	11
Address and control input pulse width	tIPW	MIN	–	0.40	0.40	0.40	0.40	0.40	0.40	0.40	tCK (avg)	
Boot Parameters (10 MHz–55 MHz)[12, 13, 14]												
Clock cycle time	tCKb	MAX	–	100	100	100	100	100	100	100	ns	
		MIN	–	18	18	18	18	18	18	18		
CKE input setup time	tISCKEb	MIN	–	2.5	2.5	2.5	2.5	2.5	2.5	2.5	ns	
CKE input hold time	tIHCKEb	MIN	–	2.5	2.5	2.5	2.5	2.5	2.5	2.5	ns	
Address and control input setup time	tISb	MIN	–	1150	1150	1150	1150	1150	1150	1150	ps	
Address and control input hold time	tIHb	MIN	–	1150	1150	1150	1150	1150	1150	1150	ps	
DQS output data access time from CK_t/CK_c	tDQSCKb	MIN	–	2.0	2.0	2.0	2.0	2.0	2.0	2.0	ns	
		MAX	–	10.0	10.0	10.0	10.0	10.0	10.0	10.0		
Data strobe edge to output data edge tDQSQb - 1.2	tDQSQb	MAX	–	1.2	1.2	1.2	1.2	1.2	1.2	1.2	ns	
Data hold skew factor	tQHSb	MAX	–	1.2	1.2	1.2	1.2	1.2	1.2	1.2	ns	

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 91: AC Timing (Continued)

Notes 1–2 apply to all parameters and conditions. AC timing parameters must satisfy the tCK minimum conditions (in multiples of tCK) as well as the timing specifications when values for both are indicated.

Parameter	Symbol	Min/ Max	tCK Min	Data Rate							Unit	Notes
				1066	933	800	667	533	400	333		
Mode Register Parameters												
MODE REGISTER WRITE command period	tMRW	MIN	5	5	5	5	5	5	5	5	tCK (avg)	
MODE REGISTER READ command period	tMRR	MIN	2	2	2	2	2	2	2	2	tCK (avg)	
Core Parameters[15]												
READ latency	RL	MIN	3	8	7	6	5	4	3	3	tCK (avg)	
WRITE latency	WL	MIN	1	4	4	3	2	2	1	1	tCK (avg)	
ACTIVATE-to-ACTIVATE command period	tRC	MIN	–	tRAS + tRPab (with all-bank precharge), tRAS + tRPpb (with per-bank precharge)							ns	17
CKE minimum pulse width during SELF REFRESH (low pulse width during SELF REFRESH)	tCKESR	MIN	3	15	15	15	15	15	15	15	ns	
SELF REFRESH exit to next valid command delay	tXSR	MIN	2	tRFCab + 10							ns	
Exit power-down to next valid command delay	tXP	MIN	2	7.5	7.5	7.5	7.5	7.5	7.5	7.5	ns	
CAS-to-CAS delay	tCCD	MIN	2	2	2	2	2	2	2	2	tCK (avg)	
Internal READ to PRECHARGE command delay	tRTP	MIN	2	7.5	7.5	7.5	7.5	7.5	7.5	7.5	ns	
RAS-to-CAS delay	tRCD	MIN	3	18	18	18	18	18	18	18	ns	
Row precharge time (single bank)	tRPpb	MIN	3	18	18	18	18	18	18	18	ns	
Row precharge time (all banks)	tRPab 4-bank	MIN	3	18	18	18	18	18	18	18	ns	
Row precharge time (all banks)	tRPab 8-bank	MIN	3	21	21	21	21	21	21	21	ns	
Row active time	tRAS	MIN	3	42	42	42	42	42	42	42	ns	
		MAX	–	70	70	70	70	70	70	70	µs	
WRITE recovery time	tWR	MIN	3	15	15	15	15	15	15	15	ns	
Internal WRITE-to-READ command delay	tWTR	MIN	2	7.5	7.5	7.5	7.5	7.5	10	10	ns	
Active bank *a* to active bank *b*	tRRD	MIN	2	10	10	10	10	10	10	10	ns	
Four-bank activate window	tFAW	MIN	8	50	50	50	50	50	50	60	ns	
Minimum deep power-down time	tDPD	MIN	–	500	500	500	500	500	500	500	µs	
Temperature Derating[16]												

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 91: AC Timing (Continued)

Notes 1–2 apply to all parameters and conditions. AC timing parameters must satisfy the ^{t}CK minimum conditions (in multiples of ^{t}CK) as well as the timing specifications when values for both are indicated.

Parameter	Symbol	Min/ Max	^{t}CK Min	Data Rate							Unit	Notes
				1066	933	800	667	533	400	333		
^{t}DQSCK derating	^{t}DQSCK (derated)	MAX	–	5620	6000	6000	6000	6000	6000	6000	ps	
Core timing temperature derating	^{t}RCD (derated)	MIN	–	^{t}RCD + 1.875							ns	
	^{t}RC (derated)	MIN	–	^{t}RC + 1.875							ns	
	^{t}RAS (derated)	MIN	–	^{t}RAS + 1.875							ns	
	^{t}RP (derated)	MIN	–	^{t}RP + 1.875							ns	
	^{t}RRD (derated)	MIN	–	^{t}RRD + 1.875							ns	

Notes:

1. Frequency values are for reference only. Clock cycle time (^{t}CK) is used to determine device capabilities.
2. All AC timings assume an input slew rate of 1 V/ns.
3. READ, WRITE, and input setup and hold values are referenced to V_{REF}.
4. ^{t}DQSCKDS is the absolute value of the difference between any two ^{t}DQSCK measurements (in a byte lane) within a contiguous sequence of bursts in a 160ns rolling window. ^{t}DQSCKDS is not tested and is guaranteed by design. Temperature drift in the system is <10˚C/s. Values do not include clock jitter.
5. ^{t}DQSCKDM is the absolute value of the difference between any two ^{t}DQSCK measurements (in a byte lane) within a 1.6µs rolling window. ^{t}DQSCKDM is not tested and is guaranteed by design. Temperature drift in the system is <10˚C/s. Values do not include clock jitter.
6. ^{t}DQSCKDL is the absolute value of the difference between any two ^{t}DQSCK measurements (in a byte lane) within a 32ms rolling window. ^{t}DQSCKDL is not tested and is guaranteed by design. Temperature drift in the system is <10˚C/s. Values do not include clock jitter.
   For LOW-to-HIGH and HIGH-to-LOW transitions, the timing reference is at the point when the signal crosses the transition threshold (V_{TT}). ^{t}HZ and ^{t}LZ transitions occur in the same access time (with respect to clock) as valid data transitions. These parameters are not referenced to a specific voltage level but to the time when the device output is no longer driving (for ^{t}RPST, ^{t}HZ(DQS) and ^{t}HZ(DQ)), or begins driving (for ^{t}RPRE, ^{t}LZ(DQS), ^{t}LZ(DQ)). The figure below shows a method to calculate the point when the device is no longer driving ^{t}HZ(DQS) and ^{t}HZ(DQ) or begins driving ^{t}LZ(DQS) and ^{t}LZ(DQ) by measuring the signal at two different voltages. The actual voltage measurement points are not critical as long as the calculation is consistent. The parameters ^{t}LZ(DQS), ^{t}LZ(DQ), ^{t}HZ(DQS), and ^{t}HZ(DQ) are defined as single-ended. The timing parameters ^{t}RPRE and ^{t}RPST are determined from the differential signal DQS_t/DQS_c.

Output Transition Timing

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

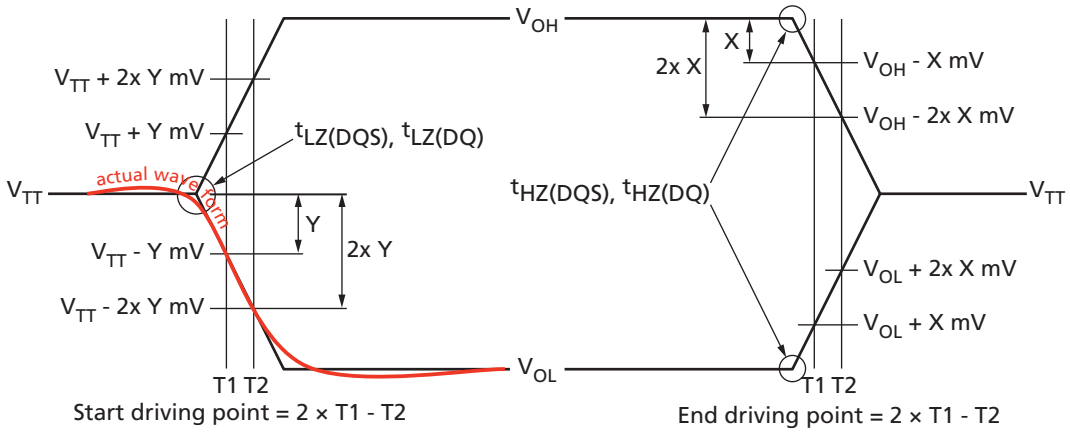

7. Measured from the point when DQS_t/DQS_c begins driving the signal, to the point when DQS_t/DQS_c begins driving the first rising strobe edge.
8. Measured from the last falling strobe edge of DQS_t/DQS_c to the point when DQS_t/DQS_c finishes driving the signal.
9. CKE input setup time is measured from CKE reaching a HIGH/LOW voltage level to CK_t/CK_c crossing.
10. CKE input hold time is measured from CK_t/CK_n crossing to CKE reaching a HIGH/LOW voltage level.
11. Input setup/hold time for signal (CA[9:0], CS_n).
12. To ensure device operation before the device is configured, a number of AC boot timing parameters are defined in this table. The letter b is appended to the boot parameter symbols (for example, ^{t}CK during boot is ^{t}CKb).
13. Mobile LPDDR2 devices set some mode register default values upon receiving a RESET (MRW) command, as specified in Mode Register Definition.
14. The output skew parameters are measured with default output impedance settings using the reference load.
15. The minimum ^{t}CK column applies only when ^{t}CK is greater than 6ns.
16. Timing derating applies for operation at 85˚C to 105˚C when the requirement to derate is indicated by mode register 4 op-code (see the MR4 Device Temperature (MA[7:0] = 04h) table).
17. DRAM devices should be evenly addressed when being accessed. Disproportionate accesses to a particular row address may result in reduction of the product lifetime.

CA and CS_n Setup, Hold, and Derating

For all input signals (CA and CS_n), the total required setup time (^{t}IS) and hold time (^{t}IH) are calculated by adding the data sheet ^{t}IS (base) and ^{t}IH (base) values to the Δ^{t}IS and Δ^{t}IH derating values, respectively. Example: ^{t}IS (total setup time) = ^{t}IS(base) + Δ^{t}IS. (See the series of tables following this section.)

The typical setup slew rate (^{t}IS) for a rising signal is defined as the slew rate between the last crossing of $V_{REF(DC)}$ and the first crossing of $V_{IH(AC)min}$. The typical setup slew rate for a falling signal is defined as the slew rate between the last crossing of $V_{REF(DC)}$ and the first crossing of $V_{IL(AC)max}$. If the actual signal is consistently earlier than the typical slew rate line between the shaded $V_{REF(DC)}$-to-(AC) region, use the typical slew rate for the derating value (see Figure 83 (page 141)). If the actual signal is later than the typical slew rate line anywhere between the shaded $V_{REF(DC)}$-to-AC region, the slew rate of a

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

tangent line to the actual signal from the AC level to the DC level is used for the derating value (see Figure 85 (page 143)).

The hold (^{t}IH) typical slew rate for a rising signal is defined as the slew rate between the last crossing of $V_{IL(DC)max}$ and the first crossing of $V_{REF(DC)}$. The hold (^{t}IH) typical slew rate for a falling signal is defined as the slew rate between the last crossing of $V_{IH(DC)min}$ and the first crossing of $V_{REF(DC)}$. If the actual signal is consistently later than the typical slew rate line between the shaded DC-to-$V_{REF(DC)}$ region, use the typical slew rate for the derating value (see Figure 84 (page 142)). If the actual signal is earlier than the typical slew rate line anywhere between the shaded DC-to-$V_{REF(DC)}$ region, the slew rate of a tangent line to the actual signal from the DC level to $V_{REF(DC)}$ level is used for the derating value (see Figure 86 (page 144)).

For a valid transition, the input signal must remain above or below $V_{IH}/V_{IL(AC)}$ for a specified time, ^{t}VAC (see Table 96 (page 139)).

For slow slew rates the total setup time could be a negative value; that is, a valid input signal will not have reached $V_{IH}/V_{IL(AC)}$ at the time of the rising clock transition. A valid input signal is still required to complete the transition and reach $V_{IH}/V_{IL(AC)}$.

For slew rates between the values listed in Table 94, the derating values are obtained using linear interpolation. Typically, slew rate values are not subject to production testing. They are verified by design and characterization.

Table 92: CA and CS_n Setup and Hold Base Values (>400 MHz, 1 V/ns Slew Rate)

Parameter	Data Rate						Reference
	1066	933	800	667	533	466	
^{t}IS (base)	0	30	70	150	240	300	$V_{IH}/V_{IL(AC)} = V_{REF(DC)}$ ±220mV
^{t}IH (base)	90	120	160	240	330	390	$V_{IH}/V_{IL(DC)} = V_{REF(DC)}$ ±130mV

Note: 1. AC/DC referenced for 1 V/ns CA and CS_n slew rate, and 2 V/ns differential CK_t/CK_c slew rate.

Table 93: CA and CS_n Setup and Hold Base Values (<400 MHz, 1 V/ns Slew Rate)

Parameter	Data Rate				Reference
	400	333	266	200	
^{t}IS (base)	300	440	600	850	$V_{IH}/V_{IL(AC)} = V_{REF(DC)}$ ±300mV
^{t}IH (base)	400	540	700	950	$V_{IH}/V_{IL(DC)} = V_{REF(DC)}$ ±200mV

Note: 1. AC/DC referenced for 1 V/ns CA and CS_n slew rate, and 2 V/ns differential CK_t/CK_c slew rate.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 94: Derating Values for AC/DC-Based ^{t}IS/^{t}IH (AC220)

Δ^{t}IS, Δ^{t}IH derating in ps
AC220 Threshold -> VIH(ac)=VREF(dc)+220mV, VIL(ac)=VREF(dc)-220mV
DC100 Threshold -> VIH(dc)=VREF(dc)+130mV, VIL(dc)=VREF(dc)-130mV

		CK_t, CK_c Differential Slew Rate															
		4.0 V/ns		3.0 V/ns		2.0 V/ns		1.8 V/ns		1.6 V/ns		1.4 V/ns		1.2 V/ns		1.0 V/ns	
		Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH
CA, CS_n slew rate V/ns	2.0	110	65	110	65	110	65										
	1.5	74	43	73	43	73	43	89	59								
	1.0	0	0	0	0	**0**	**0**	16	16	32	32						
	0.9			-3	-5	-3	-5	13	11	29	27	45	43				
	0.8					-8	-13	8	3	24	19	40	35	56	55		
	0.7							2	-6	18	10	34	26	50	46	66	78
	0.6									10	-3	26	13	42	33	58	65
	0.5											4	-4	20	16	36	48
	0.4													-7	2	17	34

Note: 1. Shaded cells are not supported.

Table 95: Derating Values for AC/DC-Based ^{t}IS/^{t}IH (AC300)

Δ^{t}IS, Δ^{t}IH derating in ps
AC300 Threshold -> VIH(ac)=VREF(dc)+300mV, VIL(ac)=VREF(dc)-300mV
DC200 Threshold -> VIH(dc)=VREF(dc)+200mV, VIL(dc)=VREF(dc)-200mV

		CK_t, CK_c Differential Slew Rate															
		4.0 V/ns		3.0 V/ns		2.0 V/ns		1.8 V/ns		1.6 V/ns		1.4 V/ns		1.2 V/ns		1.0 V/ns	
		Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH	Δ^{t}IS	Δ^{t}IH
CA, CS_n slew rate V/ns	2.0	150	100	150	100	150	100										
	1.5	100	67	100	67	100	67	116	83								
	1.0	0	0	0	0	**0**	**0**	16	16	32	32						
	0.9			-4	-8	-4	-8	12	8	28	24	44	40				
	0.8					-12	-20	4	-4	20	12	36	28	52	48		
	0.7							-3	-18	13	-2	29	14	45	34	61	66
	0.6									2	-21	18	-5	34	15	50	47
	0.5											-12	-32	4	-12	20	20
	0.4													-35	-40	-11	-8

Note: 1. Shaded cells are not supported.

Table 96: Required Time for Valid Transition – ^{t}VAC > $V_{IH(AC)}$ and < $V_{IL(AC)}$

Slew Rate (V/ns)	^{t}VAC at 300mV (ps)		^{t}VAC at 220mV (ps)	
	Min	Max	Min	Max
>2.0	75	–	175	–

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 96: Required Time for Valid Transition – $^{t}VAC > V_{IH(AC)}$ and $< V_{IL(AC)}$ (Continued)

Slew Rate (V/ns)	^{t}VAC at 300mV (ps)		^{t}VAC at 220mV (ps)	
	Min	Max	Min	Max
2.0	57	–	170	–
1.5	50	–	167	–
1.0	38	–	163	–
0.9	34	–	162	–
0.8	29	–	161	–
0.7	22	–	159	–
0.6	13	–	155	–
0.5	0	–	150	–
<0.5	0	–	150	–

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 83: Typical Slew Rate and ^{t}VAC – ^{t}IS for CA and CS_n Relative to Clock

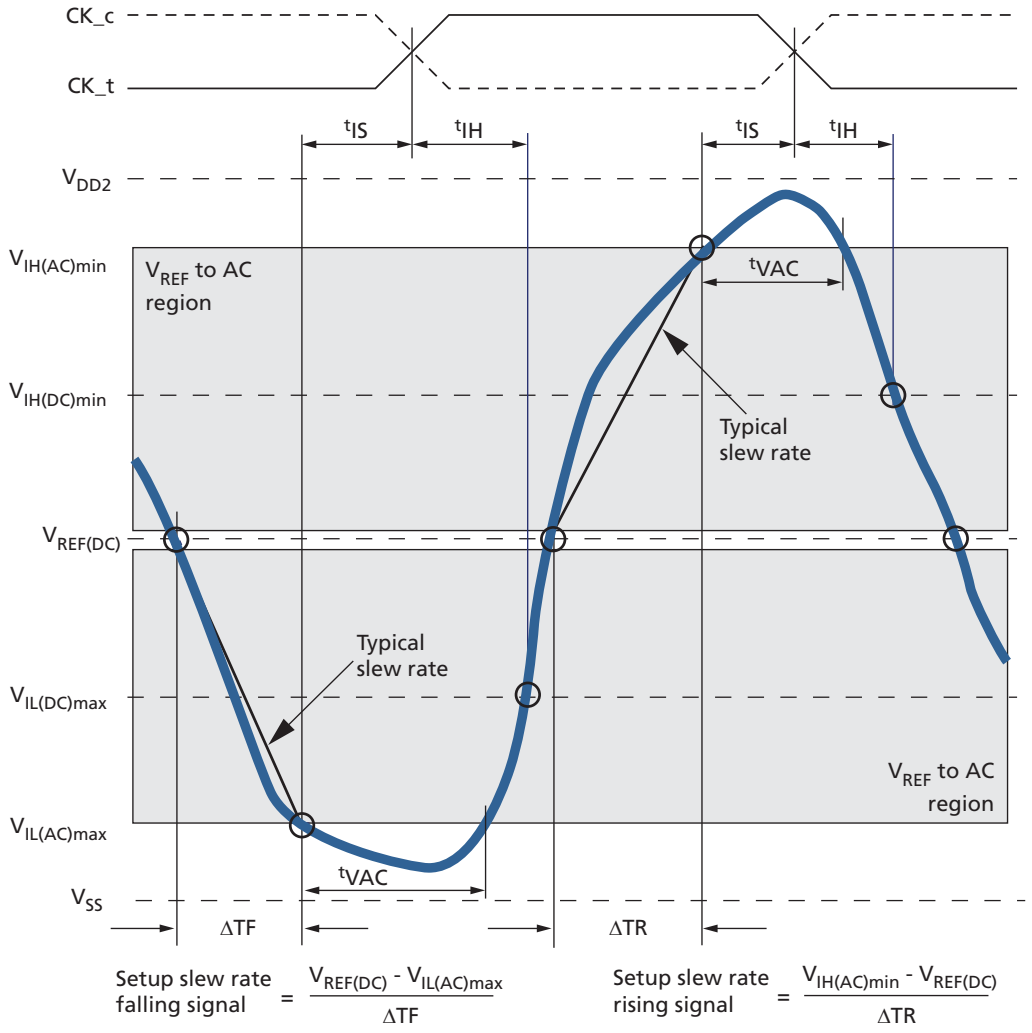

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 84: Typical Slew Rate – ^{t}IH for CA and CS_n Relative to Clock

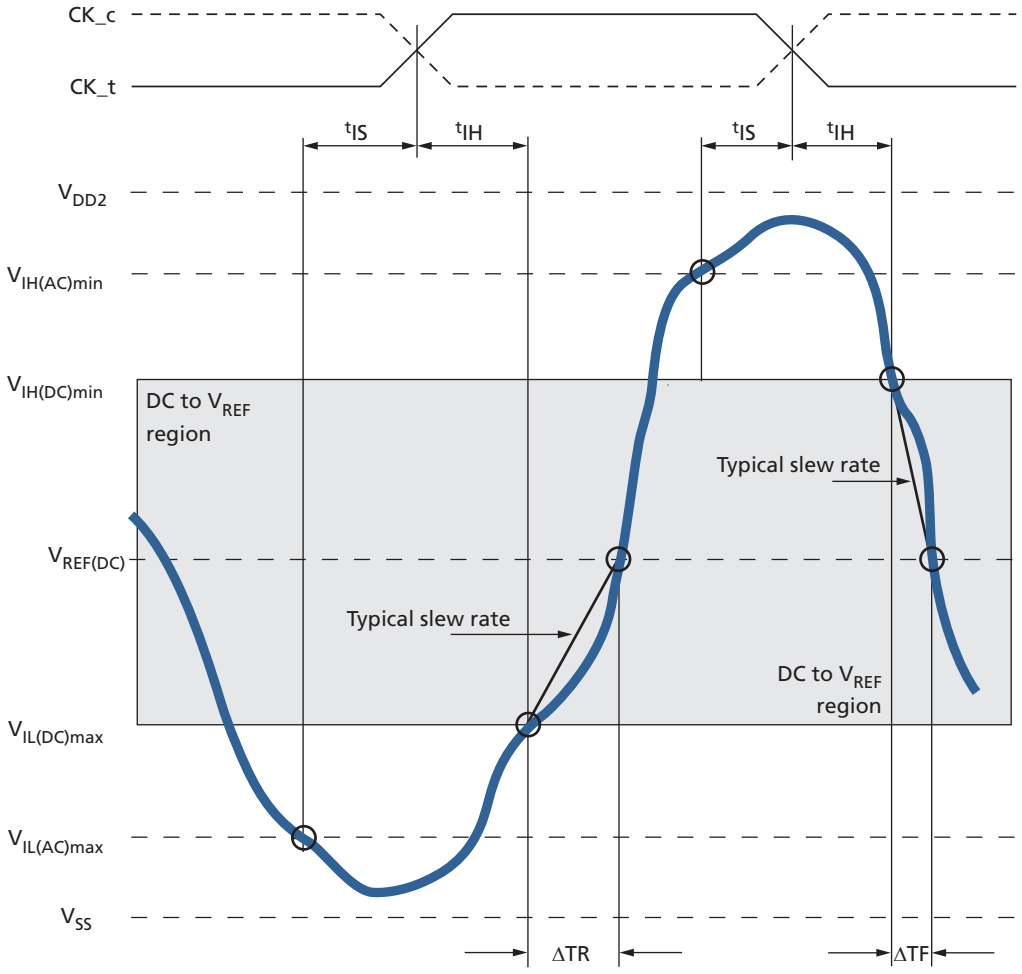

$$\text{Hold slew rate falling signal} = \frac{V_{IH(DC)min} - V_{REF(DC)}}{\Delta TF}$$

$$\text{Hold slew rate rising signal} = \frac{V_{REF(DC)} - V_{IL(DC)max}}{\Delta TR}$$

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 85: Tangent Line – ^{t}IS for CA and CS_n Relative to Clock

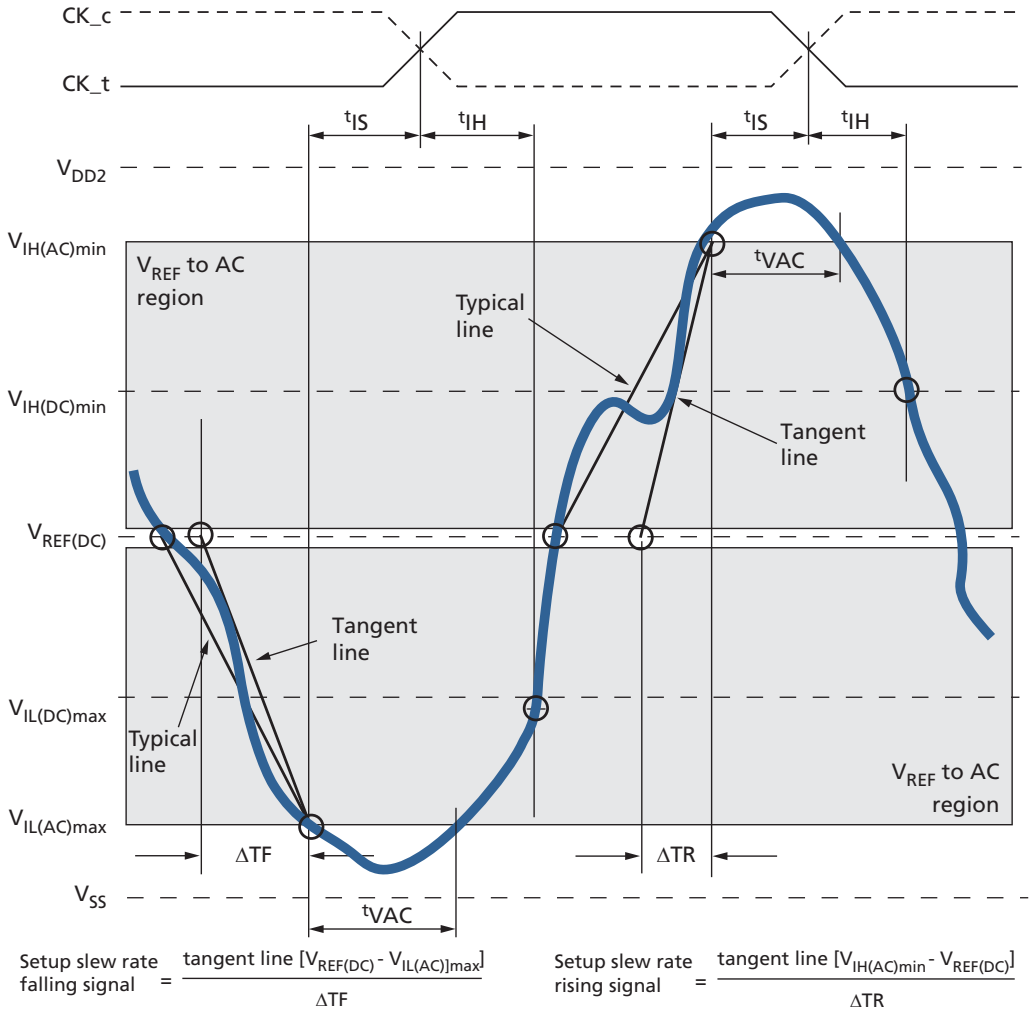

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 86: Tangent Line – ^{t}IH for CA and CS_n Relative to Clock

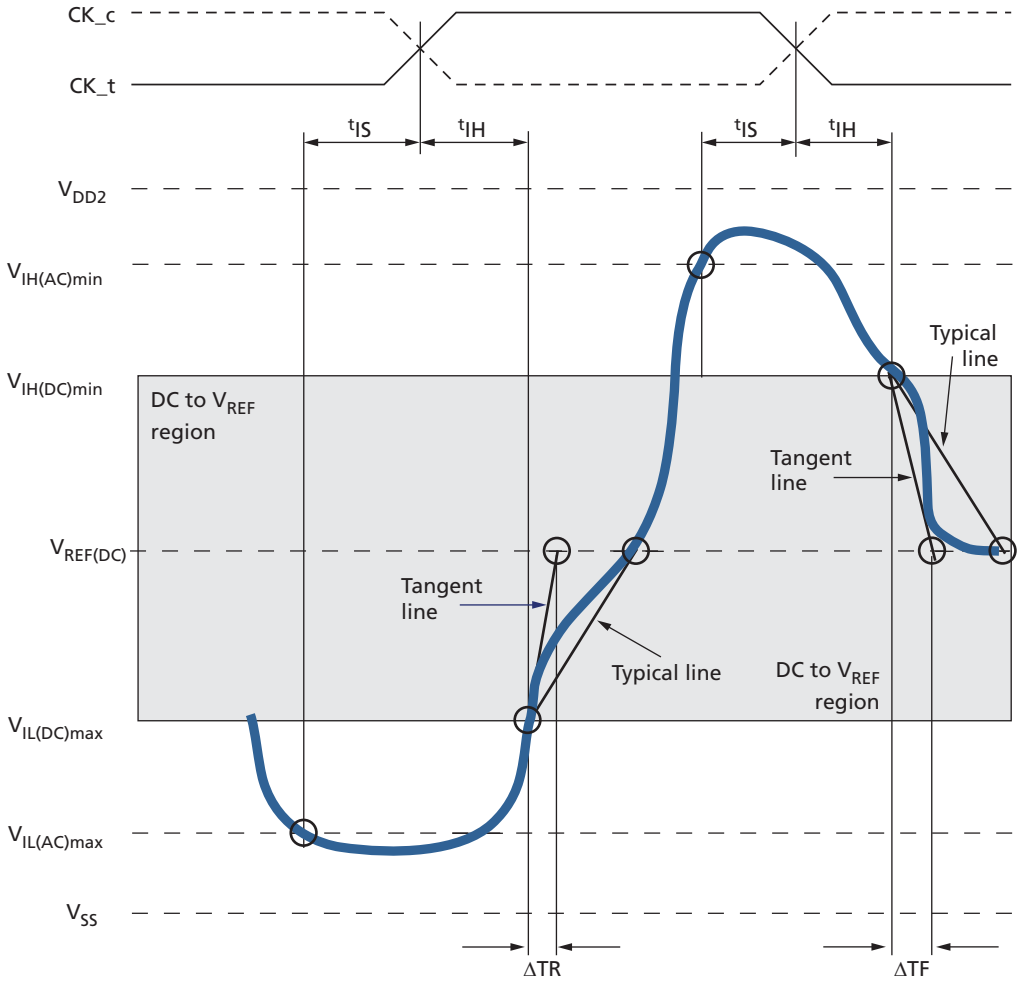

$$\text{Hold slew rate falling signal} = \frac{\text{tangent line } [V_{IH(DC)min} - V_{REF(DC)}]}{\Delta TF}$$

$$\text{Hold slew rate rising signal} = \frac{\text{tangent line } [V_{REF(DC)} - V_{IL(DC)max}]}{\Delta TR}$$

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Data Setup, Hold, and Slew Rate Derating

For all input signals (DQ, DM) the total required setup time (^{t}DS) and hold time (^{t}DH) are calculated by adding the data sheet ^{t}DS(base) and ^{t}DH(base) values (see the following table) to the Δ^{t}DS and Δ^{t}DH derating values, respectively (see the following derating tables). Example: ^{t}DS = ^{t}DS(base) + Δ^{t}DS.

The typical ^{t}DS slew rate for a rising signal is defined as the slew rate between the last crossing of $V_{REF(DC)}$ and the first crossing of $V_{IH(AC)min}$. The typical ^{t}DS slew rate for a falling signal is defined as the slew rate between the last crossing of $V_{REF(DC)}$ and the first crossing of $V_{IL(AC)max}$ (see the Typical Slew Rate and ^{t}VAC – ^{t}DS for DQ Relative to Strobe figure).

If the actual signal is consistently earlier than the typical slew rate line in the figure, "Typical Slew Rate and ^{t}VAC – ^{t}IS for CA and CS_n Relative to Clock (CA and CS_n Setup, Hold, and Derating), the area shaded gray between the $V_{REF(DC)}$ region and the AC region, use the typical slew rate for the derating value. If the actual signal is later than the typical slew rate line anywhere between the shaded $V_{REF(DC)}$ region and the AC region, the slew rate of a tangent line to the actual signal from the AC level to the DC level is used for the derating value (see figure "Tangent Line – ^{t}IS for CA and CS_n Relative to Clock" in CA and CS_n Setup, Hold, and Derating).

The typical ^{t}DH slew rate for a rising signal is defined as the slew rate between the last crossing of $V_{IL(DC)max}$ and the first crossing of $V_{REF(DC)}$. The typical ^{t}DH slew rate for a falling signal is defined as the slew rate between the last crossing of $V_{IH(DC)min}$ and the first crossing of $V_{REF(DC)}$ (see the Typical Slew Rate – DH for DQ Relative to Strobe figure).

If the actual signal is consistently later than the typical slew rate line between the shaded DC-level-to-$V_{REF(DC)}$ region, the typical slew rate should be used for the derating value. If the actual signal is earlier than the typical slew rate line anywhere between shaded DC-to-$V_{REF(DC)}$ region, the slew rate of a tangent line to the actual signal from the DC level to the $V_{REF(DC)}$ level is used for the derating value (see the Tangent Line – ^{t}DH for DQ with Respect to Strobe figure).

For a valid transition, the input signal must remain above or below $V_{IH}/V_{IL(AC)}$ for the specified time, ^{t}VAC (see the Required Time for Valid Transition – ^{t}VAC > $V_{IH(AC)}$ or < $V_{IL(AC)}$ table).

The total setup time for slow slew rates could be negative; that is, a valid input signal may not have reached $V_{IH}/V_{IL(AC)}$ at the time of the rising clock transition. A valid input signal is still required to complete the transition and reach $V_{IH}/V_{IL(AC)}$.

For slew rates between the values listed in the following tables, the derating values can be obtained using linear interpolation. Typically, slew rate values are not subject to production testing. They are verified by design and characterization.

Table 97: Data Setup and Hold Base Values (>400 MHz, 1 V/ns Slew Rate)

Parameter	Data Rate						Reference
	1066	933	800	667	533	466	
^{t}DS (base)	-10	15	50	130	210	230	$V_{IH}/V_{IL(AC)} = V_{REF(DC)}$ ±220mV

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 97: Data Setup and Hold Base Values (>400 MHz, 1 V/ns Slew Rate) (Continued)

Parameter	Data Rate						Reference
	1066	933	800	667	533	466	
^{t}DH (base)	80	105	140	220	300	320	$V_{IH}/V_{IL(DC)} = V_{REF(DC)}$ ±130mV

Note: 1. AC/DC referenced for 1 V/ns DQ, DM slew rate, and 2 V/ns differential DQS_t/DQS_c slew rate.

Table 98: Data Setup and Hold Base Values (<400 MHz, 1 V/ns Slew Rate)

Parameter	Data Rate				Reference
	400	333	266	200	
^{t}DS (base)	180	300	450	700	$V_{IH}/V_{IL(AC)} = V_{REF(DC)}$ ±300mV
^{t}DH (base)	280	400	550	800	$V_{IH}/V_{IL(DC)} = V_{REF(DC)}$ ±200mV

Note: 1. AC/DC referenced for 1 V/ns DQ, DM slew rate, and 2 V/ns differential DQS_t/DQS_c slew rate.

Table 99: Derating Values for AC/DC-Based ^{t}DS/^{t}DH (AC220)

Δ^{t}DS, Δ^{t}DH derating in ps
AC220 Threshold -> VIH(ac)=VREF(dc)+220mV, VIL(ac)=VREF(dc)-220mV
DC130 Threshold -> VIH(dc)=VREF(dc)+130mV, VIL(dc)=VREF(dc)-130mV

		DQS_t, DQS_c Differential Slew Rate															
		4.0 V/ns		3.0 V/ns		2.0 V/ns		1.8 V/ns		1.6 V/ns		1.4 V/ns		1.2 V/ns		1.0 V/ns	
		Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH
DQ, DM slew rate V/ns	2.0	110	65	110	65	110	65										
	1.5	74	43	73	43	73	43	89	59								
	1.0	0	0	0	0	**0**	**0**	16	16	32	32						
	0.9			-3	-5	-3	-5	13	11	29	27	45	43				
	0.8					-8	-13	8	3	24	19	40	35	56	55		
	0.7							2	-6	18	10	34	26	50	46	66	78
	0.6									10	-3	26	13	42	33	58	65
	0.5											4	-4	20	16	36	48
	0.4													-7	2	17	34

Note: 1. Shaded cells are not supported.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Table 100: Derating Values for AC/DC-Based ^{t}DS/^{t}DH (AC300)

Δ^{t}DS, Δ^{t}DH derating in ps
AC300 Threshold -> VIH(ac)=VREF(dc)+300mV, VIL(ac)=VREF(dc)-300mV
DC200 Threshold -> VIH(dc)=VREF(dc)+200mV, VIL(dc)=VREF(dc)-200mV

		DQS_t, DQS_c Differential Slew Rate															
		4.0 V/ns		3.0 V/ns		2.0 V/ns		1.8 V/ns		1.6 V/ns		1.4 V/ns		1.2 V/ns		1.0 V/ns	
		Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH	Δ^{t}DS	Δ^{t}DH
DQ, DM slew rate V/ns	2.0	150	100	150	100	150	100										
	1.5	100	67	100	67	100	67	116	83								
	1.0	0	0	0	0	**0**	**0**	16	16	32	32						
	0.9			-4	-8	-4	-8	12	8	28	24	44	40				
	0.8					-12	-20	4	-4	20	12	36	28	52	48		
	0.7							-3	-18	13	-2	29	14	45	34	61	66
	0.6									2	-21	18	-5	34	15	50	47
	0.5											-12	-32	4	-12	20	20
	0.4													-35	-40	-11	-8

Note: 1. Shaded cells are not supported.

Table 101: Required Time for Valid Transition – ^{t}VAC > $V_{IH(AC)}$ or < $V_{IL(AC)}$

Slew Rate (V/ns)	^{t}VAC at 300mV (ps)		^{t}VAC at 220mV (ps)	
	Min	Max	Min	Max
>2.0	75	–	175	–
2.0	57	–	170	–
1.5	50	–	167	–
1.0	38	–	163	–
0.9	34	–	162	–
0.8	29	–	161	–
0.7	22	–	159	–
0.6	13	–	155	–
0.5	0	–	150	–
<0.5	0	–	150	–

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 87: Typical Slew Rate and ^{t}VAC – ^{t}DS for DQ Relative to Strobe

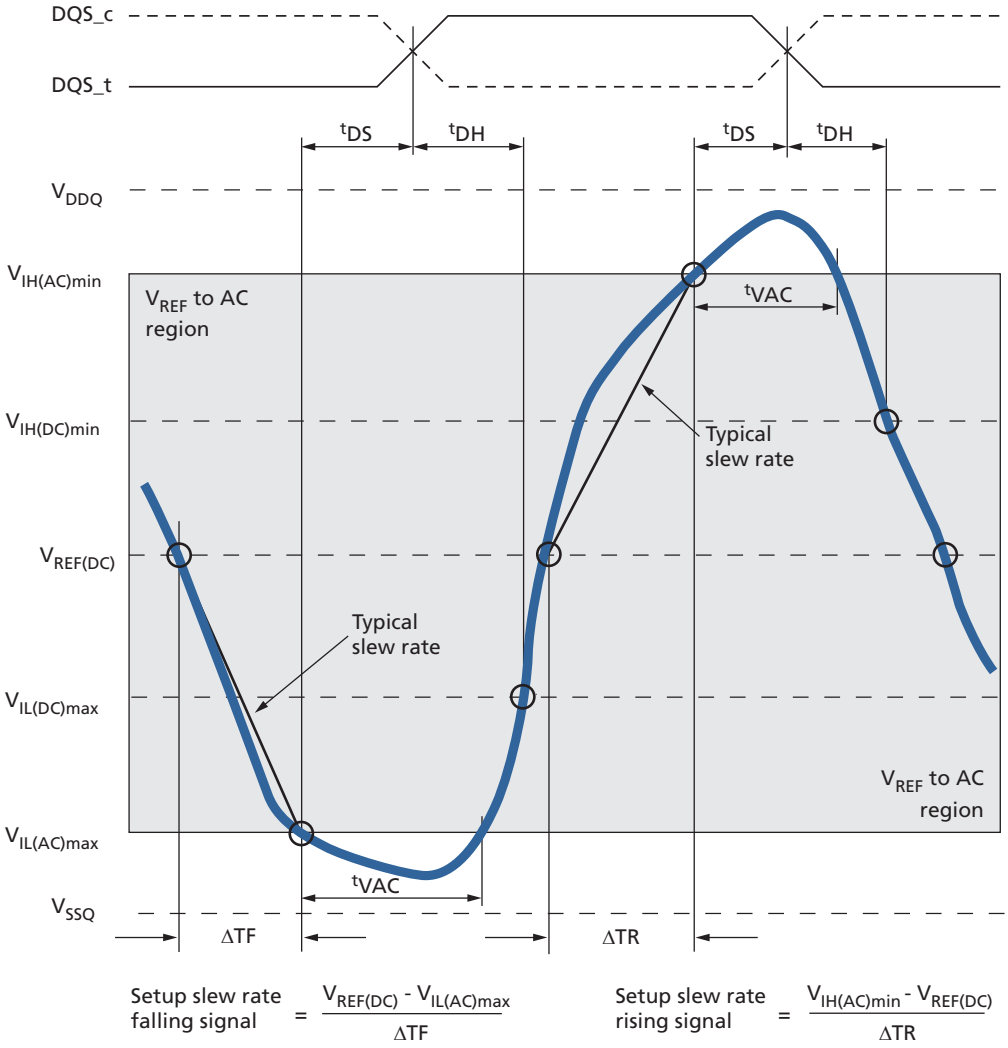

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 88: Typical Slew Rate – ^{t}DH for DQ Relative to Strobe

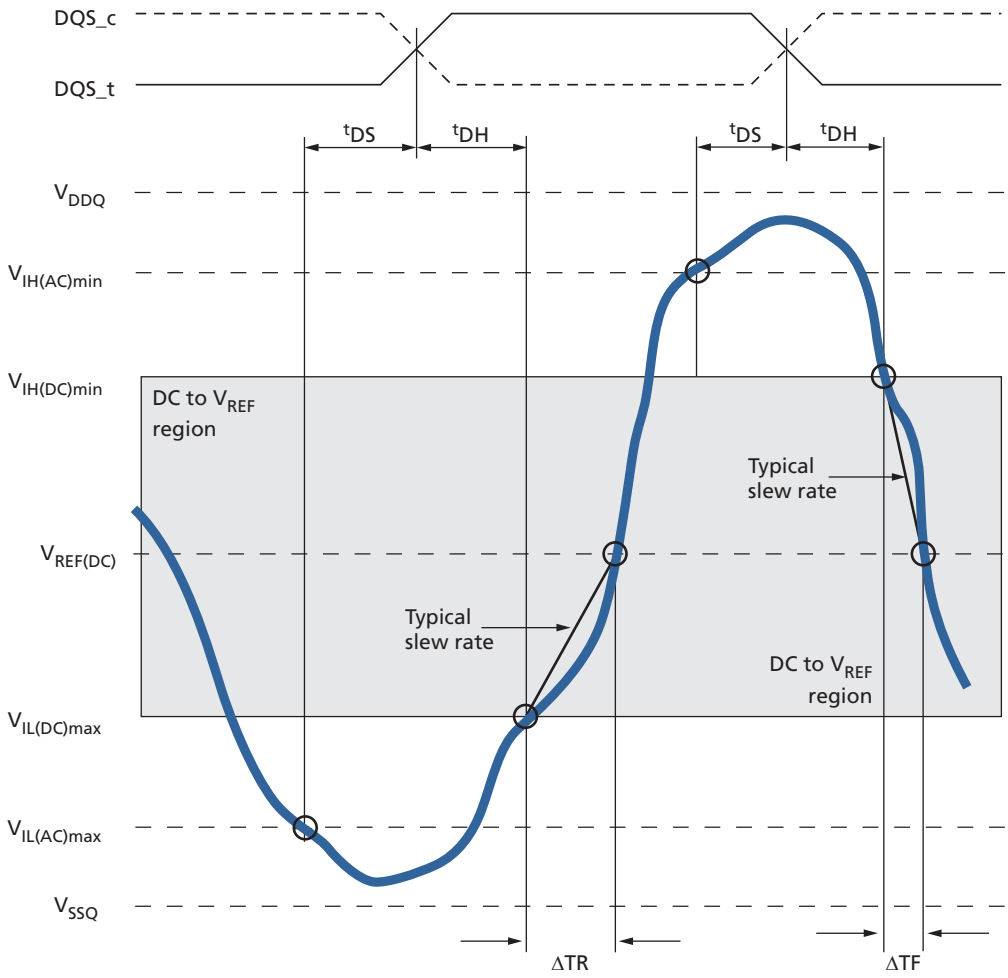

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 89: Tangent Line – ^{t}DS for DQ with Respect to Strobe

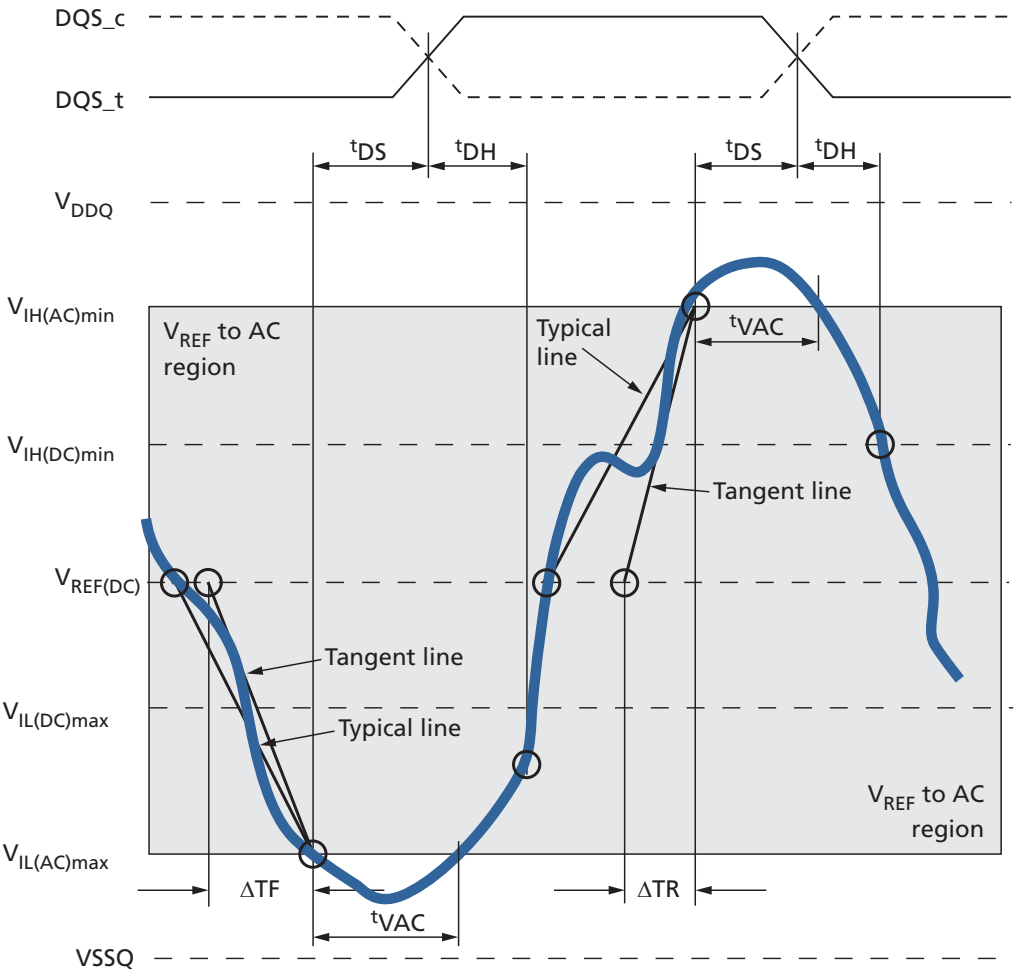

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Figure 90: Tangent Line – ^{t}DH for DQ with Respect to Strobe

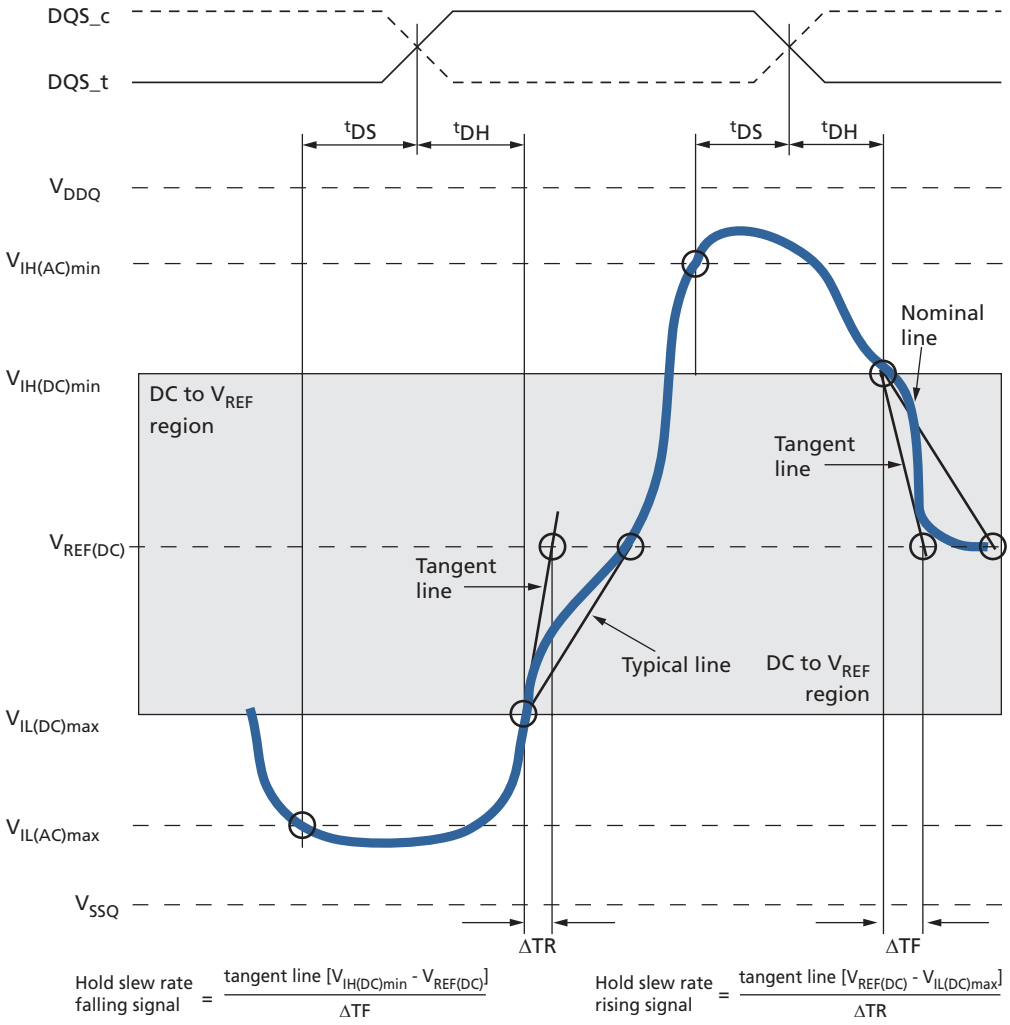

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Revision History

Rev. F – 08/16

- Updated legal status to Production
- Removed "Embedded" from title
- Corrected Revision information in Options

Rev. E – 05/16

- Updated I_{DD} table

Rev. D – 03/16

- Updated Ballout Diagrams for 216-Ball Dual-Channel FBGA – 2 x 4Gb Die and 4 x 4Gb Die to match Ball Description table

Rev. C – 02/16

- Preliminary DDP release

Rev. B – 01/15

- Added 220-ball ballout and a 14x14 package

Rev. A – 09/14

- Initial release created from the 216b_2c0e_2channel Rev. A data sheet

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-4000
www.micron.com/products/support Sales inquiries: 800-932-4992
Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.
This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2014 Micron Technology, Inc. All rights reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View EDB8164B4PK-1D-F-D on WIN SOURCE
- Micron Technology Inc. Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management