THE DATASHEET OF

EMF6T2R

Power management (dual transistors)

EMF6

2SA2018 and 2SK3019 are housed independently in a EMT6 package.

●**Application**
Power management circuit

●**Features**
1) Power switching circuit in a single package.
2) Mounting cost and area can be cut in half.

●**Structure**
Silicon epitaxial planar transistor

●**Dimensions** (Units : mm)



ROHM : EMT6
Each lead has same dimensions
Abbreviated symbol : F6

●**Equivalent circuits**



●**Packaging specifications**

Type	EMF6
Package	EMT6
Marking	F6
Code	T2R
Basic ordering unit (pieces)	8000

●Absolute maximum ratings (Ta=25°C)

Tr1

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	–15	V
Collector-emitter voltage	V_{CEO}	–12	V
Emitter-base voltage	V_{EBO}	–6	V
Collector current	I_C	–500	mA
	I_{CP}	–1.0	A *1
Power dissipation	P_C	150(TOTAL)	mW *2
Junction temperature	Tj	150	°C
Range of storage temperature	Tstg	–55 to +150	°C

*1 Single pulse Pw=1ms
*2 120mW per element must not be exceeded. Each terminal mounted on a recommended land.

Tr2

Parameter		Symbol	Limits	Unit
Drain-source voltage		V_{DSS}	30	V
Gate-source voltage		V_{GSS}	±20	V
Drain current	Continuous	I_D	100	mA
	Pulsed	I_{DP}	200	mA *1
Reverse drain current	Continuous	I_{DR}	100	mA
	Pulsed	I_{DRP}	200	mA *1
Total power dissipation		P_D	150(TOTAL)	mW *2
Channel temperature		Tch	150	°C
Range of storage temperature		Tstg	–55 to +150	°C

*1 PW≤10ms Duty cycle≤50%
*2 120mW per element must not be exceeded. Each terminal mounted on a recommended land.

●Electrical characteristics (Ta=25°C)

Tr1

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-emitter breakdown voltage	BV_{CEO}	–12	–	–	V	I_C=–1mA
Collector-base breakdown voltage	BV_{CBO}	–15	–	–	V	I_C=–10μA
Emitter-base breakdown voltage	BV_{EBO}	–6	–	–	V	I_E=–10μA
Collector cut-off current	I_{CBO}	–	–	–100	nA	V_{CB}=–15V
Emitter cut-off current	I_{EBO}	–	–	–100	nA	V_{EB}=–6V
Collector-emitter saturation voltage	$V_{CE(sat)}$	–	–100	–250	mV	I_C=–200mA, I_B=–10mA
DC current gain	h_{FE}	270	–	680	–	V_{CE}=–2V, I_C=–10mA
Transition frequency	f_T	–	260	–	MHz	V_{CE}=–2V, I_E=10mA, f=100MHz
Collector output capacitance	Cob	–	6.5	–	pF	V_{CB}=–10V, I_E=0mA, f=1MHz

Tr2

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Gate-source leakage	I_{GSS}	–	–	±1	μA	V_{GS}=±20V, V_{DS}=0V
Drain-source breakdown voltage	$V_{(BR)DSS}$	30	–	–	V	I_D=10μA, V_{GS}=0V
Zero gate voltage drain current	I_{DSS}	–	–	1.0	μA	V_{DS}=30V, V_{GS}=0V
Gate-threshold voltage	$V_{GS(th)}$	0.8	–	1.5	V	V_{DS}=3V, I_D=100μA
Static drain-source on-state resistance	$R_{DS(on)}$	–	5	8	Ω	I_D=10mA, V_{GS}=4V
		–	7	13	Ω	I_D=1mA, V_{GS}=2.5V
Forward transfer admittance	$\|Y_{fs}\|$	20	–	–	ms	V_{DS}=3V, I_D=10mA
Input capacitance	C_{iss}	–	13	–	pF	V_{DS}=5V, V_{GS}=0V, f=1MHz
Output capacitance	C_{oss}	–	9	–	pF	
Reverce transfer capacitance	C_{rss}	–	4	–	pF	
Turn-on delay time	$t_{d(on)}$	–	15	–	ns	I_D=10mA, V_{DD} ≒5V, V_{GS}=5V, R_L=500Ω, R_{GS}=10Ω
Rise time	t_r	–	35	–	ns	
Turn-off delay time	$t_{d(off)}$	–	80	–	ns	
Fall time	t_f	–	80	–	ns	

●Electrical characteristic curves

Tr1

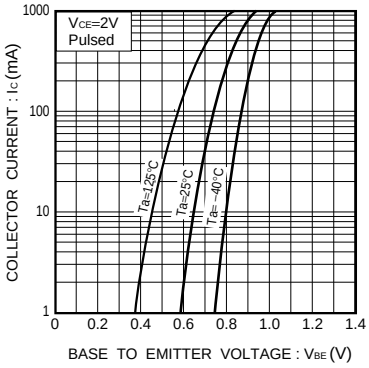

Fig.1 Grounded emitter propagation characteristics

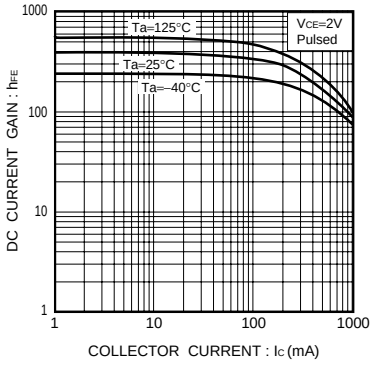

Fig.2 DC current gain vs. collector current

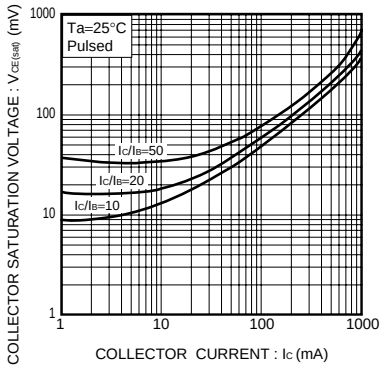

Fig.3 Collector-emitter saturation voltage vs. collector current (I)

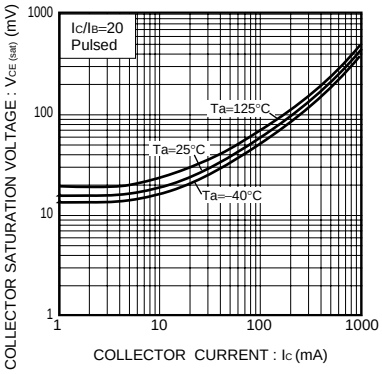

Fig.4 Collector-emitter saturation voltage vs. collector current (II)

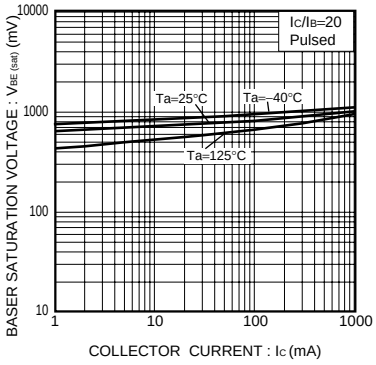

Fig.5 Base-emitter saturation voltage vs. collector current

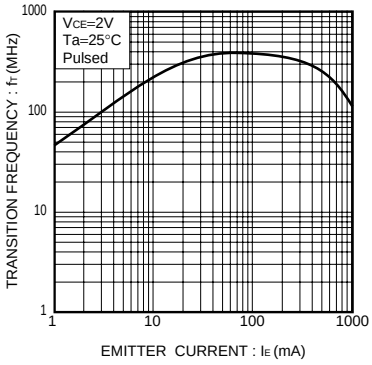

Fig.6 Gain bandwidth product vs. emitter current

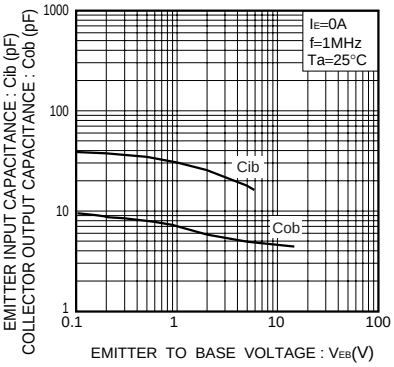

Fig.7 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

Tr2

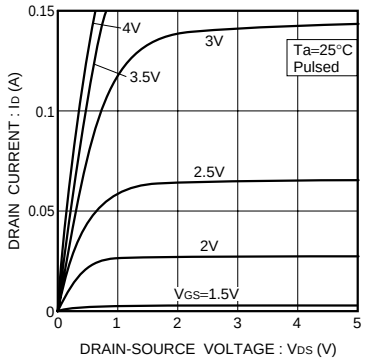

Fig.9 Typical output characteristics

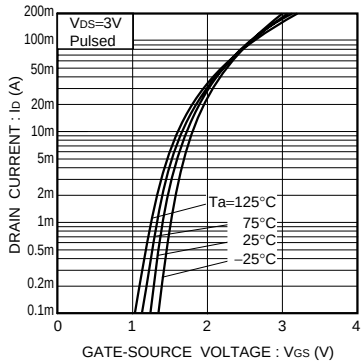

Fig.10 Typical transfer characteristics

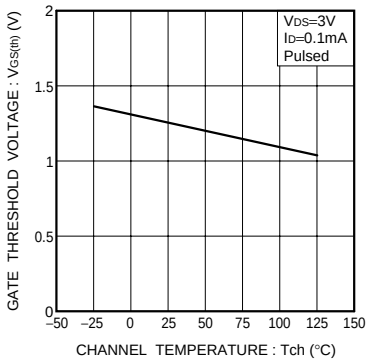

Fig.11 Gate threshold voltage vs. channel temperature

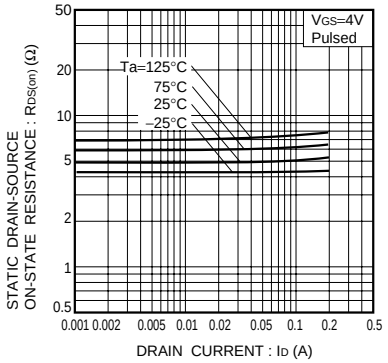

Fig.12 Static drain-source on-state resistance vs. drain current (I)

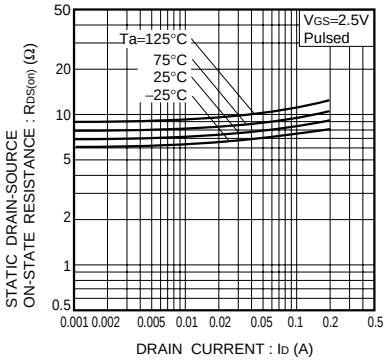

Fig.13 Static drain-source on-state resistance vs. drain current (II)

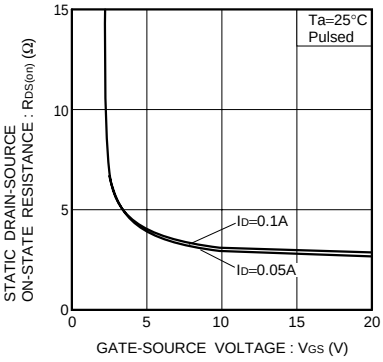

Fig.14 Static drain-source on-state resistance vs. gate-source voltage

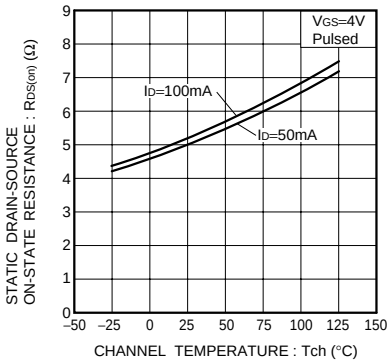

Fig.15 Static drain-source on-state resistance vs. channel temperature

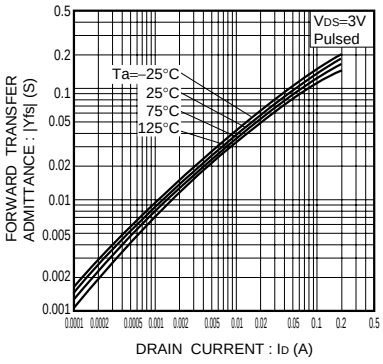

Fig.16 Forward transfer admittance vs. drain current

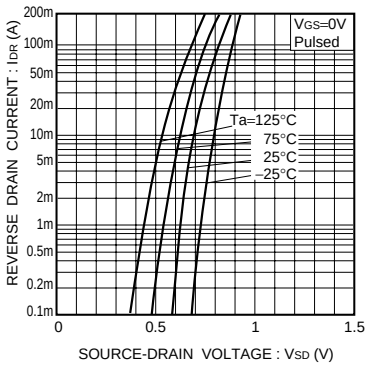

Fig.17 Reverse drain current vs. source-drain voltage (I)

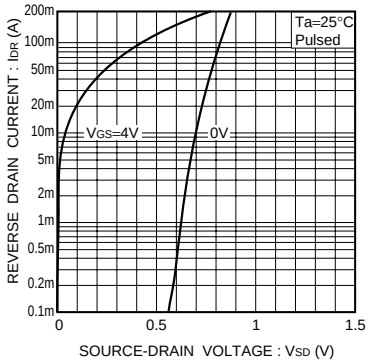

Fig.18 Reverse drain current vs. source-drain voltage (II)

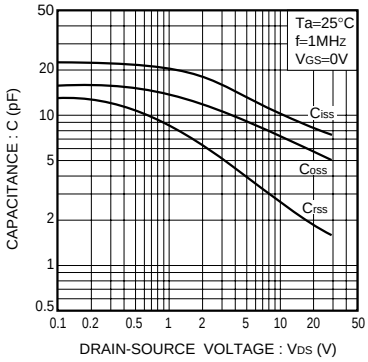

Fig.19 Typical capacitance vs. drain-source voltage

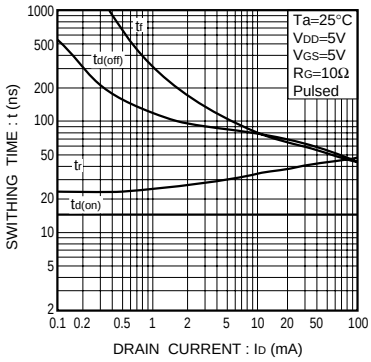

Fig.20 Switching characteristics

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).
Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.
It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan
TEL : +81-75-311-2121
FAX : +81-75-315-0172

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View EMF6T2R on WIN SOURCE
- Rohm Semiconductor Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management