


LOW OFFSET VOLTAGE, LOW DRIFT OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM OP-07 is ultra-low input offset voltage and bias current, low drift and high gain operational amplifier with internal frequency compensation.

The NJM OP-07 is suitable for a precision instrumental amplifier.

■ PACKAGE OUTLINE



NJMOP-07D




NJMOP-07M

■ FEATURES

- Low V_{IO} (60 μ V)
- Low I_B (1.8nA)
- Low Drift (unnull 0.5 μ V/ $^{\circ}$ C)
(null 0.4 μ V/ $^{\circ}$ C)
(0.4 μ V/ M_o)
- Wide Operating Voltage (\pm 3V \sim \pm 22V)
- Package Outline DIP8, DMP8
- Bipolar Technology

■ PIN CONFIGURATION




NJMOP-07D
NJMOP-07M

PIN FUNCTION

1. V_{IO} Trim
2. -INPUT
3. +INPUT
4. V^-
5. NC
6. OUTPUT
7. V^+
8. V_{IO} Trim

■ EQUIVALENT CIRCUIT

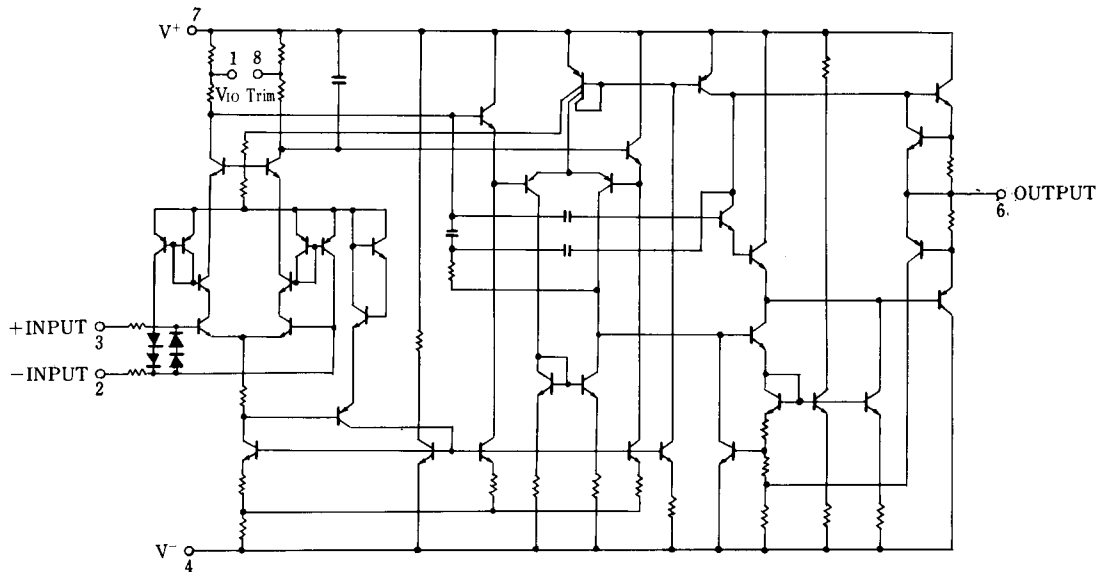

NJMOP-07

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+ / V^-	± 22	V
Input Voltage	V_1	± 22 (note1)	V
Differential Input Voltage	V_{ID}	± 30	V
Power Dissipation	P_D	(DIP8) 500 (DMP8) 300	mW
Storage Temperature Range	T_{stg}	-40~+125	°C
Operating Temperature Range	T_{opr}	-40~+85	°C
Output Current		continuous	

(note1) For supply voltage less than $\pm 22V$, the absolute maximum input voltage is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS

(Ta=+25°C, $V^+ / V^- = \pm 15V$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}		-	60	150	μV
Long Term Stability		(note1,2)	-	0.4	2	$\mu V / M_O$
Input Offset Current	I_{IO}		-	0.8	6	nA
Input Bias Current	I_B		-	± 1.8	± 7	nA
Open Loop Output Resistance	R_O	$V_O=0, I_O=0$	-	60	-	Ω
Input Resistance	R_{ID}	(Differential Mode)	8	33	-	M Ω
Input Resistance	R_{IC}	(Common Mode)	-	120	-	G Ω
Input Common Mode Voltage Range	V_{ICM}		± 13	± 14	-	V
Common Mode Rejection Ratio	CMR	$V_{CM} = \pm 13V$	100	120	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+ / V^- = \pm 3V \sim \pm 18V$	90	104	-	dB
Large Signal Voltage Gain 1	AV_1	$R_L \geq 2k\Omega, V_O = \pm 10V$	101.5	112.0	-	dB
Large Signal Voltage Gain 2	AV_2	$R_L = 500\Omega, V_O = \pm 0.5V, V^+ / V^- = \pm 3V$	100.0	112.0	-	dB
Maximum Output Voltage 1	V_{OM1}	$R_L \geq 10k\Omega$	± 12	± 13	-	V
Maximum Output Voltage 2	V_{OM2}	$R_L > 2k\Omega$	± 11.5	± 12.8	-	V
Maximum Output Voltage 3	V_{OM3}	$R_L > 1k\Omega$	-	± 12	-	V
Slew Rate	SR	$R_L \geq 2k\Omega$	-	0.17	-	V/ μS
Unity Gain Bandwidth	f_T	$A_{VCL} = 1$	-	0.5	-	MHz
Operating Current 1	I_{CC1}	$V^+ / V^- = \pm 15V$	-	2.7	5.0	mA
Operating Current 2	I_{CC2}	$V^+ / V^- = \pm 3V$	-	0.67	1.3	mA
Offset Adjustment Range		$R_p = 20k\Omega$	-	± 4	-	mV
Equivalent Input Noise Voltage	V_{NI}	0.1Hz~10Hz (note2)	-	0.38	0.65	$\mu V_{P,P}$
Equivalent Input Noise Voltage 1	e_{n1}	$f_0 = 10Hz$ (note2)	-	10.5	20	nV/ \sqrt{Hz}
Equivalent Input Noise Voltage 2	e_{n2}	$f_0 = 100Hz$ (note2)	-	10.2	13.5	nV/ \sqrt{Hz}
Equivalent Input Noise Voltage 3	e_{n3}	$f_0 = 1kHz$ (note2)	-	9.8	11.5	nV/ \sqrt{Hz}
Equivalent Input Noise Current	I_{NI}	0.1Hz~10Hz (note2)	-	15	35	pA \sqrt{Hz}
Equivalent Input Noise Current 1	i_{n1}	$f_0 = 10Hz$ (note2)	-	0.35	0.9	pA/ \sqrt{Hz}
Equivalent Input Noise Current 2	i_{n2}	$f_0 = 100Hz$ (note2)	-	0.15	0.27	pA/ \sqrt{Hz}
Equivalent Input Noise Current 3	i_{n3}	$f_0 = 1kHz$ (note2)	-	0.13	0.18	pA/ \sqrt{Hz}

■ ELECTRICAL CHARACTERISTICS


($0^{\circ}\text{C} \leq T_a \leq 70^{\circ}\text{C}, V^+ / V^- = \pm 15\text{V}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}		-	85	250	μV
Average V_{IO} Drift (unnull)			-	0.5	1.8	$\mu\text{V}/^{\circ}\text{C}$
Average V_{IO} Drift (null)		$R_p = 20\text{k}\Omega$	-	0.4	1.6	$\mu\text{V}/^{\circ}\text{C}$
Input Offset Current	I_{IO}		-	1.6	8	nA
Average I_{IO} Drift			-	12	50	$\text{pA}/^{\circ}\text{C}$
Input Bias Current	I_{IB}		-	± 2.2	± 9	nA
Average I_{IB} Drift			-	18	50	$\text{pA}/^{\circ}\text{C}$
Input Common Mode Voltage Range	V_{ICM}		± 13	± 13.5	-	V
Common Mode Rejection Ratio	CMR	$V_{CM} = \pm 13\text{V}$	97	120	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+ / V^- = \pm 3\text{V} \sim \pm 18\text{V}$	86	120	-	dB
Voltage Gain	A_V	$R_L \geq 2\text{k}\Omega, V_O = \pm 10\text{V}$	100	400	-	V/mV
Maximum Output Voltage	V_{OM}	$R_L \geq 2\text{k}\Omega$	± 11	± 12.6	-	V


(note 1) Long Term Stability refers to the average trend line of V_{IO} vs. time over extended periods after the first 30 days of operation.

(note 2) According to the evaluation by NJRC, more than 90% of all these products can be guaranteed.

■ OFFSET ADJUSTMENT METHOD









For making low sensitivity of change in the input offset voltage against resistance regulation of potentiometer
(Easy case of offset adjustment)

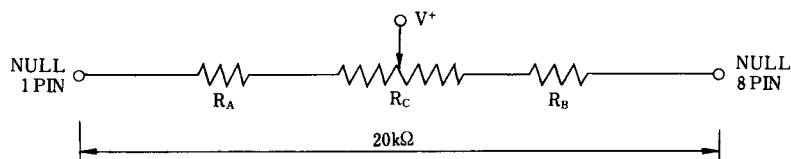

* R_A, R_B Fixed $7.5\text{k}\Omega, R_C$ adjustable $5.0\text{k}\Omega$


* R_A, R_B, R_C are metalfilm resistors, R_C is more than 10 times winding.

■ TYPICAL CHARACTERISTICS

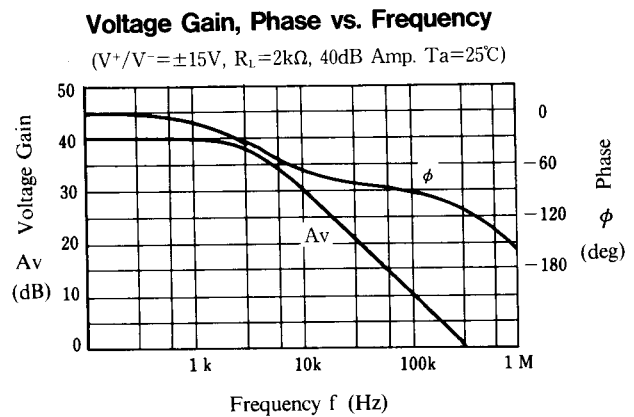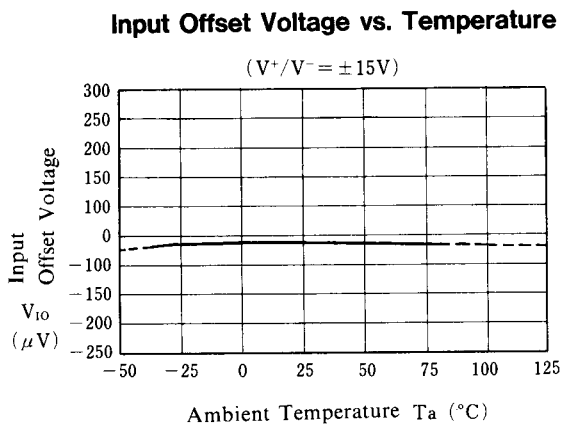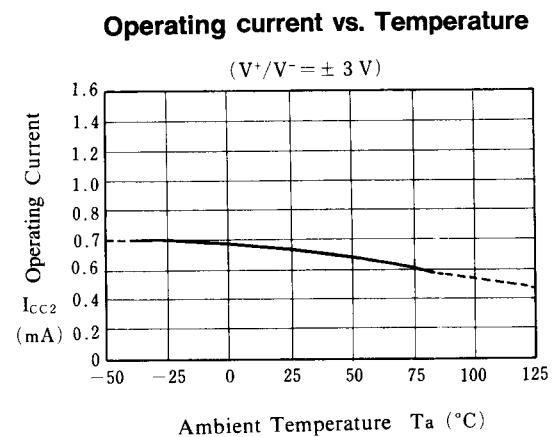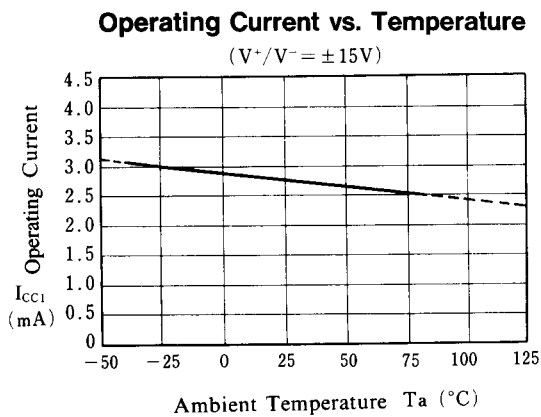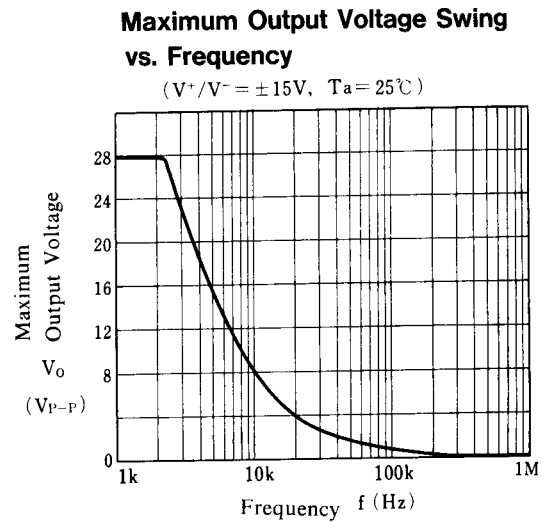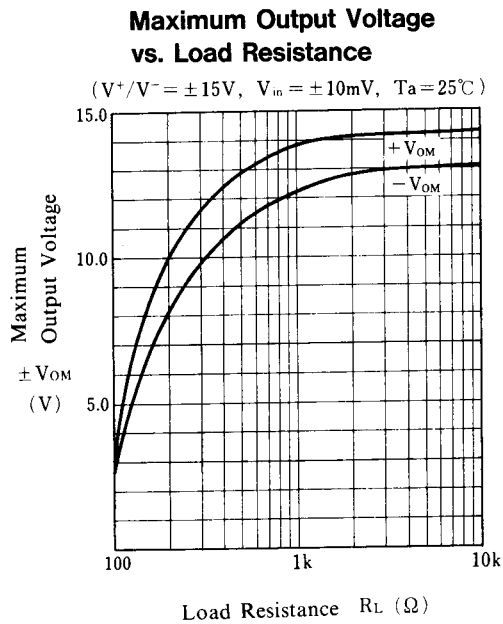


■ TYPICAL CHARACTERISTICS


Input Bias Current vs. Temperature

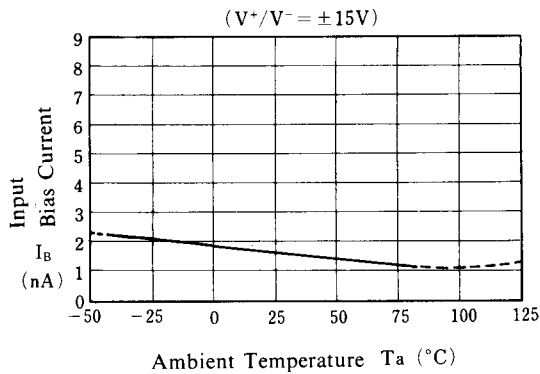


Input Offset Current vs. Temperature

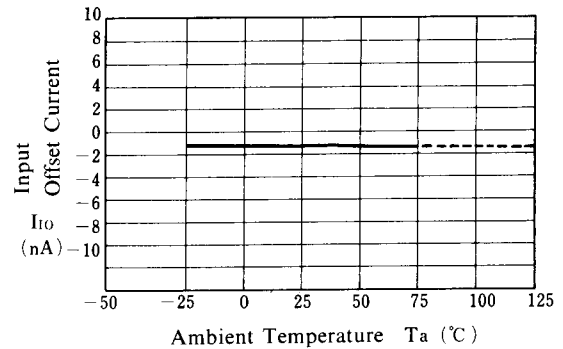


Maximum Output Voltage vs. Temperature

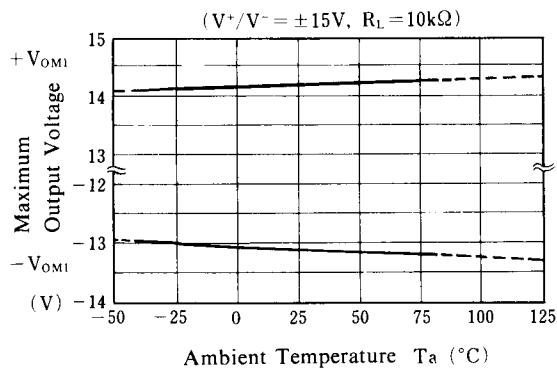

Maximum Output Voltage vs. Temperature

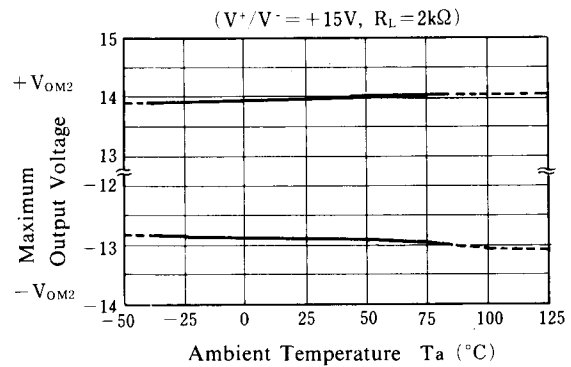

Power Dissipation vs. Supply Voltage

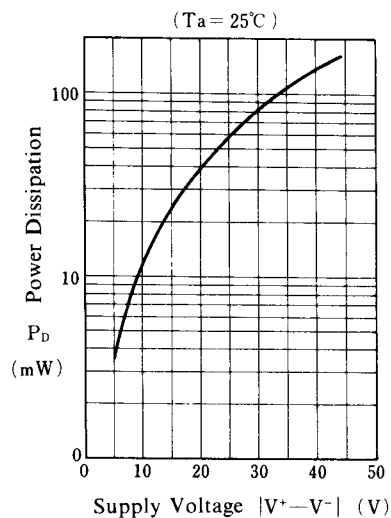

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View NJMOP07M-TE3 on WIN SOURCE](#)
- ⊖ [Nisshinbo Micro Devices Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management