



**THE DATASHEET OF  
CMT-8111-B**



### CMT-8111

**Description:**

Highly dependable Triad common mode EMI suppression inductors are used in various types of power supplies to eliminate noise common to all lines. These units also provide effective differential mode filtering. Meeting VDE, IEC, UL and CSA requirements, they minimize AC line transmitted interference often created by high frequency switching power supplies.

**Construction:**

Constructed with UL rated 130°C (Class B) materials.

**Electrical Specifications (@25C) .1V@1Khz**

Min. Inductance <sup>(1)</sup>	Amps <sup>(2)</sup> RMS	Max. DC (Ω) Resistance
12.0 mH	4.0	0.11

1. Inductance per winding.
2. Rated current to cause approximately 35°C temperature rise.

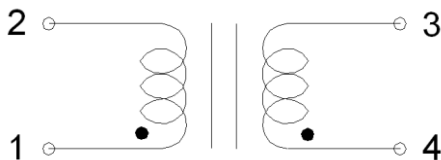
**Dimensions:**

A	B	C	D	E	F	G
Max.	± 0.01	± 0.015	± 0.015	Max.	Max.	Min.
1.35	0.80	0.90	0.60	1.45	0.05	0.15

\*Units in inches.

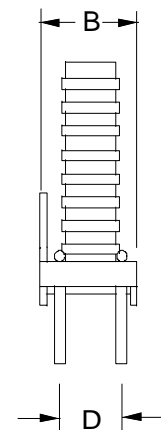
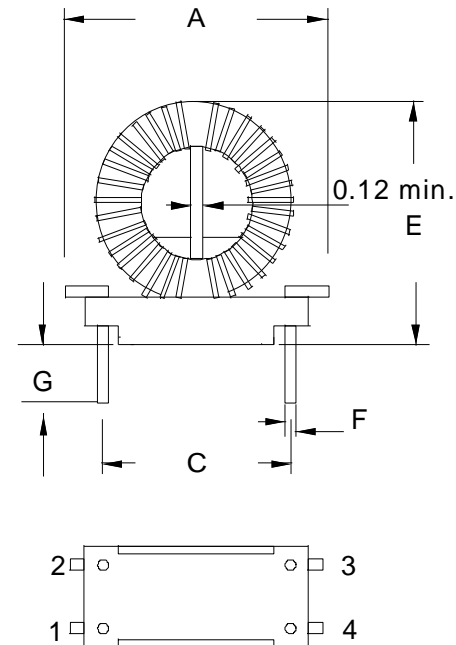
**Safety:** 1500VAC Dielectric Strength between windings.

**Schematic:**





**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CMT-8111-B on WIN SOURCE](#)
-  [Triad Magnetics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management