



# THE DATASHEET OF L9954LXPTR



### Features

- Three half bridges for 0.75 A loads ( $R_{DSon} = 1600 \text{ m}\Omega$ )
- Two configurable high-side driver for up to 1.5A load ( $R_{DSon} = 500 \text{ m}\Omega$ ) or 0.35 A load ( $R_{on} = 1800 \text{ m}\Omega$ )
- One high-side driver for 6 A load ( $R_{DSon} = 100 \text{ m}\Omega$ )
- Programmable soft start function to drive loads with higher inrush currents (i.e. current > 6 A, current > 1.5 A)
- Very low current consumption in standby mode ( $I_S < 6 \mu\text{A}$  typ;  $T_j \leq 85 \text{ }^\circ\text{C}$ )
- All outputs short circuit protected
- Current monitor output for high-side OUT1, OUT4, OUT5 and OUT6
- All outputs over temperature protected
- Open-load diagnostic for all outputs
- Overload diagnostic for all outputs
- PWM control of all outputs
- Charge pump output for reverse polarity protection



### Applications

- Door actuator driver with bridges for mirror axis control and high-side driver for mirror defroster and two 10 W light bulbs and/or LEDs.

### Description

The L9954LXP is a microcontroller driven multifunctional door actuator driver for automotive applications. Up to two DC motors and three grounded resistive loads can be driven with three half bridges and three high-side drivers. The integrated standard Serial Peripheral Interface (SPI) controls all operation modes (forward, reverse, brake and high impedance). All diagnostic information is available via SPI.

**Table 1. Device summary**

| Package     | Order codes |               |
|-------------|-------------|---------------|
|             | Tube        | Tape and reel |
| PowerSSO-36 | L9954LXP    | L9954LXPTR    |

# Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Block diagram and pin description</b>                                   | <b>6</b>  |
| <b>2</b> | <b>Electrical specifications</b>   | <b>9</b>  |
| 2.1      | Absolute maximum ratings   | 9         |
| 2.2      | ESD protection   | 9         |
| 2.3      | Thermal data   | 9         |
| 2.4      | Electrical characteristics   | 10        |
| 2.5      | SPI - electrical characteristics   | 14        |
| <b>3</b> | <b>Application information</b>   | <b>20</b> |
| 3.1      | Dual power supply: VS and VCC  | 20        |
| 3.2      | Standby mode   | 20        |
| 3.3      | Inductive loads  | 20        |
| 3.4      | Diagnostic functions   | 20        |
| 3.5      | Overvoltage and under voltage detection                                    | 21        |
| 3.6      | Charge pump  | 21        |
| 3.7      | Temperature warning and thermal shutdown                                   | 21        |
| 3.8      | Open-load detection  | 21        |
| 3.9      | Overload detection   | 21        |
| 3.10     | Current monitor  | 22        |
| 3.11     | PWM inputs   | 22        |
| 3.12     | Cross-current protection   | 22        |
| 3.13     | Programmable soft start function to drive loads with higher inrush current | 23        |
| <b>4</b> | <b>Functional description of the SPI</b>                                   | <b>24</b> |
| 4.1      | Serial Peripheral Interface (SPI)  | 24        |
| 4.2      | Chip Select Not (CSN)  | 24        |
| 4.3      | Serial Data In (DI)  | 24        |
| 4.4      | Serial Data Out (DO)   | 24        |
| 4.5      | Serial Clock (CLK)   | 25        |
| 4.6      | Input Data Register  | 25        |

---

|          |  |           |
|----------|--|-----------|
| 4.7      | Status register .....                        | 25        |
| 4.8      | SPI - input data and status registers .....  | 26        |
| <b>5</b> | <b>Packages thermal data .....</b>           | <b>30</b> |
| <b>6</b> | <b>Package and packing information .....</b> | <b>31</b> |
| 6.1      | ECOPACK® packages .....                      | 31        |
| 6.2      | PowerSSO-36 package information .....        | 31        |
| 6.3      | PowerSSO-36 packing information .....        | 33        |
| <b>7</b> | <b>Revision history .....</b>                | <b>34</b> |

# List of tables

|           |  |    |
|-----------|--|----|
| Table 1.  | Device summary . . . . .                           | 1  |
| Table 2.  | Pin definitions and functions . . . . .            | 7  |
| Table 3.  | Absolute maximum ratings . . . . .                 | 9  |
| Table 4.  | ESD protection . . . . .                           | 9  |
| Table 5.  | Operating junction temperature . . . . .           | 9  |
| Table 6.  | Temperature warning and thermal shutdown . . . . . | 10 |
| Table 7.  | Supply . . . . .                                   | 10 |
| Table 8.  | Overvoltage and under voltage detection . . . . .  | 11 |
| Table 9.  | Current monitor output . . . . .                   | 11 |
| Table 10. | Charge pump output . . . . .                       | 12 |
| Table 11. | OUT1 - OUT6 . . . . .                              | 12 |
| Table 12. | Delay time from standby to active mode . . . . .   | 14 |
| Table 13. | Inputs: CSN, CLK, PWM1/2 and DI . . . . .          | 15 |
| Table 14. | DI timing . . . . .                                | 15 |
| Table 15. | DO . . . . .                                       | 15 |
| Table 16. | DO timing . . . . .                                | 16 |
| Table 17. | CSN timing . . . . .                               | 16 |
| Table 18. | SPI - input data and status registers 0 . . . . .  | 26 |
| Table 19. | SPI - input data and status registers 1 . . . . .  | 28 |
| Table 20. | PowerSSO-36 mechanical data . . . . .              | 32 |
| Table 21. | Document revision history . . . . .                | 34 |



## List of figures

|            |   |    |
|------------|---|----|
| Figure 1.  | Block diagram . . . . .   | 6  |
| Figure 2.  | Configuration diagram (top view) . . . . .  | 6  |
| Figure 3.  | SPI - transfer timing diagram . . . . .   | 17 |
| Figure 4.  | SPI - input timing . . . . .  | 17 |
| Figure 5.  | SPI - DO valid data delay time and valid time . . . . .                               | 18 |
| Figure 6.  | SPI - DO enable and disable time . . . . .  | 18 |
| Figure 7.  | SPI - driver turn-on / off timing, minimum CSN HI time . . . . .                      | 19 |
| Figure 8.  | SPI - timing of status bit 0 (fault condition) . . . . .                              | 19 |
| Figure 9.  | Programmable soft start function for inductive loads and incandescent bulbs . . . . . | 23 |
| Figure 10. | Packages thermal data . . . . .   | 30 |
| Figure 11. | PowerSSO-36 package dimensions . . . . .  | 31 |
| Figure 12. | PowerSSO-36 tube shipment (no suffix) . . . . .                                       | 33 |
| Figure 13. | PowerSSO-36 tape and reel shipment (suffix "TR") . . . . .                            | 33 |

# 1 Block diagram and pin description

Figure 1. Block diagram

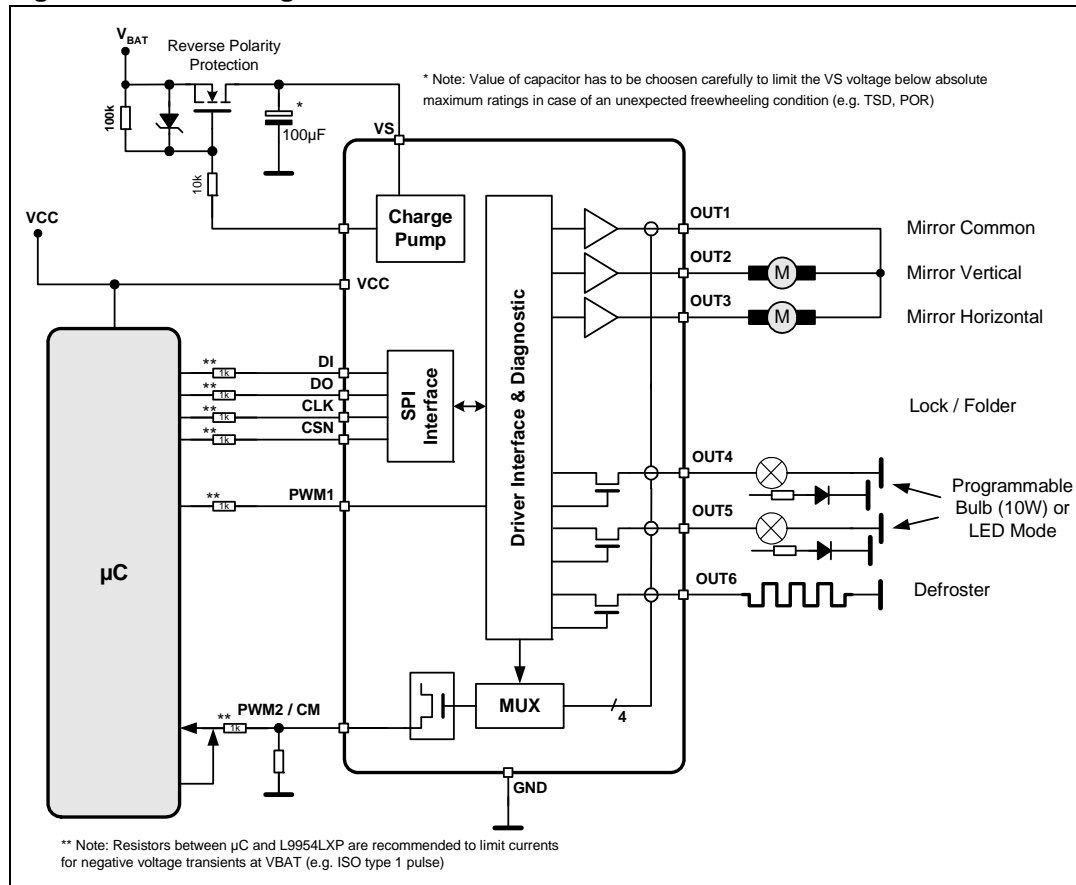


Figure 2. Configuration diagram (top view)

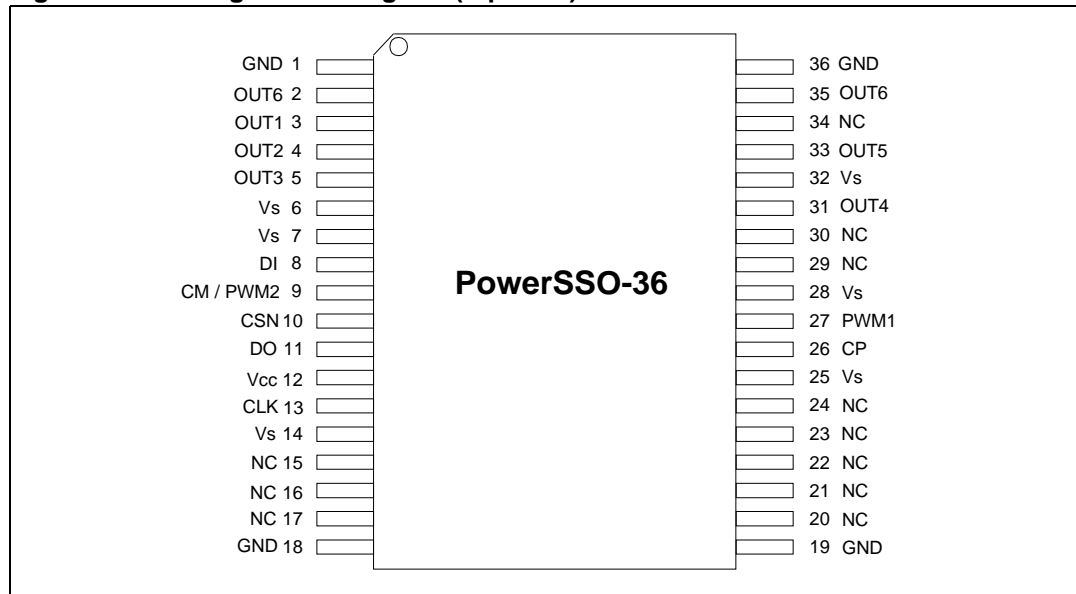


Table 2. Pin definitions and functions

| Pin                     | Symbol               | Function  |
|-------------------------|----------------------|---|
| 1, 18, 19, 36           | GND                  | Ground:<br>reference potential.<br>Important: for the capability of driving the full current at the outputs all pins of GND must be externally connected.   |
| 2, 35                   | OUT6                 | High-side driver output 6<br>The output is built by a high-side switch and is intended for resistive loads, hence the internal reverse diode from GND to the output is missing. For ESD reason a diode to GND is present but the energy which can be dissipated is limited. The high-side driver is a power DMOS transistor with an internal parasitic reverse diode from the output to $V_S$ (bulk-drain-diode). The output is over-current and open-load protected.<br>Important: for the capability of driving the full current at the outputs both pins of OUT6 must be externally connected. |
| 3<br>4<br>5             | OUT1<br>OUT2<br>OUT3 | Half-bridge output 1,2,3<br>The output is built by a high-side and a low-side switch, which are internally connected. The output stage of both switches is a power DMOS transistor. Each driver has an internal parasitic reverse diode (bulk-drain-diode: high-side driver from output to $V_S$ , switches driver from GND to output). This output is over-current and open-load protected.  |
| 6, 7, 14, 25,<br>28, 32 | $V_S$                | Power supply voltage (external reverse protection required)<br>For this input a ceramic capacitor as close as possible to GND is recommended.<br>Important: for the capability of driving the full current at the outputs all pins of $V_S$ must be externally connected.   |
| 8                       | DI                   | Serial data input<br>The input requires CMOS logic levels and receives serial data from the microcontroller. The data is an 24bit control word and the least significant bit (LSB, bit 0) is transferred first.   |
| 9                       | CM/PWM2              | Current monitor output/PWM2 input<br>Depending on the selected multiplexer bits of input data register this output sources an image of the instant current through the corresponding high-side driver with a ratio of 1/10.000. This pin is bidirectional. The microcontroller can overdrive the current monitor signal to provide a second PWM input for the output OUT5.  |
| 10                      | CSN                  | Chip select not input<br>This input is low active and requires CMOS logic levels. The serial data transfer between L9954LXP and micro controller is enabled by pulling the input CSN to low-level.  |
| 11                      | DO                   | Serial data output<br>The diagnosis data is available via the SPI and this 3-state output. The output remains in 3-state, if the chip is not selected by the input CSN (CSN = high)   |

**Table 2. Pin definitions and functions (continued)**

| Pin  | Symbol          | Function   |
|--|-----------------|--|
| 12   | V <sub>CC</sub> | Logic supply voltage<br>For this input a ceramic capacitor as close as possible to GND is recommended.   |
| 13   | CLK             | Serial clock input<br>This input controls the internal shift register of the SPI and requires CMOS logic levels.   |
| 26   | CP              | Charge pump output<br>This output is provided to drive the gate of an external n-channel power MOS used for reverse polarity protection.   |
| 27   | PWM1            | PWM1 input<br>This input signal can be used to control the drivers OUT1-OUT4 and OUT6 by an external PWM signal.   |
| 31<br>33   | OUT4,<br>OUT5   | High-side driver output 4 and 5<br>Each output is built by a high-side switch and is intended for resistive loads, hence the internal reverse diode from GND to the output is missing. For ESD reason a diode to GND is present but the energy which can be dissipated is limited. Each high-side driver is a power DMOS transistor with an internal parasitic reverse diode from each output to V <sub>S</sub> (bulk-drain-diode). Each output is over-current and open-load protected. |
| 15, 16, 17, 20,<br>21, 22, 23, 24,<br>29, 30, 34 | NC              | Not connected pins.  |

## 2 Electrical specifications

### 2.1 Absolute maximum ratings

Stressing the device above the rating listed in the “Absolute maximum ratings” table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality document

**Table 3. Absolute maximum ratings**

| Symbol  | Parameter                               | Value                  | Unit |
|---|---|------------------------|------|
| $V_S$   | DC supply voltage                       | -0.3 to 28             | V    |
|   | Single pulse $t_{max} < 400$ ms         | 40                     | V    |
| $V_{CC}$  | Stabilized supply voltage, logic supply | -0.3 to 5.5            | V    |
| $V_{DI}, V_{DO}, V_{CLK},$<br>$V_{CSN}, V_{pwm1}$ | Digital input / output voltage          | -0.3 to $V_{CC} + 0.3$ | V    |
| $V_{CM}$  | Current monitor output                  | -0.3 to $V_{CC} + 0.3$ | V    |
| $V_{CP}$  | Charge pump output                      | -25 to $V_S + 11$      | V    |
| $I_{OUT1,2,3,4,5}$                                | Output current                          | $\pm 5$                | A    |
| $I_{OUT6}$  | Output current                          | $\pm 10$               | A    |

### 2.2 ESD protection

**Table 4. ESD protection**

| Parameter                | Value                  | Unit |
|--------------------------|------------------------|------|
| All pins                 | $\pm 2$ <sup>(1)</sup> | kV   |
| Output pins: OUT1 - OUT6 | $\pm 8$ <sup>(2)</sup> | kV   |

1. HBM according to MIL 883C, Method 3015.7 or EIA/JESD22-A114-A.

2. HBM with all unzapped pins grounded.

### 2.3 Thermal data

**Table 5. Operating junction temperature**

| Symbol | Parameter                      | Value      | Unit |
|--------|--------------------------------|------------|------|
| $T_j$  | Operating junction temperature | -40 to 150 | °C   |

**Table 6. Temperature warning and thermal shutdown**

| Symbol         | Parameter  |                     | Min. | Typ. | Max. | Unit |
|----------------|--|---------------------|------|------|------|------|
| $T_{jTW\ On}$  | Temperature warning threshold junction temperature | $T_j$               | 130  |      | 150  | °C   |
| $T_{jSD\ On}$  | Thermal shutdown threshold junction temperature    | $T_j$<br>increasing |      |      | 170  | °C   |
| $T_{jSD\ Off}$ | Thermal shutdown threshold junction temperature    | $T_j$<br>decreasing | 150  |      |      | °C   |
| $T_{jSD\ HYS}$ | Thermal shutdown hysteresis                        |                     |      | 5    |      | °K   |

## 2.4 Electrical characteristics

Values specified in this section are for  $V_S = 8$  to  $16$  V,  $V_{CC} = 4.5$  to  $5.3$  V,  $T_j = -40$  to  $150$  °C, unless otherwise specified. The voltages are referred to GND and currents are assumed positive, when the current flows into the pin.

**Table 7. Supply**

| Symbol         | Parameter                         | Test condition  | Min. | Typ. | Max. | Unit |
|----------------|-----------------------------------|---|------|------|------|------|
| $V_S$          | Operating supply voltage range    |   | 7    |      | 28   | V    |
| $I_S$          | $V_S$ DC supply current           | $V_S = 16$ V, $V_{CC} = 5.3$ V<br>active mode<br>OUT1 - OUT6 floating   |      | 7    | 20   | mA   |
|                | $V_S$ quiescent supply current    | $V_S = 16$ V, $V_{CC} = 0$ V<br>standby mode<br>OUT1 - OUT6 floating<br>$T_{test} = -40$ °C, $25$ °C            |      | 4    | 12   | µA   |
|                |                                   | $T_{test} = 85$ °C <sup>(1)</sup>   |      |      | 6    | 25   |
| $I_{CC}$       | $V_{CC}$ DC supply current        | $V_S = 16$ V, $V_{CC} = 5.3$ V<br>CSN = $V_{CC}$ , active mode  |      | 1    | 3    | mA   |
|                | $V_{CC}$ quiescent supply current | $V_S = 16$ V, $V_{CC} = 5.3$ V<br>CSN = $V_{CC}$ standby mode<br>OUT1 - OUT6 floating                           |      | 25   | 50   | µA   |
| $I_S + I_{CC}$ | Sum quiescent supply current      | $V_S = 16$ V, $V_{CC} = 5.3$ V<br>CSN = $V_{CC}$<br>standby mode<br>OUT1 - OUT6 floating<br>$T_{test} = 130$ °C |      | 50   | 200  | µA   |

1. Guaranteed by design.

**Table 8. Overvoltage and under voltage detection**

| Symbol          | Parameter                  | Test condition               | Min. | Typ. | Max. | Unit |
|-----------------|----------------------------|------------------------------|------|------|------|------|
| $V_{SUV\ On}$   | $V_S$ UV-threshold voltage | $V_S$ increasing             | 5.7  |      | 7.2  | V    |
| $V_{SUV\ Off}$  | $V_S$ UV-threshold voltage | $V_S$ decreasing             | 5.5  |      | 6.9  | V    |
| $V_{SUV\ hyst}$ | $V_S$ UV-hysteresis        | $V_{SUV\ On} - V_{SUV\ Off}$ |      | 0.5  |      | V    |
| $V_{SOV\ Off}$  | $V_S$ OV-threshold voltage | $V_S$ increasing             | 18   |      | 24.5 | V    |
| $V_{SOV\ On}$   | $V_S$ OV-threshold voltage | $V_S$ decreasing             | 17.5 |      | 23.5 | V    |
| $V_{SOV\ hyst}$ | $V_S$ OV-hysteresis        | $V_{SOV\ Off} - V_{SOV\ On}$ |      | 1    |      | V    |
| $V_{POR\ Off}$  | Power-on reset threshold   | $V_{CC}$ increasing          |      |      | 4.4  | V    |
| $V_{POR\ On}$   | Power-on reset threshold   | $V_{CC}$ decreasing          | 3.1  |      |      | V    |
| $V_{POR\ hyst}$ | Power-on reset hysteresis  | $V_{POR\ Off} - V_{POR\ On}$ |      | 0.3  |      | V    |

**Table 9. Current monitor output**

| Symbol     | Parameter  | Test condition   | Min. | Typ.              | Max. | Unit |
|------------|--|--|------|-------------------|------|------|
| $V_{CM}$   | Functional voltage range   | $V_{CC} = 5\text{ V}$  | 0    |                   | 4    | V    |
| $I_{CM,r}$ | Current monitor output ratio:<br>$I_{CM} / I_{OUT6}$                           | $0\text{ V} \leq V_{CM} \leq 4\text{ V},$<br>$V_{CC} = 5\text{ V}$ |      | $\frac{1}{10000}$ |      | -    |
|            | Current monitor output ratio:<br>$I_{CM} / I_{OUT1}$                           |  |      | $\frac{1}{3800}$  |      |      |
|            | Current monitor output ratio:<br>$I_{CM} / I_{OUT4,5}$<br>low $R_{DSon}$ mode  |  |      | $\frac{1}{10200}$ |      |      |
|            | Current monitor output ratio:<br>$I_{CM} / I_{OUT4,5}$<br>high $R_{DSon}$ mode |  |      | $\frac{1}{2400}$  |      |      |

**Table 9. Current monitor output (continued)**

| Symbol        | Parameter   | Test condition   | Min. | Typ.         | Max.         | Unit |
|---------------|---|--|------|--------------|--------------|------|
| $I_{CM\ acc}$ | Current monitor accuracy<br>Acc $I_{CM} / I_{OUT\ 8}$                           | $0\ V \leq V_{CM} \leq 3.8\ V,$<br>$V_{CC} = 5\ V,$<br>$I_{Out,min\ 8} = 0.5\ A,$<br>$I_{Out\ max\ 8} = 5.9\ A$      |      |              |              |      |
|               | Current monitor accuracy<br>Acc $I_{CM} / I_{OUT\ 1}$                           | $0\ V \leq V_{CM} \leq 3.8\ V,$<br>$V_{CC} = 5\ V,$<br>$I_{Out,min\ 1} = 60\ mA,$<br>$I_{Out\ max\ 1} = 0.6\ A$      |      |              |              |      |
|               | Current monitor accuracy<br>Acc $I_{CM} / I_{OUT\ 4,5}$<br>high $R_{DSon}$ mode | $0\ V \leq V_{CM} \leq 3.8\ V,$<br>$V_{CC} = 5\ V,$<br>$I_{Out,min\ 4,5} = 30\ mA,$<br>$I_{Out\ max\ 4,5} = 300\ mA$ |      |              |              |      |
|               | Current monitor accuracy<br>Acc $I_{CM} / I_{OUT\ 4,5}$<br>low $R_{DSon}$ mode  | $0\ V \leq V_{CM} \leq 3.8\ V,$<br>$V_{CC} = 5\ V,$<br>$I_{Out,min\ 4,5} = 150\ mA,$<br>$I_{Out\ max\ 4,5} = 1\ A$   |      | 4% +<br>1%FS | 8% +<br>2%FS | -    |

**Table 10. Charge pump output**

| Symbol   | Parameter                     | Test condition                             | Min.     | Typ. | Max.     | Unit    |
|----------|-------------------------------|--|----------|------|----------|---------|
| $V_{CP}$ | Charge pump output<br>voltage | $V_S = 8\ V, I_{CP} = -60\ \mu A$          | $V_S+6$  |      | $V_S+13$ | V       |
|          |                               | $V_S = 10\ V, I_{CP} = -80\ \mu A$         | $V_S+8$  |      | $V_S+13$ | V       |
|          |                               | $V_S \geq 12\ V, I_{CP} = -100\ \mu A$     | $V_S+10$ |      | $V_S+13$ | V       |
| $I_{CP}$ | Charge pump output<br>current | $V_{CP} = V_S + 10\ V,$<br>$V_S = 13.5\ V$ | 95       | 150  | 300      | $\mu A$ |

**Table 11. OUT1 - OUT6**

| Symbol  | Parameter   | Test condition   | Min. | Typ. | Max. | Unit      |
|---|---|--|------|------|------|-----------|
| $R_{DSon\ OUT1},$<br>$R_{DSon\ OUT2}$<br>$R_{DSon\ OUT3}$ | On resistance to supply or<br>GND                 | $V_S = 13.5\ V, T_j = 25\ ^\circ C,$<br>$I_{OUT1,2,3} = \pm 0.4\ A$  |      | 1600 | 2200 | $m\Omega$ |
|   |   | $V_S = 13.5\ V, T_j = 125\ ^\circ C,$<br>$I_{OUT1,2,3} = \pm 0.4\ A$ |      | 2500 | 3400 | $m\Omega$ |
| $R_{DSon\ OUT4},$<br>$R_{DSon\ OUT5}$                     | On resistance to supply in<br>low $R_{DSon}$ mode | $V_S = 13.5\ V, T_j = 25\ ^\circ C,$<br>$I_{OUT4,5} = -0.8\ A$       |      | 500  | 700  | $m\Omega$ |
|   |   | $V_S = 13.5\ V, T_j = 125\ ^\circ C,$<br>$I_{OUT4,5} = -0.8\ A$      |      | 700  | 950  | $m\Omega$ |
|   | On resistance in high<br>$R_{DSon}$ mode          | $T_j = 25\ ^\circ C, I_{OUT4,5} = -0.2\ A$                           |      | 2000 | 2700 | $m\Omega$ |
|   |   | $T_j = 125\ ^\circ C, I_{OUT4,5} = -0.2\ A$                          |      | 3200 | 4300 | $m\Omega$ |

Table 11. OUT1 - OUT6 (continued)

| Symbol                                 | Parameter  | Test condition   | Min.  | Typ. | Max.  | Unit |
|--|--|--|-------|------|-------|------|
| $R_{DSon\ OUT6}$                       | On resistance to supply                                  | $V_S = 13.5\text{ V}$ , $T_j = 25\text{ °C}$ ,<br>$I_{OUT6} = -3\text{ A}$               |       | 100  | 150   | mΩ   |
|  |  | $V_S = 13.5\text{ V}$ , $T_j = 125\text{ °C}$ ,<br>$I_{OUT6} = -3\text{ A}$              |       | 150  | 200   | mΩ   |
| $I_{OUT1}$<br>$I_{OUT2}$<br>$I_{OUT3}$ | Output current limitation to GND                         | Source, $V_S = 13.5\text{ V}$  | -1.25 |      | -0.75 | A    |
| $I_{OUT1}$<br>$I_{OUT2}$<br>$I_{OUT3}$ | Output current limitation to supply                      | Sink, $V_S = 13.5\text{ V}$  | 0.75  |      | 1.25  | A    |
| $I_{OUT4}$<br>$I_{OUT5}$               | Output current limitation to GND in low $R_{DSon}$ mode  | Source, $V_S = 13.5\text{ V}$  | -3.0  |      | -1.5  | A    |
|  | Output current limitation to GND in high $R_{DSon}$ mode |  | -0.65 |      | -0.35 | A    |
| $I_{OUT6}$                             | Output current limitation to GND                         | Source, $V_S = 13.5\text{ V}$  | -10.5 |      | -6    | A    |
| $t_{d\ On\ H}$                         | Output delay time, high-side driver on                   | $V_S = 13.5\text{ V}$ , $R_{load} = (1)$<br>corresponding low-side driver is not active  | 10    | 40   | 80    | μs   |
| $t_{d\ Off\ H}$                        | Output delay time, high-side driver off                  | $V_S = 13.5\text{ V}$ , $R_{load} = (2)$   | 15    | 150  | 300   | μs   |
| $t_{d\ On\ L}$                         | Output delay time, low-side driver on                    | $V_S = 13.5\text{ V}$ , $R_{load} = (2)$<br>corresponding high-side driver is not active | 15    | 30   | 70    | μs   |
| $t_{d\ Off\ L}$                        | Output delay time, low-side driver off                   | $V_S = 13.5\text{ V}$ , $R_{load} = (2)$   | 20    | 150  | 300   | μs   |
| $t_{d\ HL}$                            | Cross current protection time, source to sink            | $t_{CC\ ONLS\_OFFHS} - t_{d\ Off\ H}^{(2)}$  |       | 200  | 400   | μs   |
| $t_{d\ LH}$                            | Cross current protection time, sink to source            | $t_{CC\ ONHS\_OFFLS} - t_{d\ Off\ L}^{(2)}$  |       | 200  | 400   | μs   |
| $I_{QLH}$                              | Switched-off output current high-side drivers of OUT1-6  | $V_{OUT1-6} = 0\text{ V}$ , standby mode   | -3    | 0    | -3    | μA   |
|  |  | $V_{OUT1-2-3-6} = 0\text{ V}$ , active mode  | -40   | -15  | 0     | μA   |
|  |  | $V_{OUT4-5} = 0\text{ V}$ , active mode  | -10   | -8   | 0     | μA   |
| $I_{QLL}$                              | Switched-off output current low-side drivers of OUT1-3   | $V_{OUT1-3} = V_S$ , standby mode  | 0     | 80   | 120   | μA   |
|  |  | $V_{OUT1-3} = V_S$ , active mode   | -40   | -15  | 0     | μA   |
| $I_{OLD123}$                           | Open-load detection current of OUT1, OUT2 and OUT3       | Source and sink  | 10    | 20   | 30    | mA   |

**Table 11. OUT1 - OUT6 (continued)**

| Symbol  | Parameter   | Test condition  | Min. | Typ. | Max. | Unit |
|---|---|---|------|------|------|------|
| I <sub>OLD45</sub>                                  | Open-load detection current of OUT4 and OUT5                                | Source  | 15   | 40   | 60   | mA   |
|   | Open-load detection current of OUT4 and OUT5 in high R <sub>DSon</sub> mode |   | 5    | 10   | 15   | mA   |
| I <sub>OLD6</sub>                                   | Open-load detection current of OUT6   | Source  | 30   | 150  | 300  | mA   |
| t <sub>d OL</sub>                                   | Minimum duration of open-load condition to set the status bit               |   | 500  |      | 3000 | µs   |
| t <sub>ISC</sub>                                    | Minimum duration of over-current condition to switch off the driver         |   | 10   |      | 100  | µs   |
| f <sub>rec0</sub>                                   | Recovery frequency for OC recovery duty cycle bit=0                         |   | 1    |      | 4    | kHz  |
| f <sub>rec1</sub>                                   | Recovery frequency for OC recovery duty cycle bit=1                         |   | 2    |      | 6    | kHz  |
| dV <sub>OUT123</sub> /dt<br>dV <sub>OUT45</sub> /dt | Slew rate of OUT <sub>123</sub> and OUT <sub>45</sub>                       | V <sub>S</sub> = 13.5 V, R <sub>load</sub> = <sup>(2)</sup> | 0.1  | 0.4  | 0.9  | V/µs |
| dV <sub>OUT6</sub> /dt                              | Slew rate of OUT <sub>6</sub>   | V <sub>S</sub> = 13.5 V, R <sub>load</sub> = <sup>(2)</sup> | 0.08 | 0.2  | 0.4  | V/µs |

1. OUT1,2,3 32OHM  
OUT4,5 16OHM  
OUT4,5 high R<sub>DSon</sub> mode 63OHM  
OUT6 4OHM

2. t<sub>CC ON</sub> is the switch On delay time t<sub>d ON</sub> if complement in half bridge has to switch off.

## 2.5 SPI - electrical characteristics

Values specified in this section are V<sub>S</sub> = 8 to 16 V, V<sub>CC</sub> = 4.5 to 5.3 V, T<sub>j</sub> = - 40 to 150 °C, unless otherwise specified. The voltages are referred to GND and currents are assumed positive, when the current flows into the pin.

**Table 12. Delay time from standby to active mode**

| Symbol           | Parameter  | Test condition  | Min. | Typ. | Max. | Unit |
|------------------|------------|---|------|------|------|------|
| t <sub>set</sub> | Delay time | Switching from standby to active mode. Time until output drivers are enabled after CSN going to high. |      | 160  | 300  | µs   |

**Table 13. Inputs: CSN, CLK, PWM1/2 and DI**

| Symbol         | Parameter  | Test condition                                | Min. | Typ. | Max. | Unit          |
|----------------|--|---|------|------|------|---------------|
| $V_{inL}$      | Input low-level                                    | $V_{CC} = 5\text{ V}$                         | 1.5  | 2.0  |      | V             |
| $V_{inH}$      | Input high-level                                   | $V_{CC} = 5\text{ V}$                         |      | 3.0  | 3.5  | V             |
| $V_{inHyst}$   | Input hysteresis                                   | $V_{CC} = 5\text{ V}$                         | 0.5  |      |      | V             |
| $I_{CSN\ in}$  | Pull up current at input CSN                       | $V_{CSN} = 3.5\text{ V}, V_{CC} = 5\text{ V}$ | -40  | -20  | -5   | $\mu\text{A}$ |
| $I_{CLK\ in}$  | Pull down current at input CLK                     | $V_{CLK} = 1.5\text{ V}$                      | 10   | 25   | 50   | $\mu\text{A}$ |
| $I_{DI\ in}$   | Pull down current at input DI                      | $V_{DI} = 1.5\text{ V}$                       | 10   | 25   | 50   | $\mu\text{A}$ |
| $I_{PWM1\ in}$ | Pull down current at input PWM1                    | $V_{PWM} = 1.5\text{ V}$                      | 10   | 25   | 50   | $\mu\text{A}$ |
| $C_{in}^{(1)}$ | Input capacitance at input CSN, CLK, DI and PWM1/2 | $0\text{ V} < V_{CC} < 5.3\text{ V}$          |      | 10   | 15   | pF            |

1. Value of input capacity is not measured in production test. Parameter guaranteed by design.

**Table 14. DI timing <sup>(1)</sup>**

| Symbol         | Parameter  | Test condition        | Min. | Typ. | Max. | Unit |
|----------------|--|-----------------------|------|------|------|------|
| $t_{CLK}$      | Clock period                                       | $V_{CC} = 5\text{ V}$ | 1000 | -    |      | ns   |
| $t_{CLKH}$     | Clock high time                                    | $V_{CC} = 5\text{ V}$ | 400  | -    |      | ns   |
| $t_{CLKL}$     | Clock low time                                     | $V_{CC} = 5\text{ V}$ | 400  | -    |      | ns   |
| $t_{set\ CSN}$ | CSN setup time, CSN low before rising edge of CLK  | $V_{CC} = 5\text{ V}$ | 400  | -    |      | ns   |
| $t_{set\ CLK}$ | CLK setup time, CLK high before rising edge of CSN | $V_{CC} = 5\text{ V}$ | 400  | -    |      | ns   |
| $t_{set\ DI}$  | DI setup time                                      | $V_{CC} = 5\text{ V}$ | 200  | -    |      | ns   |
| $t_{hold\ DI}$ | DI hold time                                       | $V_{CC} = 5\text{ V}$ | 200  | -    |      | ns   |
| $t_{r\ in}$    | Rise time of input signal DI, CLK, CSN             | $V_{CC} = 5\text{ V}$ |      | -    | 100  | ns   |
| $t_{f\ in}$    | Fall time of input signal DI, CLK, CSN             | $V_{CC} = 5\text{ V}$ |      | -    | 100  | ns   |

1. DI timing parameters tested in production by a passed / failed test:  
 $T_j = -40\text{ }^\circ\text{C} / +25\text{ }^\circ\text{C}$ : SPI communication @ 2 MHz.  
 $T_j = +125\text{ }^\circ\text{C}$ : SPI communication @ 1.25 MHz.

**Table 15. DO**

| Symbol    | Parameter         | Test condition                            | Min.           | Typ.           | Max. | Unit |
|-----------|-------------------|---|----------------|----------------|------|------|
| $V_{DOL}$ | Output low-level  | $V_{CC} = 5\text{ V}, I_D = -2\text{ mA}$ |                | 0.2            | 0.4  | V    |
| $V_{DOH}$ | Output high-level | $V_{CC} = 5\text{ V}, I_D = 2\text{ mA}$  | $V_{CC} - 0.4$ | $V_{CC} - 0.2$ |      | V    |

**Table 15. DO (continued)**

| Symbol         | Parameter                 | Test condition                                 | Min. | Typ. | Max. | Unit    |
|----------------|---------------------------|--|------|------|------|---------|
| $I_{DOLK}$     | 3-state leakage current   | $V_{CSN} = V_{CC}$ ,<br>$0V < V_{DO} < V_{CC}$ | -10  |      | 10   | $\mu A$ |
| $C_{DO}^{(1)}$ | 3-state input capacitance | $V_{CSN} = V_{CC}$ ,<br>$0V < V_{CC} < 5.3V$   |      | 10   | 15   | pF      |

1. Value of input capacity is not measured in production test. Parameter guaranteed by design.

**Table 16. DO timing**

| Symbol             | Parameter                                  | Test condition  | Min. | Typ. | Max. | Unit |
|--------------------|--|---|------|------|------|------|
| $t_{r DO}$         | DO rise time                               | $C_L = 100 pF$ , $I_{load} = -1 mA$                               | -    | 80   | 140  | ns   |
| $t_{f DO}$         | DO fall time                               | $C_L = 100 pF$ , $I_{load} = 1 mA$                                | -    | 50   | 100  | ns   |
| $t_{en DO tri L}$  | DO enable time from 3-state to low-level   | $C_L = 100 pF$ , $I_{load} = 1 mA$<br>pull up load to $V_{CC}$    | -    | 100  | 250  | ns   |
| $t_{dis DO L tri}$ | DO disable time from low-level to 3-state  | $C_L = 100 pF$ , $I_{load} = 4 mA$<br>pull up load to $V_{CC}$    | -    | 380  | 450  | ns   |
| $t_{en DO tri H}$  | DO enable time from 3-state to high-level  | $C_L = 100 pF$ , $I_{load} = -1 mA$<br>pull down load to GND      | -    | 100  | 250  | ns   |
| $t_{dis DO H tri}$ | DO disable time from high-level to 3-state | $C_L = 100 pF$ , $I_{load} = -4 mA$ pull down load to GND         | -    | 380  | 450  | ns   |
| $t_{d DO}$         | DO delay time                              | $V_{DO} < 0.3 V_{CC}$ , $V_{DO} > 0.7 V_{CC}$ ,<br>$C_L = 100 pF$ | -    | 50   | 250  | ns   |

**Table 17. CSN timing**

| Symbol             | Parameter                                | Test condition                            | Min. | Typ. | Max. | Unit    |
|--------------------|--|---|------|------|------|---------|
| $t_{CSN\_HI, stb}$ | CSN HI time, switching from standby mode | Transfer of SPI command to Input Register | 20   | -    | -    | $\mu s$ |
| $t_{CSN\_HI, min}$ | CSN HI time, active mode                 | Transfer of SPI command to input register | 4    | -    | -    | $\mu s$ |

Figure 3. SPI - transfer timing diagram

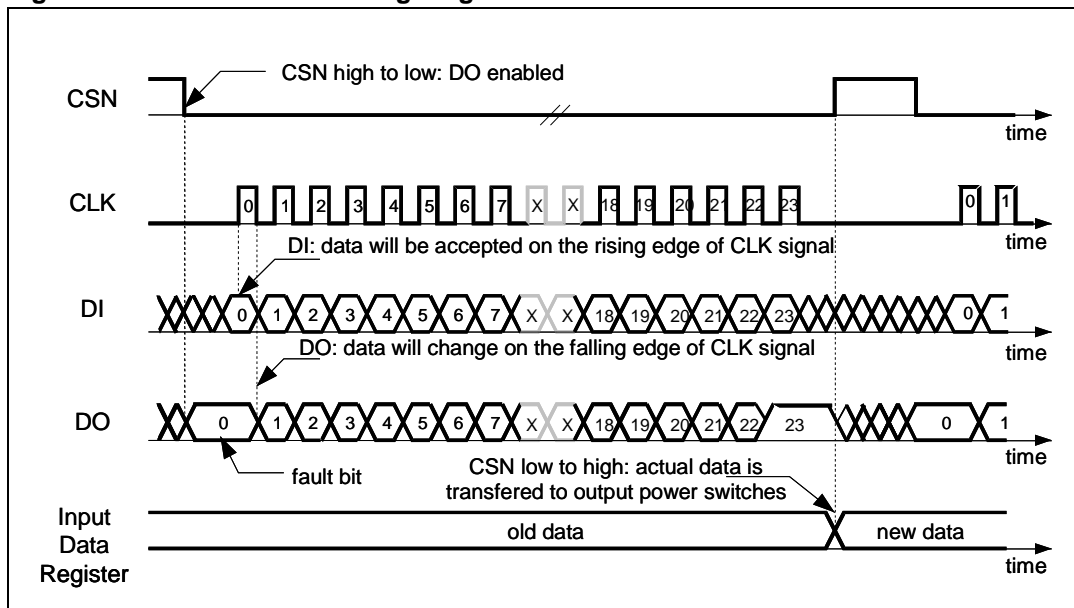
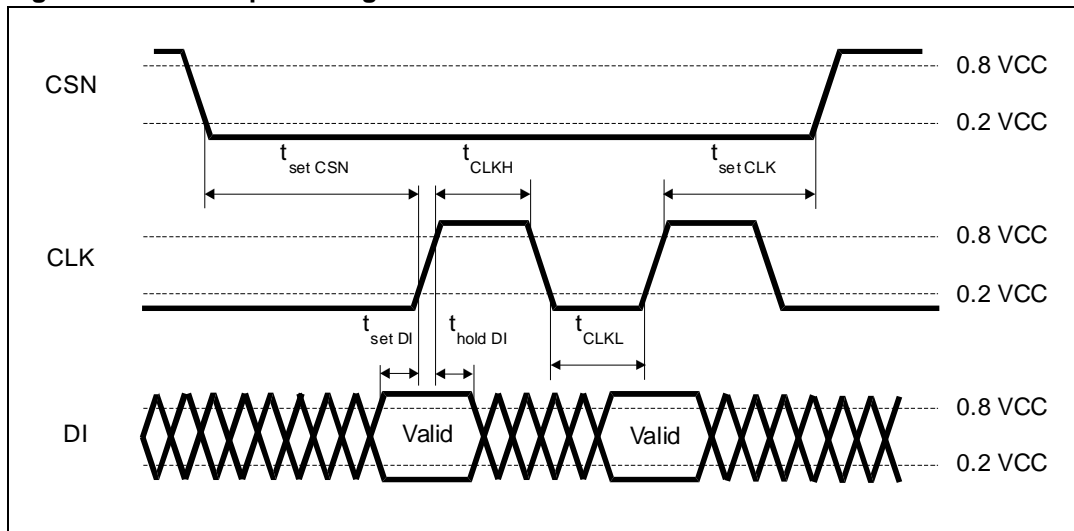
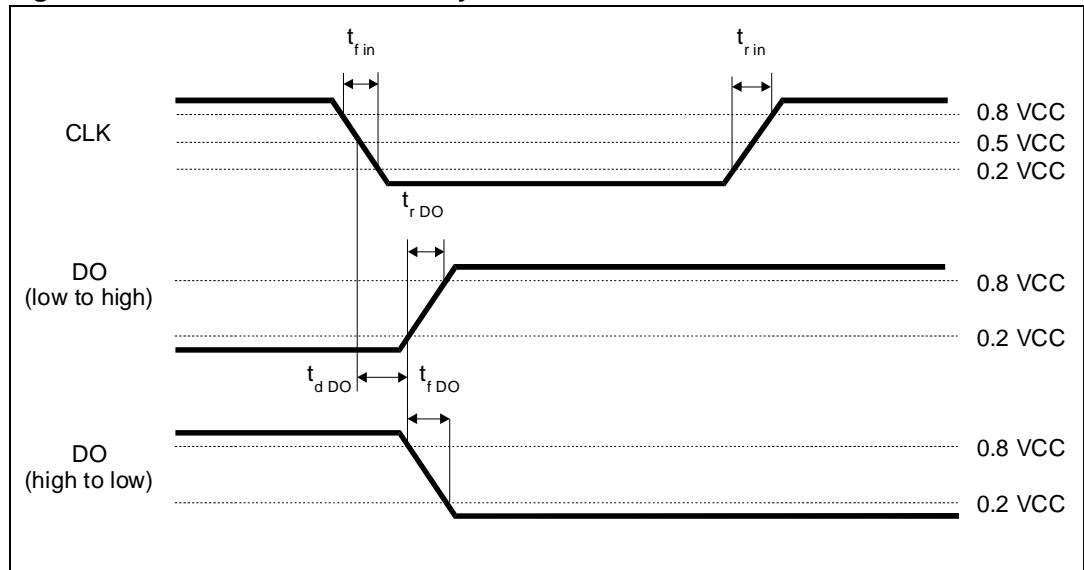


Figure 4. SPI - input timing



**Figure 5. SPI - DO valid data delay time and valid time**



**Figure 6. SPI - DO enable and disable time**

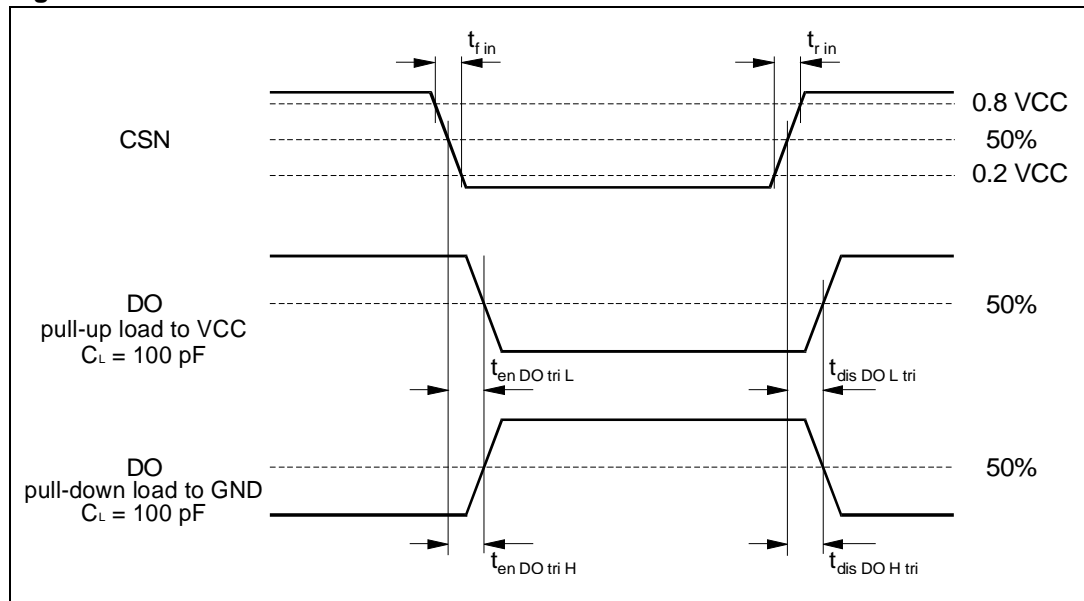


Figure 7. SPI - driver turn-on / off timing, minimum CSN HI time


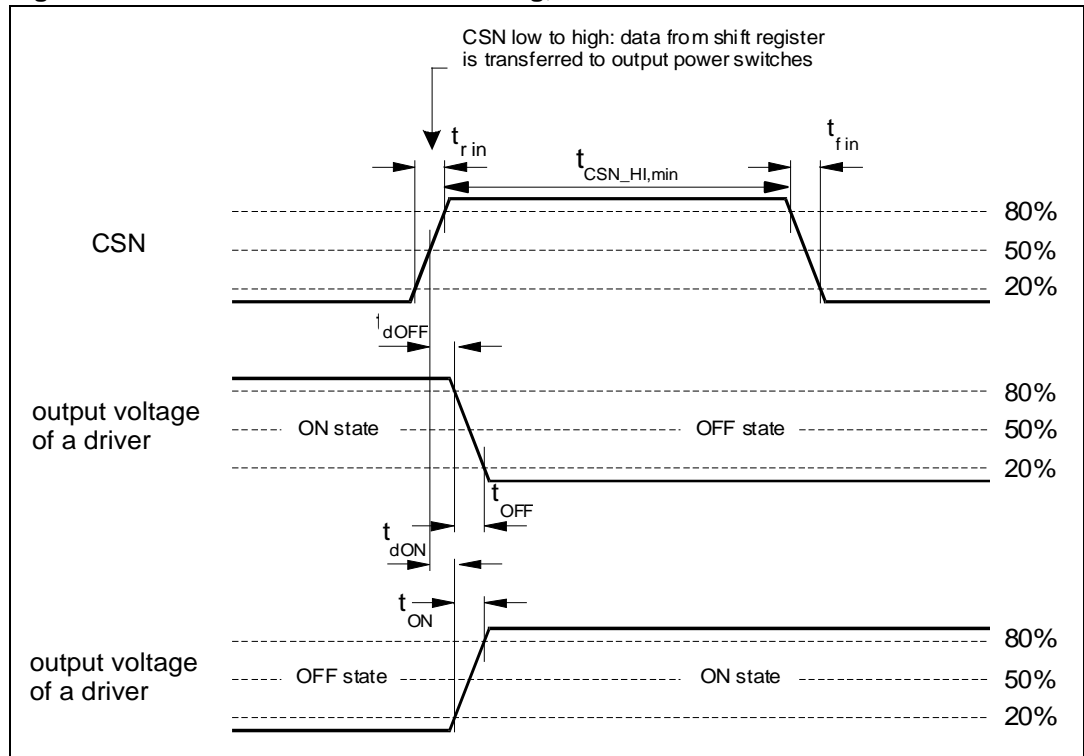


Figure 8. SPI - timing of status bit 0 (fault condition)

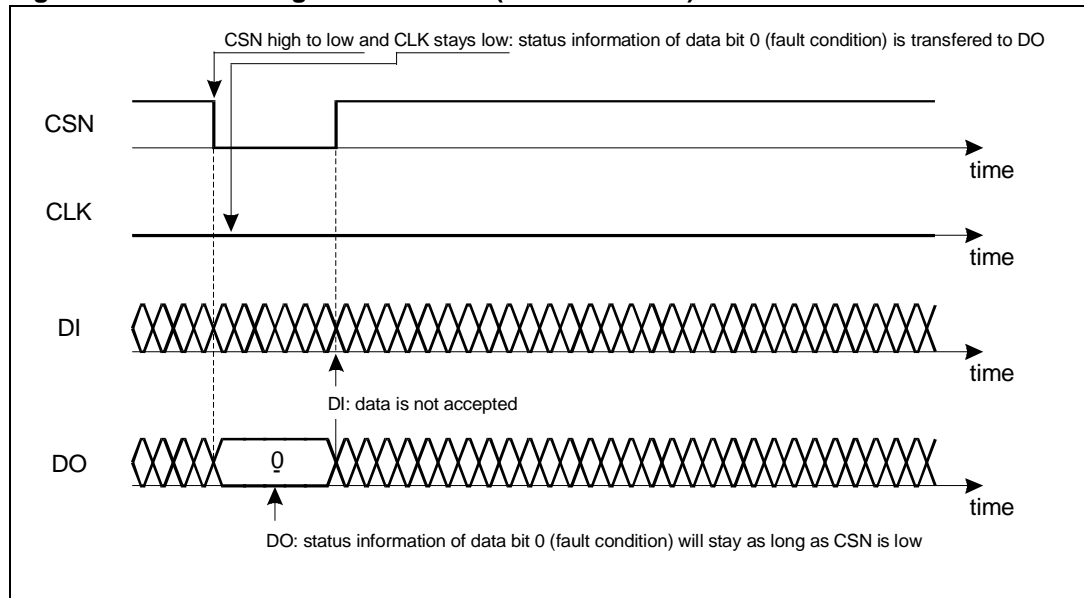

## 3 Application information

### 3.1 Dual power supply: $V_S$ and $V_{CC}$

The power supply voltage  $V_S$  supplies the half bridges and the high-side drivers. An internal charge-pump is used to drive the high-side switches. The logic supply voltage  $V_{CC}$  (stabilized 5 V) is used for the logic part and the SPI of the device.

Due to the independent logic supply voltage the control and status information not are lost, if there are temporary spikes or glitches on the power supply voltage. In case of power-on ( $V_{CC}$  increases from under voltage to  $V_{POR\ Off} = 4.2\text{ V}$ ) the circuit is initialized by an internally generated power-on-reset (POR). If the voltage  $V_{CC}$  decreases under the minimum threshold ( $V_{POR\ ON} = 3.4\text{ V}$ ), the outputs are switched to 3-state (high impedance) and the status registers are cleared.

### 3.2 Standby mode

The standby mode of the L9954LXP is activated by clearing the bit 23 of the input data register 0. All latched data is cleared and the inputs and outputs are switched to high impedance. In the standby mode the current at  $V_S$  ( $V_{CC}$ ) is less than 6  $\mu\text{A}$  (50 $\mu\text{A}$ ) for  $CSN = \text{high}$  (DO in 3-state). By switching the  $V_{CC}$  voltage a very low quiescent current can be achieved. If bit 23 is set, the device is switched to active mode.

### 3.3 Inductive loads

Each half bridge is built by an internally connected high-side and a low-side power DMOS transistor. Due to the built-in reverse diodes of the output transistors, inductive loads can be driven at the outputs OUT1 to OUT3 without external free-wheeling diodes. The high-side drivers OUT4 to OUT6 are intended to drive resistive loads. Hence only a limited energy ( $E < 1\text{ mJ}$ ) can be dissipated by the internal ESD-diodes in freewheeling condition. For inductive loads ( $L > 100\mu\text{H}$ ) an external free-wheeling diode connected to GND and the corresponding output is needed.

### 3.4 Diagnostic functions

All diagnostic functions (over/open-load, power supply over-/under voltage, temperature warning and thermal shutdown) are internally filtered and the condition has to be valid for at least 32  $\mu\text{s}$  (open-load: 1 ms, respectively) before the corresponding status bit in the status registers is set. The filters are used to improve the noise immunity of the device. Open-load and temperature warning function are intended for information purpose and not changes the state of the output drivers. On contrary, the overload condition disables the corresponding driver (over-current) and overtemperature switches off all drivers (thermal shutdown). Without setting the over-current recovery bits in the input data register, the microcontroller has to clear the over-current status bits to reactivate the corresponding drivers.

### 3.5 Overvoltage and under voltage detection

If the power supply voltage  $V_S$  rises above the overvoltage threshold  $V_{SOV\ Off}$  (typical 21 V), the outputs OUT1 to OUT6 are switched to high impedance state to protect the load. When the voltage  $V_S$  drops below the under voltage threshold  $V_{SU\V Off}$  (UV-switch-off voltage), the output stages are switched to the high impedance to avoid the operation of the power devices without sufficient gate driving voltage (increased power dissipation). If the supply voltage  $V_S$  recovers (register 0: bit 20=0) to normal operating voltage the outputs stages return to the programmed state after at least 32  $\mu$ s.

If the under voltage/overvoltage recovery disable bit is set, the automatic turn-on of the drivers is deactivated. The microcontroller needs to clear the status bits to reactivate the drivers. It is strongly recommended to set bit 20 to avoid a possible high current oscillation in case of a shorted output to GND and low battery voltage.

### 3.6 Charge pump

The charge pump runs under all conditions in normal mode. In standby the charge pump is out of action.

### 3.7 Temperature warning and thermal shutdown

If junction temperature rises above  $T_{j\ TW}$  a temperature warning flag is set after at least 32  $\mu$ s and is detectable via the SPI. If junction temperature increases above the second threshold  $T_{j\ SD}$ , the thermal shutdown bit is set and power DMOS transistors of all output stages are switched off to protect the device after at least 32  $\mu$ s. Temperature warning flag and thermal shutdown bit are latched and must be cleared by the microcontroller. The related bit is only cleared if the temperature decreases below the trigger temperature. If the thermal shutdown bit has been cleared the output stages are reactivated.

### 3.8 Open-load detection

The open-load detection monitors the load current in each activated output stage. If the load current is below the open-load detection threshold for at least 1 ms ( $t_{dOL}$ ) the corresponding open-load bit is set in the status register. Due to mechanical/electrical inertia of typical loads a short activation of the outputs (e.g. 3 ms) can be used to test the open-load status without changing the mechanical/electrical state of the loads.

### 3.9 Overload detection

In case of an over-current condition a flag is set in the status register in the same way as open-load detection. If the over-current signal is valid for at least  $t_{ISC} = 32 \mu$ s, the over-current flag is set and the corresponding driver is switched off to reduce the power dissipation and to protect the integrated circuit. If the over-current recovery bit of the output is zero the microcontroller has to clear the status bits to reactivate the corresponding driver.

### 3.10 Current monitor

The current monitor output sources a current image at the current monitor output which has a fixed ratio (1/10000) of the instantaneous current of the selected high-side driver. Signal at output CM is blanked after switching on of driver until correct settlement of circuitry (at least for 32  $\mu$ s).

The bits 18 and 19 of the input data register 0 control which of the outputs OUT1, OUT4, OUT5 and OUT6 is multiplexed to the current monitor output. The current monitor output allows a more precise analysis of the actual state of the load rather than the detection of an open- or overload condition. For example this can be used to detect the motor state (starting, free-running, stalled). Moreover, it is possible to regulate the power of the defroster more precise by measuring the load current. The current monitor output is bidirectional (c.f. PWM inputs).

### 3.11 PWM inputs

Each driver has a corresponding PWM enable bit which can be programmed by the SPI interface. If the PWM enable bit in Input data register 1 is set, the output is controlled by the logically AND-combination of the PWM signal and the output control bit in input data register 0. The outputs OUT1-OUT4 and OUT6 are controlled by the PWM1 input and the output OUT5 is controlled by the bidirectional input CM/PMW2. For example, the two PWM inputs can be used to dim two lamps independently by external PWM signals.


### 3.12 Cross-current protection

The three half-bridges of the device are cross-current protected by an internal delay time. If one driver (LS or HS) is turned-off the activation of the other driver of the same half bridge is automatically delayed by the cross-current protection time. After the cross-current protection time is expired the slew-rate limited switch-off phase of the driver is changed to a fast turn-off phase and the opposite driver is turned-on with slew-rate limitation. Due to this behavior it is always guaranteed that the previously activated driver is totally turned-off before the opposite driver starts to conduct.

### 3.13 Programmable soft start function to drive loads with higher inrush current

Loads with start-up currents higher than the overcurrent limits (e.g. inrush current of lamps, start current of motors and cold resistance of heaters) can be driven by using the programmable soft start function (i.e. overcurrent recovery mode). Each driver has a corresponding over-current recovery bit. If this bit is set, the device switches automatically on the outputs again after a programmable recovery time. The duty cycle in over-current condition can be programmed by the SPI interface to be about 15 %...25 %. The PWM modulated current provides sufficient average current to power up the load (e.g. heat up the bulb) until the load reaches operating condition. The PWM frequency settles at 1.5 kHz or 3 kHz. The device itself cannot distinguish between a real overload and a non linear load like a light bulb. A real overload condition can only be qualified by time. As an example the microcontroller can switch on light bulbs by setting the over-current recovery bit for the first 50ms. After clearing the recovery bit the output is automatically disabled if the overload condition still exists.

Figure 9. Programmable soft start function for inductive loads and incandescent bulbs

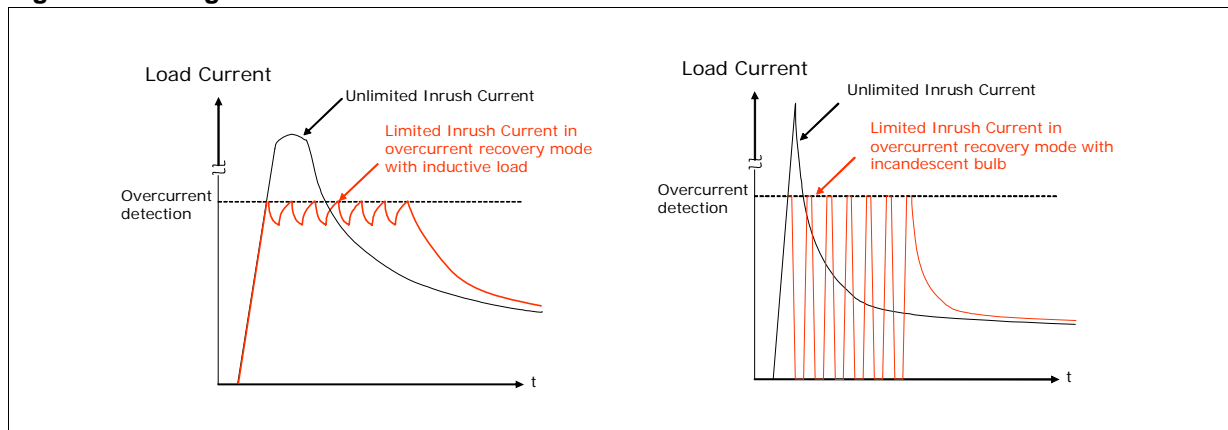

## 4 Functional description of the SPI

### 4.1 Serial Peripheral Interface (SPI)

This device uses a standard SPI to communicate with a microcontroller. The SPI can be driven by a microcontroller with its SPI peripheral running in following mode: CPOL = 0 and CPHA = 0.

For this mode, input data is sampled by the low to high transition of the clock CLK, and output data is changed from the high to low transition of CLK.

This device is not limited to microcontroller with a build-in SPI. Only three CMOS compatible output pins and one input pin are needed to communicate with the device. A fault condition can be detected by setting CSN to low. If CSN = 0, the DO pin reflects the status bit 0 (fault condition) of the device which is a logical-or of all bits in the status registers 0 and 1. The microcontroller can poll the status of the device without the need of a full SPI communication cycle.

*Note:* In contrast to the SPI standard the least significant bit (LSB) is transferred first (see [Figure 3](#)).

### 4.2 Chip Select Not (CSN)

The input pin is used to select the serial interface of this device. When CSN is high, the output pin (DO) is in high impedance state. A low signal activates the output driver and a serial communication can be started. The state when CSN is going low until the rising edge of CSN is called a communication frame.

### 4.3 Serial Data In (DI)

The input pin is used to transfer data serial into the device. The data applied to the DI is sampled at the rising edge of the CLK signal and shifted into an internal 24 bit shift register. At the rising edge of the CSN signal the contents of the shift register is transferred to data input register. The writing to the selected data input register is only enabled if exactly 24 bits are transmitted within one communication frame (i.e. CSN low). If more or less clock pulses are counted within one frame the complete frame is ignored. This safety function is implemented to avoid an activation of the output stages by a wrong communication frame.

*Note:* Due to this safety functionality a daisy chaining of SPI is not possible. Instead, a parallel operation of the SPI bus by controlling the CSN signal of the connected ICs is recommended.

### 4.4 Serial Data Out (DO)

The data output driver is activated by a logical low-level at the CSN input and goes from high impedance to a low or high-level depending on the status bit 0 (fault condition). The first rising edge of the CLK input after a high to low transition of the CSN pin transfers the content of the selected status register into the data out shift register. Each subsequent falling edge of the CLK shifts the next bit out.

## 4.5 Serial Clock (CLK)

The CLK input is used to synchronize the input and output serial bit streams. The data input (DI) is sampled at the rising edge of the CLK and the data output (DO) changes with the falling edge of the CLK signal.

## 4.6 Input Data Register

The device has two input registers. The first bit (bit 0) at the DI input is used to select one of the two input registers. All bits are first shifted into an input shift register. After the rising edge of CSN the contents of the input shift register is written to the selected input data register only if a frame of exact 24 data bits are detected. Depending on bit 0 the contents of the selected status register is transferred to DO during the current communication frame. Bit 1-17 controls the behavior of the corresponding driver.

If bit 23 is zero, the device goes into the standby mode. The bits 18 and 19 are used to control the current monitor multiplexer. Bit 22 is used to reset all status bits in both status registers. The bits in the status registers is cleared after the current communication frame (rising edge of CSN).

## 4.7 Status register

This devices uses two status registers to store and to monitor the state of the device. No error bit (bit 0) is used as a fault bit and is a logical-NOR combination of bits 1-22 in both status registers. The state of this bit can be polled by the microcontroller without the need of a full SPI communication cycle. If one of the over-current bits is set, the corresponding driver is disabled. If the over-current recovery bit of the output is not set the microcontroller has to clear the over-current bit to enable the driver. If the thermal shutdown bit is set, all drivers goes into a high impedance state. Again the microcontroller has to clear the bit to enable the drivers.

### 4.8 SPI - input data and status registers

Table 18. SPI - input data and status registers 0

| Bit | Input register 0 (write)                  |   |   | Status register 0 (read)    |  |               |
|-----|---|---|---|-----------------------------|--|---------------|
|     | Name                                      | Comment   |   | Name                        | Comment  |               |
| 23  | Enable bit                                | If enable bit is set the device switches in active mode. If enable bit is cleared the device goes into standby mode and all bits are cleared. After power-on reset device starts in standby mode. |   | Always 1                    | A broken V <sub>CC</sub> -or SPI connection of the L9954LXP can be detected by the microcontroller, because all 24 bits low or high is not a valid frame.  |               |
| 22  | Reset bit                                 | If reset bit is set both status registers are cleared after rising edge of CSN input.   |   | V <sub>S</sub> overvoltage  | In case of an overvoltage or undervoltage event the corresponding bit is set and the outputs are deactivated. If V <sub>S</sub> voltage recovers to normal operating conditions outputs are reactivated automatically (if bit 20 of status register 0 is not set).   |               |
| 21  | OC recovery duty cycle                    |   | This bit defines in combination with the over-current recovery bit (input register 1) the duty cycle in overcurrent condition of an activated driver. | V <sub>S</sub> undervoltage |  |               |
|     | 0: 12%                                    | 1: 25%  |   |                             |  |               |
| 20  | Overvoltage/undervoltage recovery disable | If this bit is set the microcontroller has to clear the status register after under voltage / overvoltage event to enable the outputs.  |   | Thermal shutdown            | In case of a thermal shutdown all outputs are switched off. The microcontroller has to clear the TSD bit by setting the Reset Bit to reactivate the outputs.   |               |
| 19  |   |   | Depending on combination of bit 18 and 19 the current image (1/10.000) of the selected HS-output is multiplexed to the CM output:                     | Temperature warning         | The TW bit can be used for thermal management by the microcontroller to avoid a thermal shutdown. The microcontroller has to clear the TW bit.   |               |
| 18  | Current monitor select bits               |   | Bit 19  | Bit 18                      | Output   | Not ready bit |
|     |   |   | 0   | 0                           | OUT6   |               |
|     |   |   | 1   | 0                           | OUT1   |               |
|     |   |   | 0   | 1                           | OUT4   |               |
|     |   |   | 1   | 1                           | OUT5   |               |
|     |   |   |   |                             | After switching the device from standby mode to active mode an internal timer is started to allow charge pump to settle before the outputs can be activated. This bit is cleared automatically after start up time has finished. Since this bit is controlled by internal clock it can be used for synchronizing testing events (e.g. measuring filter times). |               |

Table 18. SPI - input data and status registers 0 (continued)

| Bit | Input register 0 (write) |   | Status register 0 (read)  |  |
|-----|--------------------------|---|---|--|
|     | Name                     | Comment   | Name  | Comment  |
| 17  | OUT6 – HS on/off         | If a bit is set the selected output driver is switched on. If the corresponding PWM enable bit is set (input register 1) the driver is only activated if PWM1 (PWM2) input signal is high. The outputs of OUT1-OUT3 are half bridges. If the bits of HS- and LS-driver of the same half bridge are set, the internal logic prevents that both drivers of this output stage can be switched on simultaneously in order to avoid a high internal current from $V_S$ to GND. | OUT6 – HS over-current  | In case of an over-current event the corresponding status bit is set and the output driver is disabled. If the over-current recovery enable bit is set (input register 1) the output is automatically reactivated after a delay time resulting in a PWM modulated current with a programmable duty cycle (bit 21).<br>If the over-current recovery bit is not set the microcontroller has to clear the over-current bit (reset bit) to reactivate the output driver. |
| 16  | x (don't care)           |   | 0   |  |
| 15  | OUT5 – HS on/off         |   | OUT5 – HS over-current  |  |
| 14  | OUT4 – HS on/off         |   | OUT4 – HS over-current  |  |
| 13  | x (don't care)           |   | 0   |  |
| 12  | x (don't care)           |   | 0   |  |
| 11  | x (don't care)           |   | 0   |  |
| 10  | x (don't care)           |   | 0   |  |
| 9   | x (don't care)           |   | 0   |  |
| 8   | x (don't care)           |   | 0   |  |
| 7   | x (don't care)           |   | 0   |  |
| 6   | OUT3 – HS on/off         |   | OUT3 – HS over-current  |  |
| 5   | OUT3 – LS on/off         |   | OUT3 – LS over-current  |  |
| 4   | OUT2 – HS on/off         |   | OUT2 – HS over-current  |  |
| 3   | OUT2 – LS on/off         |   | OUT2 – LS over-current  |  |
| 2   | OUT1 – HS on/off         |   | OUT1 – HS over-current  |  |
| 1   | OUT1 – LS on/off         |   | OUT1 – LS over-current  |  |
| 0   | 0                        | No error bit  | A logical NOR-combination of all bits 1 to 22 in both status registers. |  |

Table 19. SPI - input data and status registers 1


| Bit | Input register 1 (write) |  | Status register 1 (read) |  |
|-----|--------------------------|--|--------------------------|--|
|     | Name                     | Comment  | Name                     | Comment  |
| 23  | Enable bit               | If enable bit is set the device is switched in active mode. If enable bit is cleared device goes into standby mode and all bits are cleared. After power-on reset device starts in standby mode.   | Always 1                 | A broken $V_{CC}$ or SPI connection of the L9954LXP can be detected by the microcontroller, because all 24 bits low or high is not a valid frame.  |
| 22  | OUT6 OC recovery enable  | In case of an over-current event the over-current status bit (status register 0) is set and the output is switched off. If the over current recovery enable bit is set the output is automatically reactivated after a delay time resulting in a PWM modulated current with a programmable duty cycle (bit 21 of input data register 0). Depending on occurrence of overcurrent event and internal clock phase it is possible that one recovery cycle is executed even if this bit is set to zero. | $V_S$ overvoltage        | In case of an overvoltage or under voltage event the corresponding bit is set and the outputs are deactivated. If $V_S$ voltage recovers to normal operating conditions outputs are reactivated automatically.   |
| 21  | x (don't care)           |  | $V_S$ undervoltage       |  |
| 20  | OUT5 OC recovery enable  |  | Thermal shutdown         | In case of a thermal shutdown all outputs are switched off. The microcontroller has to clear the TSD bit by setting the reset bit to reactivate the outputs.   |
| 19  | OUT4 OC recovery enable  |  | Temperature warning      | The TW bit can be used for thermal management by the microcontroller to avoid a thermal shutdown. The microcontroller has to clear the TW bit.   |
| 18  | x (don't care)           |  | Not ready bit            | After switching the device from standby mode to active mode an internal timer is started to allow charge pump to settle before the outputs can be activated. This bit is only present during start up time. Since this bit is controlled by internal clock it can be used for synchronizing testing events(e.g. measuring filter times). |

Table 19. SPI - input data and status registers 1 (continued)

| Bit | Input register 1 (write)           |   | Status register 1 (read)  |  |
|-----|------------------------------------|---|---|--|
|     | Name                               | Comment   | Name  | Comment  |
| 17  | Enable high R <sub>DSon</sub> OUT5 | After 50ms the bit can be cleared. If over-current condition still exists, a wrong load can be assumed. | OUT6 – HS open-load   | The open-load detection monitors the load current in each activated output stage. If the load current is below the open-load detection threshold for at least 1 ms (t <sub>dOL</sub> ) the corresponding open-load bit is set. Due to mechanical/electrical inertia of typical loads a short activation of the outputs (e.g. 3 ms) can be used to test the open-load status without changing the mechanical/electrical state of the loads. |
| 16  | x (don't care)                     |   | 0   |  |
| 15  | x (don't care)                     |   | OUT5 – HS open-load   |  |
| 14  | OUT3 OC recovery enable            |   | OUT4 – HS open-load   |  |
| 13  | OUT2 OC recovery enable            |   | 0   |  |
| 12  | OUT1 OC recovery enable            |   | 0   |  |
| 11  | OUT6 PWM1 enable                   |   | If the PWM1/2 enable bit is set and the output is enabled (input register 0) the output is switched on if PWM1/2 input is high and switched off if PWM1/2 input is low. OUT5 is controlled by PWM2 input. All other outputs are controlled by PWM1 input. |  |
| 10  | x (don't care)                     | 0   |   |  |
| 9   | OUT5 PWM2 enable                   | 0   |   |  |
| 8   | OUT4 PWM1 enable                   | 0   |   |  |
| 7   | x (don't care)                     | 0   |   |  |
| 6   | Enable high R <sub>DSon</sub> OUT4 | OUT3 – HS open-load   |   |  |
| 5   | x (don't care)                     | OUT3 – LS open-load   |   |  |
| 4   | x (don't care)                     | OUT2 –HS open-load  |   |  |
| 3   | OUT3 PWM1 enable                   | OUT2– LS open-load  |   |  |
| 2   | OUT2 PWM1 enable                   | OUT1 – HS open-load   |   |  |
| 1   | OUT1 PWM1 enable                   | OUT1 – LS open-load   |   |  |
| 0   | 1                                  | No error bit  | A logical NOR-combination of all bits 1 to 22 in both status registers.   |  |

## 5 Packages thermal data

Figure 10. Packages thermal data

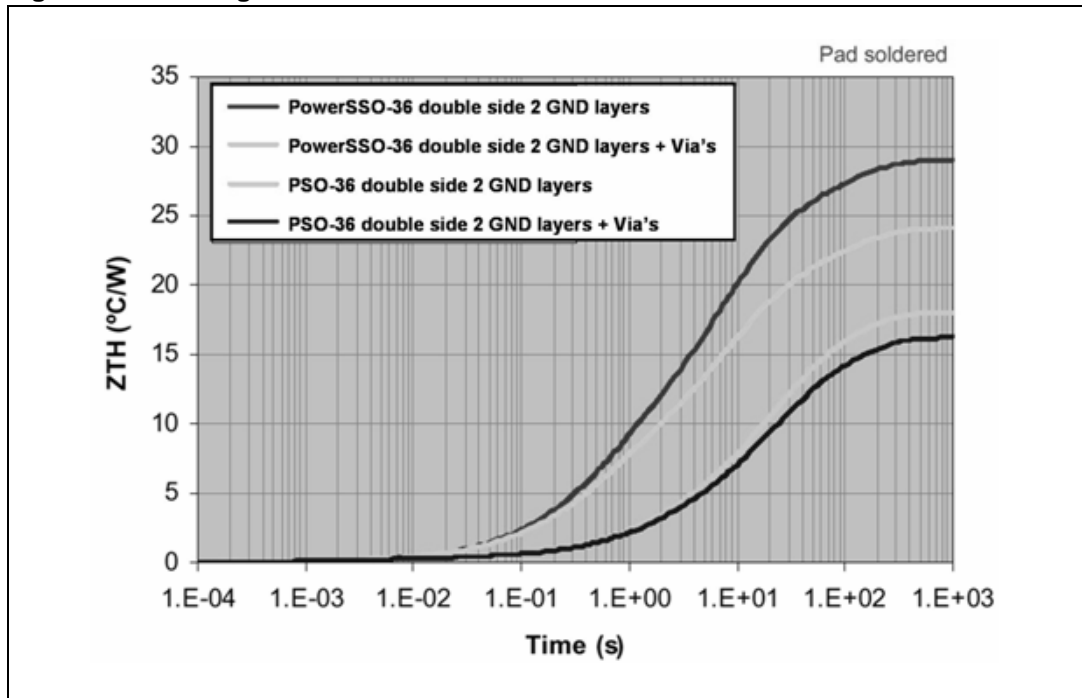

## 6 Package and packing information

### 6.1 ECOPACK<sup>®</sup> packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).

ECOPACK<sup>®</sup> is an ST trademark.

### 6.2 PowerSSO-36 package information

Figure 11. PowerSSO-36 package dimensions

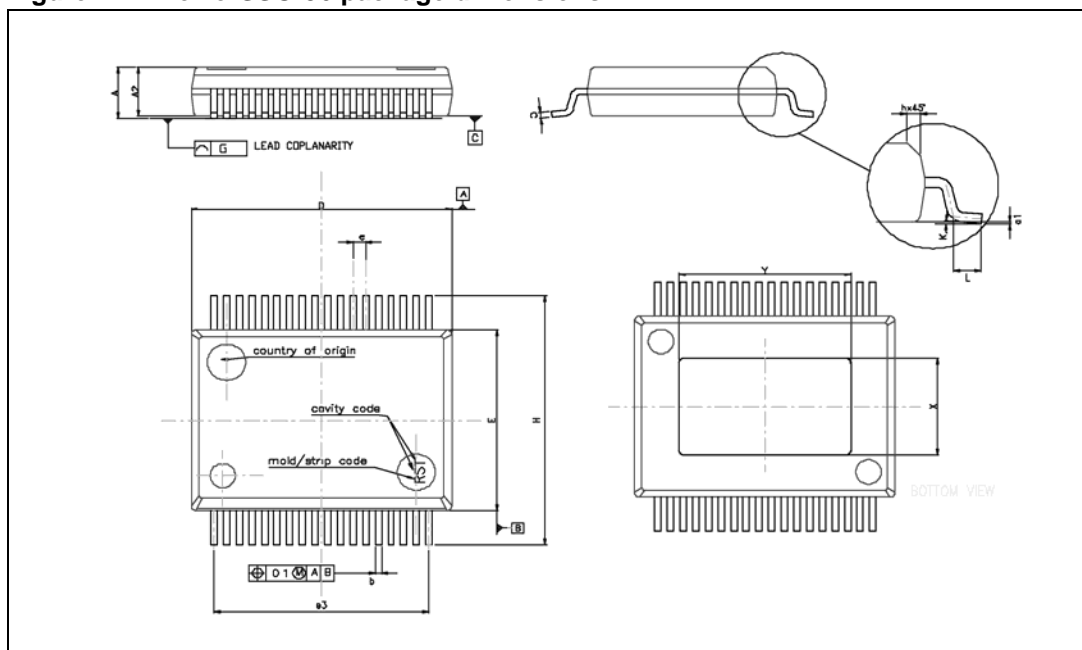


Table 20. PowerSSO-36 mechanical data

| Symbol | Millimeters |      |        |
|--------|-------------|------|--------|
|        | Min.        | Typ. | Max.   |
| A      | 2.15        | -    | 2.47   |
| A2     | 2.15        | -    | 2.40   |
| a1     | 0           | -    | 0.075  |
| b      | 0.18        | -    | 0.36   |
| c      | 0.23        | -    | 0.32   |
| D      | 10.10       | -    | 10.50  |
| E      | 7.4         | -    | 7.6    |
| e      | -           | 0.5  | -      |
| e3     | -           | 8.5  | -      |
| G      | -           | -    | 0.1    |
| G1     | -           | -    | 0.06   |
| H      | 10.1        | -    | 10.5   |
| h      | -           | -    | 0.4    |
| L      | 0.55        | -    | 0.85   |
| N      | -           | -    | 10 deg |
| X      | 4.3         | -    | 5.2    |
| Y      | 6.9         | -    | 7.5    |

### 6.3 PowerSSO-36 packing information

Figure 12. PowerSSO-36 tube shipment (no suffix)


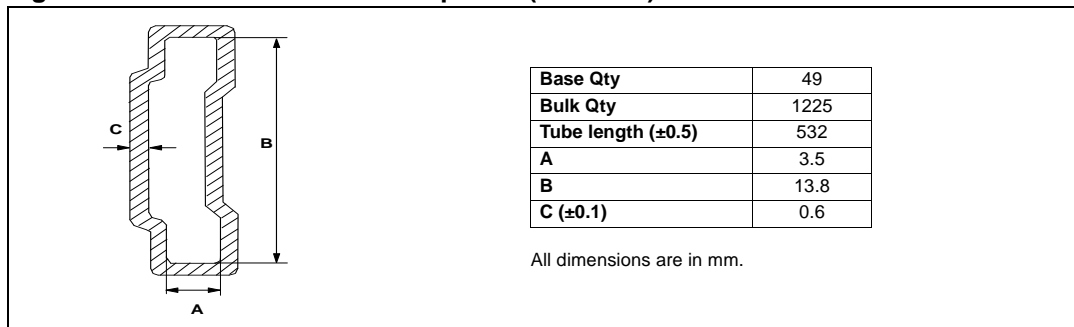


Figure 13. PowerSSO-36 tape and reel shipment (suffix “TR”)

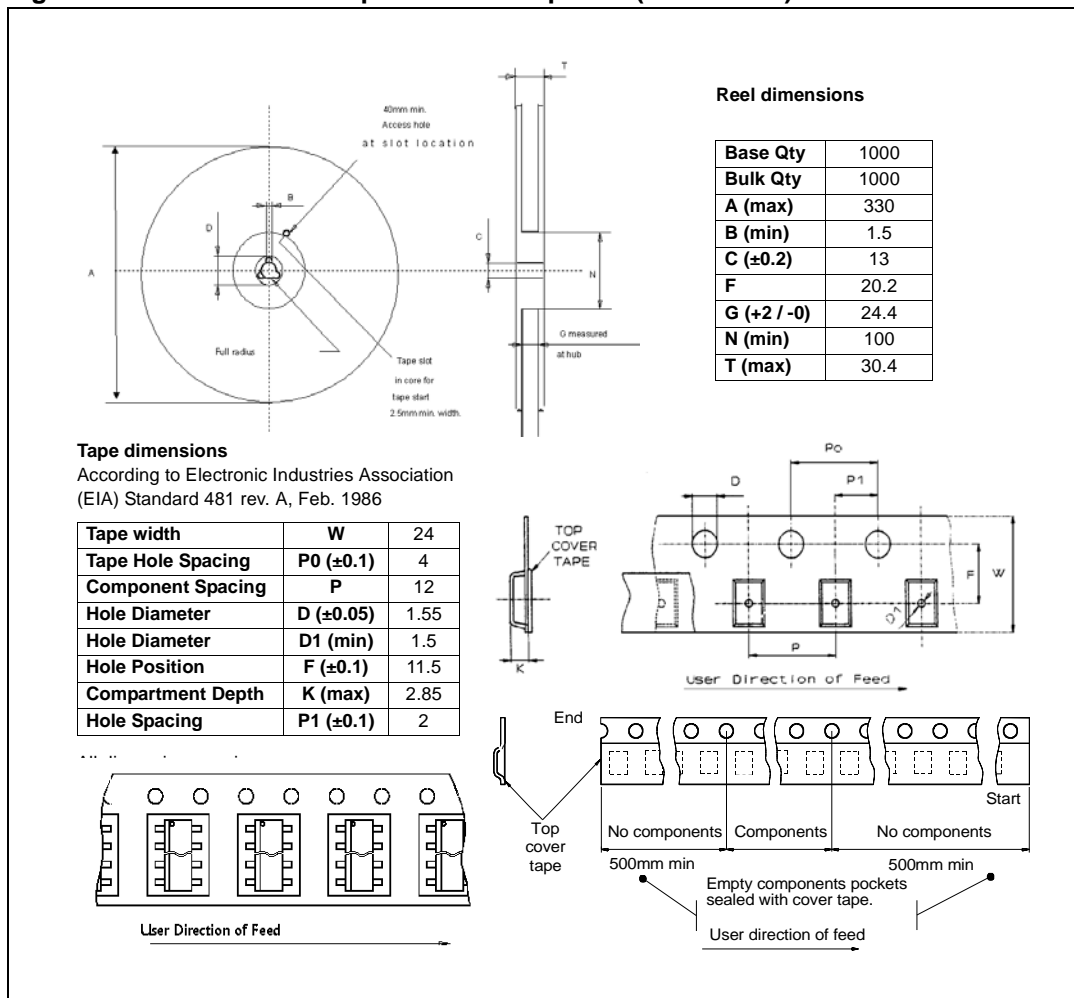

## 7 Revision history

Table 21. Document revision history

| Date        | Revision | Description of changes  |
|-------------|----------|---|
| 12-Feb-2010 | 1        | Initial release.  |
| 17-May-2010 | 2        | <i>Table 20: PowerSSO-36 mechanical data:</i><br>– Changed X: minimum value from 4.1 to 4.3 and maximum value from 4.7 to 5.2<br>– Changed Y: minimum value from 6.5 to 6.9 and maximum value from 7.1 to 7.5 |
| 19-Sep-2013 | 3        | Updated disclaimer.   |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View L9954LXPTR](#) on WIN SOURCE

 [STMicroelectronics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management