




**THE DATASHEET OF
SL15 10006**





Mechanical Specifications (mm)

D:	15.0	± max
T:	5.0	± 1.0
Lead Diameter	0.8	± .10
S:	7.8	± 2.0
L:	38.0	± 9.0
Coating Lead Run Down (straight Leads)	5.0	± Max
B:	6.35	± .60
C:	2.82	± .50

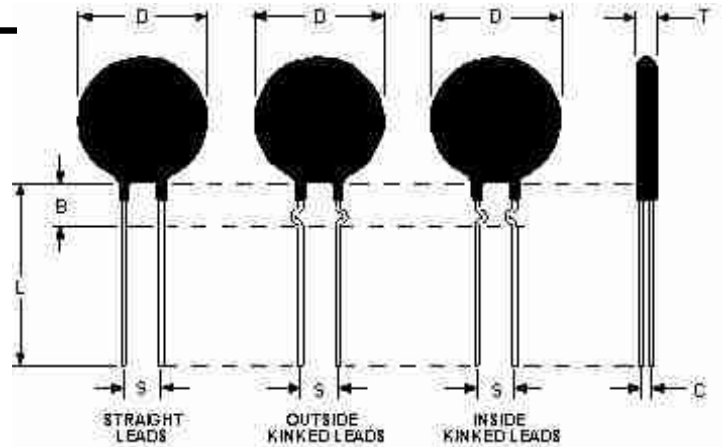

Electrical Specifications

Resistance:	10.0 Ω	± 20 %
Max Steady State Current upto 65°C:	6.00	A
Max Rec. Energy Rating:	55	J
Maximum Capacitance @ 120 VAC:	3,820	µf
Maximum Capacitance @ 240 VAC:	955	µf
Resistance @ 100% Max Current:	0.14	Ω
Resistance @ 50% Max Current:	0.36	Ω
Body Temperature at 100% Max Current:	172.00	°c
Dissipation Constant:	15.9	mw/°c
Thermal Time Constant:	54	Sec.
Material Type (for Beta and Curve):	G	

SL15 10006	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SL15 10006](#) on WIN SOURCE

 [Ametherm](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management