



**THE DATASHEET OF  
NX3225SA-25.000M-STD-CRS-2**



# Crystal Units

## NX3225SA


For Automotive

### ■ Features

- A small surface-mount type crystal unit, ideal for automotive applications.
- With a well established reputation for reliability, this product is best suited for automotive equipment.
- Stable start-up characteristic even under extremely severe environmental conditions.
- Excellent environmental characteristics, including heat, vibration and shock resistance.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- Conforms to AEC-Q200.

Pb Free

RoHS Compliant  
Directive 2011/65/EU  
Directive (EU) 2015/863

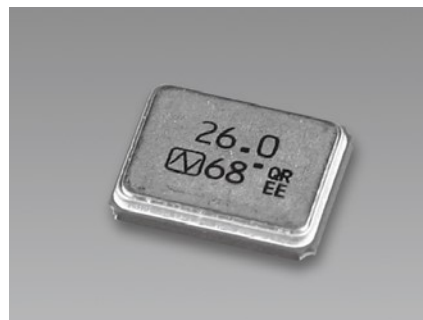

### ■ Specifications

Item	Model	NX3225SA	
		Standard	Optional
Nominal Frequency (MHz)		12 ≤ F ≤ 50	12 ≤ F ≤ 50
Overtone Order		Fundamental	Fundamental
Frequency Tolerance (25 ±3 °C)		±15 × 10 <sup>-6</sup>	±15 × 10 <sup>-6</sup>
Frequency versus Temperature Characteristics (with reference to +25 °C)		±50 × 10 <sup>-6</sup>	±50 × 10 <sup>-6</sup>
Operating Temperature Range (°C)		-40 to +125	-40 to +125
Storage Temperature Range (°C)		-40 to +125	-40 to +125
Equivalent Series Resistance		Refer to *1	Refer to *1
Level of Drive (µW)		10 (Max. 200)	10 (Max. 200)
Load Capacitance (pF)		8	6 to 32
Frequency Aging (+25 °C)		---	Max. ±3 × 10 <sup>-6</sup> / year *2
Specifications Number		STD-CRS-2	Refer to *3

Please specify the model name, frequency, and specification number when you order products.

For further questions regarding specifications, please feel free to contact us.

\*2 If you have any other requests, NDK will study it.

\*3 Ordering information: Overtone Order Fundamental / 3rd Overtone, the Operating Temperature Range, Frequency versus Temperature Characteristics, Frequency Tolerance, and Load Capacitance.

Ex. Model, Frequency (38.400000MHz 6digits), S1:Fundamental or S3:3rd Overtone

- Operating Temperature Range (-40 to +125°C) - Frequency versus Temperature Characteristics (±50×10<sup>-6</sup>)


- Frequency Tolerance (±15×10<sup>-6</sup>) - Load Capacitance (8pF)

NX3225SA

38.400000MHz

S1-40125-50-15-8

### ■ Dimensions

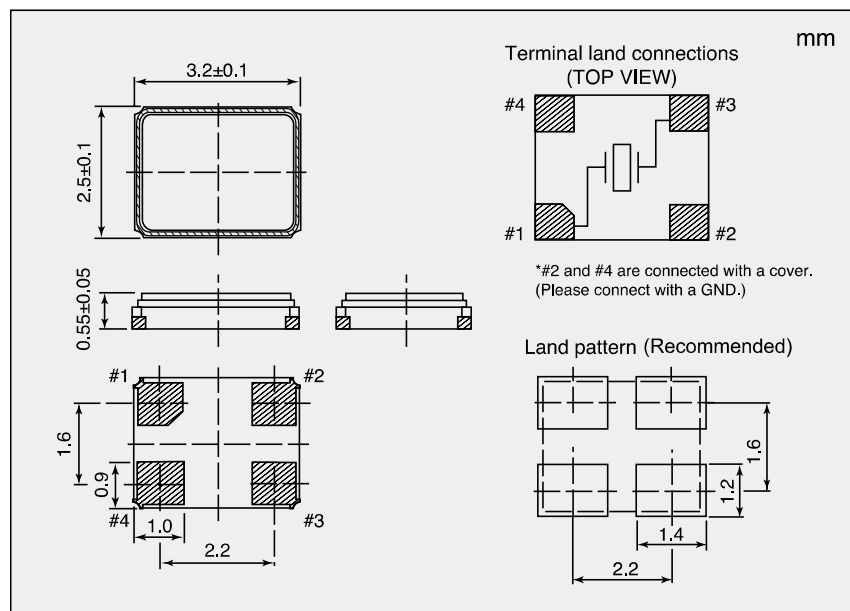

\*1 Equivalent Series Resistance

Nominal Frequency (MHz)	Equivalent Series Resistance Max. (Ω)
12 ≤ F < 20	120
20 ≤ F ≤ 50	100

If you have any other requests, NDK will study it.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NX3225SA-25.000M-STD-CRS-2 on WIN SOURCE](#)

 [NDK Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management