



**THE DATASHEET OF
SL03 10001**






ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	3.7	± max
T:	3.5	± max
Lead Diameter	0.5	± nom
S:	2.5	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)		±
B:	3.00	± nom
C:	1.20	± nom

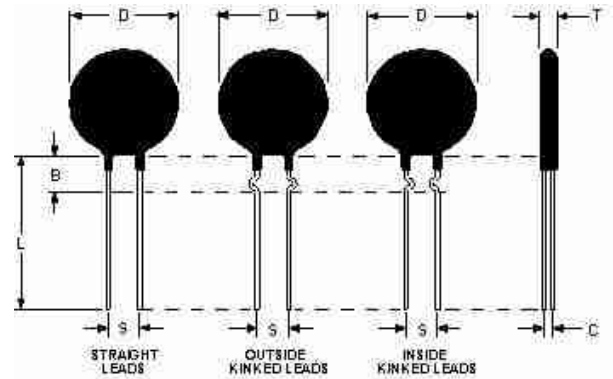

Electrical Specifications

Resistance:	10.0 Ω	± 20 %
Max Steady State Current upto 65°C:	1.00	A
Max Rec. Energy Rating:	1	J
Actual Failure Instantaneous Energy:	2	J
Maximum Capacitance @ 120 VAC:	100	μ f
Resistance @ 100% Max Current:	1.00	Ω
Resistance @ 50% Max Current:	2.00	Ω
Body Temperature at 100% Max Current:	113.00	°c
Dissipation Constant:	6.2	mw/°c
Thermal Time Constant:	52	Sec.
Material Type (for Beta and Curve):	A	

SL03 10001	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SL03 10001](#) on WIN SOURCE

 [Ametherm](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management