




**THE DATASHEET OF  
10N80L75/E**



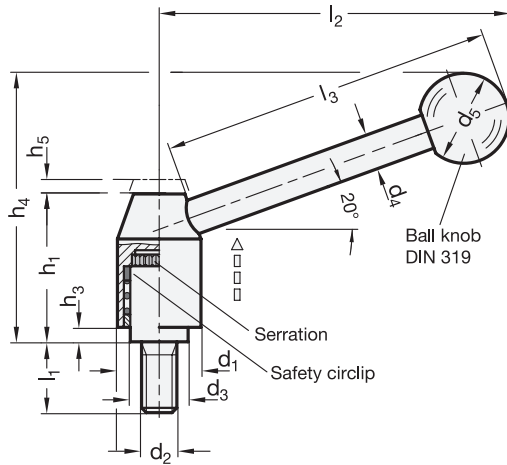

SS Stainless Steel

4 Type

E Angled lever

**Inch table**

Dimensions in: inches - millimeters

1	2	3															
d <sub>1</sub>	d <sub>2</sub> Thread	l <sub>1</sub>							d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	h <sub>1</sub>	h <sub>3</sub>	h <sub>4</sub> ≈	h <sub>5</sub> Stroke	l <sub>2</sub> ≈	l <sub>3</sub> ≈
0.83 21	5/16 x 18	0.63 16	0.79 20	0.98 25	1.26 32	1.57 40	1.97 50	2.48 63	0.53 13.5	0.31 8	0.79 20	1.32 33.5	0.04 1	2.32 59	0.16 4	2.76 70	2.76 70
0.94 24	3/8 x 16	0.79 20	0.98 25	1.26 32	1.57 40	1.97 50	2.48 63	-	0.63 16	0.39 10	0.98 25	1.57 40	0.10 2.5	2.95 75	0.18 4.5	3.78 96	3.78 96
1.10 28	1/2 x 13	0.98 25	1.26 32	1.57 40	1.97 50	2.48 63	-	-	0.75 19	0.47 12	1.18 30	1.91 48.5	0.18 4.5	3.50 89	0.18 4.5	4.33 110	4.33 110

**Metric table**

Dimensions in: millimeters - inches

1	2	3															
d <sub>1</sub>	d <sub>2</sub> Thread	l <sub>1</sub>							d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	h <sub>1</sub>	h <sub>3</sub>	h <sub>4</sub> ≈	h <sub>5</sub> Stroke	l <sub>2</sub> ≈	l <sub>3</sub> ≈
21 0.83	M 8	16 0.63	20 0.79	25 0.98	32 1.26	40 1.57	50 1.97	63 2.48	13.5 0.53	8 0.31	20 0.79	33.5 1.32	1 0.04	59 2.32	4 0.16	75 2.95	70 2.76
24 0.94	M 10	20 0.79	25 0.98	32 1.26	40 1.57	50 1.97	63 2.48	80 3.15	16 0.63	10 0.39	25 0.98	40 1.57	2.5 0.10	75 2.95	4.5 0.18	101 3.98	96 3.78
28 1.10	M 12	25 0.98	32 1.26	40 1.57	50 1.97	63 2.48	80 3.15	-	19 0.75	12 0.47	30 1.18	48.5 1.91	4.5 0.18	89 3.50	4.5 0.18	116 4.57	110 4.33

**Specification**

- Body / lever / insert  
Stainless steel AISI 303  
Matte shot-blasted finish
- Ball knob DIN 319 → page 55  
Plastic  
Duroplast (Phenolic PF)  
Black, shiny finish
- Safety circlip  
Plastic (Polyacetal POM)
- Plastic Characteristics → page 2135
- Stainless Steel Characteristics → page 2143
- RoHS compliant

**On request**

- Straight lever
- Special threads and stud lengths

**Information**

GN 212.5 heavy duty adjustable levers have proven to be ideal wherever parts have to be clamped in a confined space or in a particular lever position. The threaded insert is connected with the hub via serrations that can be disengaged.

Pulling the lever upwards disengages the serrations, allowing it to be swiveled to the ideal clamping position. When releasing the lever, the serrations automatically re-engage.

see also...



- Heavy Duty Adjustable Levers GN 212.3 (Steel, Blackened Finish) → page 518

How to order (Inch)	1 Diameter d <sub>1</sub>
	2 Thread d <sub>2</sub>
<b>GN212.5-21-5/16X18-16-E</b>	3 Thread length l <sub>1</sub>
	4 Type


How to order (Metric)	1 Diameter d <sub>1</sub>
	2 Thread d <sub>2</sub>
<b>GN212.5-28-M12-25-E</b>	3 Thread length l <sub>1</sub>
	4 Type

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 10N80L75/E on WIN SOURCE](#)
-  [J.W. Winco Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management