



THE DATASHEET OF WAU240-500



WAU240-500

Electrical Specifications (@25C)

1. Primary Rating: 120V 60Hz
2. Primary Excitation Current: <4mA
3. Secondary Rating: 24VAC ± 5%, 500mA AC
4. Secondary No-Load Rating: <29.5VAC Ref.
5. No Load Power (stand by): ≤0.21W
6. Average Efficiency: 82.96%. Meets minimum level VI efficiency*
7. Operating Temperature Range: -10 Deg C to +50 Deg C
8. Temperature Rise: 30 Deg C Max at rated load

Mechanical Parameters:

Case Type: Thermoplastic molded enclosure.
Output Cord: 24 AWG, 6 Ft. Long Min.

Warranty: 10 Years

Agency File:


UL/CUL: File E341931, UL 1310

A. Dimensions:

H	W	D
79.6	59.7	48.1

*Units: In Millimeter


B. Schematic:

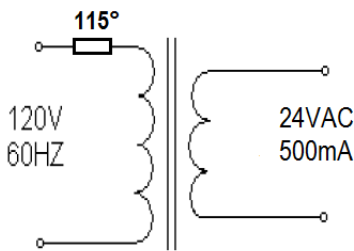

DOE/CEC Compliance: This power supply meets the minimum efficiency levels for direct operation as defined by DOE Docket Number EERE-2008-BT-STD-0005-0219.


RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.


* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

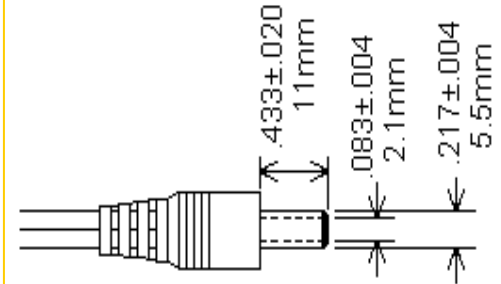

TRIAD

CLASS 2 POWER SUPPLY
MODEL: WAU240-500
INPUT: 120VAC 60Hz, 16W
OUTPUT: 24VAC @ 500mA


 LISTED
 EPBU
 E341931


 RoHS
 XXXX

MADE IN CHINA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View WAU240-500 on WIN SOURCE](#)
- ⊖ [Triad Magnetics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management