THE DATASHEET OF

ICS-324-T

www.win-source.net 0086-755-83957316

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	

APPROVED: _____

DATE: _____ TITLE: _____

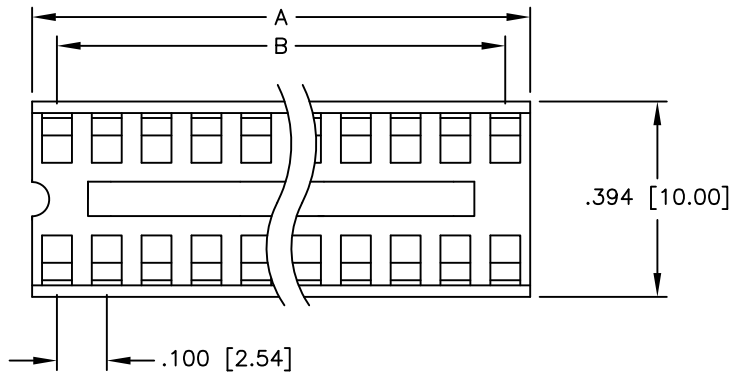

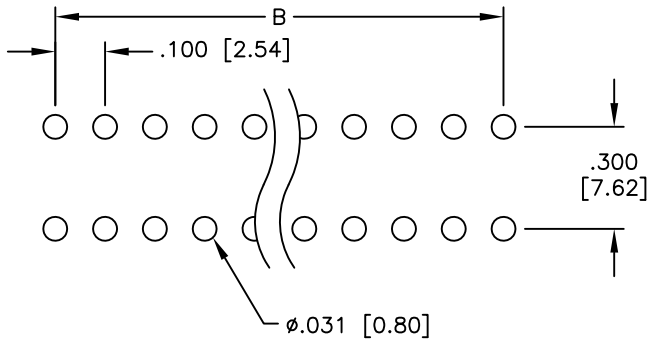

PCB LAYOUT

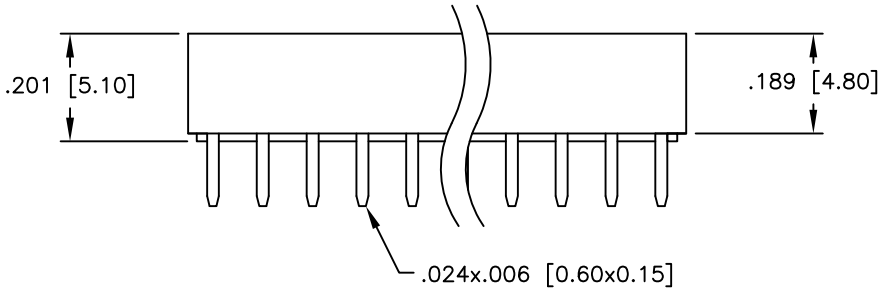

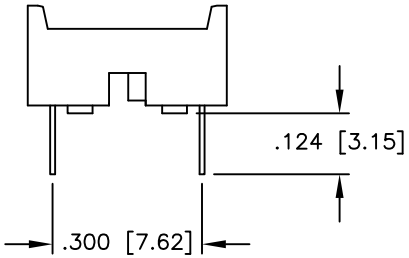

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amp max
Contact resistance: 20 mohms max initial
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: −55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 6, 8, 14, 16, 18, 20, 22, 24, 28, & 32
A = .100 [2.54] x No. of Positions Per Row
B = .100 [2.54] x No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	1/28/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
IC SOCKET, .300" ROW SPACING
TIN PLATED

SIZE	PART NO.	REV.
X	ICS-3XX-T	-

REF: | SCALE: NTS | SHEET 1 OF 1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View ICS-324-T on WIN SOURCE
- Adam Technologies, Inc. Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management