



THE DATASHEET OF SL110A



Surface Mount Schottky Barrier Rectifier

FEATURES

- Ideal for automated placement
- Low forward voltage drop
- Low leakage current
- Meets environmental standard MIL-S-19500D
- Moisture sensitivity: level 1, per J-STD-020
- Solder dip 275 °C, 10 s
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



DO-214AC (SMA)

TYPICAL APPLICATIONS

For use in general purpose rectification of lighting, power supplies, inverters, converters and freewheeling diodes for consumer, automotive and telecommunication.

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	1 A
V_{RRM}	20 V to 100 V
I_{FSM}	30A
V_F	0.42V, 0.5V, 0.68V
$T_J \text{ max.}$	125 °C , 150°C

MECHANICAL DATA

Case: DO-214AC, molded epoxy body, Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22B-106

Polarity: Laser Band Denotes Cathode Band

MAXIMUM RATINGS (TA = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SL12A	SL13A	SL14A	SL15A	SL16A	SL17A	SL18A	SL19A	SL110A	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	V
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	V
Maximum average forward rectified current at TL (See Fig.1)	$I_{F(AV)}$	1									A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	30									A
Operating junction temperature range	T_J	- 55 to + 125				- 55 to + 150					°C
Storage temperature range	T_{stg}	- 55 to + 150									°C

ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)													
PARAMETER	TEST CONDITIONS	SYMBOL	SL12A	SL13A	SL14A	SL15A	SL16A	SL17A	SL18A	SL19A	SL110A	UNIT	
Maximum instantaneous forward voltage	IF=1 A	V _F	0.42			0.5		0.68				V	
Maximum DC reverse current at rated DC blocking voltage	TA=25°C TA=100°C	I _R						0.2					mA
Typical junction capacitance	4.0 V, 1 MHz	C _J						85					pF

THERMAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)												
PARAMETER	SYMBOL	SL12A	SL13A	SL14A	SL15A	SL16A	SL17A	SL18A	SL19A	SL110A	UNIT	
Maximum thermal resistance	R _{θJA} (1)						TBD					°C/W
	R _{θJT} (2)						TBD					

Notes: (1) Thermal resistance from junction to ambient, 0.197 × 0.197" (5.0 × 5.0mm) copper pads to each terminal
 (2) Thermal resistance from junction to terminal, 0.197 × 0.197" (5.0 × 5.0mm) copper pads to each terminal

RATINGS AND CHARACTERISTICS CURVES (T_A = 25 °C unless otherwise noted)

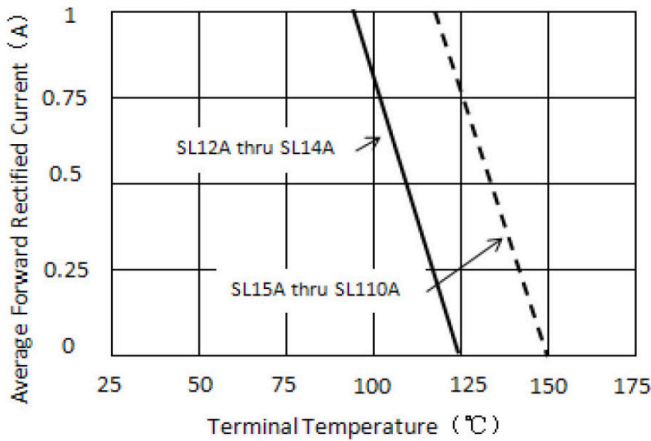


Figure 1. Forward Current Derating Curve

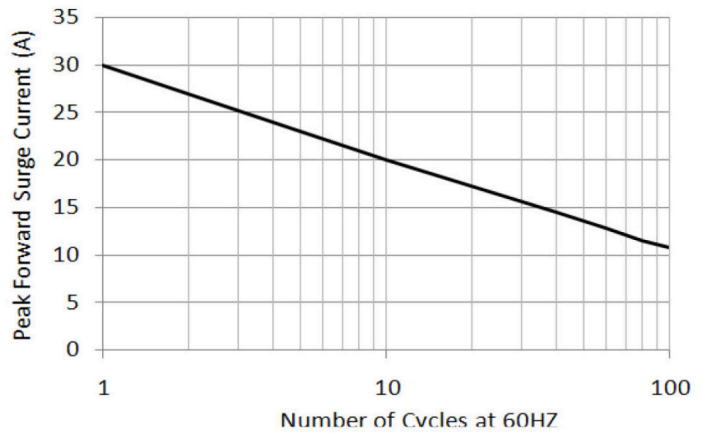


Figure 2. Maximum Non-repetitive Peak Forward Surge Current

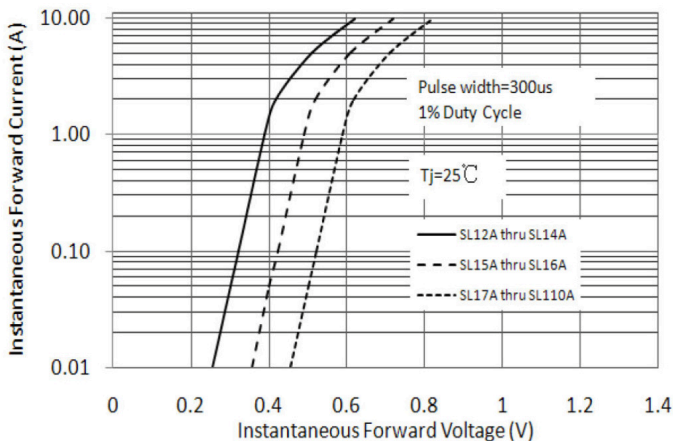


Figure 3. Typical Instantaneous Forward Characteristics

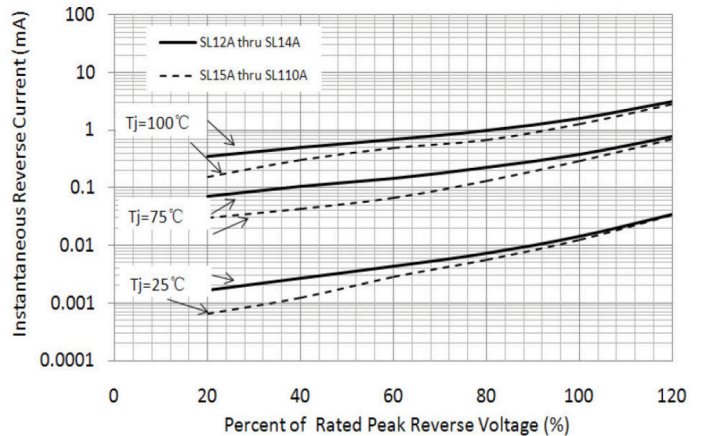


Figure 4. Typical Reverse Characteristics



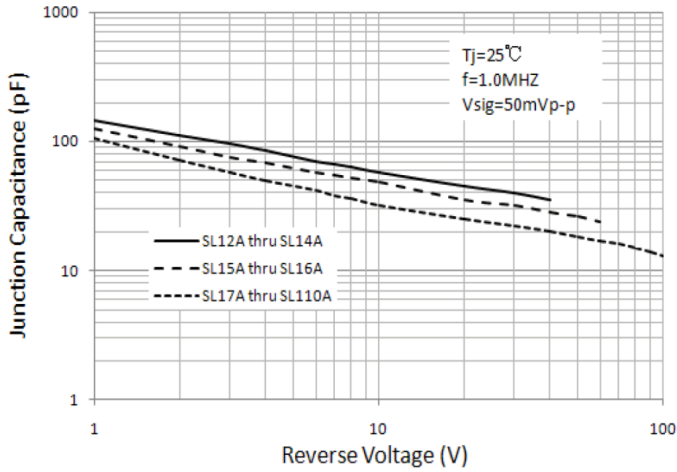




Figure 5. Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

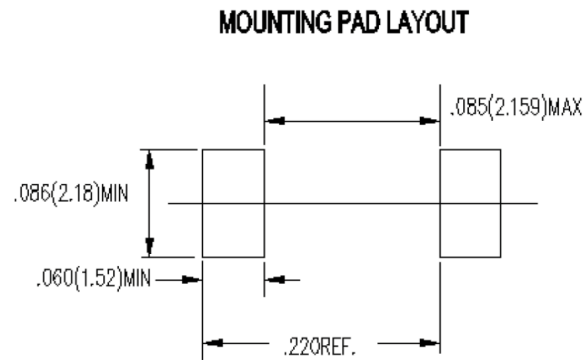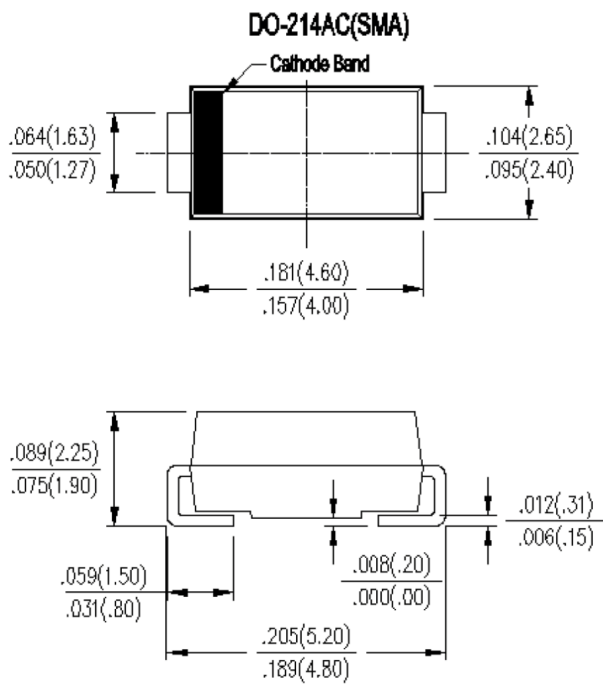

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SL110A on WIN SOURCE](#)
-  [Surge Components](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management