




**THE DATASHEET OF
C1206X225K101T**



Multilayer Ceramic Chip Capacitors [High Capacitance MLCC – 1.0uF and above]

HCC Series



◆ Features

- ❑ Surface mount suitable for wave and reflow soldering
- ❑ High reliability
- ❑ Small size and high capacitance value
- ❑ Excellent high frequency characteristics


◆ Applications

- ❑ Ideal for smoothing and decoupling circuits
- ❑ Suitable for DC-DC converter, personal computer and peripherals, telecommunication and general electronic equipment
- ❑ RoHS compliant

◆ Summary of Specifications

Operation Temperature	NP0 / X7R / X7S : -55 °C ~ +125 °C , X6S : -55 °C ~ +105 °C; X5R : -55 °C ~ +85 °C , Y5V : -30 °C ~ +85 °C
Rated Voltage	4.0Vdc to 50Vdc
Temperature Coefficient	X7R : ≤ ± 15% , -55 °C ~ +125 °C (EIA Class II)
	X7S : ≤ ± 22% , -55 °C ~ +125 °C (EIA Class II)
	X6S : ≤ ± 22% , -55 °C ~ +105 °C (EIA Class II)
	X5R : ≤ ± 15% , -55 °C ~ +85 °C (EIA Class II)
	Y5V : +22%/-82% , -30 °C ~ +85 °C (EIA Class II)
Dissipation Factor	X7R, X5R, X6S, X7S : Max. 0.15; Y5V: Max 0.2
Insulation Resistance	10GΩ or 500/CΩ whichever is smaller (C in Farads)
Aging	X7S/X7R/X6S/X5R : typically 1.0% and Y5V ≤ 7% per decade of time
Dielectric Strength	250% Rated Voltage

◆ Dimension

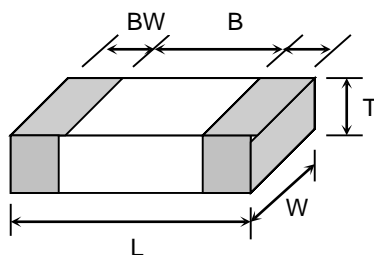

TYPE	L	W	T (max)	B (min)	BW (min)
0201	0.60±0.03 [.024±.001]	0.30±0.03 [.011 ±.001]	0.33 [.013]	0.20 [.008]	0.10 [.004]
0402	1.00±0.05 [.039±.002]	0.50±0.05 [.020 ±.002]	0.55 [.022]	0.30 [.012]	0.15 [.006]
0603	1.60±0.10 [.063±.004]	0.80±0.10 [.031 ±.004]	0.95 [.037]	0.40 [.016]	0.15 [.006]
0805	2.00±0.20 [.079±.012]	1.25±0.20 [.049 ±.008]	1.45 [.057]	0.70 [.028]	0.20 [.008]
1206	3.20±0.30 [.126±.012]	1.60±0.20 [.126±.012]	1.80 [.071]	1.50 [.059]	0.30 [.012]
1210	3.20±0.30 [.126±.012]	2.50±0.20 [.098±.008]	2.70 [.105]	1.60 [.063]	0.30 [.012]
1812	4.60±0.3 [.181±.012]	3.20±0.3 [.126±.012]	3.00 [.118]	2.50 [.098]	0.30 [.012]
2220	5.7±0.40 [.220±.016]	5.00±0.40 [.197±.016]	3.00 [.118]	3.50 [.137]	0.30 [.012]

◆ How To Order



Product Code	Chip Size	Dielectric	Capacitance Unit : pF	Tolerance	Rated Voltage	Packaging	Suffix Code
C: MLCC (Multilayer Ceramic Capacitor)	Ex. 0402 / 0603 0805 / 1206 1210 / 1812 2220	Ex.: X:X7R S:X6S B:X5R Y:Y5V R:X7S	Ex.: 105:10×10 ⁵ 106:10×10 ⁶ 226:22×10 ⁶	Ex.: J : +/- 5% K: +/- 10% M: +/- 20% Z :+80/-20%	Ex.: 004: 4Vdc 007: 6.3Vdc 010: 10Vdc 025: 25Vdc 050: 50Vdc	T: T&R 7" R: T&R 13" B: Bulk	Y

◆ Capacitance Range

X7R (X) Series		0603						0805						1206						1210					1812		2220				
Size	0402	0603		0603		0603		0805		0805		0805		0805		1206		1206		1206		1206		1210		1210		1812		2220	
Code	4V	6.3V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	35V	50V	6.3V	10V	16V	25V	35V	50V	10V	16V	25V	35V	50V	25V	50V	25V	50V			
105	O	O	B	B	B	B	B	D	D	D	D	D	D	D	D	D/E	D/E	D/E	D/E	D	D	D	D	E	F	F	F	F	F		
155																															
225			B	B				D	D	D	D	D	D	E	E	E	E	E	E	F	F	F	F	F	F	F	F	F	F		
335																															
475								D	D	D	D			E	E	E	E	E	E	F	F	F	F	F	F	F	F	F	F		
106								D	D	D				E	E	E	E	E	E	F	F	F	F	F/G	F/G	F/G	F/G	G	G		
226																															
476																															

X7S (R) Series		0402		0603			0805		1206	1210
Code	6.3V	10V	10V	16V	25V	25V	50V	16V	6.3V	
105		O								
155										
225	O	O		B	B					
335										
475			B	B			D			
106						D				
226								E		
476										
107									G	

Y5V (Y) Series		0603					0805					1206			1210							
Code	6.3V	10V	6.3	10V	16V	25V	6.3V	10V	16V	25V	50V	10V	16V	25V	10V	16V	25V	35V				
105	O	O		B	B	B							B	B	D							
155																						
225				B	B	B						D	D	D								
475				B	B							D	D	D								
106												D	D	D		D	D/E	E	F	F	F	F
226												D	D			D/E	D/E		F	F		

X6S (S) Series		0402		0603					0805					1206					1210													
Code	4V	6.3V	6.3V	10V	16V	25V	4V	6.3V	10V	16V	25V	50V	4V	6.3V	10V	16V	25V	35V	50V	4V	6.3V	10V	16V	25V	35V	50V	6.3V	10V	16V	25V	35V	50V
105	S	S	O	O	O	O		B	B	B	B	B																				
225			O	O	O	O		B	B	B	B	B																				
475			O	O	O			B	B	B	B	B																				
106			O				B	B	B	B																						
226							B	B	B	B																						
476																																
107																																
227																																

X5R (B) Series		0402		0603					0805					1206					1210												
Code	4V	6.3V	10V	6.3V	10V	16V	25V	35V	6.3V	10V	16V	25V	35V	50V	4V	6.3V	10V	16V	25V	35V	50V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V
105		S	S	O	O	O	O	O	O	B	B	B	B	B																	
225		S	S	O	O	O	O	O	O	B	B	B	B	B																	
335																															
475				O	O	O				B	B	B	B	B																	
106				O	O					B	B	B	B	B																	
226										B	B																				
476										B																					
107																															
227																															

- The yellow indication denotes values that are under development. Please contact Holy Stone office for further details
- Other dimensions, capacitance values and voltages ratings are available on request. Please contact Holy Stone.

◆ Thickness Specification

Symbol Code	S	O	A	B	C	D	E	F	G	H
Thickness(mm)	0.3±0.03	0.5±0.05	0.6±0.1	0.85±0.15	1.0+0.1/-0.05	1.25±0.20	1.6±0.2	2.0±0.2	2.4±0.2	2.8±0.2



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [⊖ View C1206X225K101T on WIN SOURCE](#)
- [⊖ Holy Stone Enterprise Co., Ltd. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management