



**THE DATASHEET OF
R1206-005-R**



Type R1206

Resettable Fuse (PTC's)

Surface Mount



www.optifuse.com (619) 593-5050

Application:

All high-density boards

Product Features:

- Small surface mount, Solid State
- Faster time to trip than standard SMD devices.
- Lower resistance than standard SMD devices.

Operation Current: 50mA ~ 2.0A

Maximum Voltage: 100VDC

Temperature Range: -40°C to 85°C

Agency Standards and Listings:



Electrical Characteristics (23°C)

| Part Number | Hold Current | Trip Current | Rated Voltage | Max Current | Typical Power | Max Time to Trip | | Resistance Tolerance | |
|----------------|--------------|--------------|-----------------|---------------|---------------|------------------|------|----------------------|------------|
| | I_H , A | I_T , A | V_{MAX} , Vdc | I_{MAX} , A | P_d , W | Current | Time | R_{MIN} | R_{1MAX} |
| | | | | | | Amp | Sec | Ω | Ω |
| R1206-005 | 0.05 | 0.15 | 60 | 100 | 0.4 | 0.25 | 1.50 | 3.600 | 50.00 |
| R1206-005-R | 0.05 | 0.15 | 60 | 100 | 0.4 | 0.25 | 1.50 | 3.600 | 50.00 |
| R1206-010 | 0.10 | 0.25 | 60 | 100 | 0.4 | 0.50 | 1.00 | 1.600 | 15.00 |
| R1206-010-R | 0.10 | 0.25 | 60 | 100 | 0.4 | 0.50 | 1.00 | 1.600 | 15.00 |
| R1206-012 | 0.12 | 0.39 | 48 | 100 | 0.6 | 1.00 | 0.20 | 1.400 | 6.500 |
| R1206-012-R | 0.12 | 0.39 | 48 | 100 | 0.6 | 1.00 | 0.20 | 1.400 | 6.500 |
| R1206-016 | 0.16 | 0.45 | 48 | 100 | 0.6 | 1.00 | 0.30 | 1.100 | 5.000 |
| R1206-016-R | 0.16 | 0.45 | 48 | 100 | 0.6 | 1.00 | 0.30 | 1.100 | 5.000 |
| R1206-020 | 0.20 | 0.40 | 30 | 100 | 0.4 | 8.00 | 0.10 | 0.600 | 2.500 |
| R1206-020-R | 0.20 | 0.40 | 30 | 100 | 0.4 | 8.00 | 0.10 | 0.600 | 2.500 |
| R1206-025 | 0.25 | 0.50 | 16 | 100 | 0.6 | 8.00 | 0.08 | 0.550 | 2.300 |
| R1206-025-R | 0.25 | 0.50 | 16 | 100 | 0.6 | 8.00 | 0.08 | 0.550 | 2.300 |
| R1206-025-24-R | 0.25 | 0.50 | 24 | 100 | 0.6 | 8.00 | 0.08 | 0.550 | 2.300 |
| R1206-035 | 0.35 | 0.75 | 16 | 100 | 0.4 | 8.00 | 0.10 | 0.300 | 1.200 |
| R1206-035-R | 0.35 | 0.75 | 16 | 100 | 0.4 | 8.00 | 0.10 | 0.300 | 1.200 |
| R1206-035-30-R | 0.35 | 0.75 | 30 | 100 | 0.6 | 8.00 | 0.10 | 0.300 | 1.200 |
| R1206-050 | 0.50 | 1.00 | 8 | 100 | 0.4 | 8.00 | 0.10 | 0.150 | 0.700 |
| R1206-050-R | 0.50 | 1.00 | 8 | 100 | 0.4 | 8.00 | 0.10 | 0.150 | 0.700 |
| R1206-050-24-R | 0.50 | 1.00 | 24 | 100 | 0.6 | 8.00 | 0.10 | 0.150 | 0.750 |
| R1206-075-R | 0.75 | 1.50 | 8 | 100 | 0.6 | 8.00 | 0.20 | 0.090 | 0.290 |
| R1206-075-16-R | 0.75 | 1.50 | 16 | 100 | 0.6 | 8.00 | 0.20 | 0.090 | 0.290 |
| R1206-100-R | 1.00 | 1.80 | 6 | 100 | 0.6 | 8.00 | 0.30 | 0.055 | 0.210 |
| R1206-110-R | 1.10 | 2.20 | 8 | 100 | 0.8 | 8.00 | 0.30 | 0.040 | 0.180 |
| R1206-150-R | 1.50 | 3.00 | 8 | 100 | 0.8 | 8.00 | 1.00 | 0.040 | 0.120 |
| R1206-200-R | 2.00 | 3.50 | 6 | 100 | 0.8 | 8.00 | 1.50 | 0.018 | 0.080 |

I_H = Hold Current – Maximum current at which the device will not trip at 23°C still air.
 I_T = Trip Current – Minimum current at which the device will always trip at 23°C still air.
 V_{MAX} = Maximum voltage device can withstand without damage at it's rated current.
 I_{MAX} = Maximum fault current device can withstand without damage at rated voltage (V max).
 P_d = Typical power dissipated from device when in the tripped state in 23°C still air environment.
 R_{MIN} = Minimum device resistance at 23°C.
 R_{1MAX} = Maximum device resistance at 23°C, 1 hour after tripping.
 Note: All specifications subject to change without notice.

Type R1206

Resettable Fuse (PTC's)

Surface Mount




www.optifuse.com (619) 593-5050

Physical Specifications:

Termination Pad Characteristics: Pure Tin

R1206: Product Dimensions (millimeters)

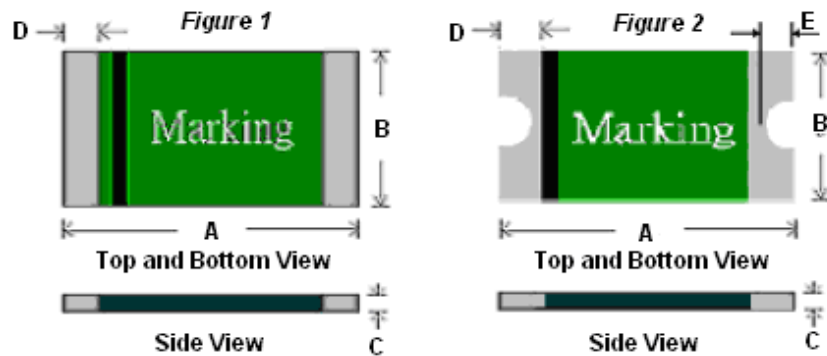

| Part Number | Figure | A | | B | | C | | D | | E | |
|----------------|--------|------|------|------|------|------|------|------|------|------|------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| R1206-005 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | - | - |
| R1206-005-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-010 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | - | - |
| R1206-010-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-012 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | - | - |
| R1206-012-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-016 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | - | - |
| R1206-016-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-020 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | - | - |
| R1206-020-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-025 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | - | - |
| R1206-025-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-025-24-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-035 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.75 | 0.10 | 0.75 | - | - |
| R1206-035-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-035-30-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.90 | 1.30 | 0.25 | 0.75 | 0.10 | 0.45 |
| R1206-050 | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.25 | 0.55 | 0.10 | 0.75 | - | - |
| R1206-050-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.25 | 0.55 | 0.10 | 0.75 | 0.10 | 0.45 |
| R1206-050-24-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.80 | 1.20 | 0.25 | 0.75 | 0.10 | 0.45 |
| R1206-075-R | 1 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.25 | 0.25 | 0.75 | 0.10 | 0.45 |
| R1206-075-16-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.25 | 0.25 | 0.75 | 0.10 | 0.45 |
| R1206-100-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| R1206-110-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| R1206-150-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.80 | 1.40 | 0.25 | 0.75 | 0.10 | 0.45 |
| R1206-200-R | 2 | 3.00 | 3.50 | 1.50 | 1.80 | 0.85 | 1.60 | 0.25 | 0.75 | 0.10 | 0.45 |

Note: All specifications subject to change without notice.


Type R1206 Resettable Fuse (PTC's) Surface Mount



www.optifuse.com


(619) 593-5050

Thermal Derating Curve – Type R1206

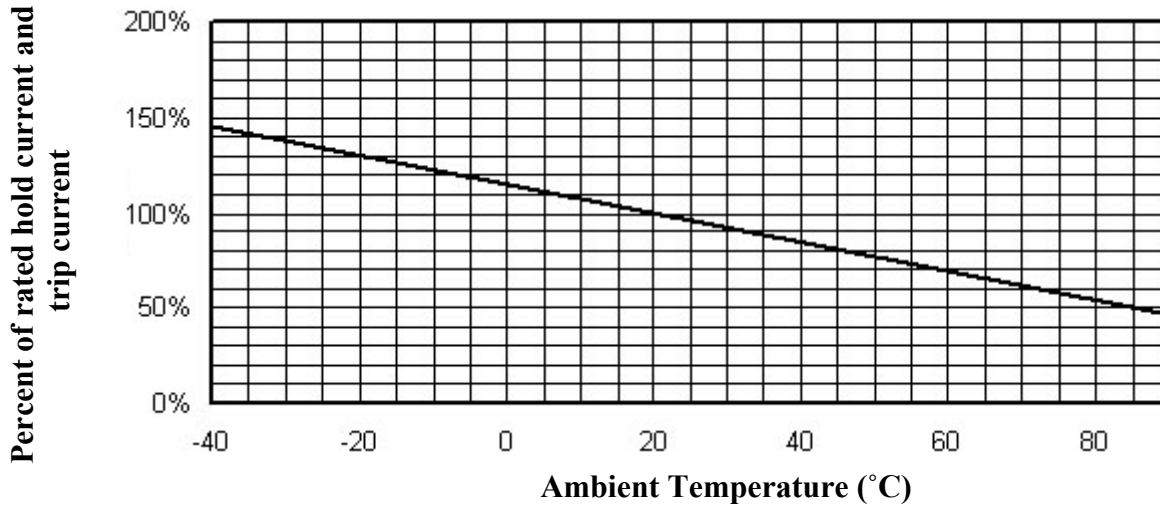

Typical Time-To-Trip at 23°C

- Z = R1206-005's
- A = R1206-010's
- B = R1206-012's
- C = R1206-016's
- D = R1206-020's
- E = R1206-025's
- F = R1206-035's
- G = R1206-050's
- H = R1206-075's
- I = R1206-100-R
- J = R1206-110-R
- K = R1206-150-R
- L = R1206-200-R

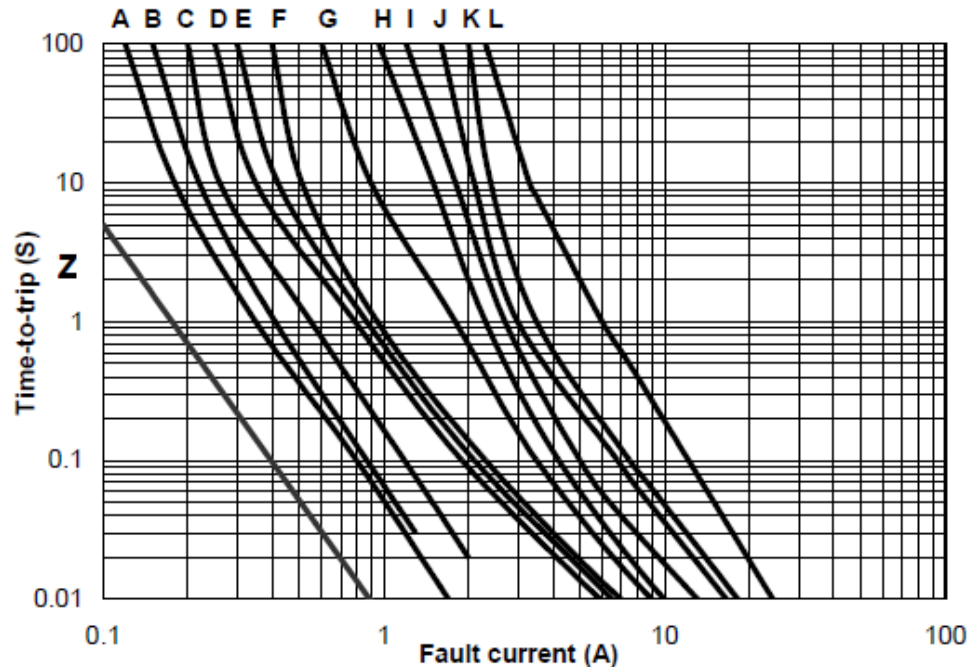

Type R1206

Resettable Fuse (PTC's)

Surface Mount



www.optifuse.com

(619) 593-5050

| Profile Features | Pb-Free Assembly |
|---|------------------------------------|
| Average Ramp-Up Rate (T_{smax} to T_p) | 3 °C/second max. |
| Preheat: Temperature Min (T _{smin}) Temperature Max (T _{smax}) Time (T _{smin} to T _{smax}) | 150 °C 200 °C 60-180 seconds |
| Time maintained above: Temperature (T _L) Time (t _L) | 217 °C 60-150 seconds |
| Peak/Classification Temperature (T_p): | 260 °C |
| Time within 5 °C of actual Peak: Temperature (t _p) | 20-40 seconds |
| Ramp-Down Rate: | 6 °C/second max. |
| Time 25 °C to Peak Temperature: | 8 minute max. |


Solder reflow

* Due to “Lead Free” nature, Temperature and Dwelling time for the soldering zone is higher than those for Regular. This may cause damage to other components.

1. Recommended maximum paste thickness > 0.25mm.
2. Devices can be cleaned using standard industry methods and aqueous solvents.
3. Rework use standard industry practices.
4. Storage Environment: < 30°C / 60%RH

Caution:

1. If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
2. Devices are not designed to be wave soldered to the bottom side of the board.

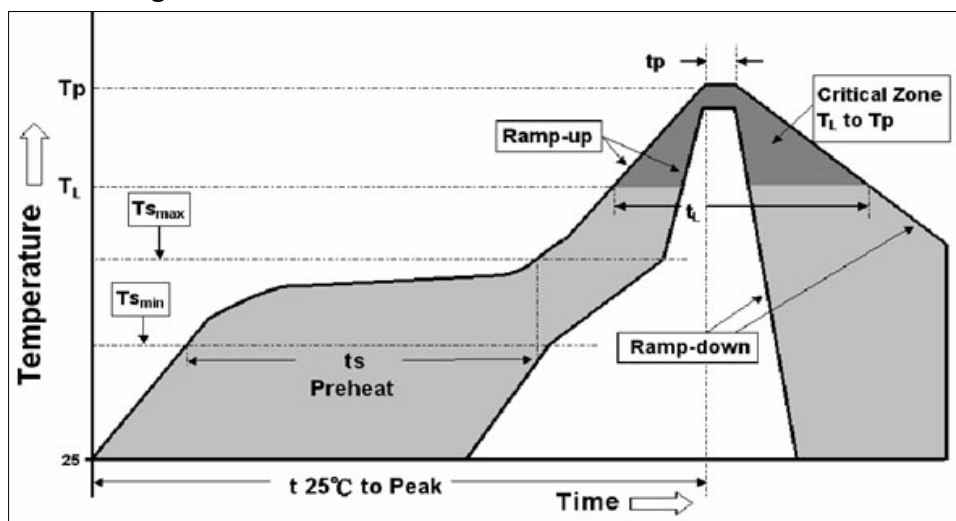

Type R1206 Resettable Fuse (PTC's) Surface Mount



www.optifuse.com (619) 593-5050


Standard Package

| Part Numbers | Reel/Tape |
|----------------|-----------|
| R1206-005 | 3K |
| R1206-005-R | 3K |
| R1206-010 | 3K |
| R1206-010-R | 3K |
| R1206-012 | 3K |
| R1206-012-R | 3K |
| R1206-016 | 3K |
| R1206-016-R | 3K |
| R1206-020 | 3K |
| R1206-020-R | 3K |
| R1206-025 | 3K |
| R1206-025-R | 3K |
| R1206-025-24-R | 3K |

| Part Numbers | Reel/Tape |
|----------------|-----------|
| R1206-035 | 4K |
| R1206-035-R | 4K |
| R1206-035-30-R | 3K |
| R1206-050 | 4K |
| R1206-050-R | 4K |
| R1206-050-24-R | 3K |
| R1206-075-R | 3K |
| R1206-075-16-R | 3K |
| R1206-100-R | 3K |
| R1206-110-R | 3K |
| R1206-150-R | 2K |
| R1206-200-R | 2K |

Pad Layouts – Solder Reflow and Rework Recommendations

The dimensions in the table below provide the recommended pad layout for each R0805 device.



| Pad Dimensions (millimeters) |
|------------------------------|
| A – Nominal – 2.00mm |
| B – Nominal – 1.00 mm |
| C – Nominal – 1.90 mm |

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 -PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 -Avoid contact of PPTC device with chemical solvent. Prolonged contact may damage the device performance.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View R1206-005-R on WIN SOURCE](#)

 [OptiFuse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management