






**THE DATASHEET OF
AT-S-26-6/6/S-7/R**



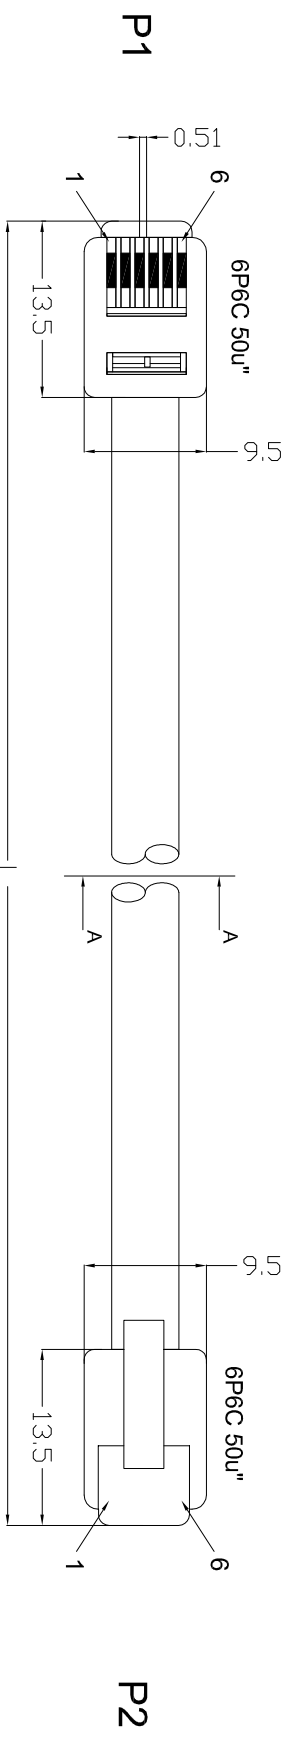

Conductor: {26AWG(0.16x7)BC}x6C
 Insulation:(PP6331 TD:0.95±0.03)x6C
 Jacket: PVC NOUL 65P

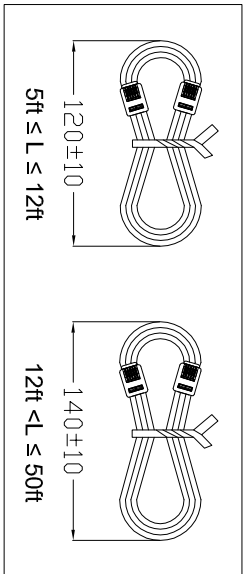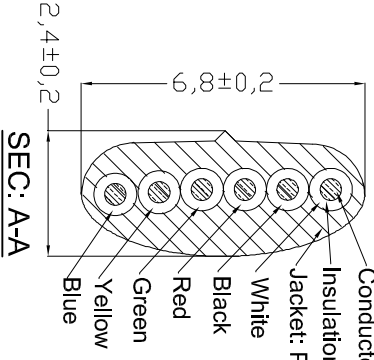

P1	P2
1 White	1
2 Black	2
3 Red	3
4 Green	4
5 Yellow	5
6 Blue	6

Note for plug:
 Material:
 Housing-Polycarbonate,clear.
 Terminal-0.36[.014] thick phosphor bronze.
 Thick gold in localized gold plate.
 Area,Gold flash over the remainder.
 Over 2.54mm[.000100] thick nickel underplate

Order code: AT-S-26-6/6-X-XX/R

Order color:
 B: Black
 W: White
 S: Silver

Length Code	Length (mm)
5	1525±20(5FT)
7	2135±30(7FT)
10	3050±60(10FT)
12	3660±60(12FT)
14	4270±60(14FT)
25	7625±100(25FT)
50	15250±150(50FT)

RoHS compliant
 Unit: mm

Scale	Free	Date		Name	
TOLERANCE		Drawn	18.12.2017	Amy	
.X	±0.50	Approved	18.12.2017	Amy	
.XX	±0.20				
DIM	TOL				
Angle	±2°				





Customer-No.	ASSMANN WSW-No.	Drawing-No.	Replace
	AT-S-26-6/6-X-XX/R	ASS 8169 CA	rev00

1	2	3	4	5	6	7
H	G	F	E	D	C	B

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View AT-S-26-6/6/S-7/R on WIN SOURCE](#)
-  [Assmann WSW Components](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management