



**THE DATASHEET OF  
MAX2077CTK+T**



## MAX2077

## Octal-Channel Ultrasound Front-End

### General Description

The MAX2077 octal-channel ultrasound front-end is a fully integrated, bipolar, high-density, octal-channel ultrasound receiver optimized for low-cost, high-channel count, high-performance portable and cart-based ultrasound systems. The easy-to-use IC allows the user to achieve high-end 2D and PW imaging capability using substantially less space and power. The highly compact imaging receiver lineup, including a low-noise amplifier (LNA), variable-gain amplifier (VGA), and anti-alias filter (AAF), achieves an ultra-low 2.4dB noise figure at  $R_S = R_{IN} = 200\Omega$  at a very low 64.8mW per-channel power dissipation. The full imaging receiver channel has been optimized for second-harmonic imaging with -64dBFS second-harmonic distortion performance with a 1V<sub>P-P</sub> 5MHz output signal and broadband SNR of > 68dB\* at 20dB gain. The bipolar front-end has also been optimized for excellent low-velocity PW and color-flow Doppler sensitivity with an exceptional near-carrier SNR of 140dBc/Hz at 1kHz offset from a 5MHz 1V<sub>P-P</sub> output clutter signal.

The MAX2077 octal-channel ultrasound front-end is available in a small 8mm x 8mm, 56-pin thin QFN or 10mm x 10mm, 68-pin thin QFN package with an exposed pad and is specified over a 0°C to +70°C temperature range. To add CW Doppler capability, replace the MAX2077 with the MAX2078.

### Applications

- Medical Ultrasound Imaging
- Sonar

**Ordering Information and Typical Application Circuits appear at end of data sheet.**

### Benefits and Features

- 8 Full Channels of LNA, VGA, and AAF in a Small, 8mm x 8mm, 56-Pin or 10mm x 10mm, 68-Pin TQFN Package
- Ultra-Low Full-Channel Noise Figure of 2.4dB at  $R_{IN} = R_S = 200\Omega$
- Low Output-Referred Noise of 23nV/ $\sqrt{\text{Hz}}$  at 5MHz, 20dB Gain, Yielding a Broadband SNR of 68dB\* for Excellent Second-Harmonic Imaging
- High Near-Carrier SNR of 140dBc/Hz at 1kHz Offset from a 5MHz, 1V<sub>P-P</sub> Output Signal, and 20dB of Gain for Excellent Low-Velocity PW and Color-Flow Doppler Sensitivity in a High-Clutter Environment
- Ultra-Low Power 64.8mW per Full-Channel (LNA, VGA, and AAF) Normal Imaging Mode
- Selectable Active Input-Impedance Matching of 50 $\Omega$ , 100 $\Omega$ , 200 $\Omega$ , and 1k $\Omega$
- Wide Input-Voltage Range of 330mV<sub>P-P</sub> in High LNA Gain Mode and 550mV<sub>P-P</sub> in Low LNA Gain Mode
- Integrated Selectable 3-Pole 9MHz, 10MHz, 15MHz, and 18MHz Butterworth AAF
- Fast-Recovery, Low-Power Modes (< 2 $\mu$ s)
- Pin Compatible with the MAX2078 Ultrasound Front-End with CW Doppler (MAX2077 68-Pin Package Variant)

\*When coupled with the MAX1437B ADC.

### Absolute Maximum Ratings

V<sub>CC\_</sub> to GND.....-0.3V to +5.5V  
 V<sub>CC2</sub> - V<sub>CC1</sub>..... > -0.3V  
 ZF<sub>-</sub>, IN<sub>-</sub>, AG to GND ..... -0.3V to (V<sub>CC\_</sub> + 0.3V)  
 INC<sub>-</sub>.....20mA DC  
 V<sub>REF</sub> to GND.....-0.3V to +3V  
 IN<sub>-</sub> to AG.....-0.6V to +0.6V  
 OUT<sub>-</sub>, DIN, DOUT, VG<sub>-</sub>, NP,  $\overline{\text{CS}}$ , CLK,  
 PD to GND..... -0.3V to (V<sub>CC1</sub> + 0.3V)  
 V<sub>CC\_</sub>, V<sub>REF</sub> analog and digital control signals must be applied  
 in this order

Input Differential Voltage .....2.0V<sub>P-P</sub> differential  
 Continuous Power Dissipation (T<sub>A</sub> = +70°C)  
     56-Pin TQFN (derate 47.6mW/°C above +70°C).....3.8W  
     68-Pin TQFN (derate 40.0mW/°C above +70°C).....4.0W  
 Operating Temperature Range (Note 1).....0°C to +70°C  
 Junction Temperature.....+150°C  
 Storage Temperature Range..... -40°C to +150°C  
 Lead Temperature (soldering, 10s) .....+300°C

*Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

### Package Information

|  |                         |
|--|-------------------------|
| <b>PACKAGE TYPE: 56 TQFN</b>                     |                         |
| Package Code                                     | T5688+2                 |
| Outline Number                                   | <a href="#">21-0135</a> |
| <b>THERMAL RESISTANCE, FOUR-LAYER BOARD</b>      |                         |
| Junction to Ambient (θ <sub>JA</sub> ) (Notes 2) | 21°C/W                  |
| Junction to Case (θ <sub>JC</sub> ) (Note 3)     | 1°C/W                   |

|   |                         |
|---|-------------------------|
| <b>PACKAGE TYPE: 68 TQFN</b>                    |                         |
| Package Code                                    | T6800+2                 |
| Outline Number                                  | <a href="#">21-0142</a> |
| <b>THERMAL RESISTANCE, FOUR-LAYER BOARD</b>     |                         |
| Junction to Ambient (θ <sub>JA</sub> ) (Note 2) | 20°C/W                  |
| Junction to Case (θ <sub>JC</sub> ) (Note 3)    | 0.3°C/W                 |

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](http://www.maximintegrated.com/thermal-tutorial).

- Note 1:** T<sub>C</sub> is the temperature on the exposed pad of the package. T<sub>A</sub> is the ambient temperature of the device and PCB.
- Note 2:** Junction temperature T<sub>J</sub> = T<sub>A</sub> + (θ<sub>JA</sub> × V<sub>CC</sub> × I<sub>CC</sub>), assuming there is no heat removal from the exposed pad. The junction temperature must not exceed 150°C.
- Note 3:** Junction temperature T<sub>J</sub> = T<sub>C</sub> + (θ<sub>JC</sub> × V<sub>CC</sub> × I<sub>CC</sub>). This formula can only be used if the component is soldered down to a printed circuit board pad containing multiple ground vias to remove the heat. The junction temperature must not exceed 150°C.

## DC Electrical Characteristics

(Typical Application Circuits,  $V_{REF} = 2.475V$  to  $2.525V$ ,  $V_{CC1} = 3.13V$  to  $3.47V$ ,  $V_{CC2} = 4.5V$  to  $5.25V$ ,  $T_A = 0^{\circ}C$  to  $+70^{\circ}C$ ,  $V_{GND} = 0V$ ,  $NP = 0$ ,  $PD = 0$ , no RF signals applied. Typical values are at  $V_{CC1} = 3.3V$ ,  $V_{CC2} = 4.75V$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.) (Note 4)

| PARAMETER   | SYMBOL            | CONDITIONS                            | MIN   | TYP               | MAX     | UNITS   |
|---|-------------------|---------------------------------------|-------|-------------------|---------|---------|
| 3.3V Supply Voltage                               | $V_{CC1}$         |                                       | 3.13  | 3.3               | 3.47    | V       |
| 4.75V/5V Supply Voltage                           | $V_{CC2}$         |                                       | 4.5   | 4.75              | 5.25    | V       |
| External Reference Voltage Range                  | $V_{REF}$         | (Note 5)                              | 2.475 |                   | 2.525   | V       |
| CMOS Input High Voltage                           | $V_{IH}$          | Applies to CMOS control inputs        | 2.5   |                   |         | V       |
| CMOS Input Low Voltage                            | $V_{IL}$          | Applies to CMOS control inputs        |       |                   | 0.8     | V       |
| CMOS Input Leakage Current                        | $I_{IN}$          | 0V to 3.3V                            |       |                   | 10      | $\mu A$ |
| Data Output High Voltage                          | DOUT_HI           | 10M $\Omega$ load                     |       | $V_{CC1}$         |         | V       |
| Data Output Low Voltage                           | DOUT_LO           | 10M $\Omega$ load                     |       | 0                 |         | V       |
| 4.75V/5V Supply Standby Current                   | $I_{NP\_5V\_TOT}$ | NP = 1, all channels                  |       | 3.9               | 6       | mA      |
| 3V Supply Standby Current                         | $I_{NP\_3V\_TOT}$ | NP = 1, all channels                  |       | 1.7               | 3       | mA      |
| 4.75V/5V Power-Down Current                       | $I_{PD\_5V\_TOT}$ | PD = 1, all channels (Note 6)         |       | 0.4               | 10      | $\mu A$ |
| 3V Power-Down Current                             | $I_{PD\_3V\_TOT}$ | PD = 1, all channels (Note 6)         |       | 0.3               | 10      | $\mu A$ |
| 3V Supply Current per Channel                     | $I_{3V\_NM}$      | Total I divided by 8, VG+ - VG- = -2V |       | 11                | 18      | mA      |
| 4.75V/5V Supply Current per Channel               | $I_{5V\_NM}$      | Total I divided by 8                  |       | 6.0               | 8.3     | mA      |
| DC Power per Channel                              | $P_{NM}$          |                                       |       | 64.8              | 105     | mW      |
| Differential Analog Control Voltage Range         | VGAIN_RANG        | VG+ - VG-                             |       | $\pm 3$           |         | V       |
| Common-Mode Voltage for Difference Analog Control | VGAIN_COMM        | (VG+ + VG-)/2                         |       | 1.65<br>$\pm 5\%$ |         | V       |
| Source/Sink Current for Gain Control Pins         | $I_{ACONTROL}$    | Per pin                               |       | $\pm 1.6$         | $\pm 4$ | $\mu A$ |
| Reference Current                                 | $I_{REF}$         | All channels                          |       | 9.7               | 13      | $\mu A$ |
| Output Common-Mode Level                          | $V_{CMO}$         |                                       |       | 1.73              |         | V       |

## AC Electrical Characteristics

(Typical Application Circuits,  $V_{REF} = 2.475V$  to  $2.525V$ ,  $V_{CC1} = 3.13V$  to  $3.47V$ ,  $V_{CC2} = 4.5V$  to  $5.25V$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ ,  $V_{GND} = 0V$ ,  $NP = 0$ ,  $PD = 0$ ,  $D3/D2/D1/D0 = 1/0/1/0$  ( $R_{IN} = 200\Omega$ , LNA gain = 18.5dB),  $D5/D4 = 1/1$  ( $f_C = 18MHz$ ),  $f_{RF} = 5MHz$ ,  $R_S = 200\Omega$ , capacitance to GND at each of the VGA differential outputs is 25pF, differential capacitance across VGA outputs is 15pF,  $R_L = 1k\Omega$  differential, reference noise less than  $10nV/\sqrt{Hz}$  from 1kHz to 20MHz, DOOUT loaded with  $10M\Omega$  and 60pF. Typical values are at  $V_{CC1} = 3.3V$ ,  $V_{CC2} = 4.75V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.) (Note 4)

| PARAMETER                                 | CONDITIONS   | MIN  | TYP       | MAX  | UNITS          |
|---|--|------|-----------|------|----------------|
| Input Impedance                           | D1/D0 = 0/0, $R_{IN} = 50\Omega$ , $f_{RF} = 2MHz$   | 47.5 | 50        | 60   | $\Omega$       |
|   | D1/D0 = 0/1, $R_{IN} = 100\Omega$ , $f_{RF} = 2MHz$  | 90   | 100       | 115  |                |
|   | D1/D0 = 1/0, $R_{IN} = 200\Omega$ , $f_{RF} = 2MHz$  | 185  | 200       | 220  |                |
|   | D1/D0 = 1/1, $R_{IN} = 1000\Omega$ , $f_{RF} = 2MHz$   | 600  | 830       | 1000 |                |
| Noise Figure                              | $R_S = R_{IN} = 50\Omega$ , LNA gain = 18.5dB, $VG+ - VG- = +3V$   |      | 4.5       |      | dB             |
|   | $R_S = R_{IN} = 100\Omega$ , LNA gain = 18.5dB, $VG+ - VG- = +3V$  |      | 3.4       |      |                |
|   | $R_S = R_{IN} = 200\Omega$ , LNA gain = 18.5dB, $VG+ - VG- = +3V$  |      | 2.4       |      |                |
|   | $R_S = R_{IN} = 1000\Omega$ , LNA gain = 18.5dB, $VG+ - VG- = +3V$   |      | 2.2       |      |                |
| Low-Gain Noise Figure                     | D3/D2/D1/D0 = 0/0/0/1, LNA gain = 12.5dB, $R_S = R_{IN} = 200\Omega$ , $VG+ - VG- = +3V$   |      | 3.9       |      | dB             |
| Input-Referred Noise Voltage              | D3/D2/D1/D0 = 1/1/1/0  |      | 0.9       |      | $nV/\sqrt{Hz}$ |
| Input-Referred Noise Current              | D3/D2/D1/D0 = 1/1/1/0  |      | 2.1       |      | $pA/\sqrt{Hz}$ |
| Maximum Gain, High Gain Setting           | $VG+ - VG- = +3V$  | 41   | 42.4      | 45   | dB             |
| Minimum Gain, High Gain Setting           | $VG+ - VG- = -3V$  | 9    | 10.1      | 12   | dB             |
| Maximum Gain, Low Gain Setting            | D3/D2/D1/D0 = 0/0/0/1, $R_{IN} = 200\Omega$ , LNA gain = 12.5dB, $VG+ - VG- = +3V$   | 34.4 | 37.6      | 39   | dB             |
| Minimum Gain, Low Gain Setting            | D3/D2/D1/D0 = 0/0/0/1, $R_{IN} = 200\Omega$ , LNA gain = 12.5dB, $VG+ - VG- = -3V$   | 3    | 5.4       | 8    | dB             |
| Anti-Aliasing Filter 3dB Corner Frequency | D5/D4 = 0/0, $f_C = 9MHz$  |      | 9         |      | MHz            |
|   | D5/D4 = 0/1, $f_C = 10MHz$   |      | 10        |      |                |
|   | D5/D4 = 1/0, $f_C = 15MHz$   |      | 15        |      |                |
|   | D5/D4 = 1/1, $f_C = 18MHz$   |      | 18        |      |                |
| Gain Range                                | $VG+ - VG- = -3V$ to $+3V$   |      | 33        |      | dB             |
| Absolute Gain Error                       | $VG+ - VG- = -2V$  |      | $\pm 0.4$ |      | dB             |
|   | $VG+ - VG- = 0V$   |      | $\pm 0.4$ |      |                |
|   | $VG+ - VG- = +2V$  |      | $\pm 0.4$ |      |                |
| Input Gain Compression                    | $VG+ - VG- = -3V$ (VGA minimum gain), gain ratio with 330mV <sub>P-P</sub> /50mV <sub>P-P</sub> input tones  |      | 1.4       |      | dB             |
|   | LNA low gain = 12.5dB, $VG+ - VG- = -3V$ (VGA minimum gain), gain ratio with 600mV <sub>P-P</sub> /50mV <sub>P-P</sub>                                     |      | 0.8       |      |                |
| VGA Gain Response Time                    | Gain step up ( $V_{IN} = 5mV_{P-P}$ , gain changed from 10dB to 44dB, settling time is measured within 1dB final value)                                    |      | 1.4       |      | $\mu s$        |
|   | Gain step down ( $V_{IN} = 5mV_{P-P}$ , gain changed from 44dB to 10dB, settling time is measured within 1dB final value)                                  |      | 1.6       |      |                |
| VGA Output Offset Under Pulsed Overload   | Overdrive is $\pm 10mA$ in clamping diodes, gain at 30dB, 16 pulses at 5MHz, repetition rate 20kHz; offset is measured at output when RF duty cycle is off |      | 180       |      | mV             |

## AC Electrical Characteristics (continued)

(Typical Application Circuits,  $V_{REF} = 2.475V$  to  $2.525V$ ,  $V_{CC1} = 3.13V$  to  $3.47V$ ,  $V_{CC2} = 4.5V$  to  $5.25V$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ ,  $V_{GND} = 0V$ ,  $NP = 0$ ,  $PD = 0$ ,  $D3/D2/D1/D0 = 1/0/1/0$  ( $R_{IN} = 200\Omega$ , LNA gain = 18.5dB),  $D5/D4 = 1/1$  ( $f_C = 18MHz$ ),  $f_{RF} = 5MHz$ ,  $R_S = 200\Omega$ , capacitance to GND at each of the VGA differential outputs is 25pF, differential capacitance across VGA outputs is 15pF,  $R_L = 1k\Omega$  differential, reference noise less than  $10nV/\sqrt{Hz}$  from 1kHz to 20MHz, DOUT loaded with  $10M\Omega$  and 60pF. Typical values are at  $V_{CC1} = 3.3V$ ,  $V_{CC2} = 4.75V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.) (Note 4)

| PARAMETER                                      | CONDITIONS  | MIN | TYP       | MAX | UNITS          |
|--|---|-----|-----------|-----|----------------|
| Small-Signal Output Noise                      | 20dB of gain, $V_{G+} - V_{G-} = -0.85V$ , no input signal  |     | 23        |     | $nV/\sqrt{Hz}$ |
| Large-Signal Output Noise                      | 20dB of gain, $V_{G+} - V_{G-} = -0.85V$ , $f_{RF} = 5MHz$ , $f_{NOISE} = f_{RF} + 1kHz$ , $V_{OUT} = 1V_{P-P}$ differential  |     | 35        |     | $nV/\sqrt{Hz}$ |
| Second Harmonic (HD2)                          | $V_{IN} = 50mV_{P-P}$ , $f_{RF} = 2MHz$ , $V_{OUT} = 1V_{P-P}$  |     | -67       |     | dBc            |
|  | $V_{IN} = 50mV_{P-P}$ , $f_{RF} = 5MHz$ , $V_{OUT} = 1V_{P-P}$  |     | -64.2     |     |                |
| High-Gain IM3 Distortion                       | $D3/D2/D1/D0 = 1/0/1/0$ ( $R_{IN} = 200\Omega$ , LNA gain = 18.5dB), $V_{IN} = 50mV_{P-P}$ , $f_{RF1} = 5MHz$ , $f_{RF2} = 5.01MHz$ , $V_{OUT} = 1V_{P-P}$ (Note 7)                     | -52 | -61       |     | dBc            |
| Low-Gain IM3 Distortion                        | $D3/D2/D1/D0 = 0/0/0/1$ ( $R_{IN} = 200\Omega$ , LNA gain = 12.5dB), $V_{IN} = 100mV_{P-P}$ , $f_{RF1} = 5MHz$ , $f_{RF2} = 5.01MHz$ , $V_{OUT} = 1V_{P-P}$ (Note 7)                    | -50 | -60       |     | dBc            |
| Standby Mode Power-Up Response Time            | Gain set for 26dB, $f_{RF} = 5MHz$ , $V_{OUT} = 1V_{P-P}$ , settled within 1dB from transition on NP pin  |     | 2.1       |     | $\mu s$        |
| Standby Mode Power-Down Response Time          | To reach DC current target $\pm 10\%$   |     | 2.0       |     | $\mu s$        |
| Power-Up Response Time                         | Gain set for 28dB, $f_{RF} = 5MHz$ , $V_{OUT} = 1V_{P-P}$ , settled within 1dB from transition on PD  |     | 2.7       |     | Ms             |
| Power-Down Response Time                       | Gain set for 28dB, $f_{RF} = 5MHz$ , DC power reaches 6mW/channel, from transition on PD  |     | 5         |     | ns             |
| Adjacent Channel Crosstalk                     | $V_{OUT} = 1V_{P-P}$ differential, $f_{RF} = 10MHz$ , 28dB of gain  |     | -58       |     | dBc            |
| Nonadjacent Channel Crosstalk                  | $V_{OUT} = 1V_{P-P}$ differential, $f_{RF} = 10MHz$ , 28dB of gain  |     | -71       |     | dBc            |
| Phase Matching Between Channels                | Gain = 28dB, $V_{G+} - V_{G-} = 0.4V$ , $V_{OUT} = 1V_{P-P}$ , $f_{RF} = 10MHz$   |     | $\pm 1.2$ |     | Degrees        |
| 3V Supply Modulation Ratio                     | Gain = 28dB, $V_{G+} - V_{G-} = 0.4V$ , $V_{OUT} = 1V_{P-P}$ , $f_{RF} = 5MHz$ , $f_{MOD} = 1kHz$ , $V_{MOD} = 50mV_{P-P}$ , ratio of output sideband at 5.001MHz, $1V_{P-P}$           |     | -73       |     | dBc            |
| 4.75V/5V Supply Modulation Ratio               | Gain = 28dB, $V_{G+} - V_{G-} = 0.4V$ , $V_{OUT} = 1V_{P-P}$ , $f_{RF} = 5MHz$ , $f_{MOD} = 1kHz$ , $V_{MOD} = 50mV_{P-P}$ , ratio of output sideband at 5.001MHz, $1V_{P-P}$           |     | -82       |     | dBc            |
| Gain Control Lines Common-Mode Rejection Ratio | Gain = 28dB, $V_{G+} - V_{G-} = 0.4V$ , $V_{OUT} = 1V_{P-P}$ , $f_{RF} = 5MHz$ , $f_{MOD(CM)} = 1kHz$ , $V_{MOD(CM)} = 50mV_{P-P}$ , ratio of output sideband at 5.001MHz to $1V_{P-P}$ |     | -74       |     | dBc            |
| Overdrive Phase Delay                          | $V_{G+} - V_{G-} = -3V$ , delay between $V_{IN} = 300mV_{P-P}$ and $V_{IN} = 30mV_{P-P}$ differential   |     | 5         |     | ns             |
| Output Impedance                               | Differential  |     | 100       |     | $\Omega$       |

### DC Electrical Characteristics—Serial Peripheral Interface




(DOUT loaded with 60pF and 10MΩ, 2ns rise and fall edges on CLK.)

| PARAMETER   | SYMBOL          | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-----------------|------------|-----|-----|-----|-------|
| Clock Speed   |                 |            |     |     | 10  | MHz   |
| Minimum Data-to-Clock Setup Time                    | t <sub>CS</sub> |            |     | 5   |     | ns    |
| Minimum Data-to-Clock Hold Time                     | t <sub>CH</sub> |            |     | 0   |     | ns    |
| Minimum Clock-to- $\overline{\text{CS}}$ Setup Time | t <sub>ES</sub> |            |     | 5   |     | ns    |
| $\overline{\text{CS}}$ Positive Minimum Pulse Width | t <sub>EW</sub> |            |     | 1   |     | ns    |
| Minimum Clock Pulse Width                           | t <sub>CW</sub> |            |     | 2   |     | ns    |

- Note 4:** Minimum and maximum limits at T<sub>A</sub> = +25°C and +70°C are guaranteed by design, characterization, and/or production test.
- Note 5:** Noise performance of the device is dependent on the noise contribution from V<sub>REF</sub>. Use a low-noise supply for V<sub>REF</sub>. The reference input noise is given for 8 channels, knowing that the reference-noise contributions are correlated in all 8 channels. If more channels are used, the reference noise must be reduced to get the best noise performance.
- Note 6:** Not applicable to the MAX2077CTK+.
- Note 7:** See the *Ultrasound-Specific IMD3 Specification* section.







### Typical Operating Characteristics

(Typical Application Circuits, V<sub>REF</sub> = 2.475V to 2.525V, V<sub>CC1</sub> = 3.3V, V<sub>CC2</sub> = 4.75V, T<sub>A</sub> = +25°C, V<sub>GND</sub> = 0V, NP = 0, PD = 0, D3/D2/D1/D0 = 1/0/1/0 (R<sub>IN</sub> = 200Ω, LNA gain = 18.5dB), D5/D4 = 1/1 (f<sub>C</sub> = 18MHz), f<sub>RF</sub> = 5MHz, R<sub>S</sub> = 200Ω, capacitance to GND at each of the VGA differential outputs is 25pF, differential capacitance across VGA outputs is 15pF, R<sub>L</sub> = 1kΩ differential, reference noise less than 10nV/√Hz from 1kHz to 20MHz, DOUT loaded with 10MΩ and 60pF, unless otherwise noted. All typical operating curves have been taken with the MAX2077CTN+ package variant.)

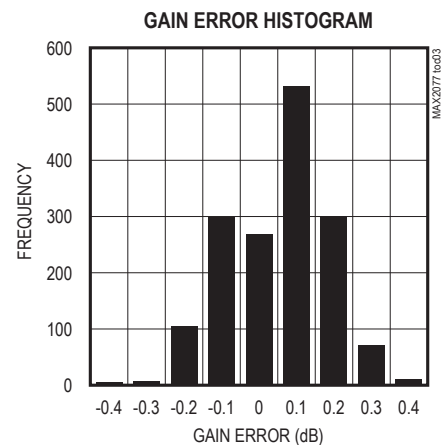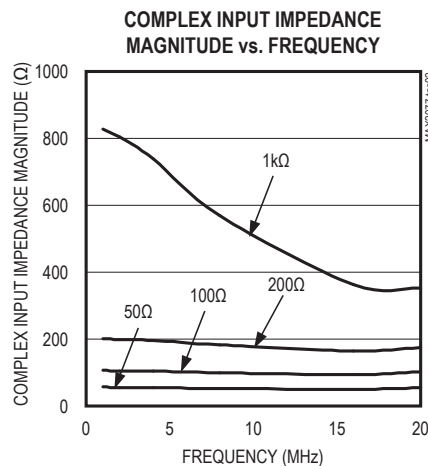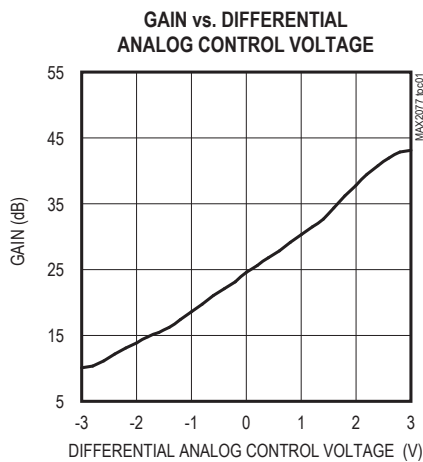







Typical Operating Characteristics (continued)

(Typical Application Circuits,  $V_{REF} = 2.475V$  to  $2.525V$ ,  $V_{CC1} = 3.3V$ ,  $V_{CC2} = 4.75V$ ,  $T_A = +25^\circ C$ ,  $V_{GND} = 0V$ ,  $NP = 0$ ,  $PD = 0$ ,  $D3/D2/D1/D0 = 1/0/1/0$  ( $R_{IN} = 200\Omega$ , LNA gain = 18.5dB),  $D5/D4 = 1/1$  ( $f_C = 18MHz$ ),  $f_{RF} = 5MHz$ ,  $R_S = 200\Omega$ , capacitance to GND at each of the VGA differential outputs is 25pF, differential capacitance across VGA outputs is 15pF,  $R_L = 1k\Omega$  differential, reference noise less than  $10nV/\sqrt{Hz}$  from 1kHz to 20MHz, DOOUT loaded with  $10M\Omega$  and 60pF, unless otherwise noted. All typical operating curves have been taken with the MAX2077CTN+ package variant.)

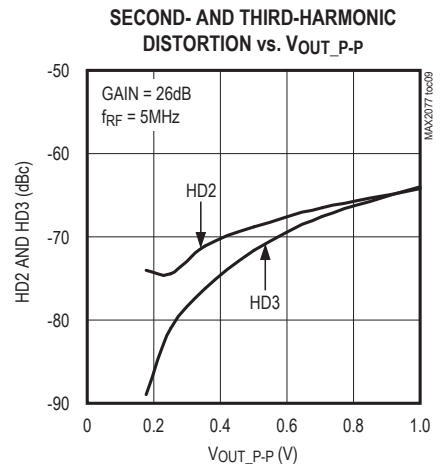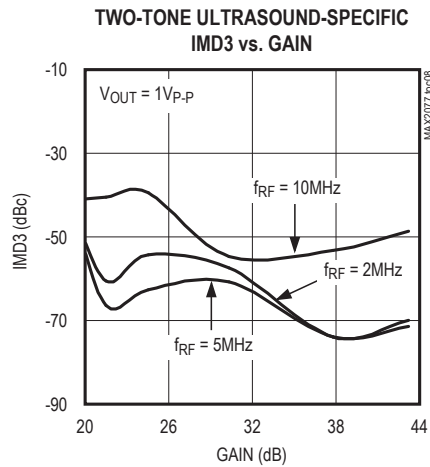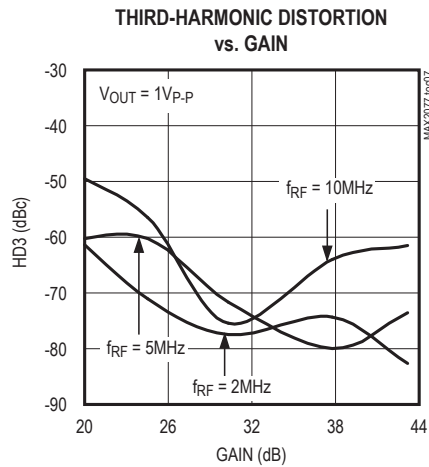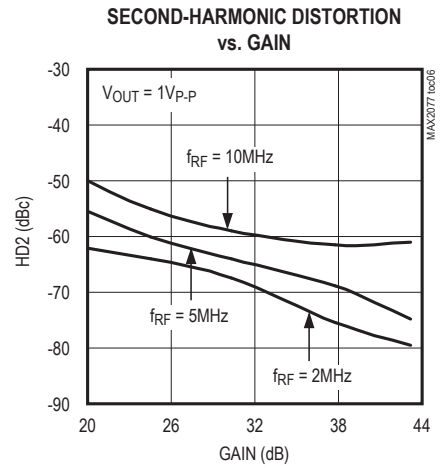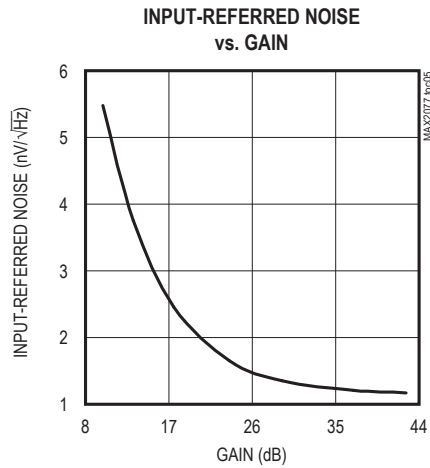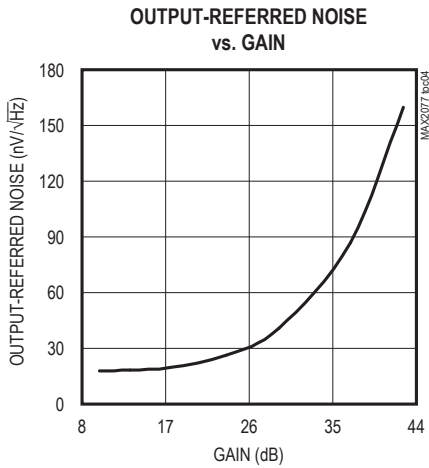

Typical Operating Characteristics (continued)


(Typical Application Circuits,  $V_{REF} = 2.475V$  to  $2.525V$ ,  $V_{CC1} = 3.3V$ ,  $V_{CC2} = 4.75V$ ,  $T_A = +25^\circ C$ ,  $V_{GND} = 0V$ ,  $NP = 0$ ,  $PD = 0$ ,  $D3/D2/D1/D0 = 1/0/1/0$  ( $R_{IN} = 200\Omega$ , LNA gain = 18.5dB),  $D5/D4 = 1/1$  ( $f_C = 18MHz$ ),  $f_{RF} = 5MHz$ ,  $R_S = 200\Omega$ , capacitance to GND at each of the VGA differential outputs is 25pF, differential capacitance across VGA outputs is 15pF,  $R_L = 1k\Omega$  differential, reference noise less than  $10nV/\sqrt{Hz}$  from 1kHz to 20MHz, DOUT loaded with  $10M\Omega$  and 60pF, unless otherwise noted. All typical operating curves have been taken with the MAX2077CTN+ package variant.)

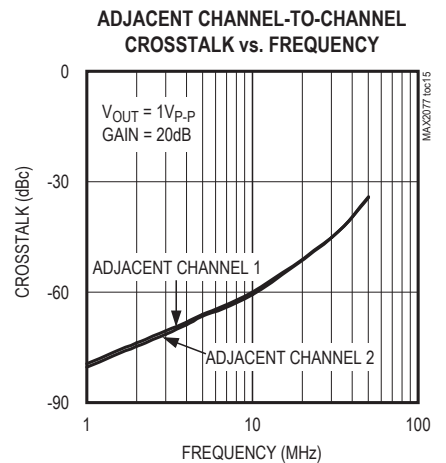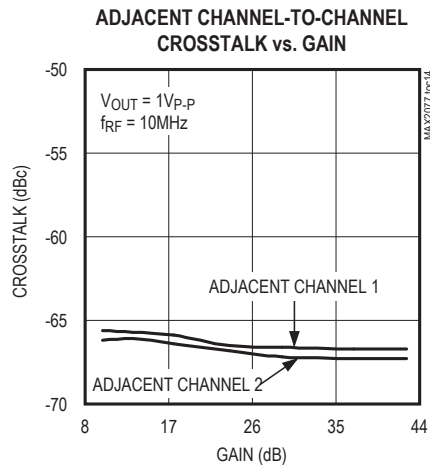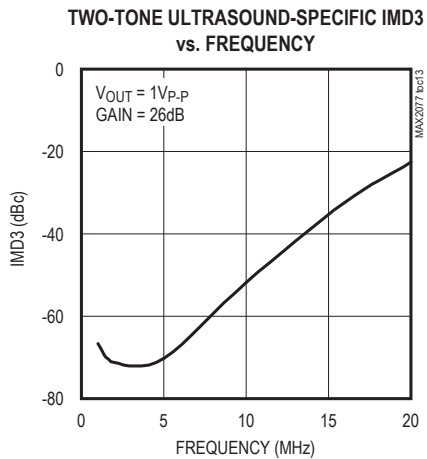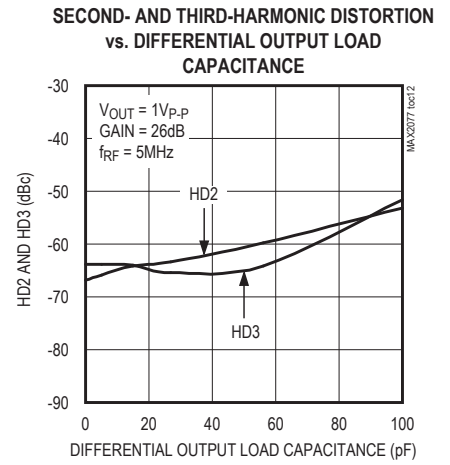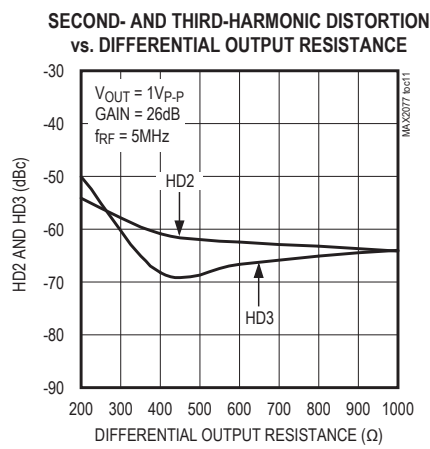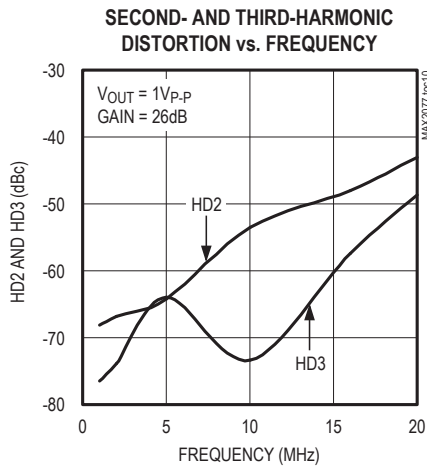


**Typical Operating Characteristics (continued)**

(Typical Application Circuits,  $V_{REF} = 2.475V$  to  $2.525V$ ,  $V_{CC1} = 3.3V$ ,  $V_{CC2} = 4.75V$ ,  $T_A = +25^\circ C$ ,  $V_{GND} = 0V$ ,  $NP = 0$ ,  $PD = 0$ ,  $D3/D2/D1/D0 = 1/0/1/0$  ( $R_{IN} = 200\Omega$ , LNA gain = 18.5dB),  $D5/D4 = 1/1$  ( $f_C = 18MHz$ ),  $f_{RF} = 5MHz$ ,  $R_S = 200\Omega$ , capacitance to GND at each of the VGA differential outputs is 25pF, differential capacitance across VGA outputs is 15pF,  $R_L = 1k\Omega$  differential, reference noise less than  $10nV/\sqrt{Hz}$  from 1kHz to 20MHz, DOUT loaded with  $10M\Omega$  and 60pF, unless otherwise noted. All typical operating curves have been taken with the MAX2077CTN+ package variant.)


**LARGE-SIGNAL BANDWIDTH vs. FREQUENCY**  
(GAIN = 20dB,  $V_{OUT} = 1V_{p-p}$ )

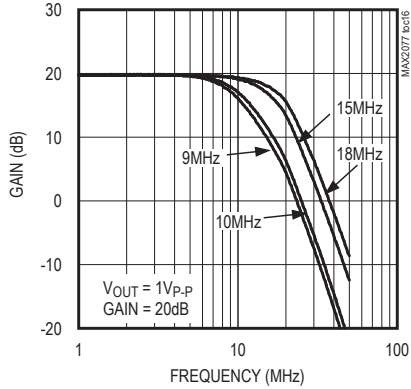


**COMMON-MODE OUTPUT VOLTAGE vs. GAIN**

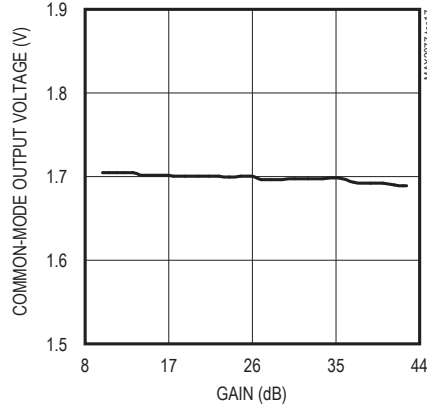


**DIFFERENTIAL OUTPUT IMPEDANCE vs. FREQUENCY**

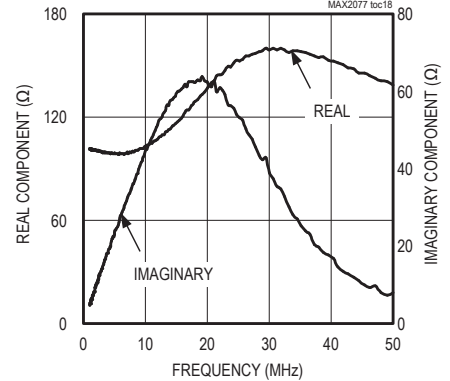


**LNA OVERLOAD RECOVERY TIME**  
( $V_{IN} = 500mV_{p-p}$  FOR  $0.5\mu s$  TO  $100mV_{p-p}$  FOR  $1\mu s$  AND BACK TO  $500mV_{p-p}$  FOR  $0.5\mu s$ , GAIN = 10dB)

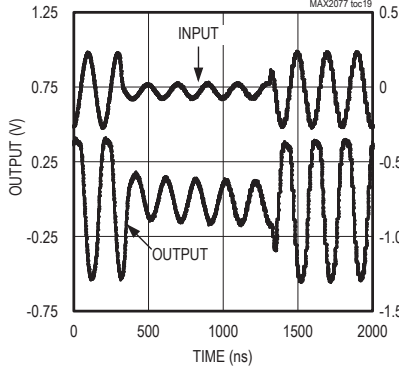

**VGA OVERLOAD RECOVERY TIME**  
( $V_{IN} = 40mV_{p-p}$  FOR  $1\mu s$  TO  $4mV_{p-p}$  FOR  $1\mu s$  AND BACK TO  $40mV_{p-p}$  FOR  $1\mu s$ , GAIN = 42.5dB)

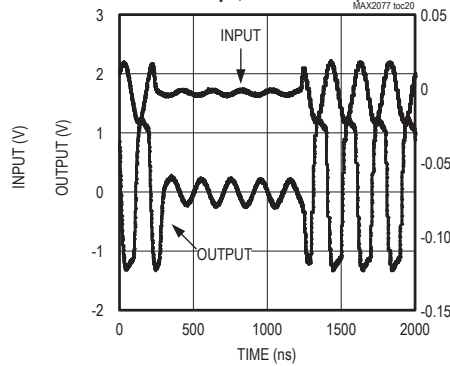


**OVERDRIVE PHASE DELAY vs. FREQUENCY**

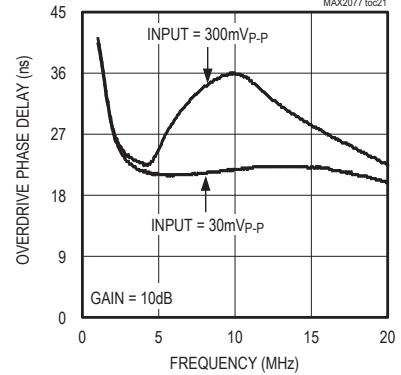


Pin Configurations

56-Pin TQFN

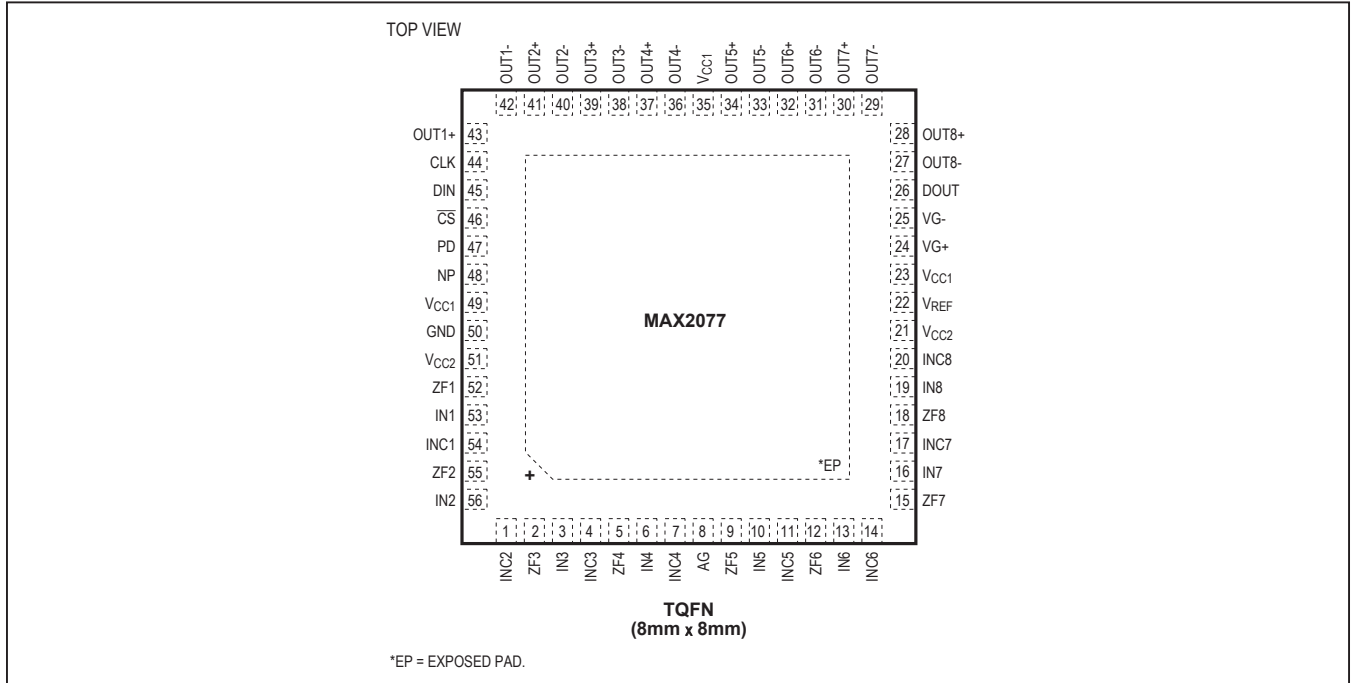

68-Pin TQFN

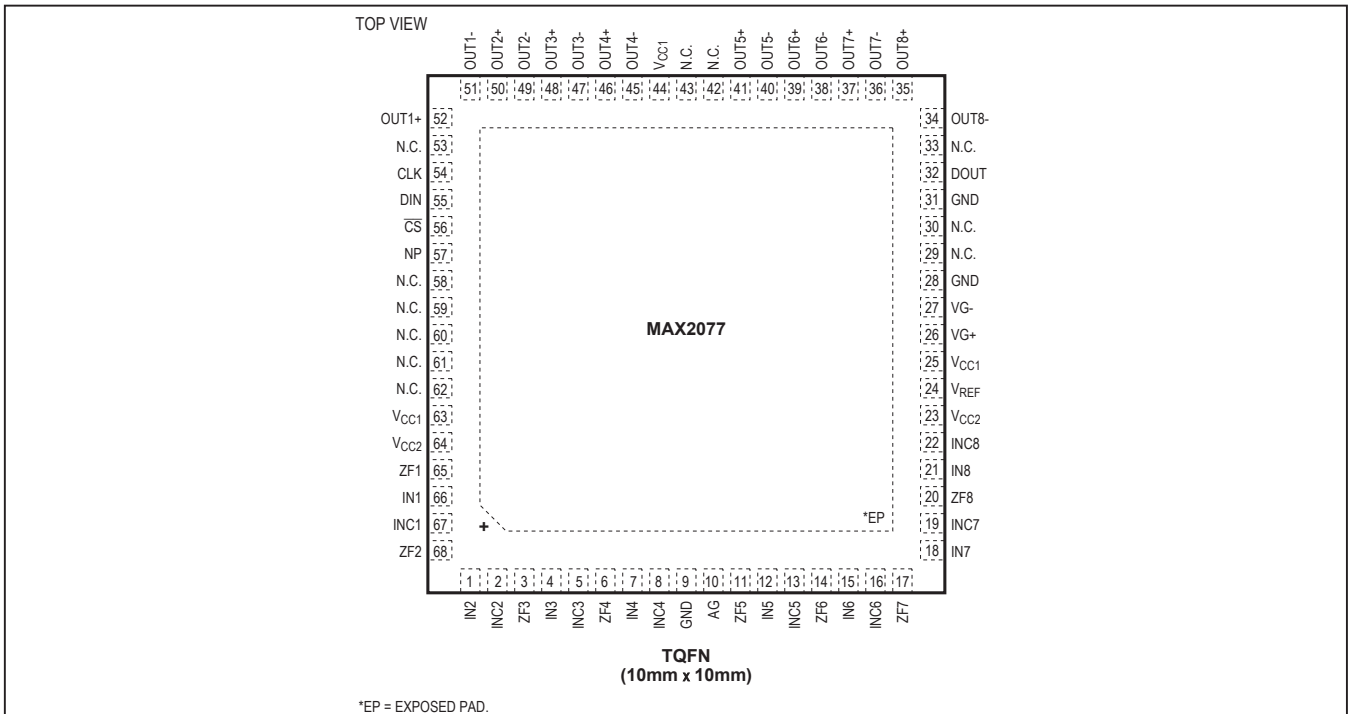


## Pin Description

| PIN        |            | NAME             | FUNCTION  |
|------------|------------|------------------|---|
| 56 TQFN    | 68 TQFN    |                  |   |
| 1          | 2          | INC2             | Channel 2 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.  |
| 2          | 3          | ZF3              | Channel 3 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.  |
| 3          | 4          | IN3              | Channel 3 Input   |
| 4          | 5          | INC3             | Channel 3 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.  |
| 5          | 6          | ZF4              | Channel 4 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.  |
| 6          | 7          | IN4              | Channel 4 Input   |
| 7          | 8          | INC4             | Channel 4 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.  |
| 8          | 10         | AG               | AC Ground. Connect a low-ESR 1 $\mu$ F capacitor to ground.   |
| 9          | 11         | ZF5              | Channel 5 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.  |
| 10         | 12         | IN5              | Channel 5 Input   |
| 11         | 13         | INC5             | Channel 5 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.  |
| 12         | 14         | ZF6              | Channel 6 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.  |
| 13         | 15         | IN6              | Channel 6 Input   |
| 14         | 16         | INC6             | Channel 6 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.  |
| 15         | 17         | ZF7              | Channel 7 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.  |
| 16         | 18         | IN7              | Channel 7 Input   |
| 17         | 19         | INC7             | Channel 7 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.  |
| 18         | 20         | ZF8              | Channel 8 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.  |
| 19         | 21         | IN8              | Channel 8 Input   |
| 20         | 22         | INC8             | Channel 8 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.  |
| 21, 51     | 23, 64     | V <sub>CC2</sub> | 4.75V Power Supply. Connect to an external 4.75V power supply. Connect all 4.75V supply pins together externally and bypass with 100nF capacitors as close as possible to the pin.  |
| 22         | 24         | V <sub>REF</sub> | External 2.5V Reference Supply. Connect to a low-noise power supply. Bypass to GND with a 0.1 $\mu$ F capacitor as close as possible to the pins. Note that noise performance of the device is dependent on the noise contribution from V <sub>REF</sub> . Use a supply with noise lower than $5nV/\sqrt{Hz}$ from 1kHz to 20MHz. |
| 23, 35, 49 | 25, 44, 63 | V <sub>CC1</sub> | 3.3V Power Supply. Connect to an external 3.3V power supply. Connect all 3.3V supply pins together externally and bypass with 100nF capacitors as close as possible to the pin.   |
| 24         | 26         | VG+              | VGA Analog Gain Control Differential Input. Set the differential voltage to -3V for minimum gain and to +3V for maximum gain.   |
| 25         | 27         | VG-              |   |
| 26         | 32         | DOUT             | Serial Port Data Output. Data output for ease of daisy-chain programming. The level is 3.3V CMOS.   |

## Pin Description (continued)

| PIN     |                               | NAME                   | FUNCTION   |
|---------|-------------------------------|------------------------|--|
| 56 TQFN | 68 TQFN                       |                        |  |
| 27      | 34                            | OUT8-                  | Channel 8 Negative Differential Output   |
| 28      | 35                            | OUT8+                  | Channel 8 Positive Differential Output   |
| 29      | 36                            | OUT7-                  | Channel 7 Negative Differential Output   |
| 30      | 37                            | OUT7+                  | Channel 7 Positive Differential Output   |
| 31      | 38                            | OUT6-                  | Channel 6 Negative Differential Output   |
| 32      | 39                            | OUT6+                  | Channel 6 Positive Differential Output   |
| 33      | 40                            | OUT5-                  | Channel 5 Negative Differential Output   |
| 34      | 41                            | OUT5+                  | Channel 5 Positive Differential Output   |
| 36      | 45                            | OUT4-                  | Channel 4 Negative Differential Output   |
| 37      | 46                            | OUT4+                  | Channel 4 Positive Differential Output   |
| 38      | 47                            | OUT3-                  | Channel 3 Negative Differential Output   |
| 39      | 48                            | OUT3+                  | Channel 3 Positive Differential Output   |
| 40      | 49                            | OUT2-                  | Channel 2 Negative Differential Output   |
| 41      | 50                            | OUT2+                  | Channel 2 Positive Differential Output   |
| 42      | 51                            | OUT1-                  | Channel 1 Negative Differential Output   |
| 43      | 52                            | OUT1+                  | Channel 1 Positive Differential Output   |
| 44      | 54                            | CLK                    | Serial Port Data Clock (Positive Edge Triggered). 3.3V CMOS. Clock input for programming the serial shift registers.   |
| 45      | 55                            | DIN                    | Serial Port Data Input Line. 3.3V CMOS. Data input to program the serial shift registers.  |
| 46      | 56                            | $\overline{\text{CS}}$ | Active-Low Serial Port Chip Select. 3.3V CMOS. Used to store programming bits in registers, as well as in CW mode, synchronizing all channel phases (on a rising edge).                          |
| 47      | —                             | PD                     | Power-Down Mode Select Input (56-Pin TQFN Only). Drive PD high to place the entire device in power-down mode. Drive PD low for normal operation. This mode overrides the standby mode.           |
| 48      | 57                            | NP                     | VGA Standby Mode Select Input. Set NP to 1 to place the entire device in standby mode. Overrides soft channel shutdown in serial shift register, but not general power-down (PD).                |
| 50      | 9, 28, 31                     | GND                    | Ground   |
| 52      | 65                            | ZF1                    | Channel 1 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.   |
| 53      | 66                            | IN1                    | Channel 1 Input  |
| 54      | 67                            | INC1                   | Channel 1 Clamp Input. Connect to a coupling capacitor. See the <i>Typical Application Circuits</i> for details.   |
| 55      | 68                            | ZF2                    | Channel 2 Active Impedance Matching Line. AC-couple to source with a 10nF capacitor.   |
| 56      | 1                             | IN2                    | Channel 2 Input  |
| —       | 29, 30, 33, 42, 43, 53, 58–62 | N.C.                   | No Connection. Internally not connected.   |
| —       | —                             | EP                     | Exposed pad. Internally connected to ground. Connect to a large ground plane using multiple vias to maximize thermal and electrical performance. Not intended as an electrical connection point. |

Functional Diagram

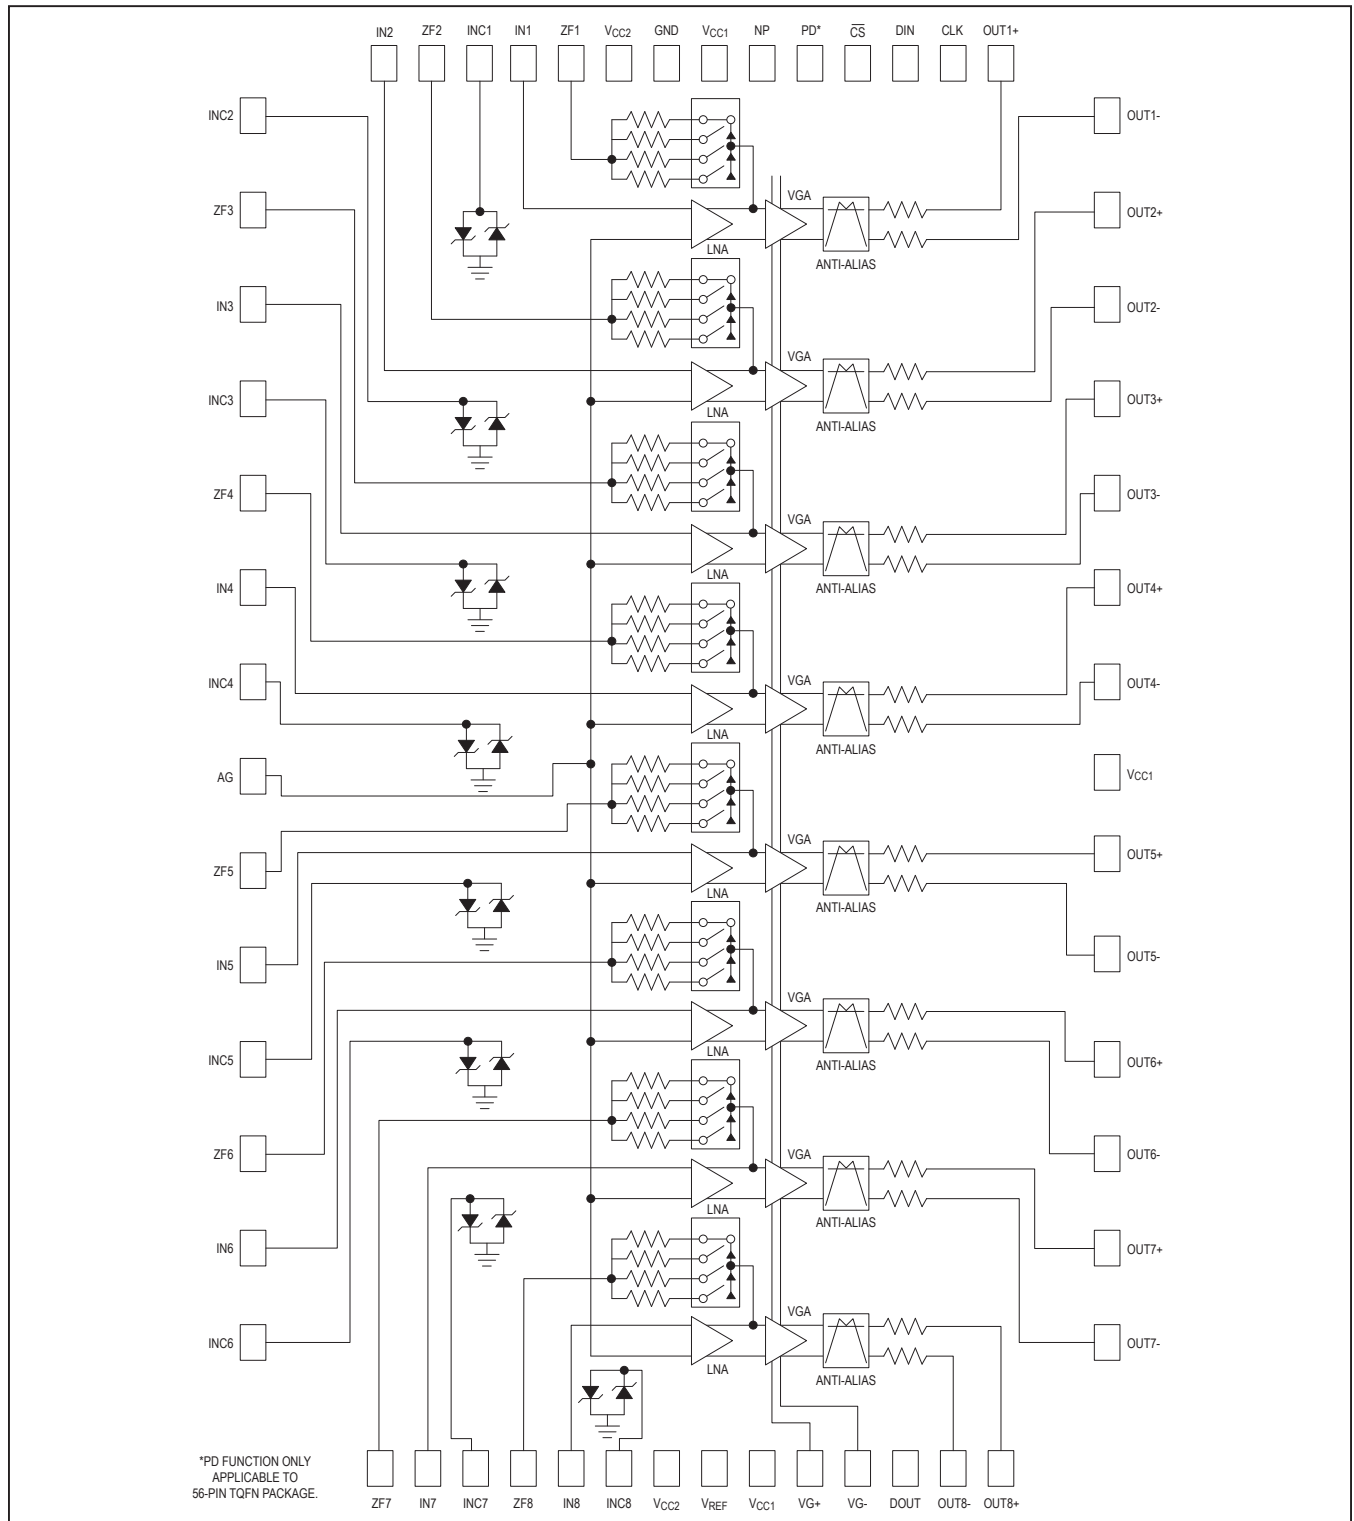

## Detailed Description

The MAX2077 is a high-density, octal-channel ultra-sound receiver optimized for low-cost, high-channel count, high-performance portable and cart-based ultra-sound applications. The integrated octal LNA, VGA, and AAF offer a complete ultrasound imaging path receiver solution.

Imaging path dynamic range has been optimized for exceptional second-harmonic performance. The complete imaging receive channel exhibits an exceptional 68dBFS\* SNR at 5MHz. The bipolar front-end has also been optimized for exceptionally low near-carrier modulation noise for exceptional low-velocity pulsed and color-flow Doppler sensitivity under high-clutter conditions, achieving an impressive near-carrier SNR of 140dBc/Hz at 1kHz offset from a  $V_{OUT} = 1V_{P-P}$ , 5MHz clutter signal. To add

\*When coupled with the MAX1437B ADC.

CW Doppler capability, replace the MAX2077 with the MAX2078.

## Modes of Operation

The MAX2077 requires programming before it can be used. The operating modes are controlled by the D0–D6 programming bits. Tables 1 and 2 show the functions of these programming bits.

## Low-Noise Amplifier (LNA)

The MAX2077's LNA is optimized for excellent dynamic range and linearity performance characteristics, making it ideal for ultrasound imaging applications. When the LNA is placed in low-gain mode, the input resistance ( $R_{IN}$ ), being a function of the gain  $A$  ( $R_{IN} = R_F/(1+A)$ ), increases by a factor of approximately 2.

**Table 1. Summary of Programming Bits**

| BIT NAME   | DESCRIPTION                         |
|------------|-------------------------------------|
| D0, D1, D2 | Input-impedance programming         |
| D3         | LNA gain (D3 = 0 is low gain)       |
| D4, D5     | Anti-alias filter $f_C$ programming |
| D6         | Don't care                          |

**Table 2. Logic Functions of Programming Bits**

| D6 | D5 | D4 | D3 | D2 | D1 | D0 | MODE                                     |
|----|----|----|----|----|----|----|--|
| X  | X  | X  | 1  | 0  | 0  | 0  | $R_{IN} = 50\Omega$ , LNA gain = 18.5dB  |
| X  | X  | X  | 1  | 0  | 0  | 1  | $R_{IN} = 100\Omega$                     |
| X  | X  | X  | 1  | 0  | 1  | 0  | $R_{IN} = 200\Omega$                     |
| X  | X  | X  | 1  | 0  | 1  | 1  | $R_{IN} = 1000\Omega$                    |
| X  | X  | X  | 0  | 0  | 0  | 0  | $R_{IN} = 100\Omega$ , LNA gain = 12.5dB |
| X  | X  | X  | 0  | 0  | 0  | 1  | $R_{IN} = 200\Omega$                     |
| X  | X  | X  | 0  | 0  | 1  | 0  | $R_{IN} = 400\Omega$                     |
| X  | X  | X  | 0  | 0  | 1  | 1  | $R_{IN} = 2000\Omega$                    |
| X  | X  | X  | 1  | 1  | X  | X  | Open feedback, LNA gain = 18.5dB         |
| X  | 0  | 0  | X  | X  | X  | X  | $f_C = 9\text{MHz}$                      |
| X  | 0  | 1  | X  | X  | X  | X  | $f_C = 10\text{MHz}$                     |
| X  | 1  | 0  | X  | X  | X  | X  | $f_C = 15\text{MHz}$                     |
| X  | 1  | 1  | X  | X  | X  | X  | $f_C = 18\text{MHz}$                     |

X = Don't care.

Consequently, the switches that control the feedback resistance ( $R_F$ ) have to be changed. For instance, the 100 $\Omega$  mode in high gain becomes the 200 $\Omega$  mode in low gain (see Table 2).

### Variable-Gain Amplifier (VGA)

The MAX2077's VGAs are optimized for high linearity, high dynamic range, and low output-noise performance, all of which are critical parameters for ultrasound imaging applications. Each VGA path includes circuitry for adjusting analog gain, as well as an output buffer with differential output ports (OUT\_+, OUT\_-) for driving ADCs.

The VGA gain can be adjusted through the differential gain control input VG+ and VG-. Set the differential gain control input voltage at -3V for minimum gain and +3V for maximum gain. The differential analog control common-mode voltage is 1.65V (typ).

### Overload Recovery

The device is also optimized for quick overload recovery for operation under the large input signal conditions that are typically found in ultrasound imaging applications. See the *Typical Operating Characteristics* for an illustration of the rapid recovery time from a transmit-related overload.

### Power-Down Mode

The MAX2077CTN+ can also be powered down with PD (the same feature is not available in the MAX2077CTK+). Set PD to logic-high for power-down mode. In powerdown mode, the device consumes 3.0 $\mu$ W (typ) power. Set PD to logic-low for normal operation.

Setting NP to logic-high places the MAX2077 in standby mode. In standby mode, the device consumes less power (5.6mW typ), but input/output pins remain biased to provide quick power-up response time. Standby mode is available for both MAX2077CTN+ and MAX2077CTK+ versions.

## Applications Information

### Serial Interface

The MAX2077 is programmed using a serial shift register arrangement. This greatly simplifies the complexity of the program circuitry, reduces the number of IC pins necessary for programming, and reduces the PCB layout complexity. The data in (DIN) and data out (DOUT) can be daisy-chained from device to device and all front-ends can run off a single programming clock.

The data can be entered after  $\overline{CS}$  goes low. Once a whole word is entered,  $\overline{CS}$  needs to rise. When programming the part, enter LSB first and MSB last. The chip-select

line ( $\overline{CS}$ ) is used to load the programming information in multiple MAX2077 devices at the same time. The line is pulled down before the programming begins and pulled up after it is complete for all devices used. On the rising edge, the information is stored in internal registers.

### Active Impedance Matching

To provide exceptional noise-figure characteristics, the input impedance of each amplifier uses a feedback topology for active impedance matching. A feedback resistor of the value  $(1 + (A/2)) \times R_S$  is added between the inverting input of the amplifier to the output. The input impedance is the feedback resistor ( $Z_F$ ) divided by  $1 + (A/2)$ . The factor of two is due to the gain of the amplifier (A) being defined with a differential output. For common input impedances, the internal digitally programmed impedances can be used (see Table 2). For other input impedances, use an externally supplied resistor in series with the existing programmable feedback impedances to set the input impedance according to the above formula.

### Noise Figure

The MAX2077 is designed to provide maximum input sensitivity with exceptionally low noise figure. The input active devices are selected for very low-equivalent input-noise voltage and current, optimized for source impedances from 50 $\Omega$  to 1000 $\Omega$ . Additionally, the noise contribution of the matching resistor is effectively divided by  $1 + (A/2)$ . Using this scheme, typical noise figure of the amplifier is approximately 2.4dB for  $R_{IN} = R_S = 200\Omega$ . Table 3 illustrates the noise figure for other input impedances.

### Input Clamp

The MAX2077 includes configurable integrated input-clamping diodes. The diodes are clamped to ground at  $\pm 0.8V$ . The input-clamping diodes can be used to prevent large transmit signals from overdriving the inputs of the amplifiers. Overdriving the inputs could possibly place charge on the input-coupling capacitor, causing longer transmit overload recovery times. Input signals are AC-coupled to the single-ended inputs IN1–IN8, but are clamped with the INC1–INC8 inputs. See the *Typical Application Circuits*. If external clamping devices are preferred, simply leave INC1–INC8 unconnected.

**Table 3. Noise Figure vs. Source and Input Impedances**

| $R_S$ ( $\Omega$ ) | $R_{IN}$ ( $\Omega$ ) | NF (dB) |
|--------------------|-----------------------|---------|
| 50                 | 50                    | 4.5     |
| 100                | 100                   | 3.4     |
| 200                | 200                   | 2.4     |
| 1000               | 1000                  | 2.2     |

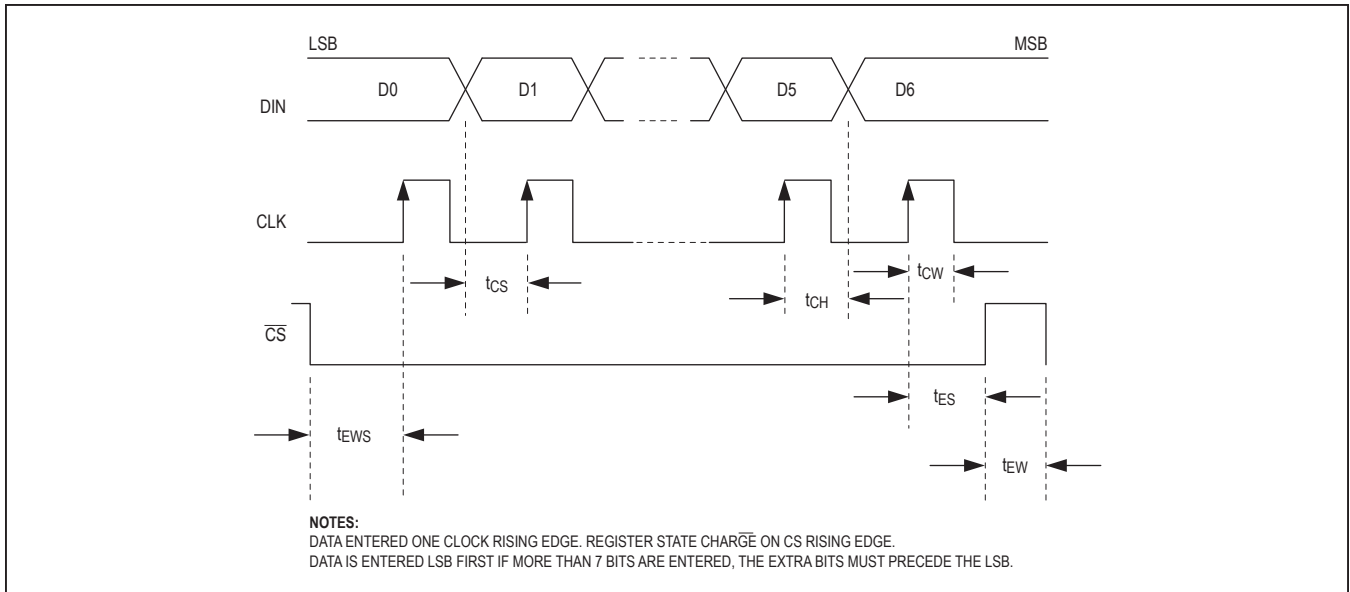


Figure 1. Shift Register Timing Diagram

**Analog Output Coupling**

Each of the VGA output pins can drive 25pF to GND and 15pF || 1kΩ differentially. The differential outputs have a common-mode bias of approximately 1.73V. AC-couple these differential outputs if the next stage has a different common-mode input range.

**Power-Supply Sequencing**

Use the following power-on sequence:

- 1) 4.75V supply
- 2) 3.3V supply
- 3) 2.5V reference voltage
- 4) Control signals

Before a signal is turned on, it should be either at 0V or in an open state.

**Ultrasound-Specific IMD3 Specification**

Unlike typical communications applications, the two input tones are not equal in magnitude for the ultrasound-specific IMD3 two-tone specification. In this measurement,  $f_1$  represents reflections from tissue and  $f_2$  represents reflections from blood. The latter reflections are typically 25dB lower in magnitude, and hence the measurement is defined with one input tone 25dB lower than the other.

The IMD3 product of interest ( $f_1 - (f_2 - f_1)$ ) presents itself as an undesired Doppler error signal in ultrasound applications (see Figure 2).

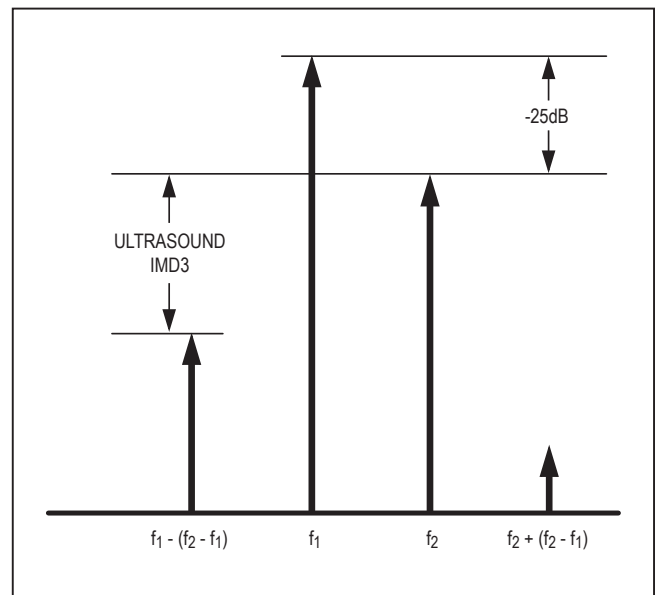



Figure 2. Ultrasound IMD3 Measurement Technique

**PCB Layout**


The pin configuration of the MAX2077 is optimized to facilitate a very compact physical layout of the device and its associated discrete components. A typical application for this device might incorporate several devices in close proximity to handle multiple channels of signal processing.

The exposed pad (EP) of the MAX2077's TQFN-EP packages provide a low thermal-resistance path to the die. It is important that the PCB on which the MAX2077 is mounted be designed to conduct heat from the EP. In addition, provide the EP with a low-inductance path to electrical ground. The EP **MUST** be soldered to a ground plane on the PCB, either directly or through an array of plated via holes.

**Typical Application Circuits**

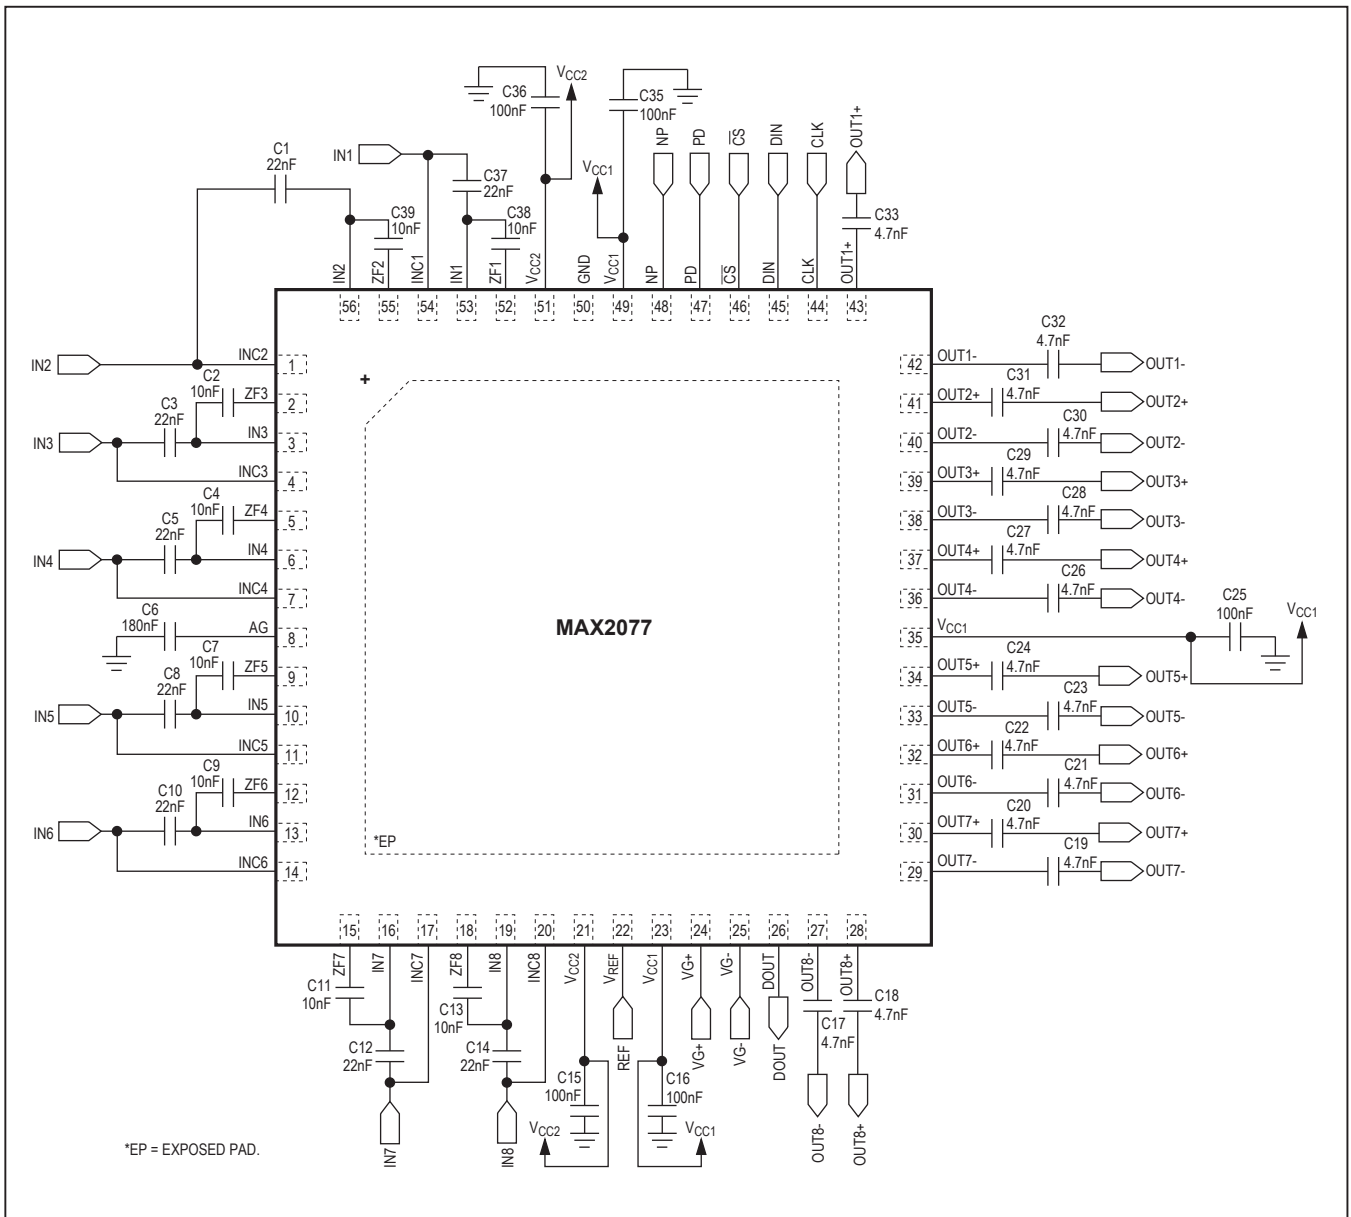

Typical Application Circuits (continued)

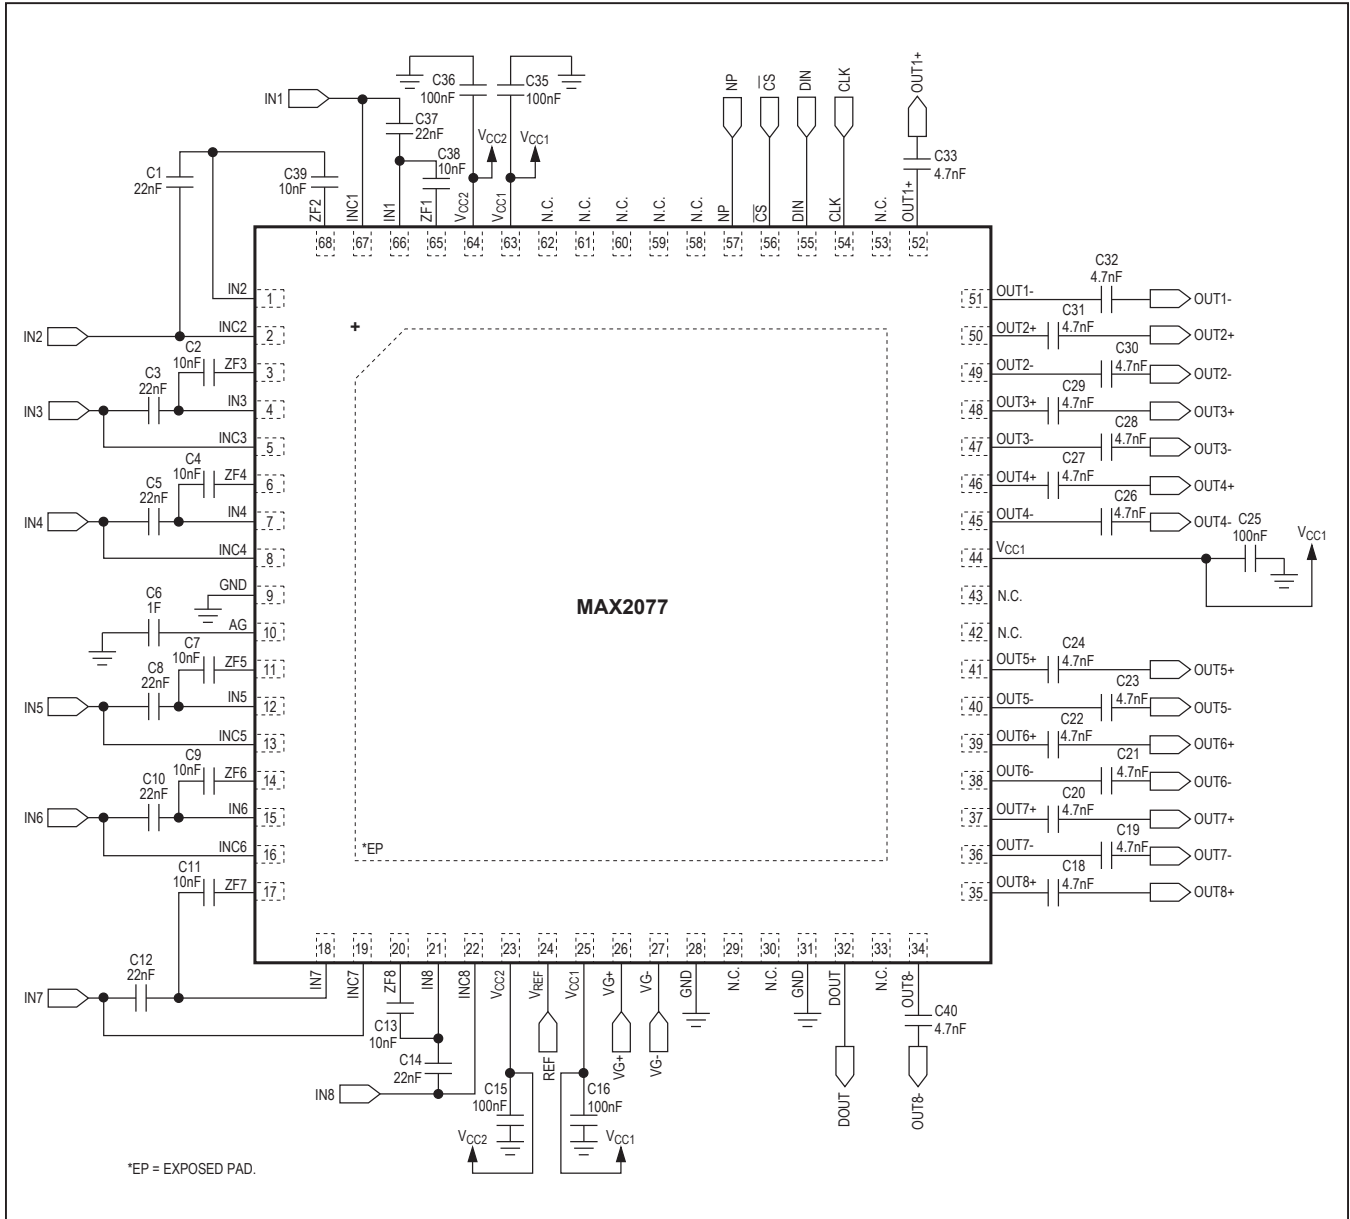

Ordering Information

| PART        | TEMP RANGE   | PIN-PACKAGE     |
|-------------|--------------|-----------------|
| MAX2077CTN+ | 0°C to +70°C | 56 Thin QFN-EP* |
| MAX2077CTK+ | 0°C to +70°C | 68 Thin QFN-EP* |

+Denotes a lead(Pb)-free/RoHS-compliant package.  
 \*EP = Exposed pad.

Chip Information

PROCESS: Complementary BiCMOS

## Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION   | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0               | 7/09          | Initial release   | —             |
| 1               | 9/09          | Removed future product reference for MAX2077CTK+ package and made minor corrections | 1, 6–9, 12    |
| 2               | 5/19          | Updated the <i>AC Electrical Characteristics</i> table                              | 4             |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MAX2077CTK+T on WIN SOURCE](#)
- ⊖ [Maxim Integrated Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management