



THE DATASHEET OF MACP-008311-CE0370

14 dB Coupler
5-1000MHz

MACP-008311-CE0370
V1

Features

- Surface Mount
- 14 dB Coupler
- RoHS* Compliant
- RoHS version of ELDC-14
- Available on Tape and Reel. Reel quantity 900

Description


M/A-COM's MACP-008311-CE0370 is a high performance 75 Ohm Coupler, in an SM-55 low cost, surface mount package. The ELDC-14 is designed for use in high volume CATV applications. Typical applications include Set-top Boxes, Network Interface Units, Cable Amplifiers and Headend equipment.




Pin Configuration

Pin No.	Function
1	Output
2	Not connected (ground)
3	External 75 Ohm
4	Coupled
5	Ground
6	Input

Schematic

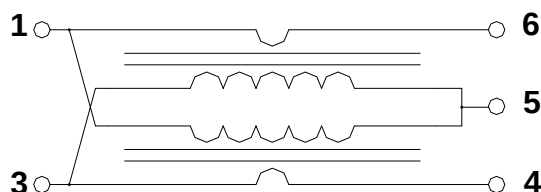

Case Style: SM-55

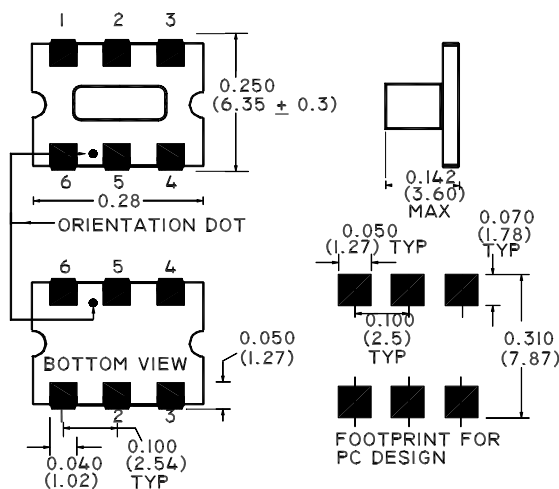

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Ordering Information

Part Number	Package
MACP-008311-CE0370	900 per reel
MACP-008311-CE03TB	Customer Test Board

Note: Reference Application Note **M513** for reel size information.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

14 dB Coupler
5-1000MHz

MACP-008311-CE0370
V1

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹


Parameter	Test Conditions	Units	Min	Typ	Max
Mainline Loss	5 - 870 MHz	dB	—	0.8	1.5
	870 - 1000 MHz	dB	—	1.0	1.8
Coupling	5 - 870 MHz	dB	—	14.3	± 0.5
	870 - 1000 MHz	dB	—	14.3	± 0.7
Coupling Flatness		dB	—	—	0.8
Directivity	5 - 870 MHz	dB	15	25	—
	870 - 1000 MHz	dB	13	20	—
Input Return Loss	5 - 870 MHz	dB	20	25	—
	870 - 1000 MHz	dB	18	23	—
Output Return Loss	5 - 870 MHz	dB	20	25	—
	870 - 1000 MHz	dB	20	25	—
Coupled Return Loss	5 - 870 MHz	dB	18	23	—
	870 - 1000 MHz	dB	18	23	—

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	250 mW
DC current	30 mA
Pin Temperature (10 sec)	260°C
Operating/Storage Temperature	-40°C to +85°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Recommended PCB Configuration

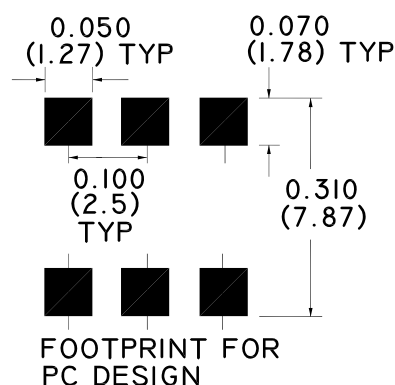


**14 dB Coupler
5-1000MHz**


MACP-008311-CE0370
V1

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹


Mainline Loss

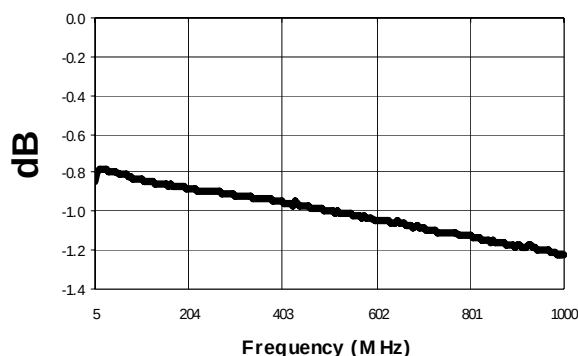


Input Return Loss

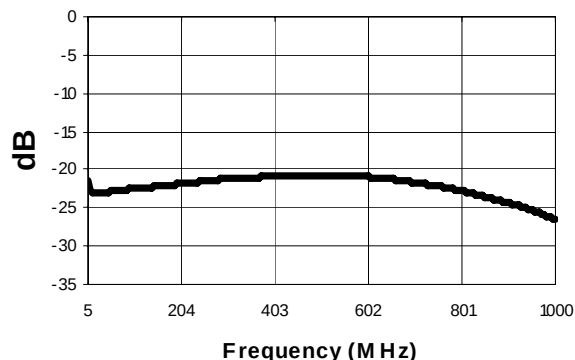


Coupling

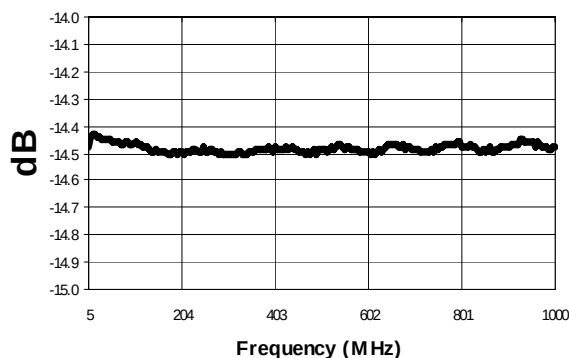


Output Return Loss

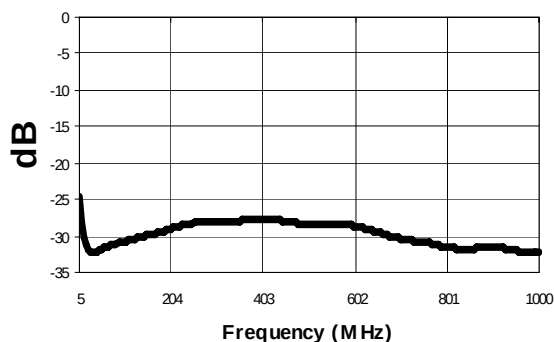

Directivity

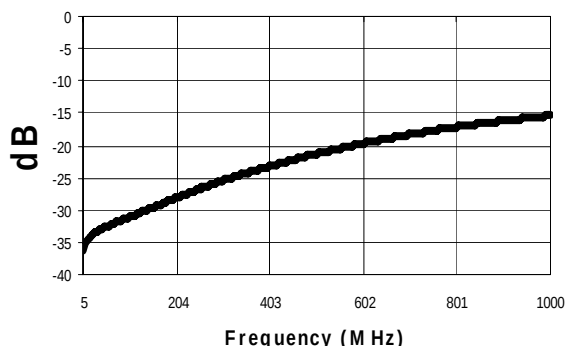

Coupled Port Return Loss

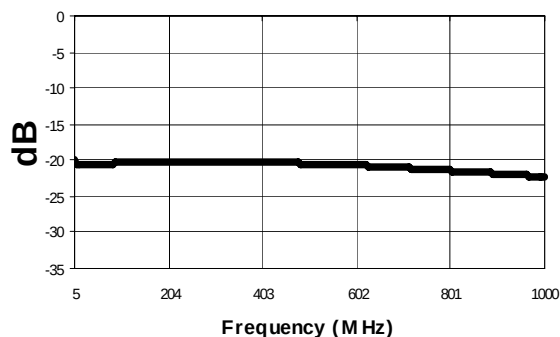

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ View [MACP-008311-CE0370](#) on WIN SOURCE
- ⊖ [M/A-Com Technology Solutions](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management