






**THE DATASHEET OF
OP2100000000G**

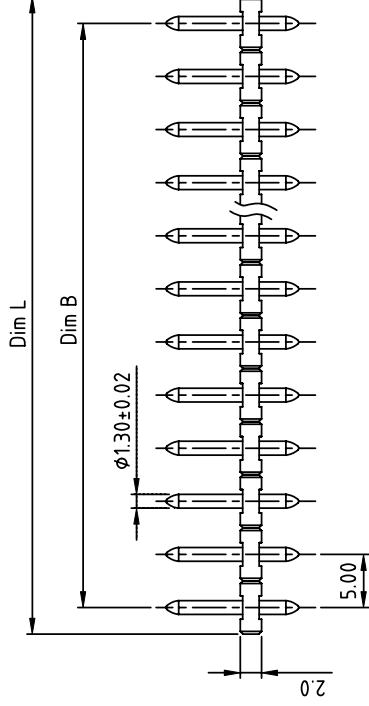

PRODUCT NUMBER	PITCH
OPxx00x000J0G	5.00 mm



- Material:
- Item ① Ter
 - Item ② Co
- Electrical:
- Voltage r
 - Current r
 - Withstan
 - Operatin
 - Solderin
 - Safety Ap

N = Number of poles

Dim L=Nx5.0

Dim B=(N-1)x5.0

poles	Tolerance
2-5p	±0.10
6-9p	±0.15
10-13p	±0.20
14-17p	±0.25
18-21p	±0.30
22-24p	±0.40

PART NO.: OP xx 00 X 0 00J0 G

- Solid block
 - No. of poles
 - 02 2 poles
 - 03 3 poles
 -
 - 24 24 poles
- 0 Tin plating 120u" Min RoHS compliant
 - 1 Gold plating 10u" (lead<4%)
 - 2 Gold flash In copper Alloy

mat'l. code		surface	
itr	ecn no dr	date	tolerances unless oth
			ASME Y14.5
			angles
			X ^{±1}
			dr EVIN ZHON
			engr EVIN ZHON
			chr HANKE FEN
			appd SHI JUN
sheet	revision	A	
index	sheet	1	

form: A4mmXLc



1

2

PDS: Rev

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OP210000000G on WIN SOURCE](#)
-  [Amphenol Anytek Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management