




**THE DATASHEET OF
ECJ-4YB1H105K**



Multilayer Ceramic Chip Capacitors (High Capacitance)

Series: **ECJ**

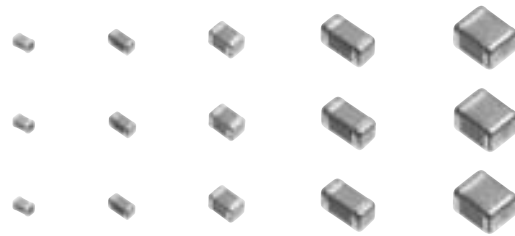

■ Features

- Small in size and large capacitance
- Low ESR/ESL and excellent High-frequency characteristics
- Optimal change from TANTALUM CHIP CAPACITORS and ALUMINUM ELECTROLYTIC CAPACITORS


■ Recommended Applications

- Class 2 (Hi-K Type)
 - Power supply circuit decoupling applications
 - Power supply circuit of the High-speed LSI
 - Smoothing circuit of DC-DC converters


■ Handling Precautions, [click here.](#)

■ Packaging Specifications, [click here.](#)

■ Explanation of Part Numbers

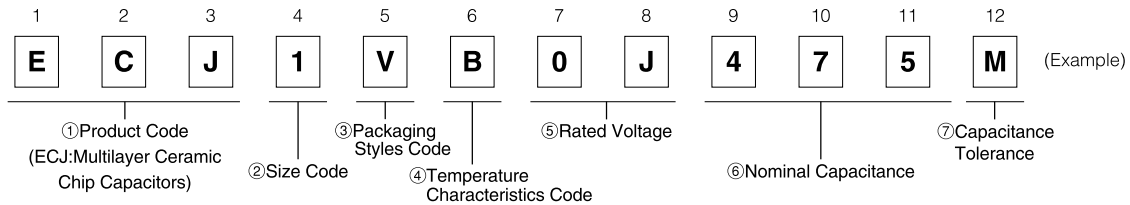


■ Construction

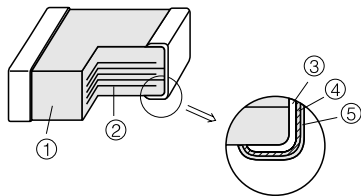

No	Name
①	Ceramic dielectric
②	Internal electrode
③	Substrate electrode
④	Intermediate electrode
⑤	External electrode

■ Dimensions in mm (not to scale)



Code	Size Code (EIA)	L	W	T	L1, L2
0	Type "10" (0402)	1.00±0.05	0.50±0.05	0.50±0.05	0.2±0.1
1	Type "11" (0603)	1.6±0.1	0.8±0.1	0.8±0.1	0.3±0.2
2	Type "12" (0805)	2.0±0.1	1.25±0.10	0.85±0.10	0.50±0.25
C		2.00±0.15	1.25±0.15	1.25±0.15	
G		2.0±0.2	1.25±0.20	1.25±0.20	
		2.0±0.2	1.25±0.20	0.85±0.10	
3	Type "13" (1206)	3.20±0.15	1.60±0.15	0.85±0.10	0.6±0.3
D		3.2±0.2	1.6±0.2	1.6±0.2	
M		3.2±0.2	1.6±0.2	0.85±0.10	
4	Type "23" (1210)	3.2±0.3	2.5±0.2	2.0±0.2	0.6±0.3
9			2.5±0.3	2.5±0.3	
		3.2±0.3	2.5±0.2	0.85±0.10	0.6±0.3

■ Packaging Styles and Standard Packaging Quantity

T : Thickness (mm)

Code	Packaging Styles		Quantity	Type"10"	Type"11"	Type"12"		Type"13"			Type"23"			
				(0402)	(0603)	(0805)	(1206)							
				T=0.5	T=0.8	T=0.85	T=1.25	T=0.85	T=1.15	T=1.6	T=0.85	T=2.0	T=2.5	
E	φ180 reel	Paper taping (Pitch:2mm)	pcs./ reel	10,000	—	—	—	—	—	—	—	—	—	
V		Paper taping (Pitch:4mm)		—	4,000	4,000	—	4,000	—	—	—	—	—	—
F		Embossed taping (Pitch:4mm)		—	—	—	3,000	—	3,000	—	3,000	—	—	—
Y				—	—	—	—	—	—	—	2,000	—	2,000	1,000

■ Temperature Characteristics

● Class 2 Capacitors

Code	Temp. Char.	Capacitance Change	Measurement Temperature Range	Reference Temperature
B	B	±10 %	-25 to 85 °C	20 °C
	X7R	±15 %	-55 to 125 °C	25 °C
5	X5R	±15 %	-55 to 85 °C	25 °C
F	F	+30, -80 %	-25 to 85 °C	20 °C
	Y5V	+22, -82 %	-30 to 85 °C	25 °C

For applicable "Temperature Characteristics", see the lists of standard products on page 8 to 9.

■ Rated Voltage

Code	1H	1E	1C	1A	0J	0G
Rated Voltage	DC 50 V	DC 25 V	DC 16 V	DC 10 V	DC 6.3 V	DC 4 V



■ Nominal Capacitance

Ex.	105	225	106	226	107
Nominal Capacitance	1,000,000 pF (1 μF)	2,200,000 pF (2.2 μF)	10,000,000 pF (10 μF)	22,000,000 pF (22 μF)	100,000,000 pF (100 μF)

■ Capacitance Tolerance

Class	Temp. Char.	Tol. Code	Capacitance Tolerance
2	B, X7R, X5R	K	±10 %
		M	±20 %
	F, Y5V	Z	+80, -20 %

■ Specification and Test Method

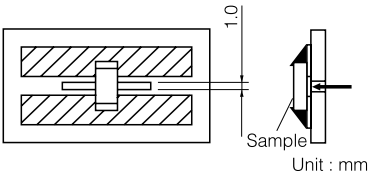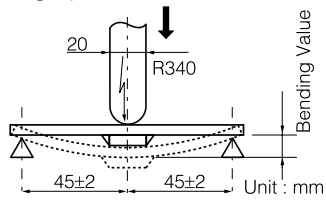Item	Specification	Test Method																														
Operating Temperature Range	Temp. Char. B, X7R : -55 to 125 °C Temp. Char. B, X5R : -55 to 85 °C Temp. Char. F, Y5V : -30 to 85 °C	—————																														
Dielectric Withstanding Voltage	No break down	Test voltage: Rated voltage ×250% Duration: 1 to 5s. Charge/discharge current: within 50 mA																														
Insulation Resistance (I R)	500/C (MΩ) min. Note: DC10V, DC6.3V; 100/C (MΩ) min. (C: Nominal Cap. in μF)	Measuring voltage: Rated voltage Duration: 60±5s Charge/discharge current: within 50 mA																														
Capacitance	within the specified tolerance	Measuring temperature: 20±2°C Pretreatment: The capacitors shall be kept in a temperature of 150+0/-10°C for 1 hour and then shall be stored in standard condition* 48±4 hours, before initial measurement.																														
Dissipation Factor (tan δ)	0.2 max. Please confirmation to the technical reports for details.	<table border="1"> <thead> <tr> <th>Nominal capacitance</th> <th>C ≤ 10μF</th> <th>C > 10μF</th> </tr> </thead> <tbody> <tr> <td>Measuring frequency</td> <td>1kHz±10%</td> <td>120Hz±20%</td> </tr> <tr> <td>Measuring voltage</td> <td>1.0±0.2Vrms</td> <td>0.5±0.2Vrms</td> </tr> </tbody> </table>	Nominal capacitance	C ≤ 10μF	C > 10μF	Measuring frequency	1kHz±10%	120Hz±20%	Measuring voltage	1.0±0.2Vrms	0.5±0.2Vrms																					
		Nominal capacitance	C ≤ 10μF	C > 10μF																												
Measuring frequency	1kHz±10%	120Hz±20%																														
Measuring voltage	1.0±0.2Vrms	0.5±0.2Vrms																														
Temperature Characteristics	Temp. Char. B : ±10 % (-25 to 85 °C) X7R: ±15 % (-55 to 125 °C) X5R: ±15 % (-55 to 85 °C) F : +30, -80 % (-25 to 85 °C) Y5V: +22, -82 % (-30 to 85 °C)	Maximum capacitance change at stage 1 to 5 <table border="1"> <thead> <tr> <th>Temp. Char.</th> <th>B, F</th> <th>X7R</th> <th>X5R</th> <th>Y5V</th> </tr> </thead> <tbody> <tr> <td>Stage 1</td> <td>20°C</td> <td>25°C</td> <td>25°C</td> <td>25°C</td> </tr> <tr> <td>Stage 2</td> <td>-25°C</td> <td>-55°C</td> <td>-55°C</td> <td>-30°C</td> </tr> <tr> <td>Stage 3 (Ref. Temp.)</td> <td>20°C</td> <td>25°C</td> <td>25°C</td> <td>25°C</td> </tr> <tr> <td>Stage 4</td> <td>85°C</td> <td>125°C</td> <td>85°C</td> <td>85°C</td> </tr> <tr> <td>Stage 5</td> <td>20°C</td> <td>25°C</td> <td>25°C</td> <td>25°C</td> </tr> </tbody> </table> *ECJ0EBOJ105□(0402/X5R/6.3V1.0μF), *ECJ1VB0J475□(0603/X5R/6.3V/4.7μF), *ECJ1VB0G106M(0603/X5R/4V/10μF) of 0.50±0.05 Vrms measurement voltage.	Temp. Char.	B, F	X7R	X5R	Y5V	Stage 1	20°C	25°C	25°C	25°C	Stage 2	-25°C	-55°C	-55°C	-30°C	Stage 3 (Ref. Temp.)	20°C	25°C	25°C	25°C	Stage 4	85°C	125°C	85°C	85°C	Stage 5	20°C	25°C	25°C	25°C
Temp. Char.	B, F	X7R	X5R	Y5V																												
Stage 1	20°C	25°C	25°C	25°C																												
Stage 2	-25°C	-55°C	-55°C	-30°C																												
Stage 3 (Ref. Temp.)	20°C	25°C	25°C	25°C																												
Stage 4	85°C	125°C	85°C	85°C																												
Stage 5	20°C	25°C	25°C	25°C																												
Adhesion	The terminal electrode shall be free from peeling or signs of peeling.	Applied force: 5N Duration: 10s 																														
Bending Strength	Appearance: no mechanical damage Capacitance change: Temp. Char. B, X7R, X5R: within ±12.5 % F, Y5V: within ±30 %	Bending value: 1 mm Bending speed: 1 mm/s 																														
Vibration Proof	Appearance: There shall be no cracks and other mechanical damage. Capacitance: Shall be within the specified tolerance tanδ: initial value	Apply a variable vibration of 1.5mm total amplitude in the 10 to 55 to 10Hz vibration frequency range swept in 1 min. in 3 mutually perpendicular directions for 2 hours each, a total of 6 hours.																														
Solderability	More than 95 % of the soldered area of both terminal electrodes shall be covered with fresh solder.	Solder bath method Solder temperature: 230±5 °C Dipping period: 4±1 s Solder: H63A (JIS-Z-3282)																														

*Standard condition : Temperature 15 to 35 °C, Relative humidity 45 to 75 %

October 2005

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Item	Specification	Test Method									
Resistance to Solder Heat	Appearance:no mechanical damage Capacitance change: Temp. Char. B, X7R, X5R: within ± 7.5 % F, Y5V: within ± 20 % $\tan\delta$ initial value IR:initial value With-stand voltage:no dielectric breakdown or damage	Solder bath method Preconditioning: Heat treatment (150°C, 1h) Solder temperature:270 \pm 5 °C Dipping period:3.0 \pm 0.5 s Preheat condition: <table border="1"> <thead> <tr> <th>Temp.</th> <th>Type "10", "11", "12"</th> <th>Type "13", "23"</th> </tr> </thead> <tbody> <tr> <td>80 to 100 °C</td> <td>120 to 180s</td> <td>300 to 360s</td> </tr> <tr> <td>150 to 200 °C</td> <td>120 to 180s</td> <td>300 to 360s</td> </tr> </tbody> </table> Recovery(Standard condition):48 \pm 4h	Temp.	Type "10", "11", "12"	Type "13", "23"	80 to 100 °C	120 to 180s	300 to 360s	150 to 200 °C	120 to 180s	300 to 360s
Temp.	Type "10", "11", "12"	Type "13", "23"									
80 to 100 °C	120 to 180s	300 to 360s									
150 to 200 °C	120 to 180s	300 to 360s									
Temperature Cycle	Appearance:no mechanical damage Capacitance change: Temp. Char. B, X7R, X5R: within ± 7.5 % F, Y5V: within ± 20 % $\tan\delta$ initial value IR:initial value With-stand voltage: no dielectric breakdown or damage	Preconditioning: Heat treatment (150°C,1h) Step 1:Minimum operation temp. 30 \pm 3 min. Step 2:Room temp. 3 min. Step 3:Maximum operation temp. 30 \pm 3 min. Step 4:Room temp. 3 min. Number of cycles:5 cycles Recovery(Standard condition):48 \pm 4h									
Damp Heat (steady state)	Appearance:no mechanical damage Capacitance change: Temp. Char. B, X7R, X5R: within ± 12.5 % F, Y5V: within ± 30 % Note:ECJ0EB0J105□(0402/X5R/6.3V/1.0 μ F) ECJ1VB0J475□(0603/X5R/6.3V/4.7 μ F) ECJ1VB0G106M(0603/X5R/4V/10 μ F) within ± 20 % $\tan\delta$ 0.3 max. Please confirmation to the technical reports for details. IR:50/C (M Ω) min. Note:DC10V, DC6.3V;10/C (M Ω)min.(C:Nominal cap. in μ F)	Preconditioning: Heat treatment (150°C,1h) Temperature:40 \pm 2 °C Relative humidity:90 to 95 % Test period:500+24/0 h Recovery(Standard condition):48 \pm 4h									
Loading Under Damp Heat	Appearance:no mechanical damage Capacitance change: Temp. Char. B, X7R, X5R: within ± 12.5 % F, Y5V: within ± 30 % Note:ECJ0EB0J105□(0402/X5R/6.3V/1.0 μ F) ECJ1VB0J475□(0603/X5R/6.3V/4.7 μ F) ECJ1VB0G106M(0603/X5R/4V/10 μ F) within ± 20 % $\tan\delta$ 0.3 max. Please confirmation to the technical reports for details. IR:25/C (M Ω) min. Note:DC10V, DC6.3V;5/C (M Ω)min.(C:Nominal cap. in μ F)	Preconditioning: Voltage treatment Temperature:40 \pm 2 °C Relative humidity:90 to 95 % Applied voltage:Rated voltage Test period:500+24/0 h Recovery(Standard condition):48 \pm 4h									
Loading at High Temperature	Appearance:no mechanical damage Capacitance change: Temp. Char. B, X7R, X5R: within ± 12.5 % F, Y5V: within ± 30 % Note:ECJ0EB0J105□(0402/X5R/6.3V/1.0 μ F) ECJ1VB0J475□(0603/X5R/6.3V/4.7 μ F) ECJ1VB0G106M(0603/X5R/4V/10 μ F) within ± 20 % $\tan\delta$ 0.3 max. Please confirmation to the technical reports for details. IR:50/C (M Ω) min. Note:DC10V, DC6.3V;10/C (M Ω)min.(C:Nominal cap. in μ F)	Preconditioning: Voltage treatment Temperature: Maximum operation temp. ± 3 °C Applied voltage:①Rated voltage \times 200% ②Rated voltage \times 150% ③Rated voltage \times 100% Please confirmation to the technical reports for details. Charge/discharge current: within 50mA Test period:1000+48/0 h Recovery(Standard condition):48 \pm 4h									

Note 1) Heat treatment:1 h of heat treatment at 150+0/-10°C followed by 48 \pm 4 h recovery under the standead condition.

Note 2) Voltage treatment:1 h of voltage treatment under the specified temperature and voltage for testing followed by 48 \pm 4 h of recovery under the standead condition.

Standard Products for Type "10" (EIA "0402"), Taped Version

Code		B		
Capacitance (μF)	Rated Voltage	DC6.3V		
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R
1	±10%(K) or ±20%(M)	ECJ0EB0J105□	0.5	○

Code		F		
Capacitance (μF)	Rated Voltage	DC6.3V		
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. F Y5V
1	+80,-20%(Z)	ECJ0EF0J105Z	0.5	○ ○

Packaging style code: "E" for taped version (φ180 reel, taping pitch: 2 mm).

Standard Products for Type "11" (EIA "0603"), Taped Version

Code		B											
Capacitance (μF)	Rated Voltage	DC16V			DC10V			DC6.3V			DC4V		
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R
1	±10%(K) or ±20%(M)	ECJ1VB1C105□	0.8	○	ECJ1VB1A105□	0.8	○	ECJ1VB0J105□	0.8	○			
2.2					ECJ1VB1A225□	0.8	○	ECJ1VB0J225□	0.8	○			
4.7								ECJ1VB0J475□	0.8	○			
10											ECJ1VB0G106M	0.8	○

Code		F												
Capacitance (μF)	Rated Voltage	DC25V			DC16V			DC10V			DC6.3V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. F Y5V	Part No.	Dim. T (mm)	Temp. Char. F Y5V	Part No.	Dim. T (mm)	Temp. Char. F Y5V	Part No.	Dim. T (mm)	Temp. Char. F Y5V	
1	+80,	ECJ1VF1E105Z	0.8	○	ECJ1VF1C105Z	0.8	○	ECJ1VF1A105Z	0.8	○	○			
2.2	-20%(Z)							ECJ1VF1A225Z	0.8	○	○	ECJ1VF0J225Z	0.8	○

Code		F		
Capacitance (μF)	Rated Voltage	DC25V		
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5S
1	+22,-22%	ECJ1V41E105M	0.8	○

□:Capacitance tolerance code: "□" for "K" or "M"

Packaging style code: "V" for taped version (φ180 reel, taping pitch: 4 mm).

Standard Products for Type "12" (EIA "0805"), Taped Version

Code		B														
Capacitance (μF)	Rated Voltage	DC25V			DC16V			DC10V			DC6.3V			DC4V		
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. B X5R	Part No.	Dim. T (mm)	Temp. Char. X5R	Part No.	Dim. T (mm)	Temp. Char. X5R
1	±10%(K) or ±20%(M)	ECJ2FB1E105□*	1.25	○	ECJ2FB1C105□*	1.25	○	ECJ2FB1A105□	1.25	○	○					
2.2		ECJ2FB1E225□*	1.25	○	ECJ2FB1C225□*	1.25	○	ECJ2FB1A225□*	1.25	—	○	ECJ2FB0J225K	1.25	○		
4.7		ECJ2FB1E475M*	1.25	○	ECJ2FB1C475□*	1.25	○	ECJ2FB1A475□*	1.25	—	○	ECJ2FB0J475M	1.25	○		
10								ECJ2FB1A106□	1.25	—	○	ECJ2FB0J106M	1.25	○		
22														Under development	1.25	○

Code		F												
Capacitance (μF)	Rated Voltage	DC50V			DC25V			DC16V			DC10V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. F Y5V	Part No.	Dim. T (mm)	Temp. Char. F Y5V	Part No.	Dim. T (mm)	Temp. Char. F Y5V	Part No.	Dim. T (mm)	Temp. Char. F Y5V	
1	+80, -20%(Z)	ECJ2FF1H105Z*	1.25	○	ECJ2FF1E105Z*	1.25	○	ECJ2VF1C105Z	0.85	○	○			
2.2					ECJ2FF1E225Z*	1.25	○	ECJGVF1C225Z	0.85	○	○			
4.7								ECJGVF1C475Z	0.85	○	○	ECJGVF1A475Z	0.85	○
10												ECJ2FF1A106Z*	1.25	○

Code		B		
Capacitance (μF)	Rated Voltage	DC6.3V		
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. X5R
2.2	+80, -20%(Z)	ECJCV50J225M	0.85	○
4.7		ECJCV50J475M	0.85	○
10		ECJCV50J106M	0.85	○

□:Capacitance tolerance code: "□" for "K" or "M"

Packaging style code: "V" or "F" for taped version (φ180 reel, taping pitch: 4 mm).

*:"L", "W", "T" Dimension tolerance ±0.15mm

Soldering method of dimension T>1mm: Do not use the flow soldering.

Standard Products for Type "13" (EIA "1206"), Taped Version

Capacitance (μF)	Code		B															
	Rated Voltage		DC25V			DC16V			DC10V			DC6.3V						
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		
1	±10%(K) or ±20%(M)	ECJ3YB1E105□	1.6	○	○	—	ECJ3FB1C105□	1.15	○	○	—							
2.2		ECJ3YB1E225□	1.6	—	—	○	ECJ3YB1C225□	1.6	○	○	—	ECJ3YB1A225□	1.6	○	○			
4.7		ECJ3YB1E475□	1.6	—	—	○	ECJ3YB1C475□	1.6	—	—	○	ECJ3YB1A475□	1.6	—	○	ECJ3YB0J475□	1.6	○
10		ECJ3YB1E106□	1.6	—	—	○	ECJ3YB1C106□	1.6	—	—	○	ECJ3YB1A106M	1.6	—	○	ECJ3YB0J106M	1.6	○
22		Under development	1.6	—	—	○	Under development	1.6	—	—	○	Under development	1.6	—	○	ECJ3YB0J226M	1.6	○
47															Under development	1.6	○	

Capacitance (μF)	Code		B	
	Rated Voltage		DC6.3V	
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.
10	±10%(K) or ±20%(M)	ECJDV50J106M	0.85	○
22		ECJDV50J226M	0.85	○

Capacitance (μF)	Code		F														
	Rated Voltage		DC50V			DC25V			DC16V			DC10V					
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.	
1	+80, -20%(Z)	ECJ3FF1H105Z	1.15		○	ECJ3FF1E105Z	1.15	○	○	ECJ3VF1C105Z	0.85	○	○				
2.2						ECJ3FF1E225Z	1.15	○	○	ECJ3VF1C225Z	0.85	○	○				
4.7						ECJ3FF1E475Z	1.15	○	—	ECJ3VF1C475Z	1.15	○	○				
10						ECJ3YF1E106Z	1.60	○	—	ECJMFF1C106Z	1.15	○	—	ECJMFF1A106Z	1.15	○	○
22														ECJMFF1A226Z	1.15	○	○

□:Capacitance tolerance code. : "□" for "K" or "M"
 Packaging style code: "F" and "Y" for taped version (φ180 reel, taping pitch: 4 mm) .
 Soldering method of dimension T>1mm: Do not use the flow soldering.

Standard Products for Type "23" (EIA "1210"), Taped Version

Capacitance (μF)	Code		B															
	Rated Voltage		DC50V			DC25V			DC16V			DC10V			DC6.3V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		
1	±10%(K) or ±20%(M)	ECJ4YB1H105□	2.0		○													
2.2						ECJ4YB1E225□	2.0		○									
4.7						ECJ4YB1E475□	2.0		○	ECJ4YB1C475□	2.0		○					
10						ECJ4YB1E106M	2.5		○	ECJ4YB1C106M	2.0		○	ECJ4YB1A106□	2.0		○	
22						ECJ4YB1E226M	2.5		○	ECJ4YB1C226M	2.5		○	ECJ4YB1A226M	2.5		○	
47										ECJ4YB1C476M	2.5		○	ECJ4YB1A476M	2.5		○	
100																ECJ4YB0J107M	2.5	○


Capacitance (μF)	Code		F															
	Rated Voltage		DC50V			DC25V			DC16V			DC10V			DC6.3V			
	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		Part No.	Dim. T (mm)	Temp. Char.		
4.7	+80, -20%(Z)	ECJ4YF1H475Z	2.0		○	ECJ4YF1E475Z	2.0		○									
10						ECJ4YF1E106Z	2.0		○	ECJ4YF1C106Z	2.0		○					
22						ECJ4YF1E226Z	2.0		○	ECJ4YF1C226Z	2.0		○	ECJ9FF1A226Z	0.85		○	
47														ECJ4YF1A476Z	2.0		○	
100																	ECJ4YF0J107Z	2.5

□:Capacitance tolerance code. : "□" for "K" or "M"
 Packaging style code: "Y" for taped version (φ180 reel, taping pitch: 4 mm) .
 Soldering method of dimension T>1mm: Do not use the flow soldering.

Standard Products for Type "34" (EIA "1812") will be discontinued. The schedule will be announced.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ECJ-4YB1H105K on WIN SOURCE](#)

 [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management