

AN1281SSM

Ripple filter IC

■ Overview

The AN1281SSM is a ripple filter IC that rejects the ripple component superimposed on the regulator output. Use for the VCO bias of cellular phones improves C/N and S/N.

■ Features

- Small I/O voltage difference
- The mounting area is reduced by adopting the SSmini-type package


■ Applications

- Cellular phones and others

■ Package

- SSMINI-5DA

■ Block Diagram

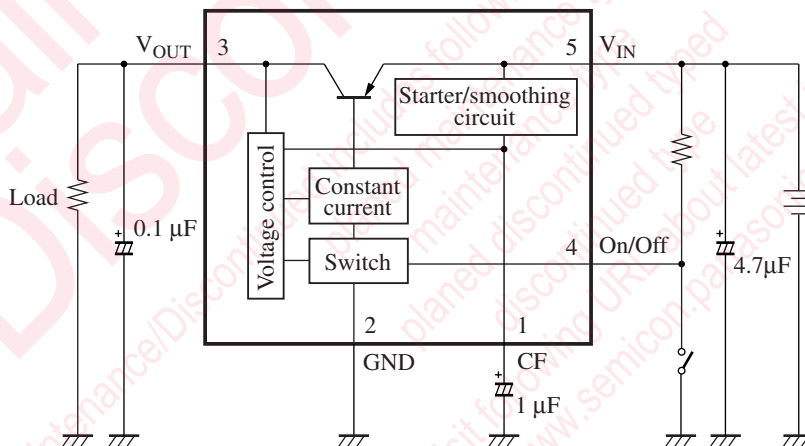

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V_{IN}	4.5	V
Supply current	I_{CC}	20	mA
Power dissipation *2	P_D	60	mW
Operating ambient temperature *1	T_{opr}	-25 to +75	°C
Storage temperature *1	T_{stg}	-40 to +125	°C
Output current	I_O	-15	mA
Allowable application voltage for on/off pin *3	$V_{ON/OFF}$	V_{IN}	V
Allowable maximum capacitance for CF pin	CF	10	μF

Note) 1. Do not apply external currents or voltages to any pins not specifically mentioned.

For circuit currents, '+' denotes current flowing into the IC, and '-' denotes current flowing out of the IC.

2. *1: Except for the power dissipation, the operating ambient temperature and storage temperature, all ratings are for $T_a = 25^\circ\text{C}$.

*2: The power dissipation shown is the value for $T_a = 75^\circ\text{C}$.

*3: Do not over the supply voltage.

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V_{CC}	2.5 to 4.3	V

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output voltage 1	V_{O1}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -1\ \mu\text{A}$	2.10	2.30	—	V
Output voltage 2	V_{O2}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -15\text{ mA}$	1.97	2.17	—	V
Output voltage 3	V_{O3}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$	2.62	2.82	—	V
Output voltage 4	V_{O4}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -15\text{ mA}$	2.55	2.70	—	V
Output voltage 5	V_{O5}	$V_{IN} = 4.3\text{ V}, I_{OUT} = -1\ \mu\text{A}$	3.95	4.15	—	V
Output voltage 6	V_{O6}	$V_{IN} = 4.3\text{ V}, I_{OUT} = -15\text{ mA}$	3.83	4.03	—	V
Consumption current 1	I_{CC1}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -1\ \mu\text{A}$	-485	-370	—	μA
Consumption current 2	I_{CC2}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -15\text{ mA}$	-420	-320	—	μA
Consumption current 3	I_{CC3}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$	-735	-565	—	μA
Consumption current 4	I_{CC4}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -15\text{ mA}$	-670	-515	—	μA
Consumption current 5	I_{CC5}	$V_{IN} = 4.3\text{ V}, I_{OUT} = -1\ \mu\text{A}$	-1.42	-1.09	—	mA
Consumption current 6	I_{CC6}	$V_{IN} = 4.3\text{ V}, I_{OUT} = -15\text{ mA}$	-1.36	-1.04	—	mA
Load regulation 1	REG_{L1}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	130	230	mV
Load regulation 2	REG_{L2}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	120	220	mV
Load regulation 3	REG_{L3}	$V_{IN} = 4.3\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	120	220	mV
Consumption current against load change 1	I_{REG1}	$V_{IN} = 2.5\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	49	110	μA
Consumption current against load change 2	I_{REG2}	$V_{IN} = 3.0\text{ V}, I_{OUT} = -1\ \mu\text{A}$ to -15 mA	0	51	110	μA

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Consumption current against load change 3	I_{REG3}	$V_{\text{IN}} = 4.3\text{ V}$, $I_{\text{OUT}} = -1\ \mu\text{A}$ to $-15\ \text{mA}$	0	51	110	μA
Ripple rejection ratio 1	RR_1	$V_{\text{IN}} = 3\ \text{V} \pm 0.1\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $f = 1\ \text{kHz}$	26.5	29.5	—	dB
Ripple rejection ratio 2	RR_2	$V_{\text{IN}} = 3\ \text{V} \pm 0.1\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $f = 25\ \text{kHz}$	30.5	33.5	—	dB
Ripple rejection ratio 3	RR_3	$V_{\text{IN}} = 3\ \text{V} \pm 0.1\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $f = 100\ \text{kHz}$	26.5	29.1	—	dB
Consumption current at off	I_{OFF}	$V_{\text{IN}} = 4.3\ \text{V}$, On/Off = 0 V	—	—	1	μA


• Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Reference value	Unit
Output voltage 7	V_{O7}	$V_{\text{IN}} = 3.0\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	2.50 to 2.8	V
Consumption current 7	I_{CC7}	$V_{\text{IN}} = 3.0\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	400 to 800	μA
Load regulation 4	REG_{L4}	$V_{\text{IN}} = 3.0\ \text{V}$, $I_{\text{OUT}} = -1\ \mu\text{A}$ to $-15\ \text{mA}$ $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	100 to 350	mV
Consumption current against load change 4	I_{REG4}	$V_{\text{IN}} = 3.0\ \text{V}$, $I_{\text{OUT}} = -1\ \mu\text{A}$ to $-15\ \text{mA}$ $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	to 200	μA
Ripple rejection ratio 4	RR_4	$V_{\text{IN}} = 3.0\ \text{V} \pm 0.1\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $f = 1\ \text{kHz}$, $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	20 to	dB
Ripple rejection ratio 5	RR_5	$V_{\text{IN}} = 3.0\ \text{V} \pm 0.1\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $f = 25\ \text{kHz}$, $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	20 to	dB
Ripple rejection ratio 6	RR_6	$V_{\text{IN}} = 3.0\ \text{V} \pm 0.1\ \text{V}$, $I_{\text{OUT}} = -15\ \text{mA}$ $f = 100\ \text{kHz}$, $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	18 to	dB
Output voltage rise time	t_r	$V_{\text{IN}} = 3\ \text{V}$, $V_{\text{ON/OFF}} = 0\ \text{V} \rightarrow 3\ \text{V}$ $I_{\text{OUT}} = -15\ \text{mA}$, $V_{\text{OUT}}: 10\% \rightarrow 90\%$ $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	to 10	μs
Output voltage fall time	t_f	$V_{\text{IN}} = 3\ \text{V}$, $V_{\text{ON/OFF}} = 3\ \text{V} \rightarrow 0\ \text{V}$ $I_{\text{OUT}} = -15\ \text{mA}$, $V_{\text{OUT}}: 90\% \rightarrow 10\%$ $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	to 500	μs
Oscillation frequency margin	G_f	$C_{\text{OUT}} \geq 0.1\ \mu\text{F}$, $V_{\text{IN}} = 3.0\ \text{V}$ $I_{\text{OUT}} = -1\ \mu\text{A}$ to $-15\ \text{mA}$ $T_a = -25^\circ\text{C}$ to $+75^\circ\text{C}$	Without abnormal oscillation.	


■ Application Notes

- $P_D - T_a$ curves of SSMINI-5DA package

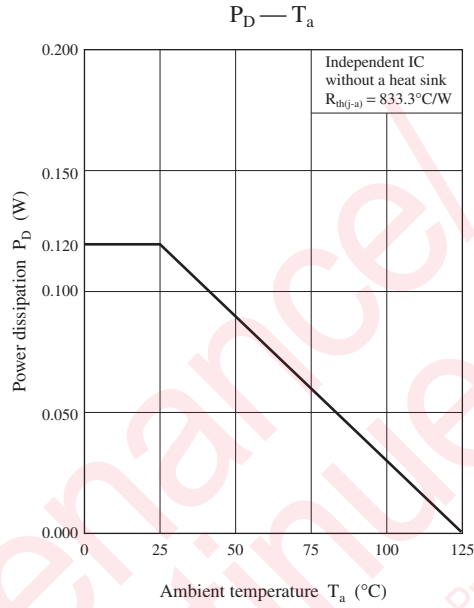


• Main characteristics


Output voltage rise time

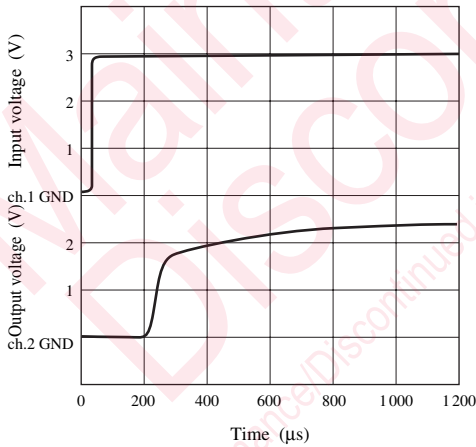

Ripple rejection ratio — Frequency

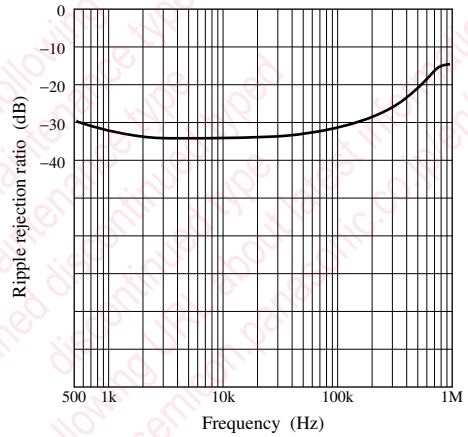

Measurement circuit

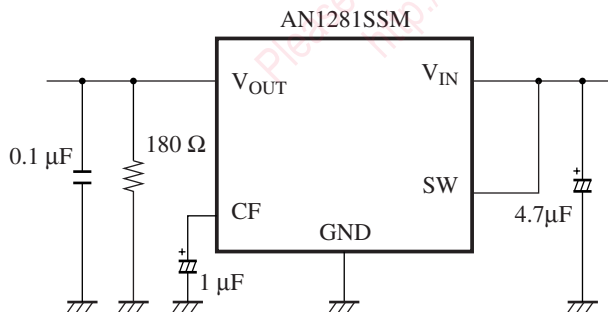

utions in using the technical information and scribed in this book

s book is to be exported or provided to non-residents, the laws and
rd to security export control, must be observed.

ly to show the main characteristics and application circuit examples
l property right or other right owned by our company or any other
any as to the infringement upon any such right owned by any other
rmation described in this book.

standard applications or general electronic equipment (such as office
and household appliances).

ng applications:

biles, traffic control equipment, combustion equipment, life support
reliability are required, or if the failure or malfunction of the prod-

ck are subject to change without notice for modification and/or im-
use of the products, therefore, ask for the most up-to-date Product
atisfy your requirements.

bsolute maximum rating and the guaranteed operating conditions
(.). Especially, please be careful not to exceed the range of absolute
er-off and mode-switching. Otherwise, we will not be liable for any

take into the consideration of incidence of break down and failure
n the systems such as redundant design, arresting the spread of fire
al injury, fire, social damages, for example, by using the products.

own and characteristics change due to external factors (ESD, EOS,
mounting or at customer's process. When using products for which
shelf life and the elapsed time since first opening the packages.

ly or partially, without the prior written permission of Matsushita

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View AN1281SSMTXL on WIN SOURCE](#)

 [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management