



**THE DATASHEET OF  
MAX1304ECM+T**



# MAX1304–MAX1306 MAX1308–MAX1310 MAX1312–MAX1314

## 8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with $\pm 10V$ , $\pm 5V$ , and 0 to +5V Analog Input Ranges

### General Description

The MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314 12-bit, analog-to-digital converters (ADCs) offer eight, four, or two independent input channels. Independent track-and-hold (T/H) circuitry provides simultaneous sampling for each channel. The MAX1304/MAX1305/MAX1306 provide a 0 to +5V input range with  $\pm 6V$  fault-tolerant inputs. The MAX1308/MAX1309/MAX1310 provide a  $\pm 5V$  input range with  $\pm 16.5V$  fault-tolerant inputs. The MAX1312/MAX1313/MAX1314 have a  $\pm 10V$  input range with  $\pm 16.5V$  fault-tolerant inputs. These ADCs convert two channels in  $0.9\mu s$ , and up to eight channels in  $1.98\mu s$ , with an 8-channel throughput of 456ksps per channel. Other features include a 20MHz T/H input bandwidth, internal clock, internal (+2.5V) or external (+2.0V to +3.0V) reference, and power-saving modes.

A 20MHz, 12-bit, bidirectional parallel data bus provides the conversion results and accepts digital inputs that activate each channel individually.

All devices operate from a +4.75V to +5.25V analog supply and a +2.7V to +5.25V digital supply and consume 57mA total supply current when fully operational.

Each device is available in a 48-pin 7mm x 7mm LQFP package and operates over the extended  $-40^{\circ}C$  to  $+85^{\circ}C$  temperature range.

### Applications

- SIN/COS Position Encoder
- Multiphase Motor Control
- Multiphase Power Monitoring
- Power-Grid Synchronization
- Power-Factor Monitoring
- Vibration and Waveform Analysis

### Selector Guide

| PART       | INPUT RANGE (V) | CHANNEL COUNT |
|------------|-----------------|---------------|
| MAX1304ECM | 0 to +5         | 8             |
| MAX1305ECM | 0 to +5         | 4             |
| MAX1306ECM | 0 to +5         | 2             |
| MAX1308ECM | $\pm 5$         | 8             |
| MAX1309ECM | $\pm 5$         | 4             |
| MAX1310ECM | $\pm 5$         | 2             |
| MAX1312ECM | $\pm 10$        | 8             |
| MAX1313ECM | $\pm 10$        | 4             |
| MAX1314ECM | $\pm 10$        | 2             |

Pin Configurations appear at end of data sheet.

### Features

- Up to Eight Channels of Simultaneous Sampling
  - 8ns Aperture Delay
  - 100ps Channel-to-Channel T/H Match
- Extended Input Ranges
  - 0 to +5V (MAX1304/MAX1305/MAX1306)
  - -5V to +5V (MAX1308/MAX1309/MAX1310)
  - -10V to +10V (MAX1312/MAX1313/MAX1314)
- Fast Conversion Time
  - One Channel in  $0.72\mu s$
  - Two Channels in  $0.9\mu s$
  - Four Channels in  $1.26\mu s$
  - Eight Channels in  $1.98\mu s$
- High Throughput
  - 1075ksps/Channel for One Channel
  - 901ksps/Channel for Two Channels
  - 680ksps/Channel for Four Channels
  - 456ksps/Channel for Eight Channels
- $\pm 1$  LSB INL,  $\pm 0.9$  LSB DNL (max)
- 84dBc SFDR, -86dBc THD, 71dB SINAD,  $f_{IN} = 500kHz$  at 0.4dBFS
- 12-Bit, 20MHz, Parallel Interface
- Internal or External Clock
- +2.5V Internal Reference or +2.0V to +3.0V External Reference
- +5V Analog Supply, +3V to +5V Digital Supply
  - 55mA Analog Supply Current
  - 1.3mA Digital Supply Current
  - Shutdown and Power-Saving Modes
- 48-Pin LQFP Package (7mm x 7mm Footprint)

### Ordering Information

| PART        | TEMP RANGE                       | PIN-PACKAGE |
|-------------|----------------------------------|-------------|
| MAX1304ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1305ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1306ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1308ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1309ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1310ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1312ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1313ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |
| MAX1314ECM+ | $-40^{\circ}C$ to $+85^{\circ}C$ | 48 LQFP     |

+Denotes lead (Pb)-free/RoHS-compliant package.

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with ±10V, ±5V, and 0 to +5V  
 Analog Input Ranges

**Absolute Maximum Ratings**

|   |                                     |   |                                     |
|---|-------------------------------------|---|-------------------------------------|
| AVDD to AGND.....   | -0.3V to +6V                        | REF+, COM, REF- to AGND .....                                   | -0.3V to (V <sub>AVDD</sub> + 0.3V) |
| DVDD to DGND.....   | -0.3V to +6V                        | Maximum Current into Any Pin Except AVDD, DVDD, AGND, DGND..... | ±50mA                               |
| AGND to DGND.....   | -0.3V to +0.3V                      | Continuous Power Dissipation (T <sub>A</sub> = +70°C)           |                                     |
| CH0–CH7, I.C. to AGND (MAX1304/MAX1305/MAX1306).....                  | ±6V                                 | LQFP (derate 22.7mW/°C above +70°C).....                        | 1818.2mW                            |
| CH0–CH7, I.C. to AGND (MAX1308/MAX1309/MAX1310).....                  | ±16.5V                              | Operating Temperature Range.....                                | -40°C to +85°C                      |
| CH0–CH7, I.C. to AGND (MAX1312/MAX1313/MAX1314).....                  | ±16.5V                              | Junction Temperature.....                                       | +150°C                              |
| D0–D11 to DGND.....   | -0.3V to (V <sub>DVDD</sub> + 0.3V) | Storage Temperature Range .....                                 | -65°C to +150°C                     |
| EOC, EOLC, RD, WR, CS to DGND.....                                    | -0.3V to (V <sub>DVDD</sub> + 0.3V) | Lead Temperature (soldering, 10s).....                          | +300°C                              |
| CONVST, CLK, SHDN, CHSHDN to DGND -0.3V to (V <sub>DVDD</sub> + 0.3V) |                                     | Soldering Temperature (reflow).....                             | +260°C                              |
| INTCLK/EXTCLK to AGND .....   | -0.3V to (V <sub>AVDD</sub> + 0.3V) |   |                                     |
| REF <sub>MS</sub> , REF, MSV to AGND .....                            | -0.3V to (V <sub>AVDD</sub> + 0.3V) |   |                                     |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**Electrical Characteristics**

(V<sub>AVDD</sub> = +5V, V<sub>DVDD</sub> = +3V, V<sub>AGND</sub> = V<sub>DGND</sub> = 0V, V<sub>REF</sub> = V<sub>REFMS</sub> = +2.5V (external reference), C<sub>REF</sub> = C<sub>REFMS</sub> = 0.1µF, C<sub>REF+</sub> = C<sub>REF-</sub> = 0.1µF, C<sub>REF+to-REF-</sub> = 2.2µF || 0.1µF, C<sub>COM</sub> = 2.2µF || 0.1µF, C<sub>MSV</sub> = 2.2µF || 0.1µF (unipolar devices), MSV = AGND (bipolar devices), f<sub>CLK</sub> = 16.67MHz 50% duty cycle, INTCLK/EXTCLK = AGND (external clock), SHDN = DGND, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C. See Figures 3 and 4.)

| PARAMETER   | SYMBOL          | CONDITIONS                     | MIN | TYP  | MAX  | UNITS  |
|---|-----------------|--------------------------------|-----|------|------|--------|
| <b>STATIC PERFORMANCE (Note 1)</b>  |                 |                                |     |      |      |        |
| Resolution  | N               |                                | 12  |      |      | Bits   |
| Integral Nonlinearity   | INL             | (Note 2)                       |     | ±0.5 | ±1.0 | LSB    |
| Differential Nonlinearity   | DNL             | No missing codes (Note 2)      |     | ±0.3 | ±0.9 | LSB    |
| Offset Error  |                 | Unipolar, 0x000 to 0x001       |     | ±3   | ±16  | LSB    |
|   |                 | Bipolar, 0xFFFF to 0x000       |     | ±3   | ±16  |        |
| Offset-Error Matching   |                 | Unipolar, between all channels |     | ±9   | ±20  | LSB    |
|   |                 | Bipolar, between all channels  |     | ±9   | ±20  |        |
| Offset-Error Temperature Drift  |                 | Unipolar, 0x000 to 0x001       |     | 7    |      | ppm/°C |
|   |                 | Bipolar, 0xFFFF to 0x000       |     | 7    |      |        |
| Gain Error  |                 |                                |     | ±2   | ±16  | LSB    |
| Gain-Error Matching   |                 | Between all channels           |     | ±3   | ±14  | LSB    |
| Gain-Error Temperature Drift  |                 |                                |     | 4    |      | ppm/°C |
| <b>DYNAMIC PERFORMANCE at f<sub>IN</sub> = 500kHz, A<sub>IN</sub> = -0.4dBFS (Note 2)</b> |                 |                                |     |      |      |        |
| Signal-to-Noise Ratio   | SNR             |                                | 68  | 71   |      | dB     |
| Signal-to-Noise Plus Distortion   | SINAD           |                                | 68  | 71   |      | dB     |
| Total Harmonic Distortion   | THD             |                                |     | -86  | -80  | dBc    |
| Spurious-Free Dynamic Range   | SFDR            |                                |     | 84   |      | dBc    |
| Channel-to-Channel Isolation  |                 |                                | 80  | 86   |      | dB     |
| <b>ANALOG INPUTS (CH0 through CH7)</b>  |                 |                                |     |      |      |        |
| Input Voltage   | V <sub>CH</sub> | MAX1304/MAX1305/MAX1306        | 0   |      | +5   | V      |
|   |                 | MAX1308/MAX1309/MAX1310        | -5  |      | +5   |        |
|   |                 | MAX1312/MAX1313/MAX1314        | -10 |      | +10  |        |

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with ±10V, ±5V, and 0 to +5V  
 Analog Input Ranges

**Electrical Characteristics (continued)**

( $V_{AVDD} = +5V$ ,  $V_{DVDD} = +3V$ ,  $V_{AGND} = V_{DGND} = 0V$ ,  $V_{REF} = V_{REFMS} = +2.5V$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu F$ ,  $C_{REF+} = C_{REF-} = 0.1\mu F$ ,  $C_{REF+to-REF-} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{COM} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{MSV} = 2.2\mu F \parallel 0.1\mu F$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67MHz$  50% duty cycle,  $INTCLK/EXTCLK = AGND$  (external clock),  $SHDN = DGND$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See Figures 3 and 4.)

| PARAMETER   | SYMBOL                | CONDITIONS                             | MIN             | TYP    | MAX   | UNITS           |
|---|-----------------------|--|-----------------|--------|-------|-----------------|
| Input Resistance<br>(Note 3)                        | $R_{CH}$              | MAX1304/MAX1305/MAX1306                |                 | 7.58   |       | k $\Omega$      |
|   |                       | MAX1308/MAX1309/MAX1310                |                 | 8.66   |       |                 |
|   |                       | MAX1312/MAX1313/MAX1314                |                 | 14.26  |       |                 |
| Input Current<br>(Note 3)                           | $I_{CH}$              | MAX1304/MAX1305/MAX1306                | $V_{CH} = +5V$  | 0.54   | 0.72  | mA              |
|   |                       |  | $V_{CH} = 0V$   | -0.157 | -0.12 |                 |
|   |                       | MAX1308/MAX1309/MAX1310                | $V_{CH} = +5V$  | 0.29   | 0.39  |                 |
|   |                       |  | $V_{CH} = -5V$  | -1.16  | -0.87 |                 |
|   |                       | MAX1312/MAX1313/MAX1314                | $V_{CH} = +10V$ | 0.56   | 0.74  |                 |
|   |                       |  | $V_{CH} = -10V$ | -1.13  | -0.85 |                 |
| Input Capacitance                                   | $C_{CH}$              |  |                 | 15     |       | pF              |
| <b>TRACK/HOLD</b>                                   |                       |  |                 |        |       |                 |
| External-Clock Throughput Rate<br>(Note 4)          | $f_{TH}$              | One channel selected for conversion    |                 | 1075   |       | kSPS            |
|   |                       | Two channels selected for conversion   |                 | 901    |       |                 |
|   |                       | Four channels selected for conversion  |                 | 680    |       |                 |
|   |                       | Eight channels selected for conversion |                 | 456    |       |                 |
| Internal-Clock Throughput Rate<br>(Note 4, Table 1) | $f_{TH}$              | One channel selected for conversion    |                 | 983    |       | kSPS            |
|   |                       | Two channels selected for conversion   |                 | 821    |       |                 |
|   |                       | Four channels selected for conversion  |                 | 618    |       |                 |
|   |                       | Eight channels selected for conversion |                 | 413    |       |                 |
| Small-Signal Bandwidth                              |                       |  |                 | 20     |       | MHz             |
| Full-Power Bandwidth                                |                       |  |                 | 20     |       | MHz             |
| Aperture Delay                                      | $t_{AD}$              |  |                 | 8      |       | ns              |
| Aperture-Delay Matching                             |                       |  |                 | 100    |       | ps              |
| Aperture Jitter                                     | $t_{AJ}$              |  |                 | 50     |       | PSRMS           |
| <b>INTERNAL REFERENCE</b>                           |                       |  |                 |        |       |                 |
| REF Output Voltage                                  | $V_{REF}$             |  | 2.475           | 2.500  | 2.525 | V               |
| Reference Output-Voltage<br>Temperature Drift       |                       |  |                 | 30     |       | ppm/ $^\circ C$ |
| REF <sub>MS</sub> Output Voltage                    | $V_{REFMS}$           |  | 2.475           | 2.500  | 2.525 | V               |
| REF+ Output Voltage                                 | $V_{REF+}$            |  |                 | 3.850  |       | V               |
| COM Output Voltage                                  | $V_{COM}$             |  |                 | 2.600  |       | V               |
| REF- Output Voltage                                 | $V_{REF-}$            |  |                 | 1.350  |       | V               |
| Differential Reference Voltage                      | $V_{REF+} - V_{REF-}$ |  |                 | 2.500  |       | V               |

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V  
 Analog Input Ranges

### Electrical Characteristics (continued)

( $V_{AVDD} = +5V$ ,  $V_{DVDD} = +3V$ ,  $V_{AGND} = V_{DGND} = 0V$ ,  $V_{REF} = V_{REFMS} = +2.5V$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu F$ ,  $C_{REF+} = C_{REF-} = 0.1\mu F$ ,  $C_{REF+to-REF-} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{COM} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{MSV} = 2.2\mu F \parallel 0.1\mu F$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67MHz$  50% duty cycle,  $INTCLK/EXTCLK = AGND$  (external clock),  $SHDN = DGND$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See Figures 3 and 4.)

| PARAMETER  | SYMBOL                | CONDITIONS   | MIN              | TYP   | MAX     | UNITS      |
|--|-----------------------|--|------------------|-------|---------|------------|
| <b>EXTERNAL REFERENCE (REF and REF<sub>MS</sub> are externally driven)</b>   |                       |  |                  |       |         |            |
| REF Input Voltage Range  | $V_{REF}$             |  | 2.0              | 2.5   | 3.0     | V          |
| REF Input Resistance   | $R_{REF}$             | (Note 5)   |                  | 5     |         | k $\Omega$ |
| REF Input Capacitance  |                       |  |                  | 15    |         | pF         |
| REF <sub>MS</sub> Input Voltage Range  | $V_{REFMS}$           |  | 2.0              | 2.5   | 3.0     | V          |
| REF <sub>MS</sub> Input Resistance   | $R_{REFMS}$           | (Note 6)   |                  | 5     |         | k $\Omega$ |
| REF <sub>MS</sub> Input Capacitance  |                       |  |                  | 15    |         | pF         |
| REF+ Output Voltage  | $V_{REF+}$            | $V_{REF} = +2.5V$  |                  | 3.850 |         | V          |
| COM Output Voltage   | $V_{COM}$             | $V_{REF} = +2.5V$  |                  | 2.600 |         | V          |
| REF- Output Voltage  | $V_{REF-}$            | $V_{REF} = +2.5V$  |                  | 1.350 |         | V          |
| Differential Reference Voltage   | $V_{REF+} - V_{REF-}$ | $V_{REF} = +2.5V$  |                  | 2.500 |         | V          |
| <b>DIGITAL INPUTS (D0–D7, <math>\overline{RD}</math>, <math>\overline{WR}</math>, <math>\overline{CS}</math>, CLK, SHDN, CHSHDN, CONVST)</b> |                       |  |                  |       |         |            |
| Input-Voltage High   | $V_{IH}$              |  | 0.7 x $V_{DVDD}$ |       |         | V          |
| Input-Voltage Low  | $V_{IL}$              |  | 0.3 x $V_{DVDD}$ |       |         | V          |
| Input Hysteresis   |                       |  | 20               |       |         | mV         |
| Input Capacitance  | $C_{IN}$              |  | 15               |       |         | pF         |
| Input Current  | $I_{IN}$              | $V_{IN} = 0V$ or $V_{DVDD}$                                    | 0.02             |       | $\pm 1$ | $\mu A$    |
| <b>CLOCK-SELECT INPUT (INTCLK/EXTCLK)</b>  |                       |  |                  |       |         |            |
| Input-Voltage High   | $V_{IH}$              |  | 0.7 x $V_{AVDD}$ |       |         | V          |
| Input-Voltage Low  | $V_{IL}$              |  | 0.3 x $V_{AVDD}$ |       |         | V          |
| <b>DIGITAL OUTPUTS (D0–D11, EOC, EOLC)</b>   |                       |  |                  |       |         |            |
| Output-Voltage High  | $V_{OH}$              | $I_{SOURCE} = 0.8mA$ , Figure 1                                | $V_{DVDD} - 0.6$ |       |         | V          |
| Output-Voltage Low   | $V_{OL}$              | $I_{SINK} = 1.6mA$ , Figure 1                                  | 0.4              |       |         | V          |
| D0–D11 Tri-State Leakage Current   |                       | $\overline{RD} = \text{high}$ or $\overline{CS} = \text{high}$ | 0.06             |       | 1       | $\mu A$    |
| D0–D11 Tri-State Output Capacitance  |                       | $\overline{RD} = \text{high}$ or $\overline{CS} = \text{high}$ | 15               |       |         | pF         |
| <b>POWER SUPPLIES</b>  |                       |  |                  |       |         |            |
| Analog Supply Voltage  | AVDD                  |  | 4.75             |       | 5.25    | V          |
| Digital Supply Voltage   | DVDD                  |  | 2.70             |       | 5.25    | V          |
| Analog Supply Current  | $I_{AVDD}$            | MAX1304/MAX1305/MAX1306, all channels selected                 |                  | 55    | 60      | mA         |
|  |                       | MAX1308/MAX1309/MAX1310, all channels selected                 |                  | 54    | 60      |            |
|  |                       | MAX1312/MAX1313/MAX1314, all channels selected                 |                  | 54    | 60      |            |

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V  
Analog Input Ranges

Electrical Characteristics (continued)

( $V_{AVDD} = +5V$ ,  $V_{DVDD} = +3V$ ,  $V_{AGND} = V_{DGND} = 0V$ ,  $V_{REF} = V_{REFMS} = +2.5V$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu F$ ,  $C_{REF+} = C_{REF-} = 0.1\mu F$ ,  $C_{REF+to-REF-} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{COM} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{MSV} = 2.2\mu F \parallel 0.1\mu F$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67MHz$  50% duty cycle,  $INTCLK/EXTCLK = AGND$  (external clock),  $SHDN = DGND$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See Figures 3 and 4.)

| PARAMETER   | SYMBOL        | CONDITIONS  | MIN | TYP       | MAX    | UNITS      |
|---|---------------|---|-----|-----------|--------|------------|
| Digital Supply Current<br>( $C_{LOAD} = 100pF$ ) (Note 7) | $I_{DVDD}$    | MAX1304/MAX1305/MAX1306,<br>all channels selected   |     | 1.3       | 2.6    | mA         |
|   |               | MAX1308/MAX1309/MAX1310,<br>all channels selected   |     | 1.3       | 2.6    |            |
|   |               | MAX1312/MAX1313/MAX1314,<br>all channels selected   |     | 1.3       | 2.6    |            |
| Shutdown Current<br>(Note 8)                              | $I_{AVDD}$    | SHDN = DVDD, $V_{CH} =$ open                        |     | 0.6       | 10     | $\mu A$    |
|   | $I_{DVDD}$    | SHDN = DVDD, $\overline{RD} = \overline{WR} =$ high |     | 0.02      | 1      |            |
| Power-Supply Rejection Ratio                              | PSRR          | $V_{AVDD} = +4.75V$ to $+5.25V$                     |     | 50        |        | dB         |
| <b>TIMING CHARACTERISTICS (Figure 1)</b>                  |               |   |     |           |        |            |
| Time to First Conversion Result                           | $t_{CONV}$    | Internal clock, Figure 7                            |     | 800       | 900    | ns         |
|   |               | External clock, Figure 8                            |     | 12        |        | CLK Cycles |
| Time to Subsequent Conversions                            | $t_{NEXT}$    | Internal clock, Figure 7                            |     | 200       | 225    | ns         |
|   |               | External clock, Figure 8                            |     | 3         |        | CLK Cycles |
| CONVST Pulse-Width Low<br>(Acquisition Time)              | $t_{ACQ}$     | (Note 9) Figures 6–10                               | 0.1 |           | 1000.0 | $\mu s$    |
| $\overline{CS}$ Pulse Width                               | $t_{CS}$      | Figure 6  | 30  |           |        | ns         |
| $\overline{RD}$ Pulse-Width Low                           | $t_{RDL}$     | Figures 7, 8, 9                                     | 30  |           |        | ns         |
| $\overline{RD}$ Pulse-Width High                          | $t_{RDH}$     | Figures 7, 8, 9                                     | 30  |           |        | ns         |
| $\overline{WR}$ Pulse-Width Low                           | $t_{WRL}$     | Figure 6  | 30  |           |        | ns         |
| $\overline{CS}$ to $\overline{WR}$                        | $t_{CTW}$     | Figure 6  |     | (Note 10) |        | ns         |
| $\overline{WR}$ to $\overline{CS}$                        | $t_{WTC}$     | Figure 6  |     | (Note 10) |        | ns         |
| $\overline{CS}$ to $\overline{RD}$                        | $t_{CTR}$     | Figures 7, 8, 9                                     |     | (Note 10) |        | ns         |
| $\overline{RD}$ to $\overline{CS}$                        | $t_{RTC}$     | Figures 7, 8, 9                                     |     | (Note 10) |        | ns         |
| Data Access Time<br>( $\overline{RD}$ Low to Valid Data)  | $t_{ACC}$     | Figures 7, 8, 9                                     |     |           | 30     | ns         |
| Bus Relinquish Time ( $\overline{RD}$ High)               | $t_{REQ}$     | Figures 7, 8, 9                                     | 5   |           | 30     | ns         |
| CLK Rise to $\overline{EOC}$ Delay                        | $t_{EOCD}$    | Figure 8  |     | 20        |        | ns         |
| CLK Rise to $\overline{EOLC}$ Fall Delay                  | $t_{EOLCD}$   | Figure 8  |     | 20        |        | ns         |
| CONVST Fall to $\overline{EOLC}$ Rise Delay               | $t_{CVEOLCD}$ | Figures 7, 8, 9                                     |     | 20        |        | ns         |
| $\overline{EOC}$ Pulse Width                              | $t_{EOC}$     | Internal clock, Figure 7                            | 50  |           |        | ns         |
|   |               | External clock, Figure 8                            |     | 1         |        | CLK Cycle  |

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
Sampling ADCs with ±10V, ±5V, and 0 to +5V  
Analog Input Ranges

Electrical Characteristics (continued)

(V<sub>AVDD</sub> = +5V, V<sub>DVDD</sub> = +3V, V<sub>AGND</sub> = V<sub>DGND</sub> = 0V, V<sub>REF</sub> = V<sub>REFMS</sub> = +2.5V (external reference), C<sub>REF</sub> = C<sub>REFMS</sub> = 0.1µF, C<sub>REF+</sub> = C<sub>REF-</sub> = 0.1µF, C<sub>REF+to-REF-</sub> = 2.2µF || 0.1µF, C<sub>COM</sub> = 2.2µF || 0.1µF, C<sub>MSV</sub> = 2.2µF || 0.1µF (unipolar devices), MSV = AGND (bipolar devices), f<sub>CLK</sub> = 16.67MHz 50% duty cycle, INTCLK/EXTCLK = AGND (external clock), SHDN = DGND, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C. See Figures 3 and 4.)

| PARAMETER                | SYMBOL            | CONDITIONS                                    | MIN  | TYP | MAX   | UNITS |
|--------------------------|-------------------|---|------|-----|-------|-------|
| Input-Data Setup Time    | t <sub>DTW</sub>  | Figure 6                                      | 10   |     |       | ns    |
| Input-Data Hold Time     | t <sub>WTD</sub>  | Figure 6                                      | 10   |     |       | ns    |
| External CLK Period      | t <sub>CLK</sub>  | Figures 8, 9                                  | 0.05 |     | 10.00 | µs    |
| External CLK High Period | t <sub>CLKH</sub> | Logic sensitive to rising edges, Figures 8, 9 | 20   |     |       | ns    |
| External CLK Low Period  | t <sub>CLKL</sub> | Logic sensitive to rising edges, Figures 8, 9 | 20   |     |       | ns    |
| External Clock Frequency | f <sub>CLK</sub>  | (Note 11)                                     | 0.1  |     | 20    | MHz   |
| Internal Clock Frequency | f <sub>INT</sub>  |   |      | 15  |       | MHz   |
| CONVST High to CLK Edge  | t <sub>CNTC</sub> | Figures 8, 9                                  | 20   |     |       | ns    |

**Note 1:** For the MAX1304/MAX1305/MAX1306, V<sub>IN</sub> = 0 to +5V. For the MAX1308/MAX1309/MAX1310, V<sub>IN</sub> = -5V to +5V. For the MAX1312/MAX1313/MAX1314, V<sub>IN</sub> = -10V to +10V.

**Note 2:** All channel performance is guaranteed by correlation to a single channel test.

**Note 3:** The analog input resistance is terminated to an internal bias point (Figure 5). Calculate the analog input current using:

$$I_{CH\_} = \frac{V_{CH\_} - V_{BIAS}}{R_{CH\_}}$$

for V<sub>CH\_</sub> within the input voltage range.

**Note 4:** Throughput rate is given per channel. Throughput rate is a function of clock frequency (f<sub>CLK</sub>). The external clock throughput rate is specified with f<sub>CLK</sub> = 16.67MHz and the internal clock throughput rate is specified with f<sub>CLK</sub> = 15MHz. See the *Data Throughput* section for more information.

**Note 5:** The REF input resistance is terminated to an internal +2.5V bias point (Figure 2). Calculate the REF input current using:

$$I_{REF} = \frac{V_{REF} - 2.5V}{R_{REF}}$$

for V<sub>REF</sub> within the input voltage range.

**Note 6:** The REF<sub>MS</sub> input resistance is terminated to an internal +2.5V bias point (Figure 2). Calculate the REF<sub>MS</sub> input current using:

$$I_{REFMS} = \frac{V_{REFMS} - 2.5V}{R_{REFMS}}$$

for V<sub>REFMS</sub> within the input voltage range.

**Note 7:** All analog inputs are driven with a -0.4dBFS 500kHz sine wave.

**Note 8:** Shutdown current is measured with the analog input unconnected. The large amplitude of the maximum shutdown current specification is due to automated test equipment limitations.

**Note 9:** CONVST must remain low for at least the acquisition period. The maximum acquisition time is limited by internal capacitor droop.

**Note 10:** CS to WR and CS to RD are internally AND together. Setup and hold times do not apply.







**Note 11:** Minimum CLK frequency is limited only by the internal T/H droop rate. Limit the time between the rising edge of CONVST and the falling edge of EOLC to a maximum of 1ms

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$  Analog Input Ranges

### Typical Operating Characteristics

( $V_{AVDD} = +5\text{V}$ ,  $V_{DVDD} = +3\text{V}$ ,  $V_{AGND} = V_{DGND} = 0\text{V}$ ,  $V_{REF} = V_{REFMS} = +2.5\text{V}$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu\text{F}$ ,  $C_{REF+} = C_{REF-} = 0.1\mu\text{F}$ ,  $C_{REF+to-REF-} = 2.2\mu\text{F} \parallel 0.1\mu\text{F}$ ,  $C_{COM} = 2.2\mu\text{F} \parallel 0.1\mu\text{F}$ ,  $C_{MSV} = 2.2\mu\text{F} \parallel 0.1\mu\text{F}$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67\text{MHz}$  50% duty cycle,  $INTCLK/\overline{EXTCLK} = AGND$  (external clock),  $f_{IN} = 500\text{kHz}$ ,  $A_{IN} = -0.4\text{dBFS}$ ,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.) (Figures 3 and 4)

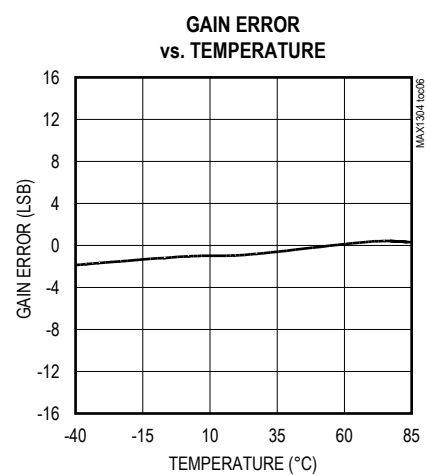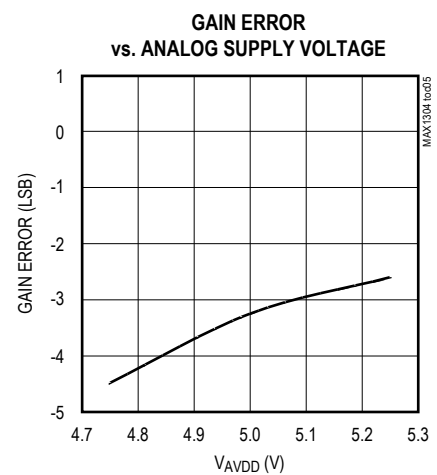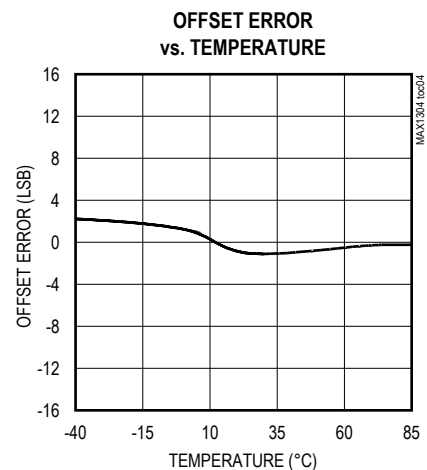
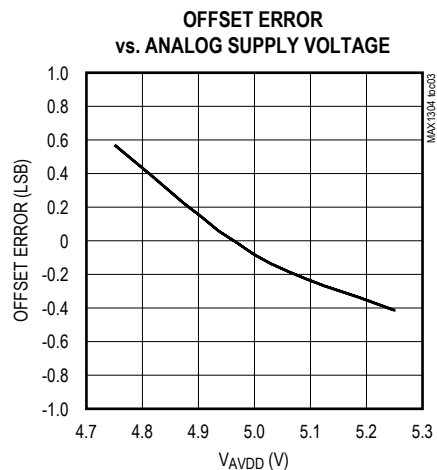
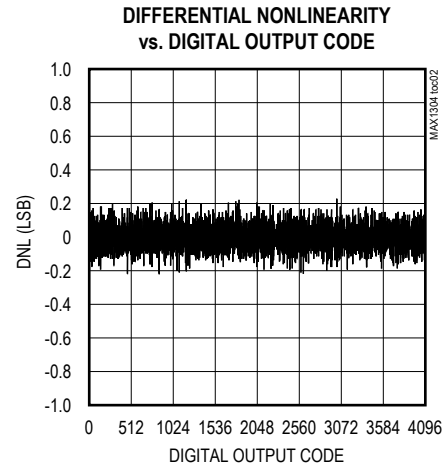
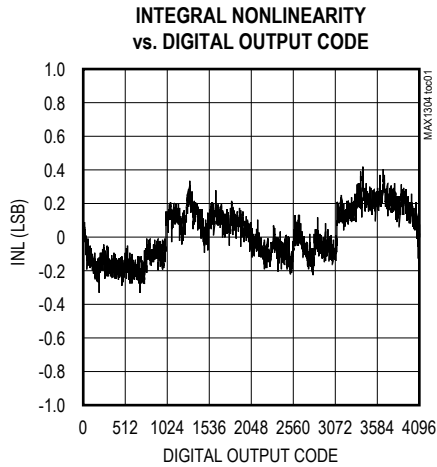


MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V Analog Input Ranges

**Typical Operating Characteristics (continued)**

( $V_{AVDD} = +5V$ ,  $V_{DVDD} = +3V$ ,  $V_{AGND} = V_{DGND} = 0V$ ,  $V_{REF} = V_{REFMS} = +2.5V$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu F$ ,  $C_{REF+} = C_{REF-} = 0.1\mu F$ ,  $C_{REF+to-REF-} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{COM} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{MSV} = 2.2\mu F \parallel 0.1\mu F$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67MHz$  50% duty cycle,  $INTCLK/\overline{EXTCLK} = AGND$  (external clock),  $f_{IN} = 500kHz$ ,  $A_{IN} = -0.4dBFS$ .  $T_A = +25^\circ C$ , unless otherwise noted.) (Figures 3 and 4)

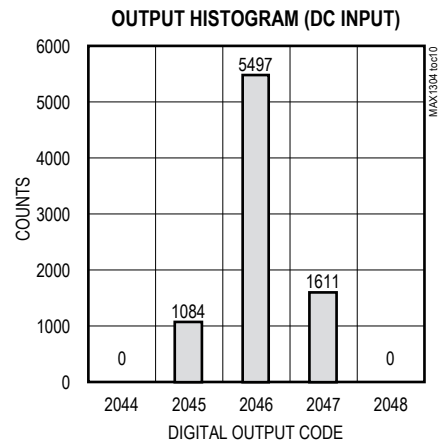
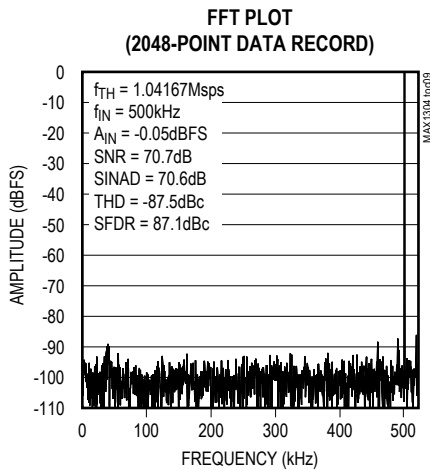
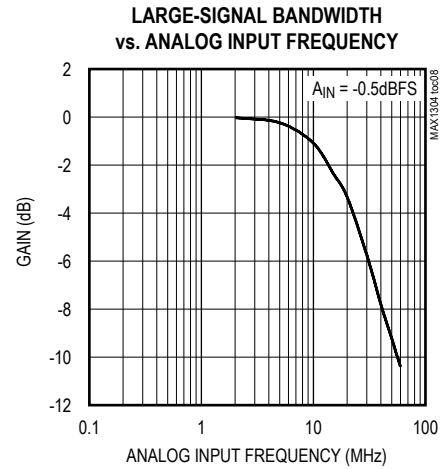
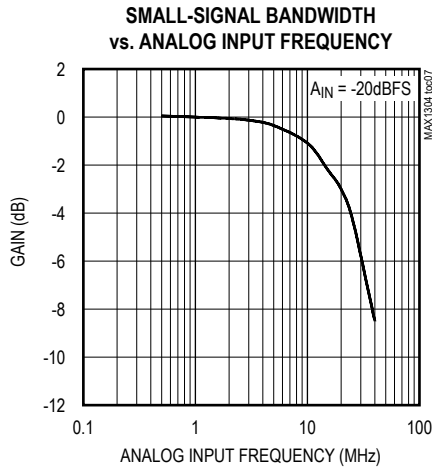


MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V Analog Input Ranges

**Typical Operating Characteristics (continued)**

( $V_{AVDD} = +5V$ ,  $V_{DVDD} = +3V$ ,  $V_{AGND} = V_{DGND} = 0V$ ,  $V_{REF} = V_{REFMS} = +2.5V$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu F$ ,  $C_{REF+} = C_{REF-} = 0.1\mu F$ ,  $C_{REF+to-REF-} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{COM} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{MSV} = 2.2\mu F \parallel 0.1\mu F$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67MHz$  50% duty cycle,  $INTCLK/\overline{EXTCLK} = AGND$  (external clock),  $f_{IN} = 500kHz$ ,  $A_{IN} = -0.4dBFS$ .  $T_A = +25^\circ C$ , unless otherwise noted.) (Figures 3 and 4)

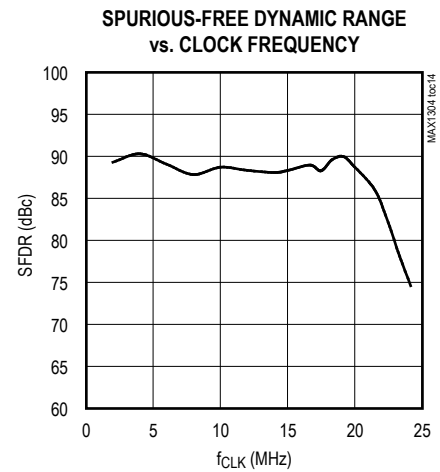
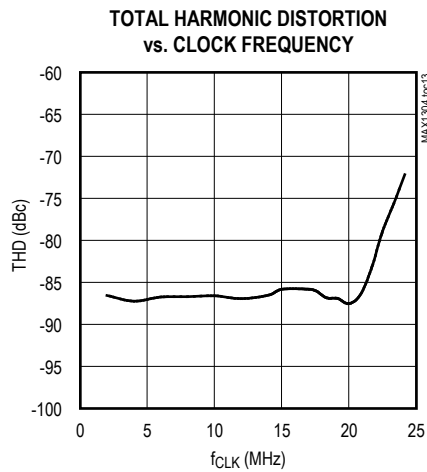
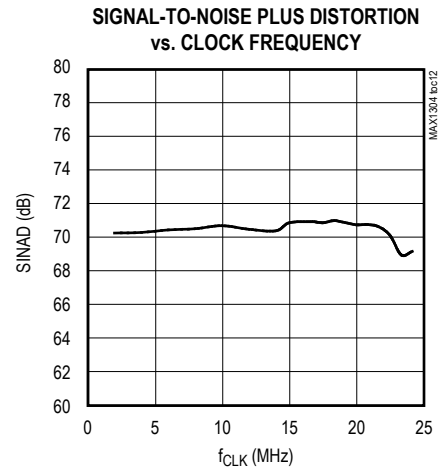
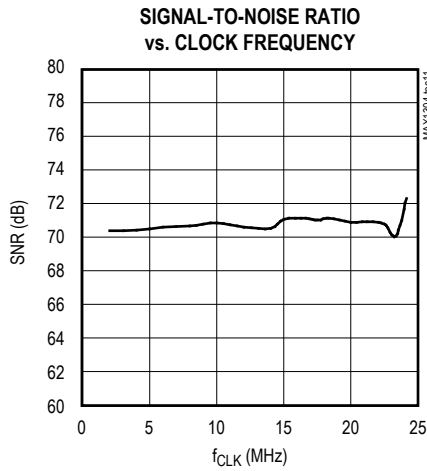


MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V Analog Input Ranges

**Typical Operating Characteristics (continued)**

( $V_{AVDD} = +5V$ ,  $V_{DVDD} = +3V$ ,  $V_{AGND} = V_{DGND} = 0V$ ,  $V_{REF} = V_{REFMS} = +2.5V$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu F$ ,  $C_{REF+} = C_{REF-} = 0.1\mu F$ ,  $C_{REF+to-REF-} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{COM} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{MSV} = 2.2\mu F \parallel 0.1\mu F$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67MHz$  50% duty cycle,  $INTCLK/\overline{EXTCLK} = AGND$  (external clock),  $f_{IN} = 500kHz$ ,  $A_{IN} = -0.4dBFS$ .  $T_A = +25^\circ C$ , unless otherwise noted.) (Figures 3 and 4)



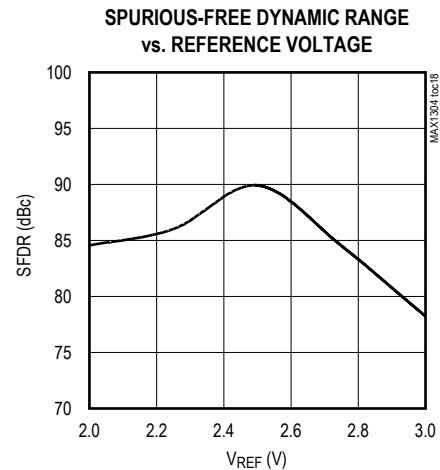
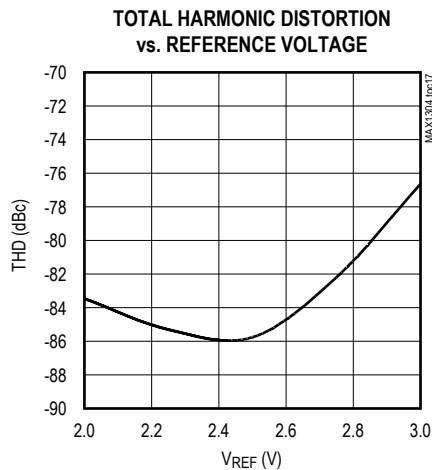
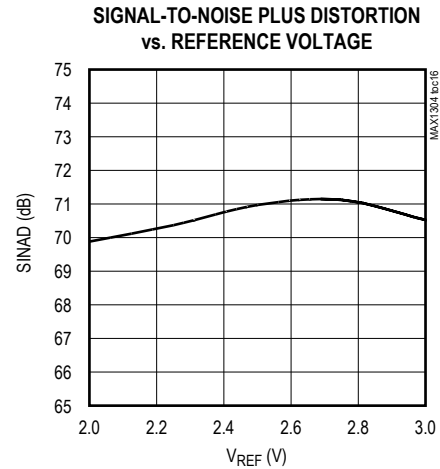
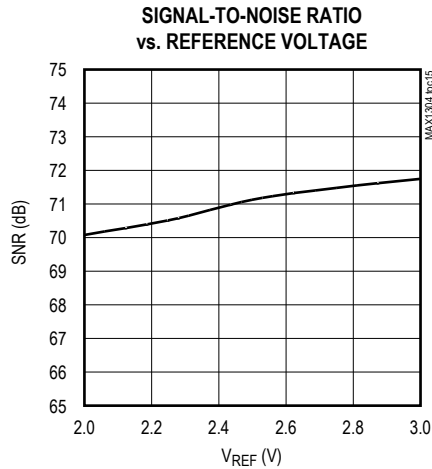


MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with ±10V, ±5V, and 0 to +5V Analog Input Ranges

Typical Operating Characteristics (continued)

( $V_{AVDD} = +5V$ ,  $V_{DVDD} = +3V$ ,  $V_{AGND} = V_{DGND} = 0V$ ,  $V_{REF} = V_{REFMS} = +2.5V$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu F$ ,  $C_{REF+} = C_{REF-} = 0.1\mu F$ ,  $C_{REF+to-REF-} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{COM} = 2.2\mu F \parallel 0.1\mu F$ ,  $C_{MSV} = 2.2\mu F \parallel 0.1\mu F$  (unipolar devices),  $MSV = AGND$  (bipolar devices),  $f_{CLK} = 16.67MHz$  50% duty cycle,  $INTCLK/\overline{EXTCLK} = AGND$  (external clock),  $f_{IN} = 500kHz$ ,  $A_{IN} = -0.4dBFS$ ,  $T_A = +25^\circ C$ , unless otherwise noted.) (Figures 3 and 4)


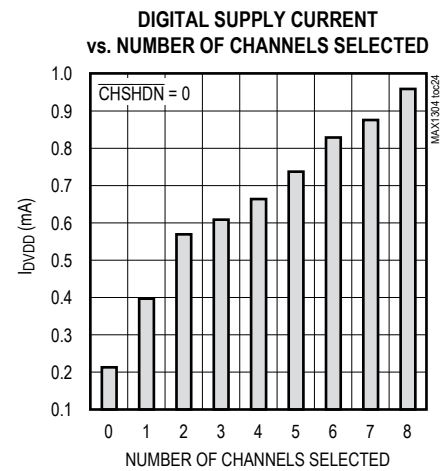
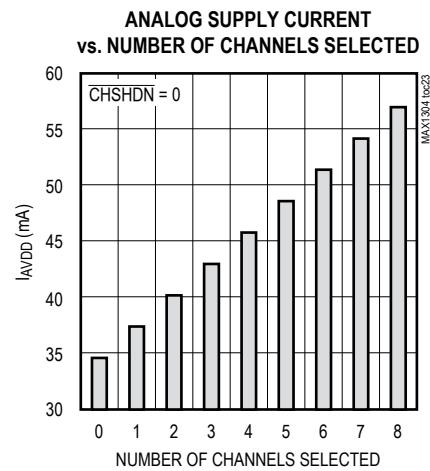
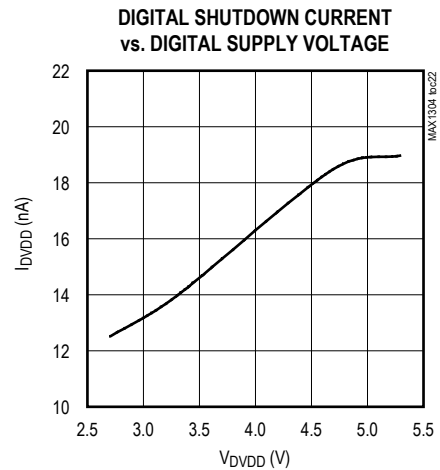
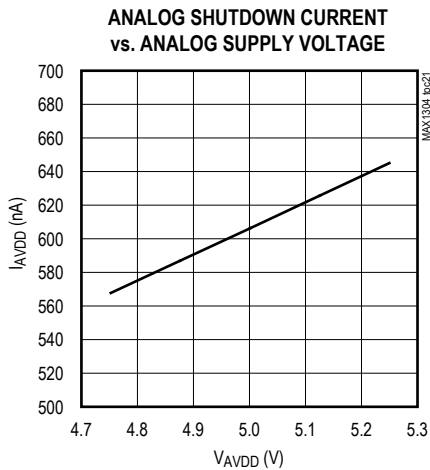
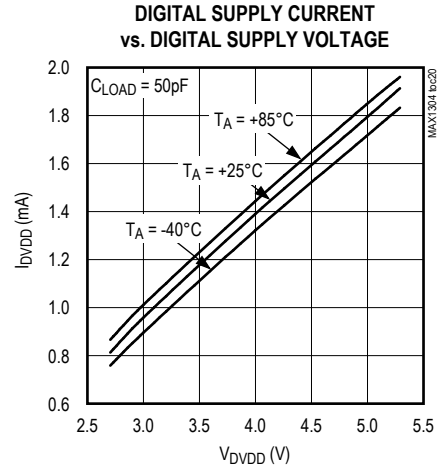
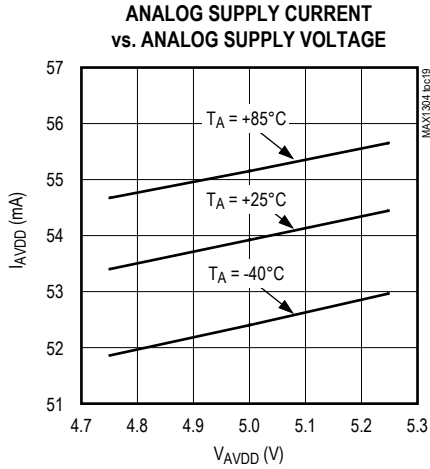


MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$  Analog Input Ranges

Typical Operating Characteristics (continued)

( $V_{AVDD} = +5\text{V}$ ,  $V_{DVDD} = +3\text{V}$ ,  $V_{AGND} = V_{DGND} = 0\text{V}$ ,  $V_{REF} = V_{REFMS} = +2.5\text{V}$  (external reference),  $C_{REF} = C_{REFMS} = 0.1\mu\text{F}$ ,  $C_{REF+} = C_{REF-} = 0.1\mu\text{F}$ ,  $C_{REF+to-REF-} = 2.2\mu\text{F} \parallel 0.1\mu\text{F}$ ,  $C_{COM} = 2.2\mu\text{F} \parallel 0.1\mu\text{F}$ ,  $C_{MSV} = 2.2\mu\text{F} \parallel 0.1\mu\text{F}$  (unipolar devices),  $MSV = \text{AGND}$  (bipolar devices),  $f_{CLK} = 16.67\text{MHz}$  50% duty cycle,  $\text{INTCLK}/\text{EXTCLK} = \text{AGND}$  (external clock),  $f_{IN} = 500\text{kHz}$ ,  $A_{IN} = -0.4\text{dBFS}$ .  $T_A = +25^\circ\text{C}$ , unless otherwise noted.) (Figures 3 and 4)

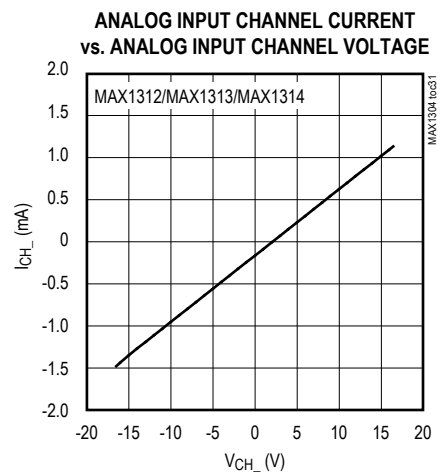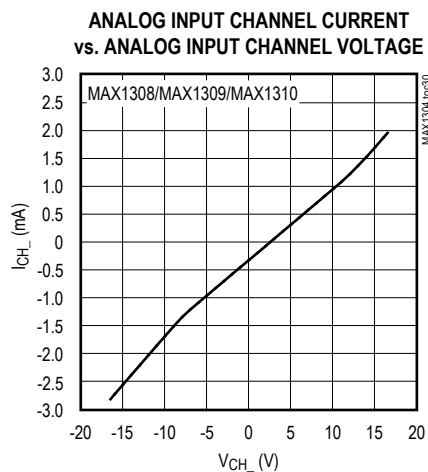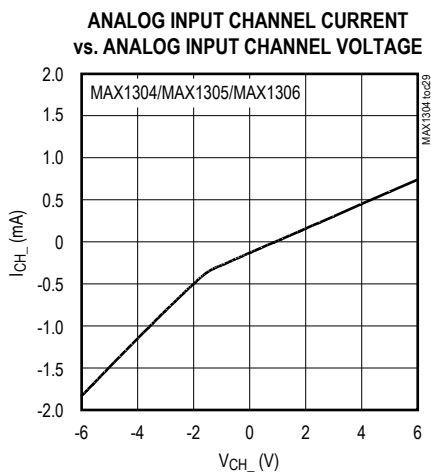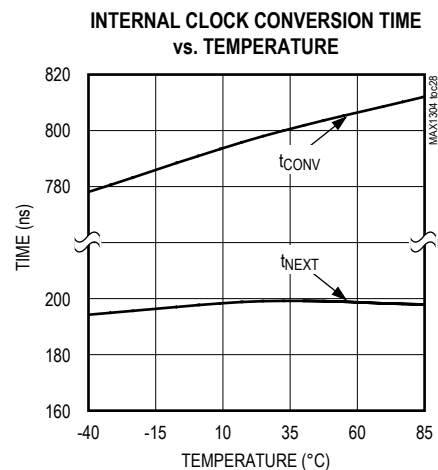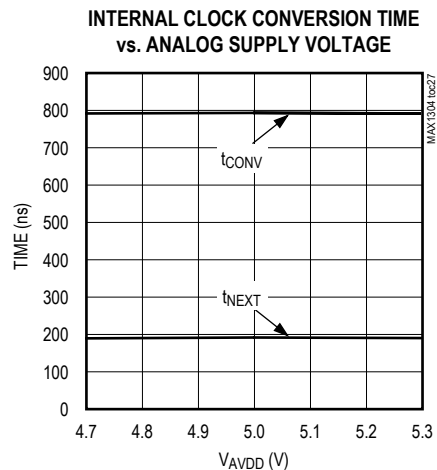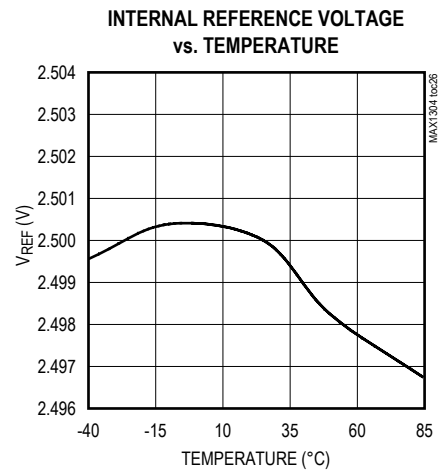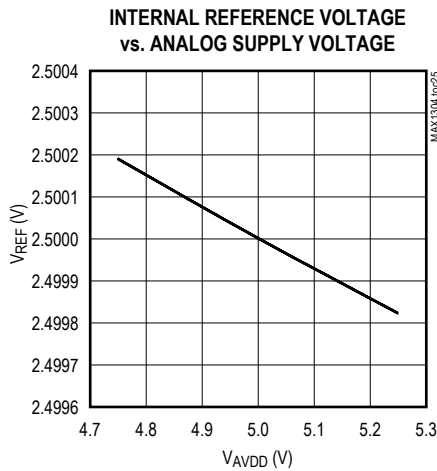

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V  
 Analog Input Ranges

## Pin Description

| PIN                           |                               |                               | NAME              | FUNCTION   |
|-------------------------------|-------------------------------|-------------------------------|-------------------|--|
| MAX1304<br>MAX1308<br>MAX1312 | MAX1305<br>MAX1309<br>MAX1313 | MAX1306<br>MAX1310<br>MAX1314 |                   |  |
| 1, 15, 17                     | 1, 15, 17                     | 1, 15, 17                     | AVDD              | Analog Power Input. AVDD is the power input for the analog section of the converter. Apply +5V to AVDD. Connect all AVDD pins together. See the <i>Layout, Grounding, and Bypassing</i> section for additional information.  |
| 2, 3, 14,<br>16, 23           | 2, 3, 14,<br>16, 23           | 2, 3, 14,<br>16, 23           | AGND              | Analog Ground. AGND is the power return for AVDD. Connect all AGND pins together.  |
| 4                             | 4                             | 4                             | CH0               | Channel 0 Analog Input   |
| 5                             | 5                             | 5                             | CH1               | Channel 1 Analog Input   |
| 6                             | 6                             | 6                             | MSV               | Midscale Voltage Bypass. For the unipolar MAX1304/MAX1305/MAX1306, connect a 2.2 $\mu$ F and a 0.1 $\mu$ F capacitor from MSV to AGND. For the bipolar MAX1308/MAX1309/MAX1310/MAX1312/MAX1313/MAX1314, connect MSV to AGND.   |
| 7                             | 7                             | —                             | CH2               | Channel 2 Analog Input   |
| 8                             | 8                             | —                             | CH3               | Channel 3 Analog Input   |
| 9                             | —                             | —                             | CH4               | Channel 4 Analog Input   |
| 10                            | —                             | —                             | CH5               | Channel 5 Analog Input   |
| 11                            | —                             | —                             | CH6               | Channel 6 Analog Input   |
| 12                            | —                             | —                             | CH7               | Channel 7 Analog Input   |
| 13                            | 13                            | 13                            | INTCLK/<br>EXTCLK | Clock-Mode Select Input. Connect INTCLK/EXTCLK to AVDD to select the internal clock. Connect INTCLK/EXTCLK to AGND to use an external clock connected to CLK.  |
| 18                            | 18                            | 18                            | REF <sub>MS</sub> | Midscale Reference Bypass or Input. REF <sub>MS</sub> connects through a 5k $\Omega$ resistor to the internal +2.5V bandgap reference buffer.<br>For the MAX1304/MAX1305/MAX1306 unipolar devices, V <sub>REFMS</sub> is the input to the unity-gain buffer that drives MSV. MSV sets the midpoint of the input voltage range. For internal reference operation, bypass REF <sub>MS</sub> with a $\geq 0.01\mu$ F capacitor to AGND. For external reference operation, drive REF <sub>MS</sub> with an external voltage from +2V to +3V.<br>For the MAX1308/MAX1309/MAX1310/MAX1312/MAX1313/MAX1314 bipolar devices, connect REF <sub>MS</sub> to REF. For internal reference operation, bypass the REF <sub>MS</sub> /REF node with a $\geq 0.01\mu$ F capacitor to AGND. For external reference operation, drive the REF <sub>MS</sub> /REF node with an external voltage from +2V to +3V. |
| 19                            | 19                            | 19                            | REF               | ADC Reference Bypass or Input. REF connects through a 5k $\Omega$ resistor to the internal +2.5V bandgap reference buffer.<br>For internal reference operation, bypass REF with a $\geq 0.01\mu$ F capacitor.<br>For external reference operation with the MAX1304/MAX1305/MAX1306 unipolar devices, drive REF with an external voltage from +2V to +3V.<br>For external reference operation with the MAX1308/MAX1309/MAX1310/MAX1312/MAX1313/MAX1314 bipolar devices, connect REF <sub>MS</sub> to REF and drive the REF <sub>MS</sub> /REF node with an external voltage from +2V to +3V.  |

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V  
 Analog Input Ranges

### Pin Description (continued)

| PIN                           |                               |                               | NAME              | FUNCTION  |
|-------------------------------|-------------------------------|-------------------------------|-------------------|---|
| MAX1304<br>MAX1308<br>MAX1312 | MAX1305<br>MAX1309<br>MAX1313 | MAX1306<br>MAX1310<br>MAX1314 |                   |   |
| 20                            | 20                            | 20                            | REF+              | Positive Reference Bypass. Bypass REF+ with a 0.1 $\mu$ F capacitor to AGND. Also bypass REF+ to REF- with a 2.2 $\mu$ F and a 0.1 $\mu$ F capacitor.<br>$V_{REF+} = V_{COM} + V_{REF}/2$ .                               |
| 21                            | 21                            | 21                            | COM               | Reference Common Bypass. Bypass COM to AGND with a 2.2 $\mu$ F and a 0.1 $\mu$ F capacitor. $V_{COM} = 13/25 \times AVDD$ .   |
| 22                            | 22                            | 22                            | REF-              | Negative Reference Bypass. Bypass REF- with a 0.1 $\mu$ F capacitor to AGND. Also bypass REF- to REF+ with a 2.2 $\mu$ F and a 0.1 $\mu$ F capacitor.<br>$V_{REF-} = V_{COM} - V_{REF}/2$ .                               |
| 24, 39                        | 24, 39                        | 24, 39                        | DGND              | Digital Ground. DGND is the power return for DVDD. Connect all DGND pins together.  |
| 25, 38                        | 25, 38                        | 25, 38                        | DVDD              | Digital Power Input. DVDD powers the digital section of the converter, including the parallel interface. Apply +2.7V to +5.25V to DVDD. Bypass DVDD to DGND with a 0.1 $\mu$ F capacitor. Connect all DVDD pins together. |
| 26                            | 26                            | 26                            | D0                | Digital I/O 0 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 27                            | 27                            | 27                            | D1                | Digital I/O 1 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 28                            | 28                            | 28                            | D2                | Digital I/O 2 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 29                            | 29                            | 29                            | D3                | Digital I/O 3 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 30                            | 30                            | 30                            | D4                | Digital I/O 4 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 31                            | 31                            | 31                            | D5                | Digital I/O 5 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 32                            | 32                            | 32                            | D6                | Digital I/O 6 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 33                            | 33                            | 33                            | D7                | Digital I/O 7 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 34                            | 34                            | 34                            | D8                | Digital Output 8 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .  |
| 35                            | 35                            | 35                            | D9                | Digital Output 9 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .  |
| 36                            | 36                            | 36                            | D10               | Digital Output 10 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 37                            | 37                            | 37                            | D11               | Digital Output 11 of 12-Bit Parallel Data Bus. High impedance when $\overline{RD} = 1$ or $\overline{CS} = 1$ .   |
| 40                            | 40                            | 40                            | $\overline{EOC}$  | End-of-Conversion Output. $\overline{EOC}$ goes low to indicate the end of a conversion. It returns high on the next rising CLK edge or the falling CONVST edge.  |
| 41                            | 41                            | 41                            | $\overline{EOLC}$ | End-of-Last-Conversion Output. $\overline{EOLC}$ goes low to indicate the end of the last conversion. It returns high when CONVST goes low for the next conversion sequence.  |
| 42                            | 42                            | 42                            | $\overline{RD}$   | Read Input. Pulling $\overline{RD}$ low initiates a read command of the parallel data bus.  |
| 43                            | 43                            | 43                            | $\overline{WR}$   | Write Input. Pulling $\overline{WR}$ low initiates a write command for configuring the device with D0–D7.   |

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V Analog Input Ranges

### Pin Description (continued)

| PIN                           |                               |                               | NAME                | FUNCTION  |
|-------------------------------|-------------------------------|-------------------------------|---------------------|---|
| MAX1304<br>MAX1308<br>MAX1312 | MAX1305<br>MAX1309<br>MAX1313 | MAX1306<br>MAX1310<br>MAX1314 |                     |   |
| 44                            | 44                            | 44                            | $\overline{CS}$     | Chip-Select Input. Pulling $\overline{CS}$ low activates the digital interface. Forcing $\overline{CS}$ high places D0–D11 in high-impedance mode.  |
| 45                            | 45                            | 45                            | CONVST              | Conversion Start Input. Driving CONVST high initiates the conversion process. The analog inputs are sampled on the rising edge of CONVST.   |
| 46                            | 46                            | 46                            | CLK                 | External Clock Input. For external clock operation, connect INTCLK/EXTCLK to AGND and drive CLK with an external clock signal from 100kHz to 20MHz. For internal clock operation, connect INTCLK/EXTCLK to AVDD and connect CLK to DGND.  |
| 47                            | 47                            | 47                            | SHDN                | Shutdown Input. Driving SHDN high initiates device shutdown. Connect SHDN to DGND for normal operation.   |
| 48                            | 48                            | 48                            | $\overline{CHSHDN}$ | Active-Low Analog-Input Channel-Shutdown Input. Drive $\overline{CHSHDN}$ low to power down analog inputs that are not selected for conversion in the configuration register. Drive $\overline{CHSHDN}$ high to power up all analog input channels regardless of whether they are selected for conversion in the configuration register. See the <i>Channel Shutdown (CHSHDN)</i> section for more information. |
| —                             | 9, 10,<br>11, 12              | 7, 8, 9,<br>10, 11, 12        | I.C.                | Internally connected. Connect I.C. to AGND.   |

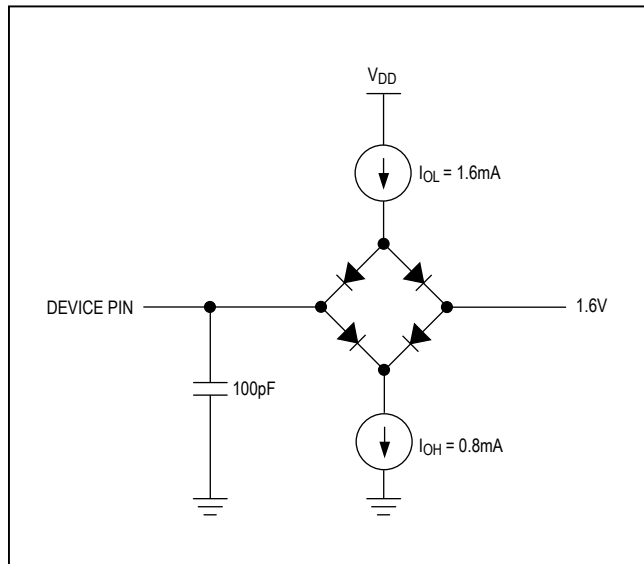


Figure 1. Digital Load Test Circuit

### Detailed Description

The MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314 are 12-bit ADCs. The devices offer 8, 4, or 2 independently selectable input channels, each with dedicated T/H circuitry. Simultaneous sampling of all active channels preserves relative phase information making these devices ideal for motor control and power monitoring. Three input ranges are available, 0 to +5V,  $\pm 5V$  and  $\pm 10V$ . The 0 to +5V devices provide  $\pm 6V$  fault-tolerant inputs. The  $\pm 5V$  and  $\pm 10V$  devices provide  $\pm 16.5V$  fault-tolerant inputs. Two-channel conversion results are available in  $0.9\mu s$ . Conversion results from all eight channels are available in  $1.98\mu s$ . The 8-channel throughput is 456ksps per channel. Internal or external reference and clock capability offer great flexibility, and ease of use. A write-only configuration register can mask out unused channels and a shutdown feature reduces power. A 20MHz, 12-bit, parallel data bus outputs the conversion results. Figure 2 shows the functional diagram of these ADCs.

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V  
 Analog Input Ranges

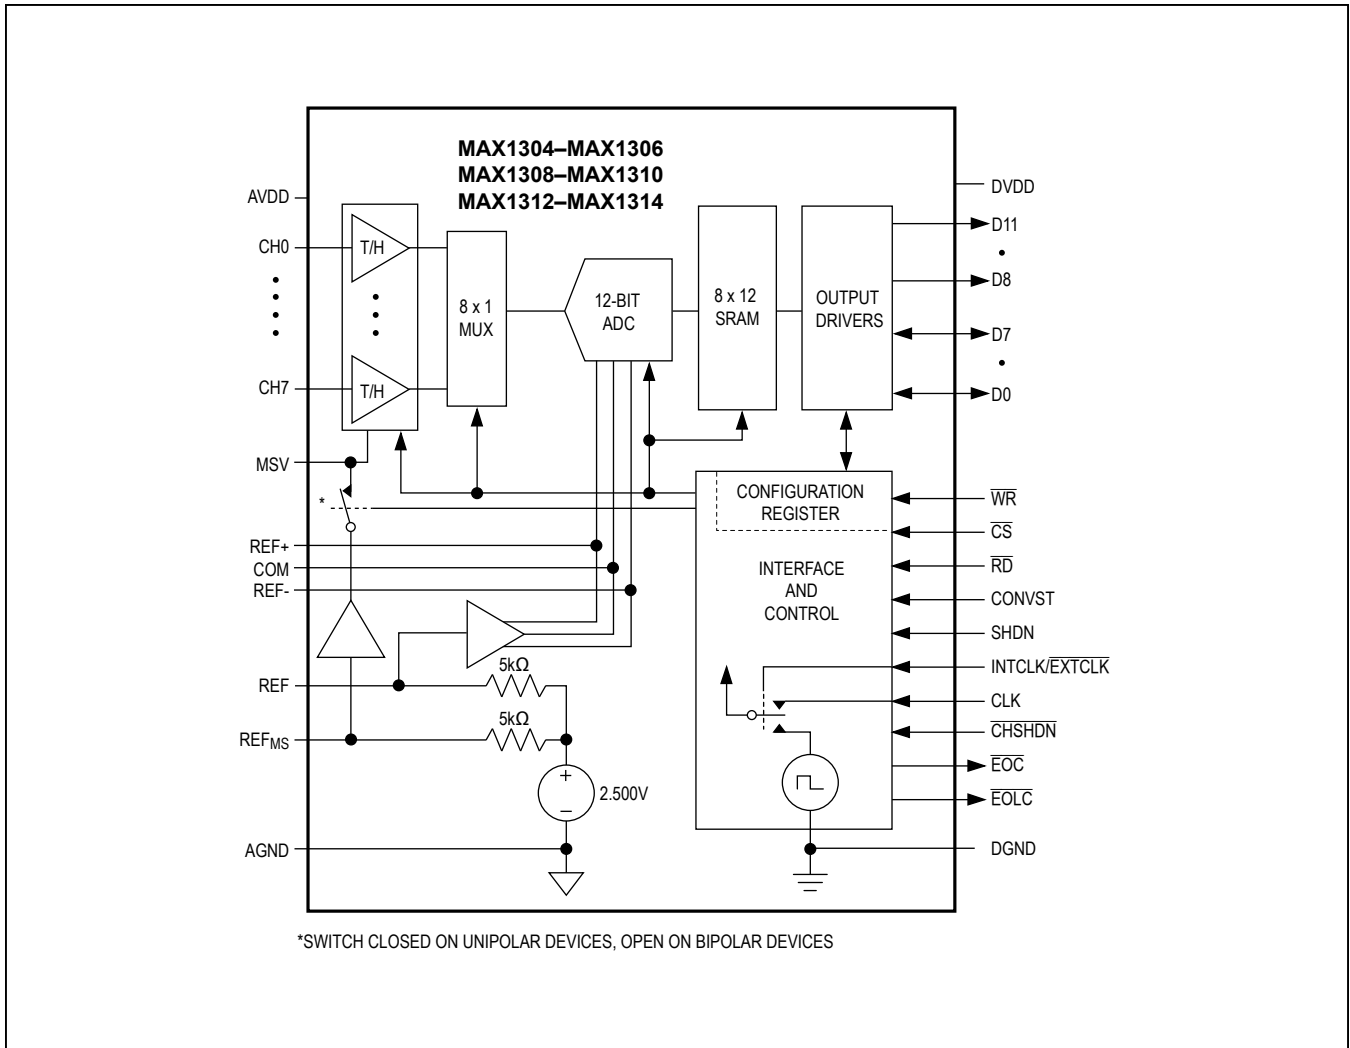


Figure 2. Functional Diagram

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$   
 Analog Input Ranges

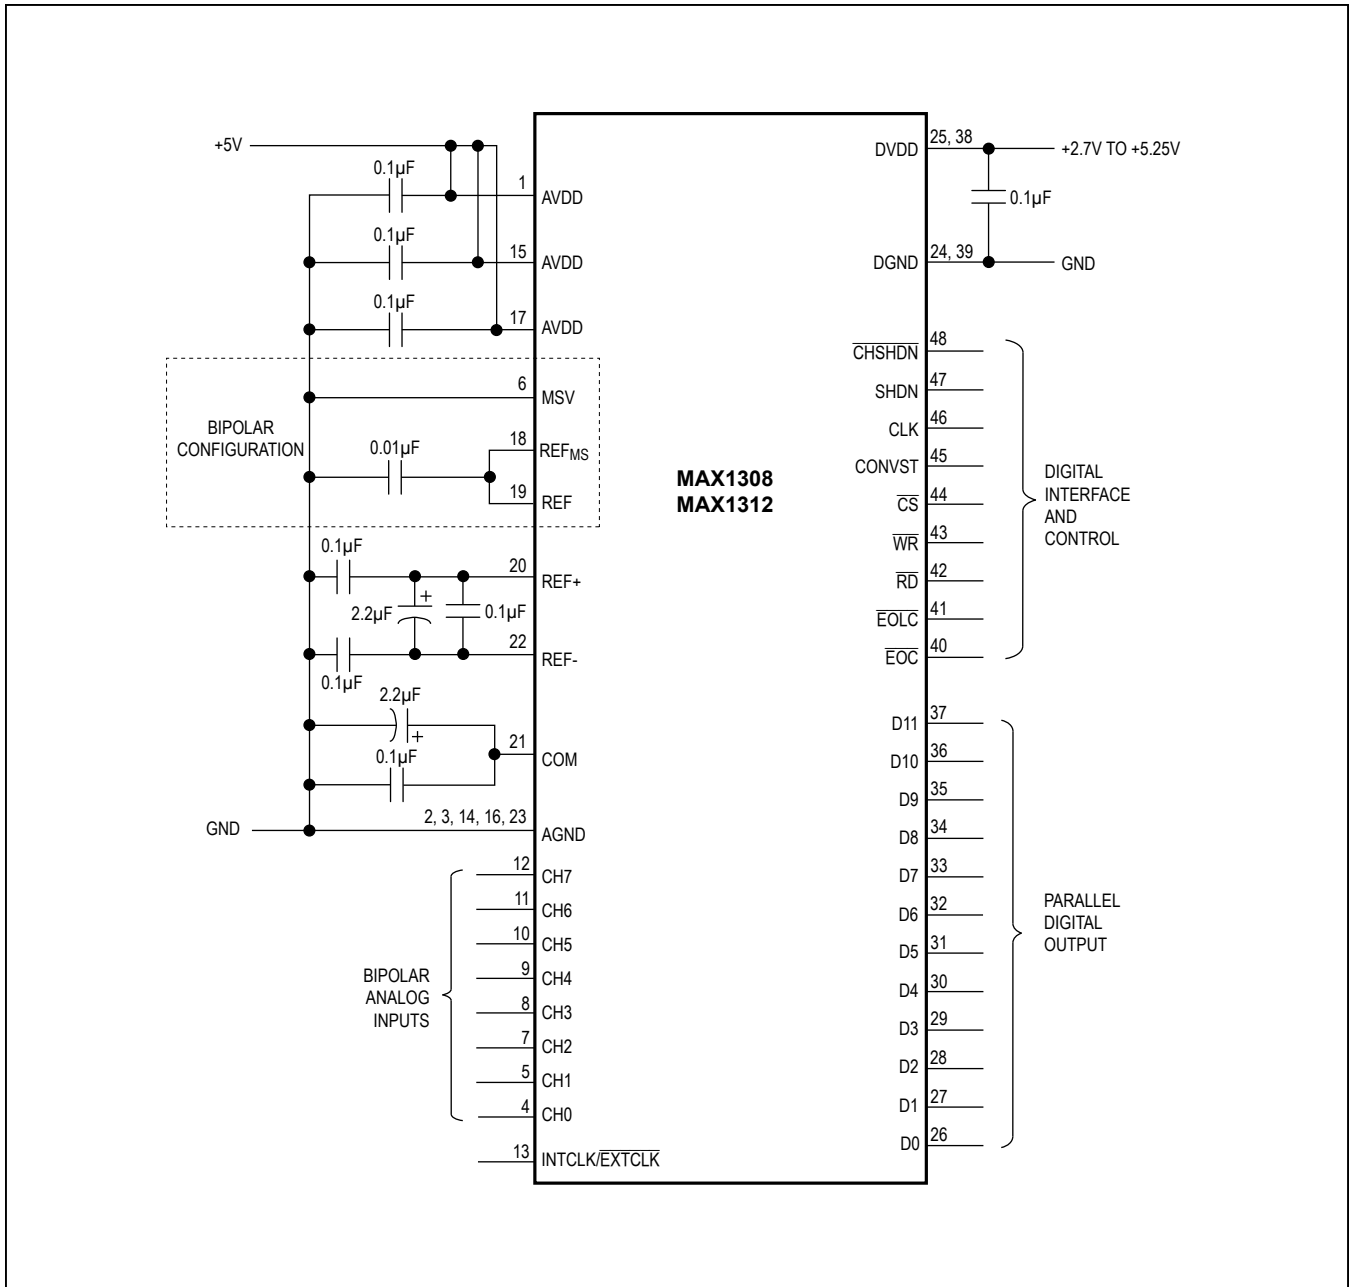


Figure 3. Typical Bipolar Operating Circuit

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$  Analog Input Ranges

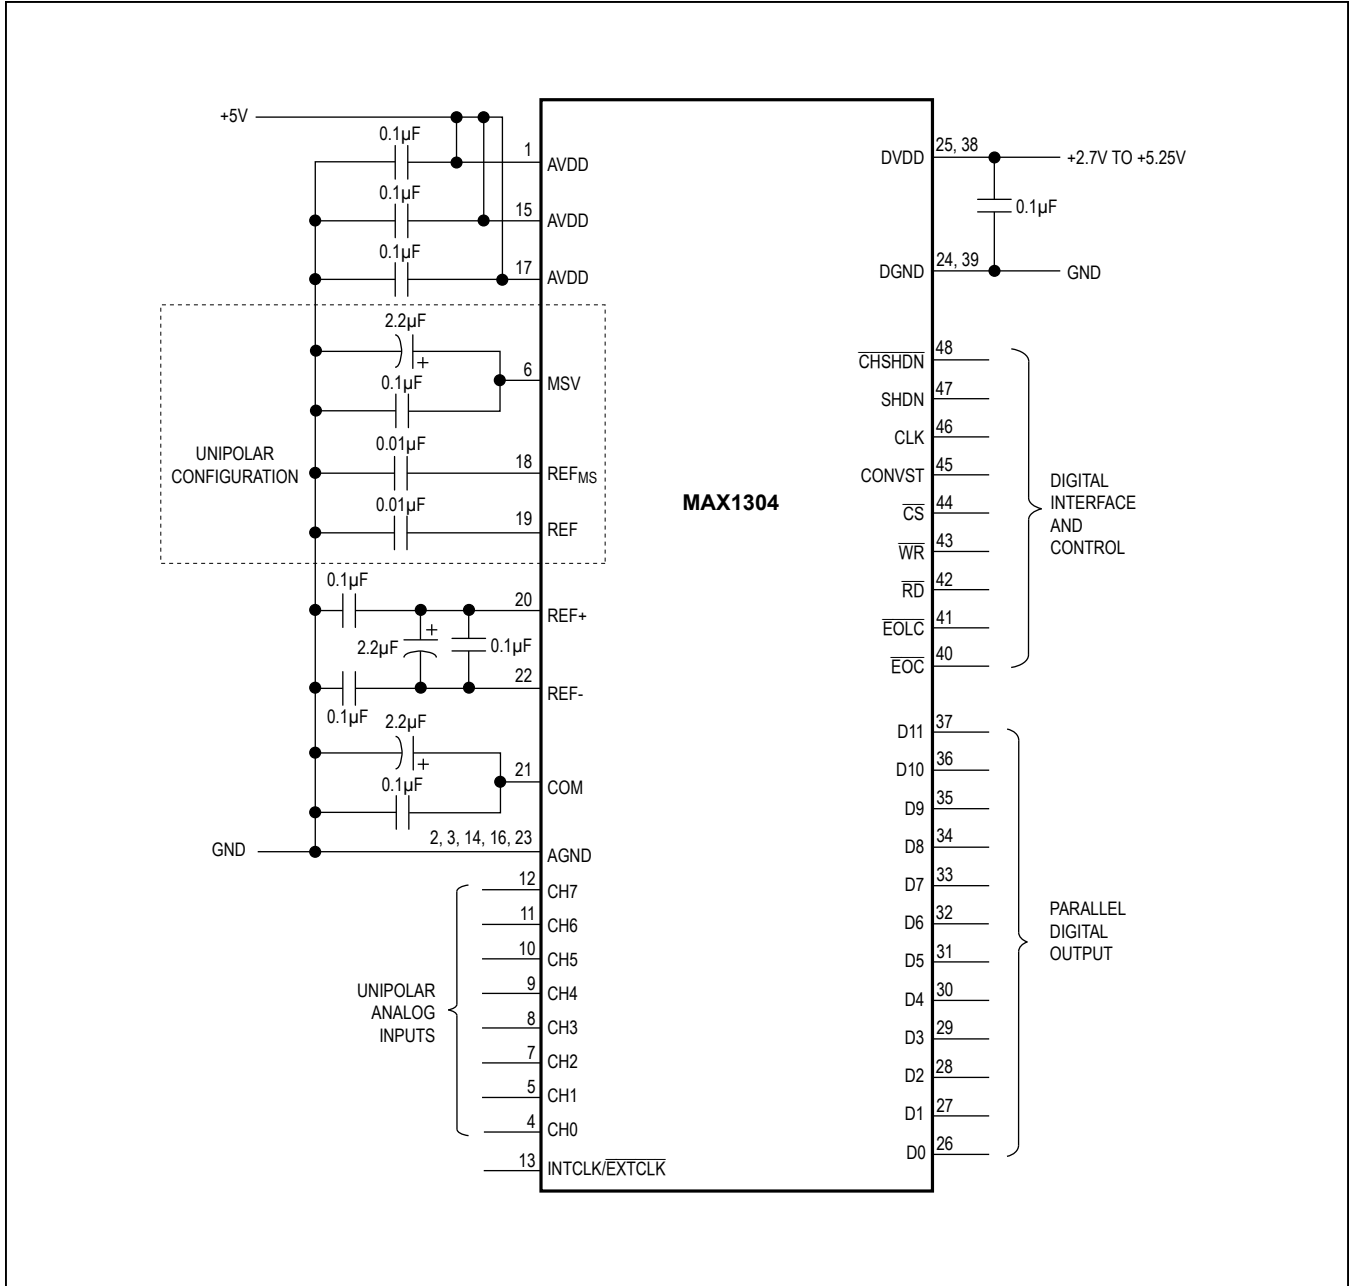


Figure 4. Typical Unipolar Operating Circuit

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with ±10V, ±5V, and 0 to +5V Analog Input Ranges

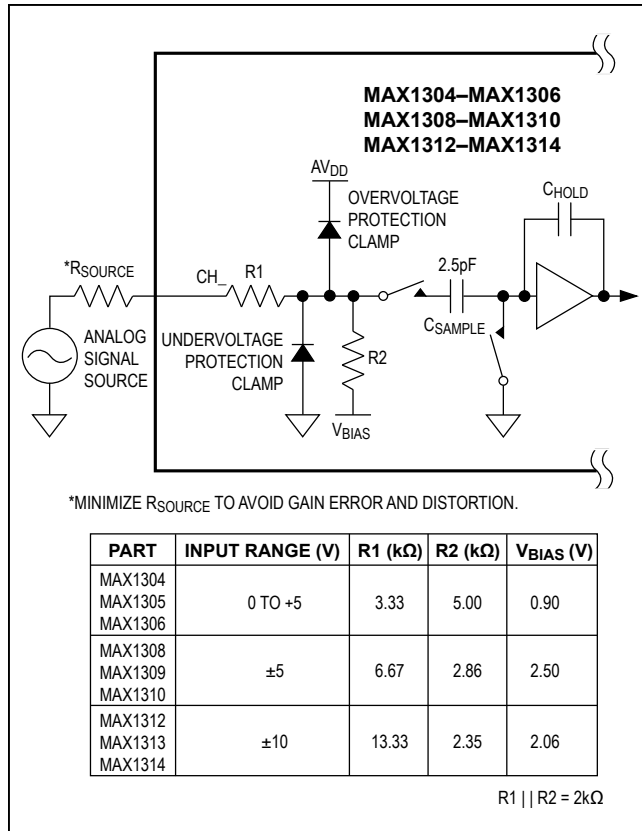


Figure 5. Single-Channel, Equivalent Analog Input T/H Circuit

## Analog Inputs

### Track and Hold (T/H)

To preserve phase information across the multichannel MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314, all input channels have dedicated T/H amplifiers. Figure 5 shows the equivalent analog input T/H circuit for one channel.

The input T/H circuit is controlled by the CONVST input. When CONVST is low, the T/H circuit tracks the analog input. When CONVST is high the T/H circuit holds the analog input. The rising edge of CONVST is the analog input sampling instant. There is an aperture delay ( $t_{AD}$ ) of 8ns and a 50ps<sub>RMS</sub> aperture jitter ( $t_{AJ}$ ). The aperture delay of each dedicated T/H input is matched within 100ps of each other.

To settle the charge on  $C_{SAMPLE}$  to 12-bit accuracy, use a minimum acquisition time ( $t_{ACQ}$ ) of 100ns. Therefore, CONVST must be low for at least 100ns. Although longer acquisition times allow the analog input to settle to its

final value more accurately, the maximum acquisition time must be limited to 1ms. Accuracy with conversion times longer than 1ms cannot be guaranteed due to capacitor droop in the input circuitry.

Due to the analog input resistive divider formed by  $R_1$  and  $R_2$  in Figure 5, any significant analog input source resistance ( $R_{SOURCE}$ ) results in gain error. Furthermore,  $R_{SOURCE}$  causes distortion due to nonlinear analog input currents. Limit  $R_{SOURCE}$  to a maximum of 100Ω.

### Selecting an Input Buffer

To improve the input signal bandwidth under AC conditions, drive the input with a wideband buffer (> 50MHz) that can drive the ADC's input capacitance (15pF) and settle quickly. For example, the MAX4431 or the MAX4265 can be used for the 0 to +5V unipolar devices, or the MAX4350 can be used for ±5V bipolar inputs.

Most applications require an input buffer to achieve 12-bit accuracy. Although slew rate and bandwidth are important, the most critical input buffer specification is settling time. The simultaneous sampling of multiple channels requires an acquisition time of 100ns. At the beginning of the acquisition, the ADC internal sampling capacitor array connects to the analog inputs, causing some disturbance. Ensure the amplifier is capable of settling to at least 12-bit accuracy during this interval. Use a low-noise, low-distortion, wideband amplifier that settles quickly and is stable with the ADC's 15pF input capacitance.

See the Maxim website at [www.maximintegrated.com](http://www.maximintegrated.com) for application notes on how to choose the optimum buffer amplifier for your ADC application.

### Input Bandwidth

The input-tracking circuitry has a 20MHz small-signal bandwidth, making it possible to digitize high-speed transient events and measure periodic signals with bandwidths exceeding the ADC's sampling rate by using undersampling techniques. To avoid high-frequency signals being aliased into the frequency band of interest, anti-alias filtering is recommended.

### Input Range and Protection

The MAX1304/MAX1305/MAX1306 provide a 0 to +5V input voltage range with fault protection of ±6V. The MAX1308/MAX1309/MAX1310 provide a ±5V input voltage range with fault protection of ±16.5V. The MAX1312/MAX1313/MAX1314 provide a ±10V input voltage range with fault protection of ±16.5V. Figure 5 shows the single-channel equivalent input circuit.

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with ±10V, ±5V, and 0 to +5V  
 Analog Input Ranges

**Data Throughput**

The data throughput ( $f_{TH}$ ) of the MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314 is a function of the clock speed ( $f_{CLK}$ ). In internal clock mode,  $f_{CLK} = 15\text{MHz}$  (typ). In external clock mode,  $100\text{kHz} \leq f_{CLK} \leq 20\text{MHz}$ . When reading during conversion (Figures 7 and 8), calculate  $f_{TH}$  as follows:

$$f_{TH} = \frac{1}{t_{ACQ} + t_{QUIET} + \frac{12 + 3 \times (N - 1) + 1}{f_{CLK}}}$$

where N is the number of active channels and  $t_{QUIET}$  is the period of bus inactivity before the rising edge of CONVST. See the *Starting a Conversion* section for more information.

Table 1 uses the above equation and shows the total throughput as a function of the number of channels selected for conversion.

**Clock Modes**

The MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314 provide a 15MHz internal conversion clock. Alternatively, an external clock can be used.

**Internal Clock**

Internal clock mode frees the microprocessor from the burden of running the ADC conversion clock. For internal clock operation, connect INTCLK/EXTCLK to AVDD and connect CLK to DGND. Note that INTCLK/EXTCLK is referenced to AVDD, not DVDD.

**External Clock**

For external clock operation, connect INTCLK/EXTCLK to AGND and connect an external clock source to CLK. Note that INTCLK/EXTCLK is referenced to AVDD, not DVDD. The external clock frequency can be up to 20MHz. Linearity is not guaranteed with clock frequencies below 100kHz due to droop in the T/H circuits.

**Table 1. Throughput vs. Channels Sampled:  $f_{CLK} = 15\text{MHz}$ ,  $t_{ACQ} = 100\text{ns}$ ,  $t_{QUIET} = 50\text{ns}$**

| CHANNELS SAMPLED (N) | CLOCK CYCLES UNTIL LAST RESULT | CLOCK CYCLE FOR READING LAST CONVERSION | TOTAL CONVERSION TIME (ns) | TOTAL THROUGHPUT (ksps) | THROUGHPUT PER CHANNEL ( $f_{TH}$ ) |
|----------------------|--------------------------------|---|----------------------------|-------------------------|-------------------------------------|
| 1                    | 12                             | 1                                       | 800                        | 983                     | 983                                 |
| 2                    | 15                             | 1                                       | 1000                       | 1643                    | 821                                 |
| 3                    | 18                             | 1                                       | 1200                       | 2117                    | 705                                 |
| 4                    | 21                             | 1                                       | 1400                       | 2474                    | 618                                 |
| 5                    | 24                             | 1                                       | 1600                       | 2752                    | 550                                 |
| 6                    | 27                             | 1                                       | 1800                       | 2975                    | 495                                 |
| 7                    | 30                             | 1                                       | 2000                       | 3157                    | 451                                 |
| 8                    | 33                             | 1                                       | 2200                       | 3310                    | 413                                 |

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

## 8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with ±10V, ±5V, and 0 to +5V Analog Input Ranges

### Applications Information

#### Digital Interface

The bidirectional parallel digital interface allows for setting the 8-bit configuration register (see the *Configuration Register* section) and reading the 12-bit conversion result. The interface includes the following control signals: chip select ( $\overline{CS}$ ), read ( $\overline{RD}$ ), write ( $\overline{WR}$ ), end of conversion ( $\overline{EOC}$ ), end of last conversion ( $\overline{EOLC}$ ), conversion start (CONVST), shutdown (SHDN), channel shutdown ( $\overline{CHSHDN}$ ), internal clock select (INTCLK/EXTCLK), and external clock input (CLK). Figures 6, 7, 8, 9, Table 2, and the *Timing Characteristics* show the operation of the interface. D0–D7 are bidirectional, and D8–D11 are output only. D0–D11 go high impedance when  $\overline{RD} = 1$  or  $\overline{CS} = 1$ .

#### Configuration Register

Enable channels as active by writing to the configuration register through I/O lines D0–D7 (Table 2). The bits in the configuration register map directly to the channels, with D0 controlling channel zero, and D7 controlling channel seven. Setting any bit high activates the corresponding input channel, while resetting any bit low deactivates the corresponding channel. On the devices with less than eight channels, some of the bits have no function (Table 2).

To write to the configuration register, pull  $\overline{CS}$  and  $\overline{WR}$  low, load bits D0 through D7 onto the parallel bus, and force  $\overline{WR}$  high. The data are latched on the rising edge of  $\overline{WR}$  (Figure 6). Write to the configuration register at any point during the conversion sequence. At power-up, write to the configuration register to select the active channels before beginning a conversion.

However, the new configuration does not take effect until the next CONVST falling edge. At power-up all channels default active. Shutdown does not change the configuration register. The configuration register may be written to in shutdown. See the *Channel Shutdown (CHSHDN)* section for information about using the configuration register for power saving.

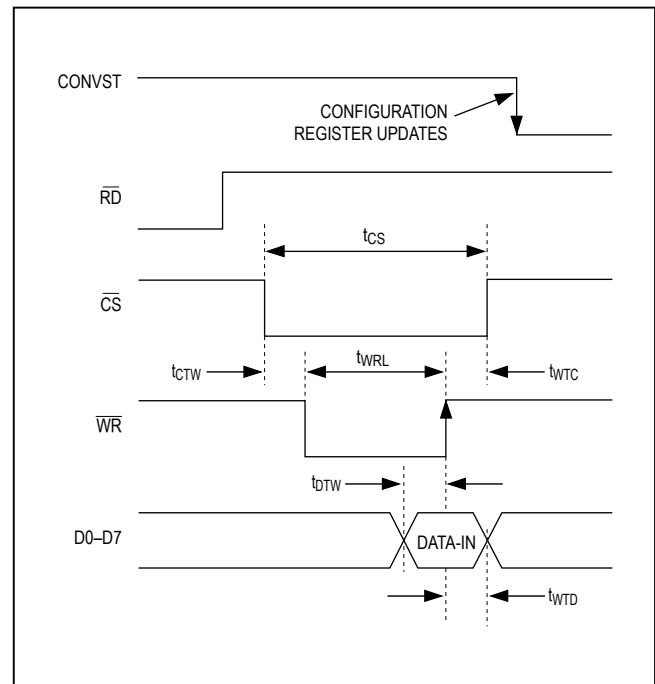


Figure 6. Write Timing

Table 2. Configuration Register

| PART NUMBER                   | STATE | BIT/CHANNEL |        |        |        |        |        |        |        |
|-------------------------------|-------|-------------|--------|--------|--------|--------|--------|--------|--------|
|                               |       | D0/CH0      | D1/CH1 | D2/CH2 | D3/CH3 | D4/CH4 | D5/CH5 | D6/CH6 | D7/CH7 |
| MAX1304<br>MAX1308<br>MAX1312 | ON    | 1           | 1      | 1      | 1      | 1      | 1      | 1      | 1      |
|                               | OFF   | 0           | 0      | 0      | 0      | 0      | 0      | 0      | 0      |
| MAX1305<br>MAX1309<br>MAX1313 | ON    | 1           | 1      | 1      | 1      | X      | X      | X      | X      |
|                               | OFF   | 0           | 0      | 0      | 0      | X      | X      | X      | X      |
| MAX1306<br>MAX1310<br>MAX1314 | ON    | 1           | 1      | X      | X      | X      | X      | X      | X      |
|                               | OFF   | 0           | 0      | X      | X      | X      | X      | X      | X      |

X = Don't care (must be 1 or 0).

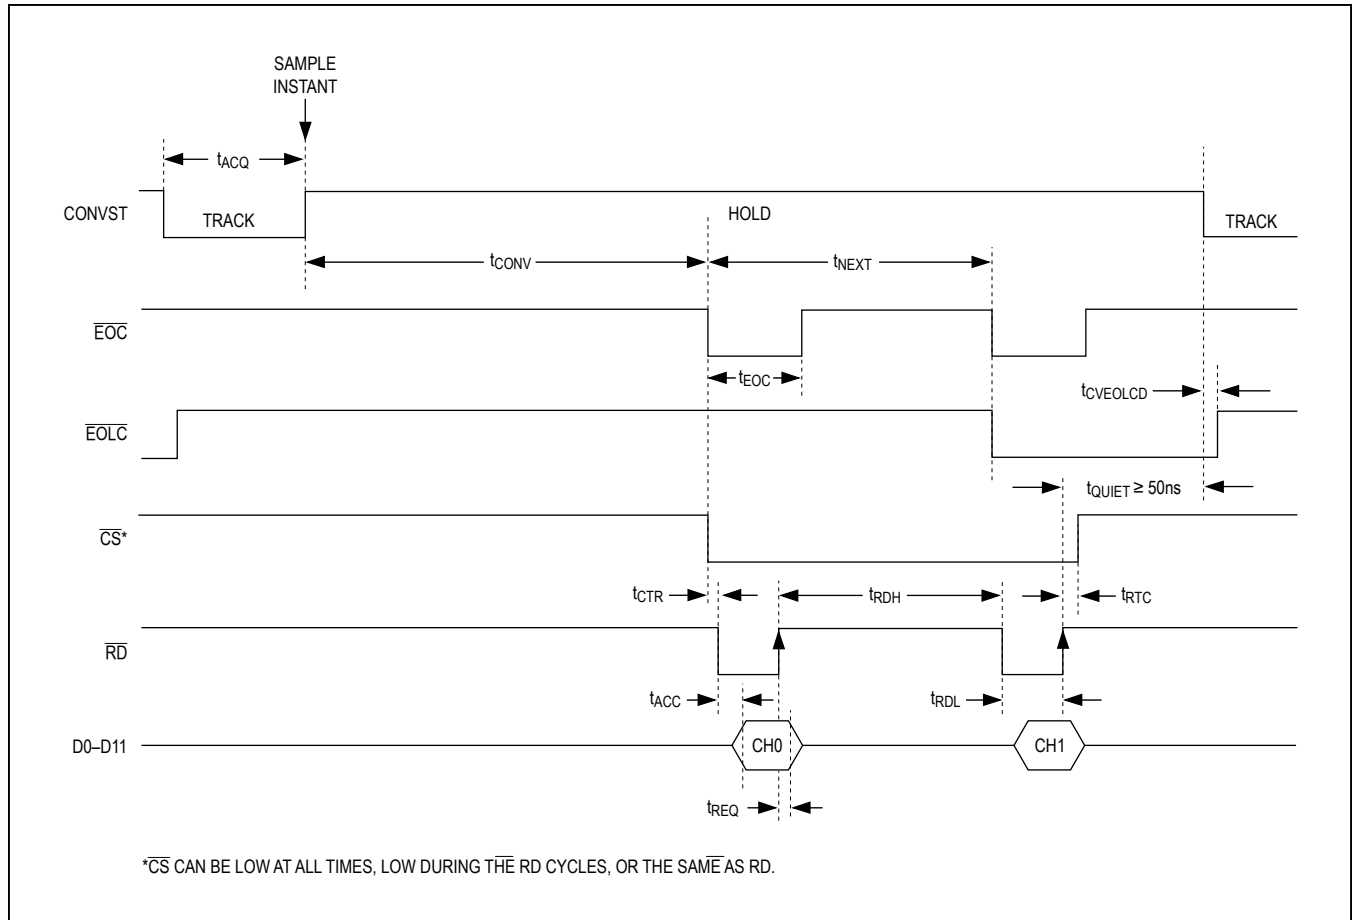


Figure 7. Read During Conversion—Channel 0 and Channel 1 Selected, Internal Clock

## Starting a Conversion

To start a conversion using internal clock mode, pull CONVST low for the acquisition time ( $t_{ACQ}$ ). The T/H acquires the signal while CONVST is low, and conversion begins on the rising edge of CONVST. The end-of-conversion signal ( $\overline{EOC}$ ) pulses low whenever a conversion result becomes available for read. The end-of-last-conversion signal ( $\overline{EOLC}$ ) goes low when the last conversion result is available (Figure 7).

To start a conversion using external clock mode, pull CONVST low for the acquisition time ( $t_{ACQ}$ ). The T/H acquires the signal while CONVST is low. The rising edge of CONVST is the sampling instant. Apply an external clock to CLK to start the conversion. To avoid T/H droop degrading the sampled analog input signals, the first CLK

pulse must occur within  $10\mu\text{s}$  from the rising edge of CONVST. Additionally, the external clock frequency must be greater than  $100\text{kHz}$  to avoid T/H droop-degrading accuracy. The first conversion result is available for read when  $\overline{EOC}$  goes low on the rising edge of the 13th clock cycle. Subsequent conversion results are available after every third clock cycle thereafter (Figures 8 and 9).

In both internal and external clock modes, hold CONVST high until the last conversion result is read. If CONVST goes low in the middle of a conversion, the current conversion is aborted and a new conversion is initiated. Furthermore, there must be a period of bus inactivity ( $t_{QUIET}$ ) for  $50\text{ns}$  or longer before the falling edge of CONVST for the specified ADC performance.

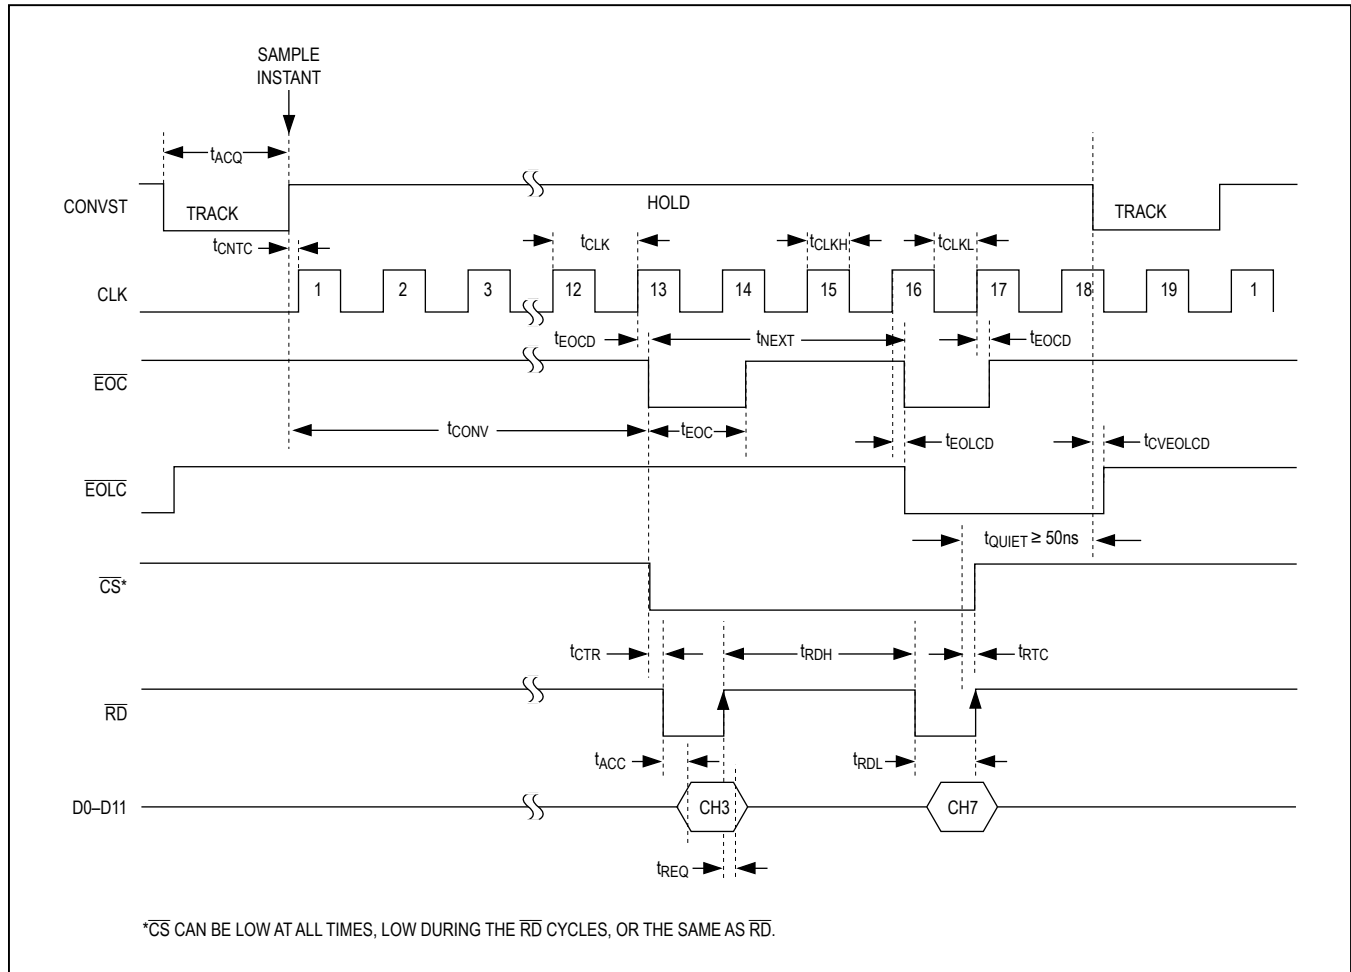


Figure 8. Read During Conversion—Channel 3 and Channel 7 Selected, External Clock

## Reading a Conversion Result

### Reading During a Conversion

Figures 7 and 8 show the interface signals to initiate a read operation during a conversion cycle. These figures show two channels selected for conversion. If more channels are selected, the results are available successively at every EOC falling edge. CS can be low at all times, low during the RD cycles, or the same as RD.

After initiating a conversion by bringing CONVST high, wait for EOC to go low. In internal clock mode, EOC goes low within 900ns. In external clock mode, EOC goes low on the rising edge of the 13th CLK cycle. To read the conversion result, drive CS and RD low to latch data to

the parallel digital output bus. Bring RD high to release the digital bus. In internal clock mode, the next EOC falling edge occurs within 225ns. In external clock mode, the next EOC falling edge occurs in three CLK cycles. When the last result is available EOLC goes low.

### Reading After Conversion

Figure 9 shows the interface signals for a read operation after a conversion with all eight channels enabled. At the falling of EOLC, driving CS and RD low places the first conversion result onto the parallel bus. Successive low pulses of RD place the successive conversion results onto the bus. When the last conversion results in the sequence are read, additional read pulses wrap the pointer back to the first converted result.

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$   
 Analog Input Ranges

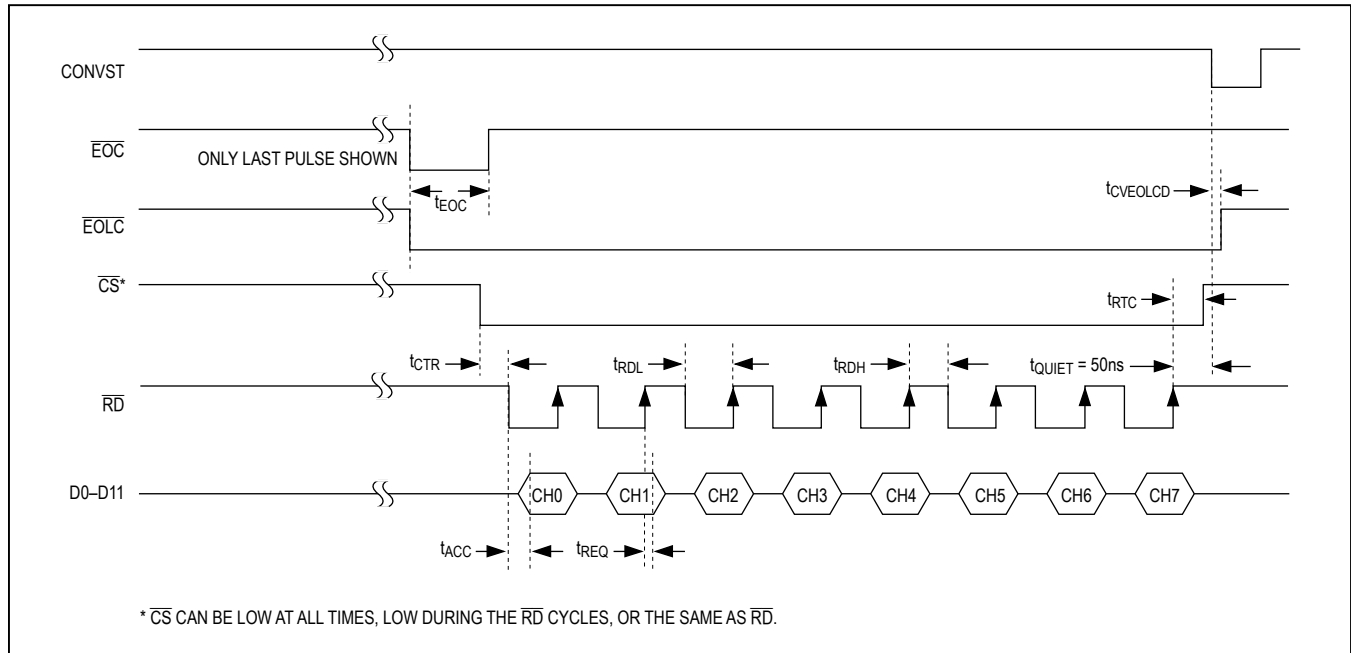


Figure 9. Read After Conversion—Eight Channels Selected, External Clock

### Power-Up Reset

At power-up, all channels are selected for conversion (see the *Configuration Register* section). After applying power, allow the 1ms wake-up time to elapse and then initiate a dummy conversion and discard the results. After the dummy conversion is complete, accurate conversions can be obtained.

### Power-Saving Modes

#### Shutdown Mode

During shutdown the internal reference and analog circuits in the device shutdown and the analog supply current drops to  $0.6\mu\text{A}$  (typ). Select shutdown mode using the SHDN input. Set SHDN high to enter shutdown mode. SHDN takes precedence over  $\overline{\text{CHSHDN}}$ .

Entering and exiting shutdown mode does not change the configuration byte. However, a new configuration byte can be written while in shutdown mode by following the standard write procedure shown in Figure 6.

$\overline{\text{EOC}}$  and  $\overline{\text{EOLC}}$  are high when the MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314 are shut down.

The state of the digital outputs D0–D11 is independent of the state of SHDN. If  $\overline{\text{CS}}$  and  $\overline{\text{RD}}$  are low, the digital outputs D0–D11 are active regardless of SHDN. The digital outputs only go high impedance when  $\overline{\text{CS}}$  or  $\overline{\text{RD}}$  is high.

When the digital outputs are powered down, the digital supply current drops to 20nA.

Exiting shutdown (falling edge of SHDN) starts a conversion in the same way as the rising edge of CONVST. After coming out of shutdown, initiate a dummy conversion and discard the results. After the dummy conversion, allow the 1ms wake-up time to expire before initiating the first accurate conversion.

#### Channel Shutdown ( $\overline{\text{CHSHDN}}$ )

The channel-shutdown feature allows analog input channels to be powered down when they are not selected for conversion. Powering down channels that are not selected for conversion reduces the analog supply current by 2.9mA per channel. To power down channels that are not selected for conversion, pull  $\overline{\text{CHSHDN}}$  low. See the *Configuration Register* section for information on selecting and deselecting channels for conversion.

The drawback of powering down analog inputs that are not selected for conversion is that it takes time to power them up. Figure 10 shows how a dummy conversion is used to power up an analog input in external clock mode. After selecting a new channel in the configuration register, initiate a dummy conversion and discard the results. After the dummy conversion, allow the 1ms wake-up time ( $t_{\text{WAKE}}$ ) to expire before initiating the first accurate conversion.

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V Analog Input Ranges

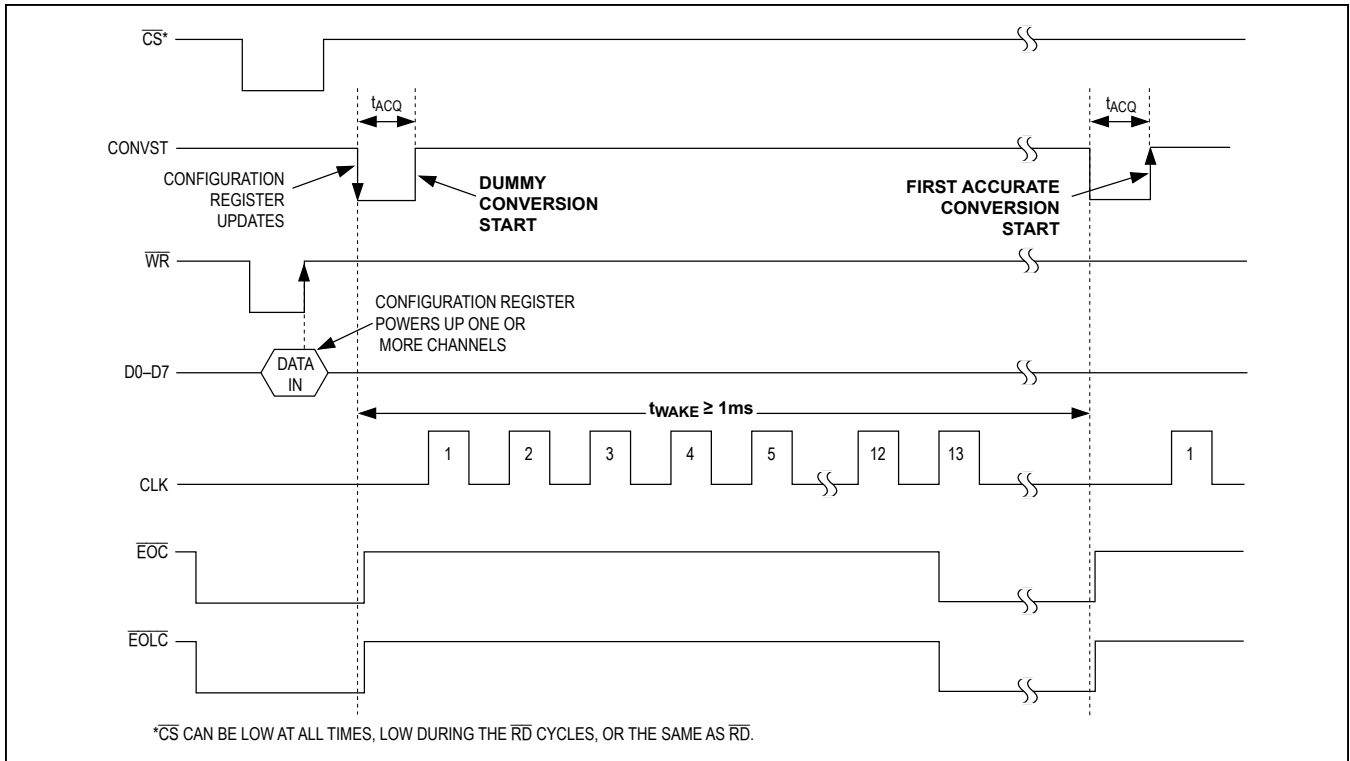


Figure 10. Powering Up an Analog Input Channel with a Dummy Conversion and Wake-Up Time ( $\overline{CHSHDN} = 0$ , External-Clock Mode, One Channel Selected)

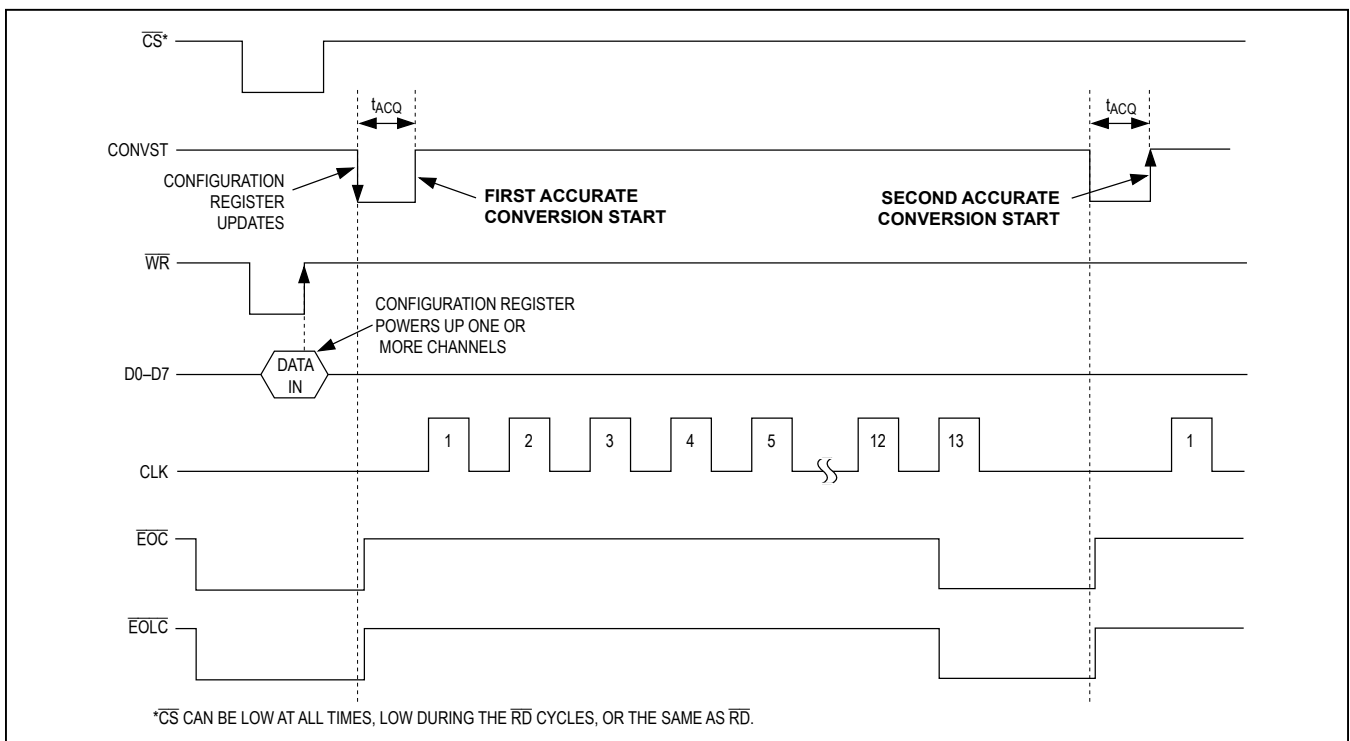


Figure 11. Powering Up an Analog Input Channel Directly ( $\overline{CHSHDN} = 1$ , External-Clock Mode, One Channel Selected)

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
Sampling ADCs with ±10V, ±5V, and 0 to +5V  
Analog Input Ranges

To avoid the timing requirements associated with powering up an analog channel, force  $\overline{\text{CHSHDN}}$  high. With  $\overline{\text{CHSHDN}}$  high, each analog input is powered up regardless of whether it is selected for conversion in the configuration register. Note that shutdown mode takes precedence over the  $\overline{\text{CHSHDN}}$  mode.

**Reference**

**Internal Reference**

The internal reference circuits provide for analog input voltages of 0 to +5V for the unipolar MAX1304/MAX1305/MAX1306, ±5V for the bipolar MAX1308/MAX1309/MAX1310 or ±10V for the bipolar MAX1312/MAX1313/MAX1314. Install external capacitors for reference stability, as indicated in Table 3 and shown in Figures 3 and 4.

As illustrated in Figure 2, the internal reference voltage is 2.5V ( $V_{\text{REF}}$ ). This 2.5V is internally buffered to create the voltages at REF+ and REF-. Table 4 shows the voltages at COM, REF+, and REF-

**External Reference**

External reference operation is achieved by overriding the internal reference voltage. Override the internal reference

voltage by driving REF with a +2.0V to +3.0V external reference. As shown in Figure 2, the REF input impedance is 5kΩ. For more information about using external references see the *Transfer Functions* section.

**Midscale Voltage (MSV)**

The voltage at MSV ( $V_{\text{MSV}}$ ) sets the midpoint of the ADC transfer functions. For the 0 to +5V input range (unipolar devices), the midpoint of the transfer function is +2.5V. For the ±5V and ±10V input range devices, the midpoint of the transfer function is zero.

As shown in Figure 2, there is a unity-gain buffer between  $\text{REF}_{\text{MS}}$  and MSV in the unipolar MAX1304/MAX1305/MAX1306. This midscale buffer sets the midpoint of the unipolar transfer functions to either the internal +2.5V reference or an externally applied voltage at  $\text{REF}_{\text{MS}}$ .  $V_{\text{MSV}}$  follows  $V_{\text{REFMS}}$  within ±3mV.

The midscale buffer is not active for the bipolar devices. For these devices, MSV must be connected to AGND or externally driven.  $\text{REF}_{\text{MS}}$  must be bypassed with a 0.01μF capacitor to AGND.

See the *Transfer Functions* section for more information about MSV.

**Table 3. Reference Bypass Capacitors**

| LOCATION  | INPUT VOLTAGE RANGE |              |
|---|---------------------|--------------|
|   | UNIPOLAR (μF)       | BIPOLAR (μF) |
| MSV Bypass Capacitor to AGND                      | 2.2    0.1          | N/A          |
| $\text{REF}_{\text{MS}}$ Bypass Capacitor to AGND | 0.01                | 0.01         |
| REF Bypass Capacitor to AGND                      | 0.01                | 0.01         |
| REF+ Bypass Capacitor to AGND                     | 0.1                 | 0.1          |
| REF+ to REF- Capacitor                            | 2.2    0.1          | 2.2    0.1   |
| REF- Bypass Capacitor to AGND                     | 0.1                 | 0.1          |
| COM Bypass Capacitor to AGND                      | 2.2    0.1          | 2.2    0.1   |

N/A = Not applicable. Connect MSV directly to AGND.

**Table 4. Reference Voltages**

| PARAMETER                           | EQUATION  | CALCULATED VALUE (V)<br>( $V_{\text{REF}} = 2.000\text{V}$ ,<br>$V_{\text{AVDD}} = 5.0\text{V}$ ) | CALCULATED VALUE (V)<br>( $V_{\text{REF}} = 2.500\text{V}$ ,<br>$V_{\text{AVDD}} = 5.0\text{V}$ ) | CALCULATED VALUE (V)<br>( $V_{\text{REF}} = 3.000\text{V}$ ,<br>$V_{\text{AVDD}} = 5.0\text{V}$ ) |
|-------------------------------------|---|---|---|---|
| $V_{\text{COM}}$                    | $V_{\text{COM}} = 13/25 \times V_{\text{AVDD}}$       | 2.600   | 2.600   | 2.600   |
| $V_{\text{REF+}}$                   | $V_{\text{REF+}} = V_{\text{COM}} + V_{\text{REF}}/2$ | 3.600   | 3.850   | 4.100   |
| $V_{\text{REF-}}$                   | $V_{\text{REF-}} = V_{\text{COM}} - V_{\text{REF}}/2$ | 1.600   | 1.350   | 1.100   |
| $V_{\text{REF+}} - V_{\text{REF-}}$ | $V_{\text{REF+}} - V_{\text{REF-}} = V_{\text{REF}}$  | 2.000   | 2.500   | 3.000   |

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with ±10V, ±5V, and 0 to +5V Analog Input Ranges

**Transfer Functions**

**Unipolar 0 to +5V Devices**

Table 5 and Figure 12 show the offset binary transfer function for the MAX1304/MAX1305/MAX1306 with a 0 to +5V input range. The full-scale input range (FSR) is two times the voltage at REF. The internal +2.5V reference gives a +5V FSR, while an external +2V to +3V reference allows an FSR of +4V to +6V, respectively. Calculate the LSB size using:

$$1\text{LSB} = \frac{2 \times V_{\text{REF}}}{2^{12}}$$

which equals 1.22mV when using a 2.5V reference.

**Table 5. 0 to +5V Unipolar Code Table**

| BINARY DIGITAL OUTPUT CODE | DECIMAL EQUIVALENT DIGITAL OUTPUT CODE (CODE <sub>10</sub> ) | INPUT VOLTAGE (V)<br>( $V_{\text{REF}} = +2.5\text{V}$<br>$V_{\text{REFMS}} = +2.5\text{V}$ ) |
|----------------------------|--|---|
| 1111 1111 1111 = 0xFFFF    | 4095   | +4.9994 ± 0.5 LSB   |
| 1111 1111 1110 = 0xFFFE    | 4094   | +4.9982 ± 0.5 LSB   |
| 1000 0000 0001 = 0x801     | 2049   | +2.5018 ± 0.5 LSB   |
| 1000 0000 0000 = 0x800     | 2048   | +2.5006 ± 0.5 LSB   |
| 0111 1111 1111 = 0x7FF     | 2047   | +2.4994 ± 0.5 LSB   |
| 0000 0000 0001 = 0x001     | 1  | +0.0018 ± 0.5 LSB   |
| 0000 0000 0000 = 0x000     | 0  | +0.0006 ± 0.5 LSB   |

The input range is centered about  $V_{\text{MSV}}$ , internally set to +2.5V. For a custom midscale voltage, drive  $\text{REF}_{\text{MS}}$  with an external voltage source and MSV will follow  $\text{REF}_{\text{MS}}$ . Noise present on MSV or  $\text{REF}_{\text{MS}}$  directly couples into the ADC result. Use a precision, low-drift voltage reference with adequate bypassing to prevent MSV from degrading ADC performance. For maximum FSR, do not violate the absolute maximum voltage ratings of the analog inputs when choosing MSV.

Determine the input voltage as a function of  $V_{\text{REF}}$ ,  $V_{\text{MSV}}$ , and the output code in decimal using:

$$V_{\text{CH}_-} = \text{LSB} \times \text{CODE}_{10} + V_{\text{MSV}} - 2.500\text{V}$$

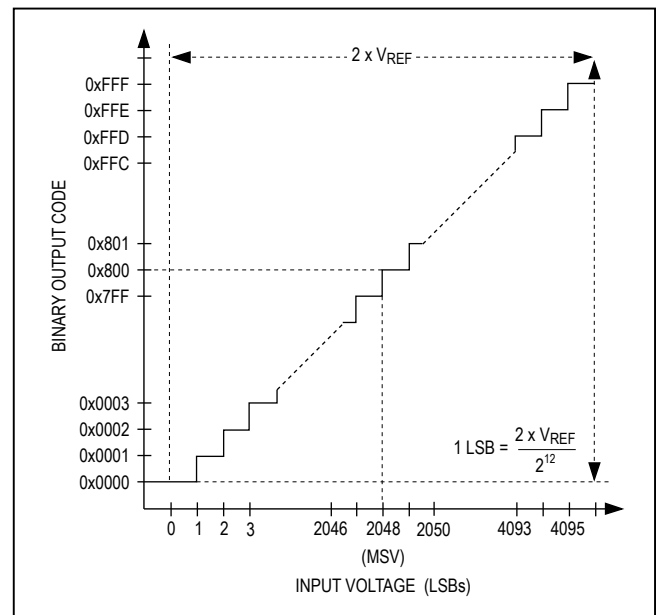


Figure 12. 0 to +5V Unipolar Transfer Function

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with ±10V, ±5V, and 0 to +5V Analog Input Ranges

**Bipolar ±5V Devices**

Table 6 and Figure 13 show the two's complement transfer function for the ±5V input range MAX1308/MAX1309/MAX1310. The FSR is four times the voltage at REF. The internal +2.5V reference gives a +10V FSR, while an external +2V to +3V reference allows an FSR of +8V to +12V, respectively. Calculate the LSB size using:

$$1\text{LSB} = \frac{4 \times V_{\text{REF}}}{2^{12}}$$

which equals 2.44mV when using a 2.5V reference.

The input range is centered about  $V_{\text{MSV}}$ . Normally,  $\text{MSV} = \text{AGND}$ , and the input is symmetrical about zero. For a custom midscale voltage, drive  $\text{MSV}$  with an external voltage source. Noise present on  $\text{MSV}$  directly couples into the ADC result. Use a precision, low-drift voltage reference with adequate bypassing to prevent  $\text{MSV}$  from degrading ADC performance. For maximum FSR, do not violate the absolute maximum voltage ratings of the analog inputs when choosing  $\text{MSV}$ .

Determine the input voltage as a function of  $V_{\text{REF}}$ ,  $V_{\text{MSV}}$ , and the output code in decimal using:

$$V_{\text{CH}_-} = \text{LSB} \times \text{CODE}_{10} + V_{\text{MSV}}$$

**Table 6. ±5V Bipolar Code Table**

| TWO's COMPLEMENT DIGITAL OUTPUT CODE | DECIMAL EQUIVALENT DIGITAL OUTPUT CODE (CODE <sub>10</sub> ) | INPUT VOLTAGE (V) ( $V_{\text{REF}} = +2.5\text{V}$ , $V_{\text{MSV}} = 0\text{V}$ ) |
|--------------------------------------|--|--|
| 0111 1111 1111 = 0x7FF               | +2047  | +4.9988 ±0.5 LSB   |
| 0111 1111 1110 = 0x7FE               | +2046  | +4.9963 ±0.5 LSB   |
| 0000 0000 0001 = 0x001               | +1   | +0.0037 ±0.5 LSB   |
| 0000 0000 0000 = 0x000               | 0  | +0.0012 ±0.5 LSB   |
| 1111 1111 1111 = 0xFFF               | -1   | -0.0012 ±0.5 LSB   |
| 1000 0000 0001 = 0x801               | -2047  | -4.9963 ±0.5 LSB   |
| 1000 0000 0000 = 0x800               | -2048  | -4.9988 ±0.5 LSB   |

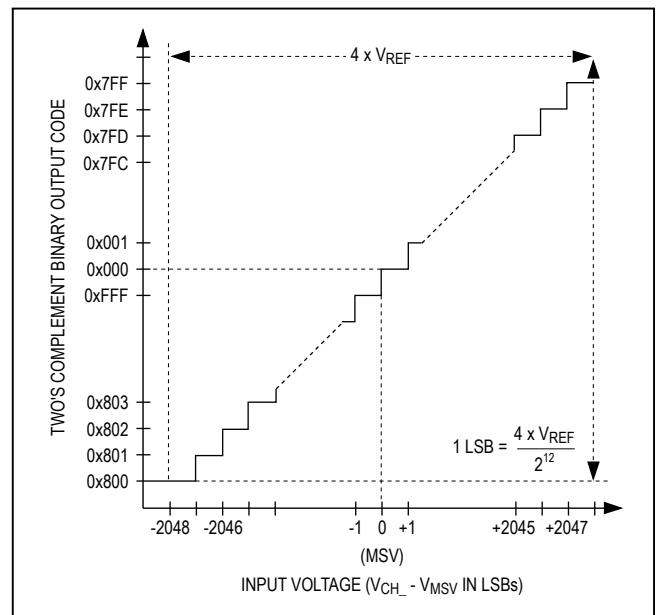


Figure 13. ±5V Bipolar Transfer Function

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with ±10V, ±5V, and 0 to +5V Analog Input Ranges

**Bipolar ±10V Devices**

Table 7 and Figure 14 show the two's complement transfer function for the ±10V input range MAX1312/MAX1313/MAX1314. The FSR is eight times the voltage at REF. The internal +2.5V reference gives a +20V FSR, while an external +2V to +3V reference allows an FSR of +16V to +24V, respectively. Calculate the LSB size using:

$$1\text{LSB} = \frac{8 \times V_{\text{REF}}}{2^{12}}$$

which equals 4.88mV with a +2.5V reference.

The input range is centered about  $V_{\text{MSV}}$ . Normally,  $\text{MSV} = \text{AGND}$ , and the input is symmetrical about zero. For a custom midscale voltage, drive  $\text{MSV}$  with an external voltage source. Noise present on  $\text{MSV}$  directly couples into the ADC result. Use a precision, low-drift voltage reference with adequate bypassing to prevent  $\text{MSV}$  from degrading ADC performance. For maximum FSR, do not violate the absolute maximum voltage ratings of the analog inputs when choosing  $\text{MSV}$ .

Determine the input voltage as a function of  $V_{\text{REF}}$ ,  $V_{\text{MSV}}$ , and the output code in decimal using:

$$V_{\text{CH}_-} = \text{LSB} \times \text{CODE}_{10} + V_{\text{MSV}}$$

**Table 7. ±10V Bipolar Code Table**

| TWO'S COMPLEMENT DIGITAL OUTPUT CODE | DECIMAL EQUIVALENT DIGITAL OUTPUT CODE (CODE <sub>10</sub> ) | INPUT VOLTAGE (V) ( $V_{\text{REF}} = +2.5\text{V}$ , $V_{\text{MSV}} = 0\text{V}$ ) |
|--------------------------------------|--|--|
| 0111 1111 1111 = 0x7FF               | +2047  | +9.9976 ±0.5 LSB   |
| 0111 1111 1110 = 0x7FE               | +2046  | +9.9927 ±0.5 LSB   |
| 0000 0000 0001 = 0x001               | +1   | +0.0073 ±0.5 LSB   |
| 0000 0000 0000 = 0x000               | 0  | 0.0024 ±0.5 LSB  |
| 1111 1111 1111 = 0xFFFF              | -1   | -0.0024 ±0.5 LSB   |
| 1000 0000 0001 = 0x801               | -2047  | -9.9927 ±0.5 LSB   |
| 1000 0000 0000 = 0x800               | -2048  | -9.9976 ±0.5 LSB   |

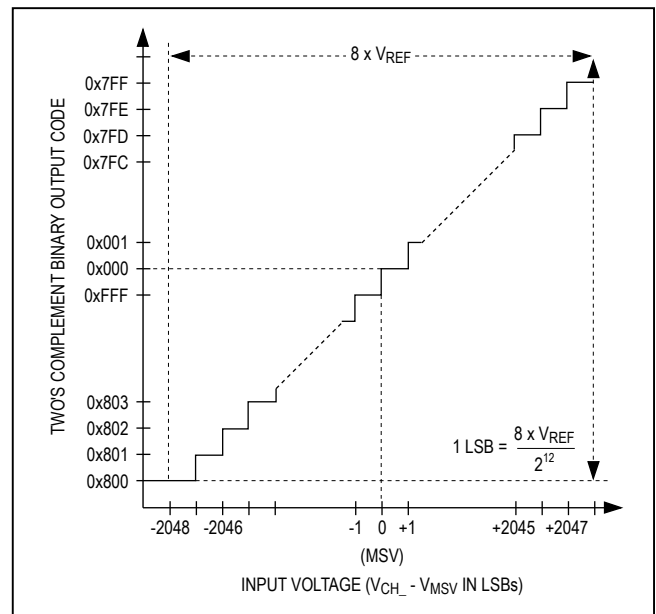


Figure 14. ±10V Bipolar Transfer Function

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V Analog Input Ranges

### 3-Phase Motor Controller

The MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314 are ideally suited for motor-control systems (Figure 15). The devices' simultaneously sampled inputs eliminate the need for complicated DSP algorithms that

realign sequentially sampled data into a simultaneous sample set. Additionally, the variety of input voltage ranges allows for flexibility when choosing current sensors and position encoders.

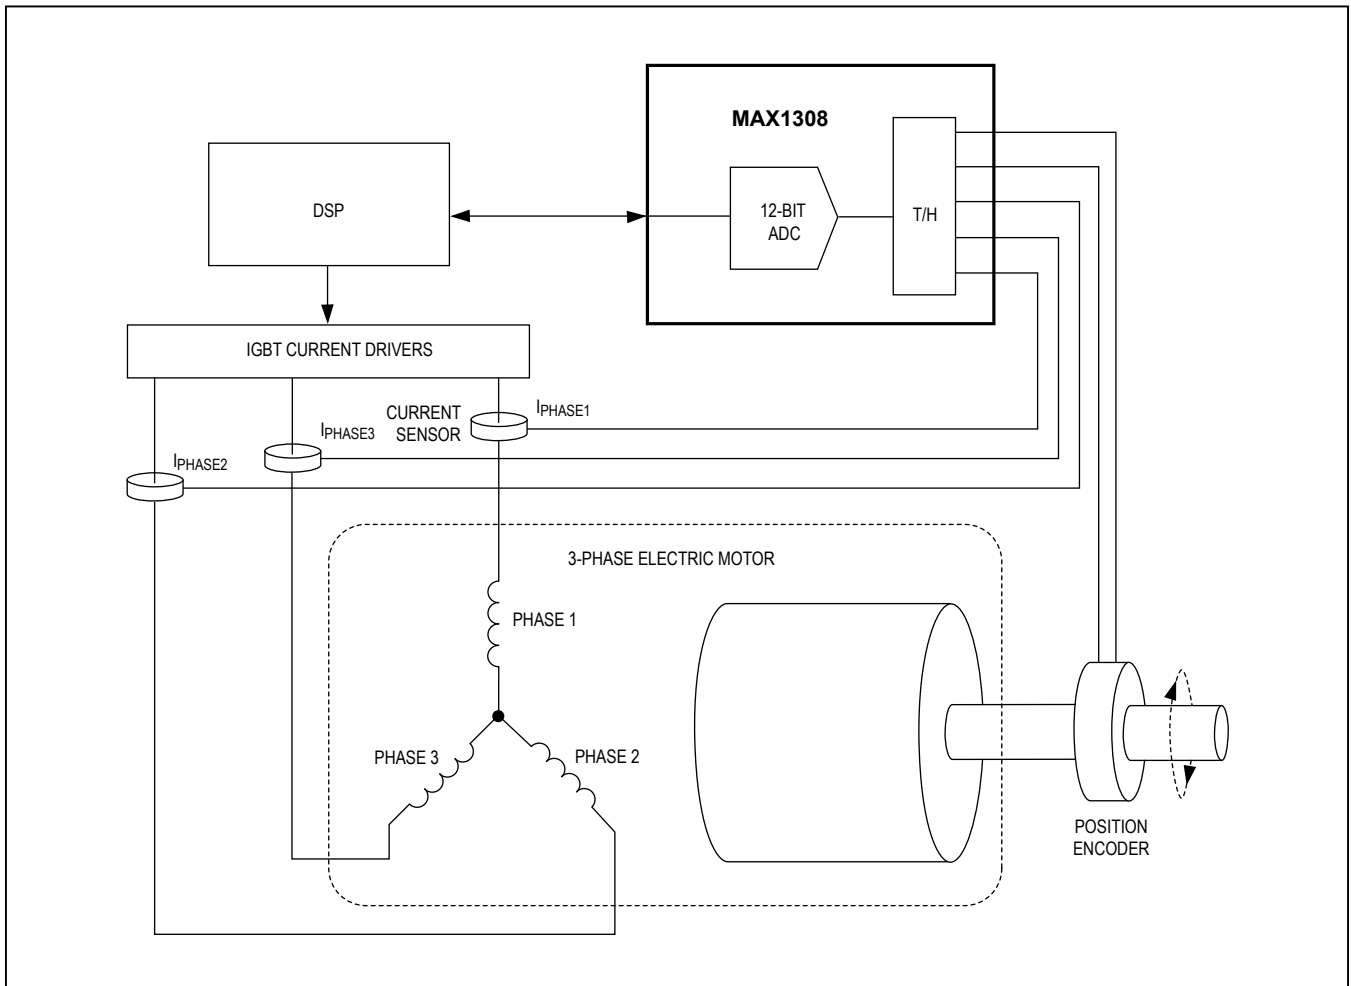


Figure 15. 3-Phase Motor Control

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$  Analog Input Ranges

### 3-Phase Power-Monitoring System

The 8-channel devices are well suited for use in 3-phase power monitoring (Figure 16). The simultaneously sam-

pled eight channels eliminate the need for complicated DSP algorithms that realign sequentially sampled data into a simultaneous sample set.

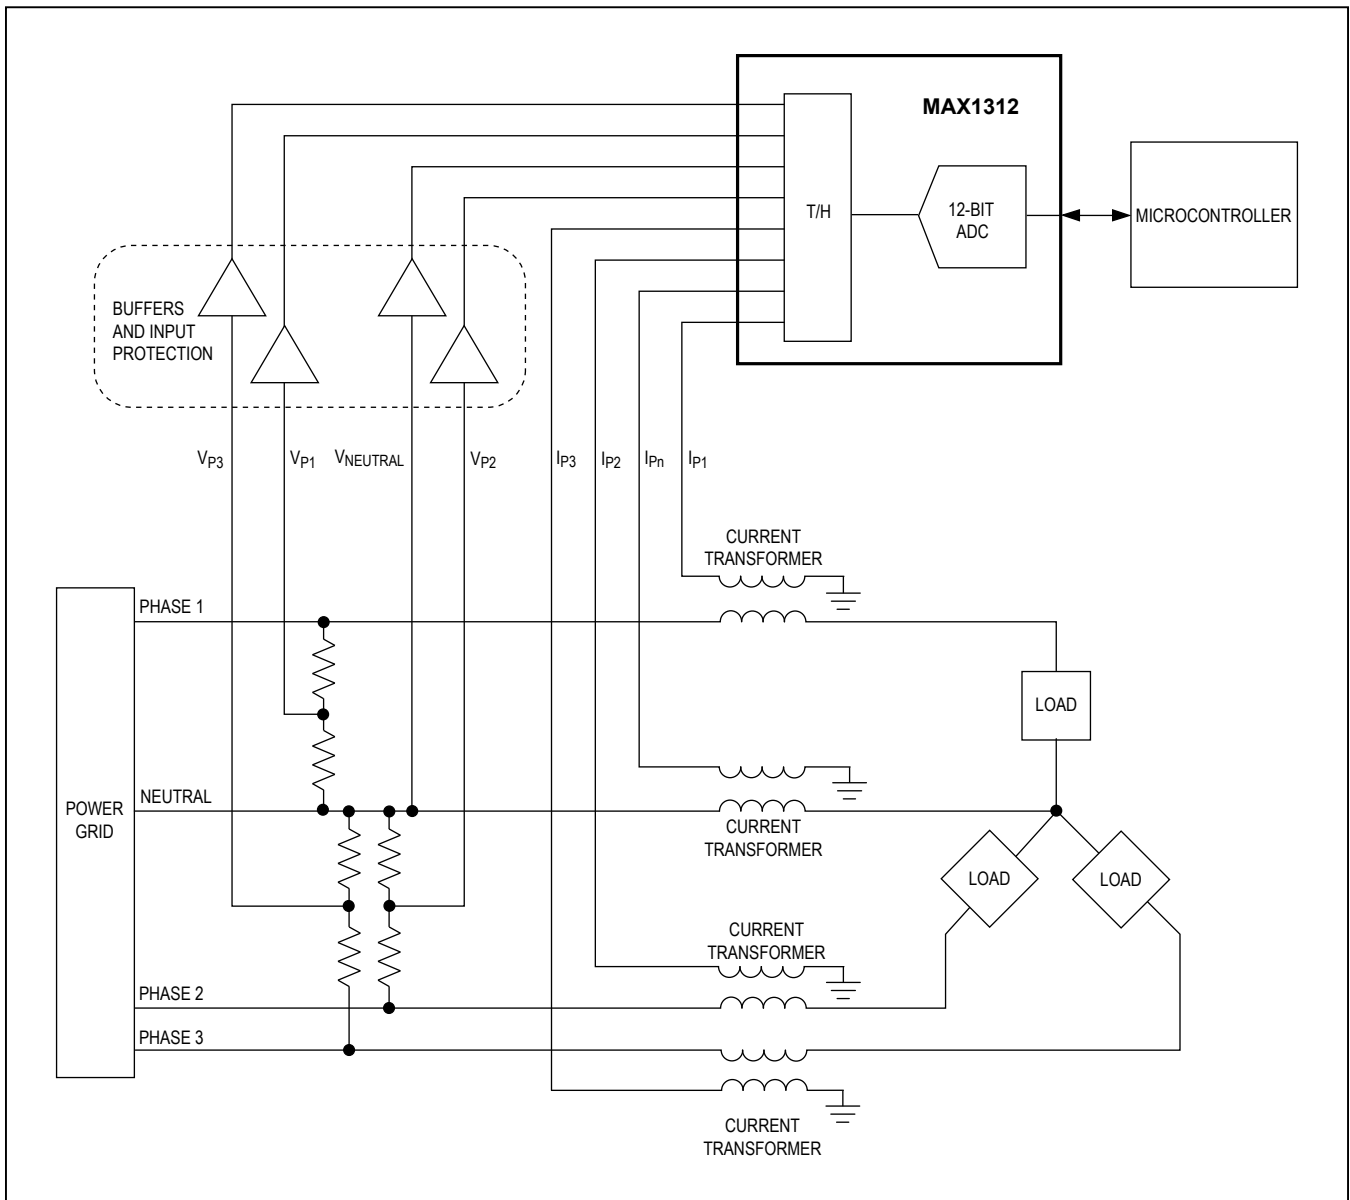


Figure 16. 3-Phase Power Monitoring

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$  Analog Input Ranges

**Layout, Grounding, and Bypassing**

For best performance use PCBs. Board layout must ensure that digital and analog signal lines are separated from each other. Do not run analog and digital lines parallel to one another (especially clock lines), and do not run digital lines underneath the ADC package.

Figure 17 shows the recommended system ground connections. Establish an analog ground point at AGND and a digital ground point at DGND. Connect all analog grounds to the analog ground point. Connect all digital grounds to the digital ground point. For lowest noise operation, make the power-supply ground returns as low impedance and as short as possible. Connect the analog ground point to the digital ground point at one location.

High-frequency noise in the power supplies degrades the ADC's performance. Bypass the analog power plane to the analog ground plane with a  $2.2\mu\text{F}$  capacitor within one inch of the device. Bypass each AVDD to AGND pair of pins with a  $0.1\mu\text{F}$  capacitor as close to the device as possible. AVDD to AGND pairs are pin 1 to pin 2, pin 14 to pin 15, and pin 16 to pin 17. Likewise, bypass the digital power plane to the digital ground plane with a  $2.2\mu\text{F}$  capacitor within one inch of the device. Bypass each DVDD to DGND pair of pins with a  $0.1\mu\text{F}$  capacitor as close to the device as possible. DVDD to DGND pairs are pin 24 to pin 25, and pin 38 to pin 39. If a supply is very noisy use a ferrite bead as a lowpass filter as shown in Figure 17.

**Definitions**

**Integral Nonlinearity (INL)**

INL is the deviation of the values on an actual transfer function from a straight line. For these devices, this straight line is drawn between the endpoints of the transfer function, once offset and gain errors have been nullified.

**Differential Nonlinearity (DNL)**

DNL is the difference between an actual step width and the ideal value of 1 LSB. For these devices, the DNL of each digital output code is measured and the worst-case value is reported in the *Electrical Characteristics* table. A DNL error specification of less than  $\pm 1$  LSB guarantees no missing codes and a monotonic transfer function.

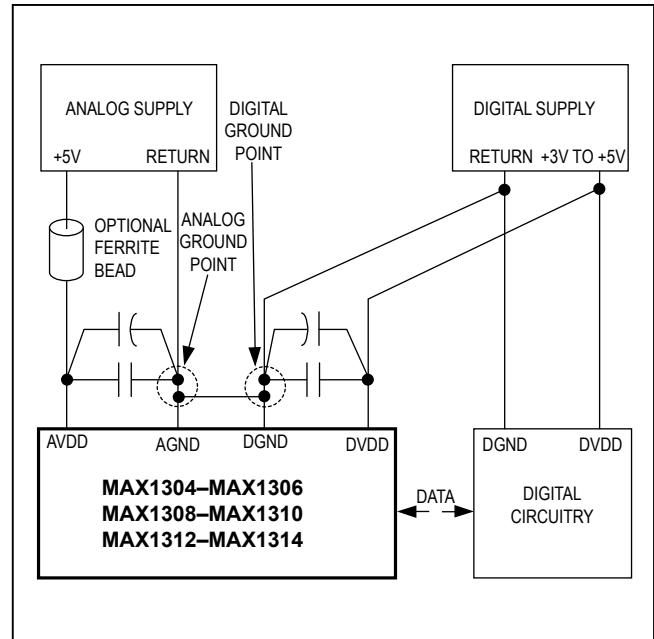


Figure 17. Power-Supply Grounding and Bypassing

**Offset Error**

Offset error is a figure of merit that indicates how well the actual transfer function matches the ideal transfer function at a single point. Typically the point at which offset error is specified is either at or near the zero-scale point of the transfer function or at or near the midscale point of the transfer function.

For the unipolar devices (MAX1304/MAX1305/MAX1306), the ideal zero-scale transition from 0x000 to 0x001 occurs at 1 LSB above AGND (Figure 12, Table 5). Unipolar offset error is the amount of deviation between the measured zero-scale transition point and the ideal zero-scale transition point.

For the bipolar devices (MAX1308/MAX1309/MAX1310/MAX1312/MAX1313/MAX1314), the ideal midscale transition from 0xFFFF to 0x000 occurs at MSV (Figures 14 and 13, Tables 7 and 6). The bipolar offset error is the amount of deviation between the measured midscale transition point and the ideal midscale transition point.

### Gain Error

Gain error is a figure of merit that indicates how well the slope of the actual transfer function matches the slope of the ideal transfer function. For the MAX1304–MAX1306/MAX1308–MAX1310/MAX1312–MAX1314, the gain error is the difference of the measured full-scale and zero-scale transition points minus the difference of the ideal full-scale and zero-scale transition points.

For the unipolar devices (MAX1304/MAX1305/MAX1306), the full-scale transition point is from 0xFFE to 0xFFF and the zero-scale transition point is from 0x000 to 0x001.

For the bipolar devices (MAX1308/MAX1309/MAX1310/MAX1312/MAX1313/MAX1314), the full-scale transition point is from 0x7FE to 0x7FF and the zero-scale transition point is from 0x800 to 0x801.

### Signal-to-Noise Ratio (SNR)

For a waveform perfectly reconstructed from digital samples, the theoretical maximum SNR is the ratio of the full-scale analog input (RMS value) to the RMS quantization error (residual error). The ideal, theoretical minimum analog-to-digital noise is caused by quantization error only and results directly from the ADC's resolution (N bits):

$$\text{SNR}_{\text{dB}[\text{max}]} = 6.02\text{dB} \times N + 1.76\text{dB}$$

In reality, there are other noise sources such as thermal noise, reference noise, and clock jitter.

For these devices, SNR is computed by taking the ratio of the RMS signal to the RMS noise. RMS noise includes all spectral components to the Nyquist frequency excluding the fundamental, the first five harmonics, and the DC offset.

### Signal-to-Noise Plus Distortion (SINAD)

SINAD is computed by taking the ratio of the RMS signal to the RMS noise plus distortion. RMS noise plus distortion includes all spectral components to the Nyquist frequency excluding the fundamental and the DC offset.

$$\text{SINAD}(\text{dB}) = 20 \times \log \left( \frac{\text{SIGNAL}_{\text{RMS}}}{(\text{NOISE} + \text{DISTORTION})_{\text{RMS}}} \right)$$

### Effective Number of Bits (ENOB)

ENOB specifies the dynamic performance of an ADC at a specific input frequency and sampling rate. An ideal ADC's error consists of quantization noise only. ENOB for a full-scale sinusoidal input waveform is computed as:

$$\text{ENOB} = \frac{\text{SINAD} - 1.76}{6.02}$$

### Total Harmonic Distortion (THD)

THD is the ratio of the RMS sum of the first five harmonics to the fundamental itself. This is expressed as:

$$\text{THD} = 20 \times \log \left( \frac{\sqrt{V_2^2 + V_3^2 + V_4^2 + V_5^2 + V_6^2}}{V_1} \right)$$

where  $V_1$  is the fundamental amplitude, and  $V_2$  through  $V_6$  are the amplitudes of the 2nd- through 6th-order harmonics.

### Spurious-Free Dynamic Range (SFDR)

SFDR is the ratio of the RMS amplitude of the fundamental (maximum signal component) to the RMS value of the next largest spurious component, excluding DC offset. SFDR is specified in decibels relative to the carrier (dBc).

### Channel-to-Channel Isolation

Channel-to-channel isolation indicates how well each analog input is isolated from the others. The channel-to-channel isolation for these devices is measured by applying DC to channel 1 through channel 7 while an AC 500kHz, -0.4dBFS sine wave is applied to channel 0. An FFT is taken for channel 0 and channel 1 and the difference (in dB) of the 500kHz magnitudes is reported as the channel-to-channel isolation.

### Aperture Delay

Aperture delay ( $t_{\text{AD}}$ ) is the time delay from the CONVST rising edge to the instant when an actual sample is taken.

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$   
Analog Input Ranges

### Aperture Jitter

Aperture Jitter ( $t_{AJ}$ ) is the sample-to-sample variation in aperture delay.

Jitter is a concern when considering an ADC's dynamic performance, e.g., SNR. To reconstruct an analog input from the ADC digital outputs, it is critical to know the time at which each sample was taken. Typical applications use an accurate sampling clock signal that has low jitter from sampling edge to sampling edge. For a system with a perfect sampling clock signal, with no clock jitter, the SNR performance of an ADC is limited by the ADC's internal aperture jitter as follows:

$$\text{SNR} = 20 \times \log \left( \frac{1}{2 \times \pi \times f_{IN} \times t_{AJ}} \right)$$

where  $f_{IN}$  represents the analog input frequency and  $t_{AJ}$  is the time of the aperture jitter.

### Small-Signal Bandwidth

A small -20dBFS analog input signal is applied to an ADC so that the signal's slew rate does not limit the ADC's performance. The input frequency is then swept up to the point where the amplitude of the digitized conversion result has decreased by -3dB.

### Full-Power Bandwidth

A large, -0.5dBFS analog input signal is applied to an ADC, and the input frequency is swept up to the point where the amplitude of the digitized conversion result has decreased by -3dB. This point is defined as full-power input bandwidth frequency.


### DC Power-Supply Rejection (PSRR)

DC PSRR is defined as the change in the positive full-scale transfer function point caused by a  $\pm 5\%$  variation in the analog power-supply voltage (AVDD).

MAX1304–MAX1306  
 MAX1308–MAX1310  
 MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
 Sampling ADCs with  $\pm 10\text{V}$ ,  $\pm 5\text{V}$ , and 0 to  $+5\text{V}$   
 Analog Input Ranges

## Pin Configurations

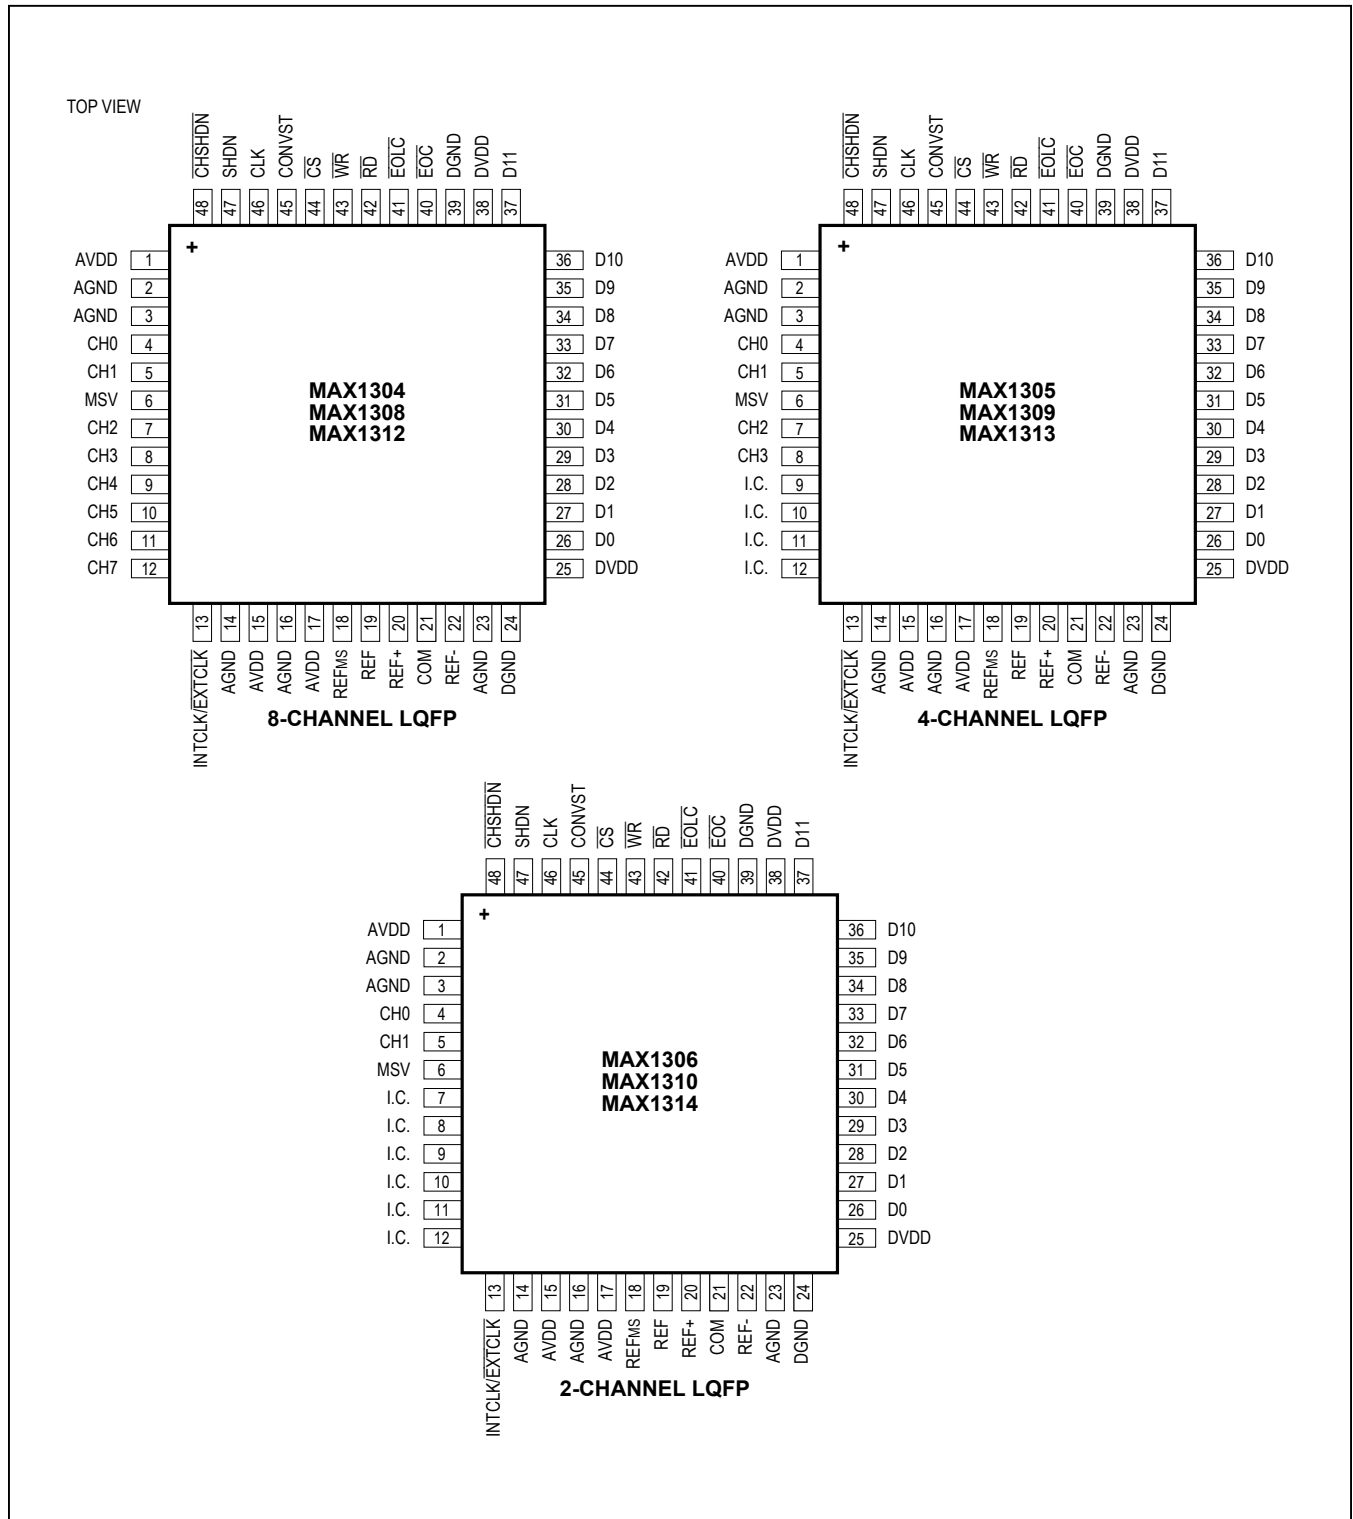

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

### Chip Information

PROCESS: 0.6µm BiCMOS

8-/4-/2-Channel, 12-Bit, Simultaneous-  
Sampling ADCs with ±10V, ±5V, and 0 to +5V  
Analog Input Ranges

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 48 LQFP      | C48+6        | <a href="#">21-0054</a> | <a href="#">90-0093</a> |

MAX1304–MAX1306  
MAX1308–MAX1310  
MAX1312–MAX1314

8-/4-/2-Channel, 12-Bit, Simultaneous-  
Sampling ADCs with  $\pm 10V$ ,  $\pm 5V$ , and 0 to +5V  
Analog Input Ranges

## Revision History



| REVISION NUMBER | REVISION DATE | DESCRIPTION  | PAGES CHANGED                   |
|-----------------|---------------|--|---------------------------------|
| 4               | 8/09          | Added automotive part numbers  | 1                               |
| 5               | 3/11          | Revised <i>Ordering Information</i> , <i>Absolute Maximum Ratings</i> , <i>Electrical Characteristics</i> , <i>Typical Operating Characteristics</i> , <i>Pin Description</i> , Tables 4, 6, and 7, Figures 2, 3, and 7, <i>DC Power-Supply Rejection (PSRR)</i> section, <i>Pin Configurations</i> , and <i>Package Information</i> . | 1–18, 20, 26, 28, 29, 32, 34–36 |
| 6               | 2/15          | Remove automotive reference from data sheet  | 1                               |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View MAX1304ECM+T on WIN SOURCE](#)
-  [Maxim Integrated Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management