THE DATASHEET OF

AK669/2-18-BLACK

www.win-source.net 0086-755-83957316

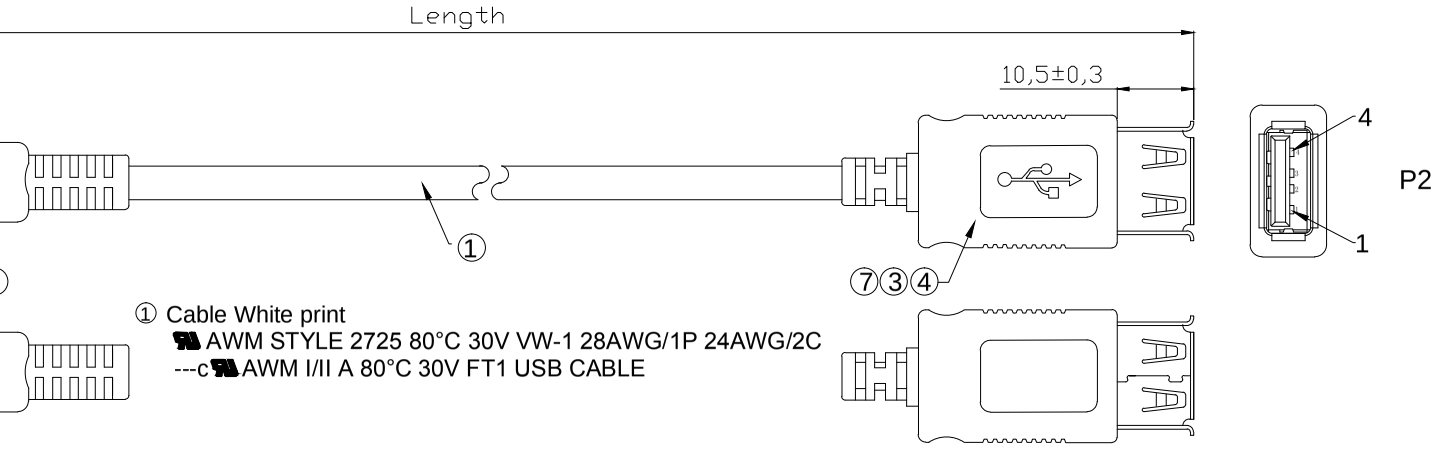

① Cable White print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
---c AWM I/II A 80°C 30V FT1 USB CABLE

Electrical test:
1. 100% short, open, miss wire test
2. Conduct resistance: 2 Ohm max.
3. Insulator resistance: 5Mohm min.
4. Dielectric test: DC 300V

	WSW P/N	Jacket color	Length(mm)
③	AK669/2-03-BLACK	Black	300±15
②	AK669/2-05-BLACK	Black	500±15
③	AK669/2-10-BLACK	Black	1000±30
③	AK669/2-15-BLACK	Black	1500±40

WSW P/N	Jacket color	Length(mm)
AK669/2-18-BLACK	Black	1800±50
AK669/2-30-BLACK	Black	3000±50
AK669/2-50-BLACK	Black	5000±50

PIN ASSIGNMENT

P1		P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Drain+Braid	Shell

NO.	NAME.	Q'TY	SPECIFICATION
⑦	Inner Jacket	NA	LD-PE
⑥	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
⑤	TIE	1	Black
④	Out Jacket	NA	Black PVC-45P
③	CONN	1	USB A Female Shell:Nickel Pin:G/F Insulator color:White, short type
②	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
①	Cable	1	USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black

					Date	Name	
				Drawn	18.11.2014	Joanna	
③	Add new length version	05.05.2019	Xavier	Approved	20.01.2017	Amy	
②	Add new length version	20.01.2017	Amy				
①	Update the drawing	09.05.2016	Amy				
⓪	Drawn	18.11.2014	Joanna				
Id.	Modification	Date	Name				

Free
ERANCE
TOL
TOL

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AK669/2-xx-BLACK

Drawing-No.
ASS 7241 CA

rev03

Replace

Sheet 1/1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View AK669/2-18-BLACK on WIN SOURCE
- Assmann WSW Components Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management