



**THE DATASHEET OF
DELTA7B/X/SMAM/S/S/11**





Delta 7B

GSM/GPRS Hinged Antenna

Key Features

- Hinged mount
- Quad band GSM/GPRS frequencies
- Omni-directional



General Description

The Delta 7B is a quad band GSM/GPRS $\frac{1}{4}$ wave, omni-directional antenna with a peak gain of 2dBi. The hinged joint allows flexibility with positioning through 0, 45 & 90 degrees along with rotational alignment.

Common IoT applications include: car park / utilities metering, wireless key entry, security systems, remote monitoring and many other GSM / GPRS based applications.

The Delta 7B is supplied, as standard, with an SMA male connector.

Additional Considerations

- Flexible positioning allows for signal optimisation
- Meets all EU compliance criteria for electronic goods





Delta 7B

GSM/GPRS Hinged Antenna



Electrical Specifications

Operating Temperature range:	-20 - 65 °C
Storage Temperature range:	-20 - 75 °C
Impedance:	50 Ohm
Radiating Element:	¼ wave omni-directional dipole
VSWR:	<2.0:1
Operating Frequencies:	850, 900, 1800, 1900MHz
Polarization:	Vertical
Radiating Element:	¼ wave omni directional dipole

Mechanical Specifications

Dimensions:	110 x 10.2mm Ø
Connector:	SMA Male
Cable:	RG178
Mounting Method:	Direct Connect

Return Loss

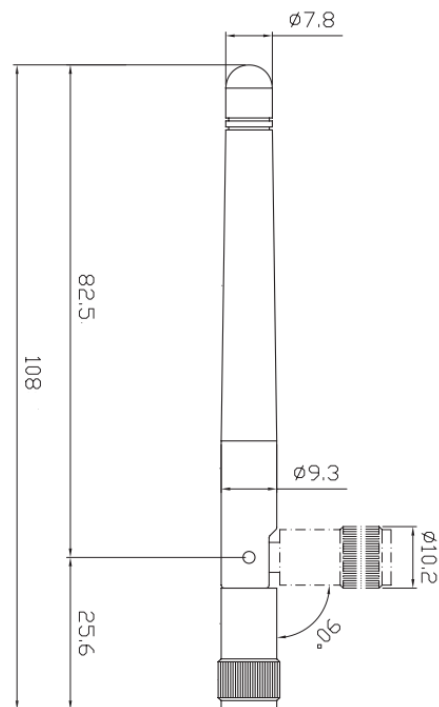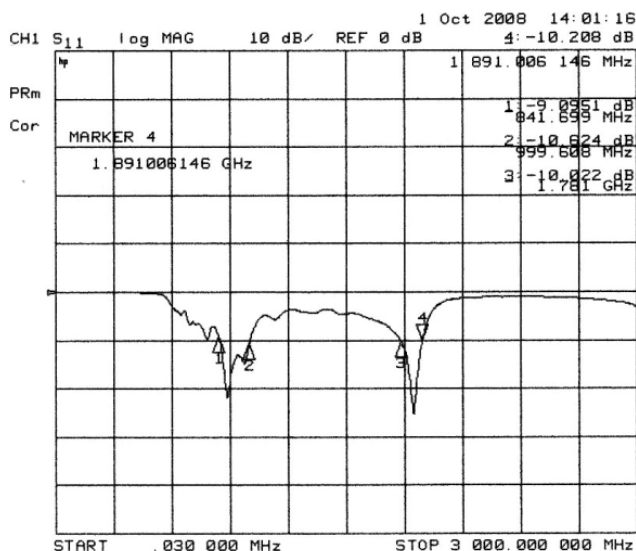




Delta 7B


GSM/GPRS Hinged Antenna

Radiation Plots


862 MHz

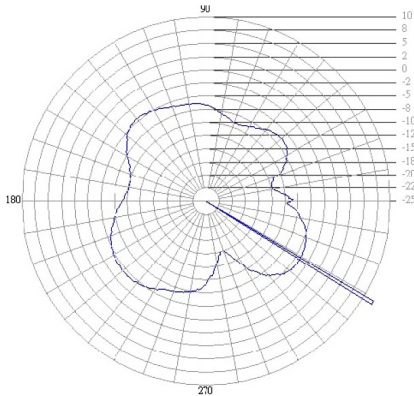


925 MHz

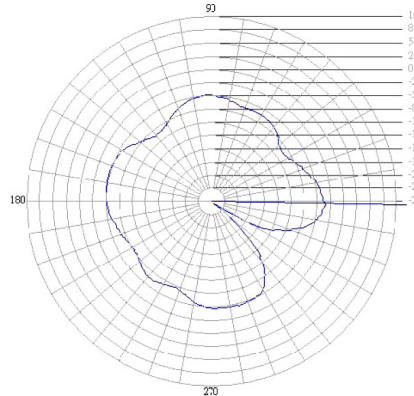


1795 MHz

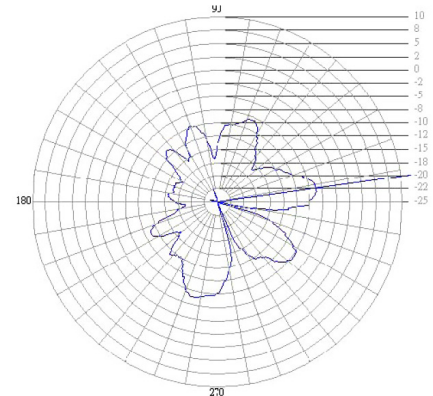

1897 MHz

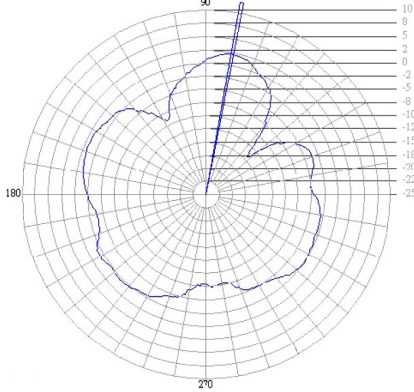

1920 MHz

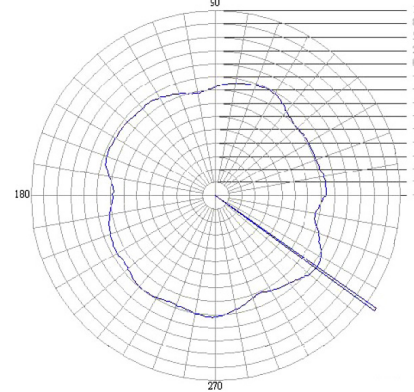

Ordering Details

Part Number

Description

DELTA7B/x/SMAM/S/S/11

GSM/GPRS Hinged Antenna with SMA Male Connector

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View DELTA7B/X/SMAM/S/S/11 on WIN SOURCE](#)
- ⊖ [Siretta Ltd Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management