THE DATASHEET OF

LTC2847IUHF#TRPBF

www.win-source.net 0086-755-83957316

Software-Selectable Multiprotocol Transceiver with Termination and 3.3V Digital Interface

FEATURES

- **Software-Selectable Transceiver Supports: RS232, RS449, EIA530, EIA530-A, V.35, V.36, X.21**
- **Operates from Single 5V Supply**
- **Separate Supply Pin for Digital Interface Works down to 3V**
- On-Chip Cable Termination
- Complete DTE or DCE Port with LTC2845
- Available in 38-Pin 5mm × 7mm QFN Package

APPLICATIONS

- Data Networking
- CSU and DSU
- Data Routers

DESCRIPTION

The LTC®2847 is a 3-driver/3-receiver multiprotocol transceiver with on-chip cable termination. When combined with the LTC2845, this chip set forms a complete software-selectable DTE or DCE interface port that supports the RS232, RS449, EIA530, EIA530-A, V.35, V.36 and X.21 protocols. All necessary cable termination is provided inside the LTC2847.

The V_{CC} supplies the drivers, the receivers and an internal charge pump that requires only five space-saving surface mounted capacitors. The V_{IN} supply drives the digital interface circuitry including the receiver output drivers. It can be tied to V_{CC} or be powered off a lower supply (down to 3V) to interface with low voltage ASICs. The LTC2847 is available in a 0.8mm tall, 5mm × 7mm QFN package.

, LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

Complete DTE or DCE Multiprotocol Serial Interface with DB-25 Connector

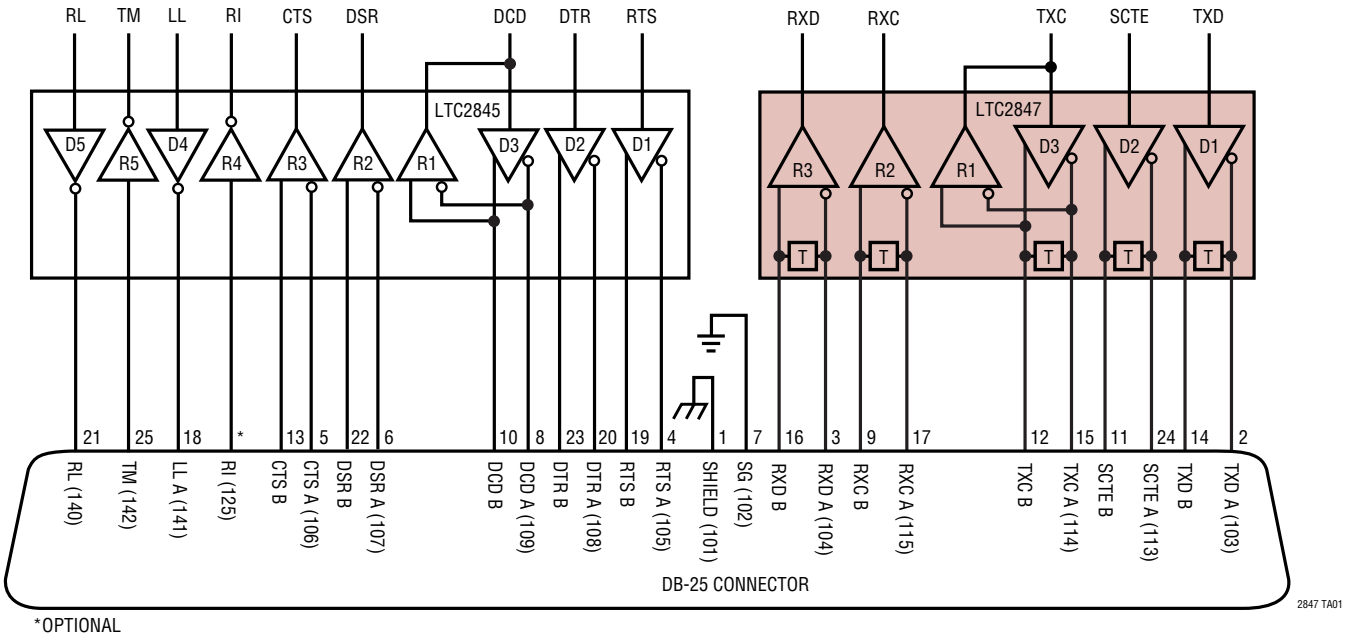

*OPTIONAL

ABSOLUTE MAXIMUM RATINGS

(Note 1)

V_{CC} Voltage ..... –0.3V to 6.5V
V_{IN} Voltage ..... –0.3V to 6.5V
Input Voltage
  Transmitters ..... –0.3V to (V_{CC} + 0.3V)
  Receivers ..... –18V to 18V
  Logic Pins ..... –0.3V to (V_{CC} + 0.3V)
Output Voltage
  Transmitters ..... (V_{EE} – 0.3V) to (V_{DD} + 0.3V)
  Receivers ..... –0.3V to (V_{IN} + 0.3V)
  V_{EE} ..... –10V to 0.3V
  V_{DD} ..... –0.3V to 10V
Short-Circuit Duration
  Transmitter Output ..... Indefinite
  Receiver Output ..... Indefinite
  V_{EE} ..... 30 sec
Operating Temperature Range
  LTC2847C ..... 0°C to 70°C
  LTC2847I ..... –40°C to 85°C
Storage Temperature Range ..... –65°C to 150°C
Lead Temperature (Soldering, 10 sec) ..... 300°C

PACKAGE/ORDER INFORMATION

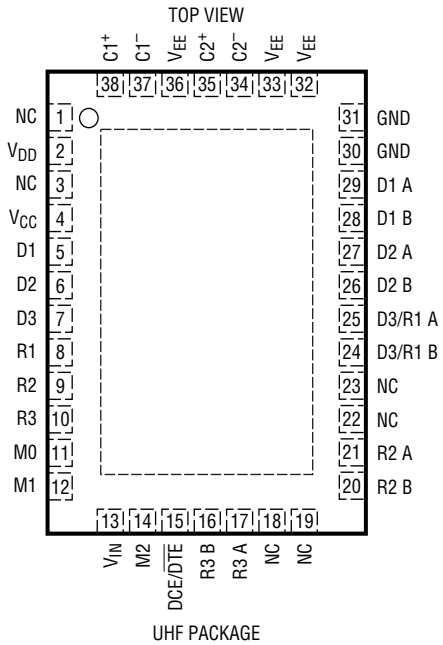

UHF PACKAGE
38-LEAD (7mm × 5mm) PLASTIC QFN
UNDERSIDE METAL INTERNALLY CONNECTED TO V_{EE}
(PCB CONNECTION OPTIONAL)
T_{JMAX} = 125°C, θ_{JA} = 34°C/W

ORDER PART NUMBER
LTC2847CUHF LTC2847IUHF
UHF PART MARKING
2847 2847I

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_{CC} = 5V, V_{IN} = 3.3V, unless otherwise noted (Notes 2, 3)

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Supplies							
I_{CC}	V_{CC} Supply Current (DCE Mode, All Digital Pins = GND or V_{IN})	RS530, RS530-A, X.21 Modes, No Load			14		mA
		RS530, RS530-A, X.21 Modes, Full Load	●		100	130	mA
		V.35 Mode	●		126	170	mA
		V.28 Mode, No Load			20		mA
		V.28 Mode, Full Load	●		35	75	mA
		No-Cable Mode	●		300	900	µA
I_{VIN}	V_{IN} Supply Current (DCE Mode, All Digital Pins = GND or V_{IN})	All Modes Except No-Cable Mode			405		µA
P_D	Internal Power Dissipation (DCE Mode)	RS530, RS530-A, X.21 Modes, Full Load			410		mW
		V.35 Mode, Full Load			625		mW
		V.28 Mode, Full Load			150		mW
V^+	Positive Charge Pump Output Voltage	V.11 or V.28 Mode, No Load	●	8	9.3		V
		V.35 Mode	●	7	8.0		V
		V.28 Mode, with Load	●	8	8.7		V
		V.28 Mode, with Load, I_{DD} = 10mA			6.5		V

ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_{CC} = 5V, V_{IN} = 3.3V, unless otherwise noted (Notes 2, 3)

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V^-	Negative Charge Pump Output Voltage	V.28 Mode, No Load			–9.6		V
		V.28 Mode, Full Load	●	–7.5	–8.5		V
		V.35 Mode	●	–5.5	–6.5		V
		RS530, RS530-A, X.21 Modes, Full Load	●	–4.5	–6.0		V
f_{OSC}	Charge Pump Oscillator Frequency				500		kHz
t_r	Charge Pump Rise Time	No-Cable Mode/Power-Off to Normal Operation			2		ms
Logic Inputs and Outputs							
V_{IH}	Logic Input High Voltage	D1, D2, D3, M0, M1, M2, DCE/$\overline{DTE}$	●	2.0			V
V_{IL}	Logic Input Low Voltage	D1, D2, D3, M0, M1, M2, DCE/$\overline{DTE}$	●			0.8	V
I_{IN}	Logic Input Current	D1, D2, D3	●			±10	µA
		M0, M1, M2, DCE/$\overline{DTE}$ = GND	●	–30	–75	–120	µA
		M0, M1, M2, DCE/$\overline{DTE}$ = V_{IN}	●			±10	µA
V_{OH}	Output High Voltage	I_O = –3mA	●	2.7	3		V
V_{OL}	Output Low Voltage	I_O = 1.6mA	●		0.2	0.4	V
I_{OSR}	Output Short-Circuit Current	0V ≤ V_O ≤ V_{IN}	●			±50	mA
I_{OZR}	Three-State Output Current	M0 = M1 = M2 = V_{IN}, V_O = GND	●	–30	–85	–160	µA
		M0 = M1 = M2 = V_{IN}, V_O = V_{IN}	●			±10	µA
V.11 Driver							
V_{ODO}	Open Circuit Differential Output Voltage	R_L = 1.95k (Figure 1)	●			±5	V
V_{ODL}	Loaded Differential Output Voltage	R_L = 50Ω (Figure 1)		0.5V_{ODO}		0.67V_{ODO}	V
		R_L = 50Ω (Figure 1)	●	±2			V
ΔV_{OD}	Change in Magnitude of Differential Output Voltage	R_L = 50Ω (Figure 1)	●			0.2	V
V_{OC}	Common Mode Output Voltage	R_L = 50Ω (Figure 1)	●			3	V
ΔV_{OC}	Change in Magnitude of Common Mode Output Voltage	R_L = 50Ω (Figure 1)	●			0.2	V
I_{SS}	Short-Circuit Current	V_{OUT} = GND				±150	mA
I_{OZ}	Output Leakage Current	$\lvert V_A \rvert$ and $\lvert V_B \rvert$ ≤ 0.25V, Power Off or No-Cable Mode or Driver Disabled	●		±1	±100	µA
t_r, t_f	Rise or Fall Time	(Figures 2, 13)	●	2	15	25	ns
t_{PLH}	Input to Output Rising	(Figures 2, 13)	●	15	40	65	ns
t_{PHL}	Input to Output Falling	(Figures 2, 13)	●	15	40	65	ns
Δt	Input to Output Difference, $\lvert t_{PLH} - t_{PHL} \rvert$	(Figures 2, 13)	●	0	3	12	ns
t_{SKEW}	Output to Output Skew	(Figures 2, 13)			3		ns

ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_{CC} = 5V, V_{IN} = 3.3V, unless otherwise noted (Notes 2, 3)

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V.11 Receiver							
V_{TH}	Input Threshold Voltage	$-7V \le V_{CM} \le 7V$	●	–0.2		0.2	V
ΔV_{TH}	Input Hysteresis	$-7V \le V_{CM} \le 7V$	●		15	40	mV
R_{IN}	Input Impedance	$-7V \le V_{CM} \le 7V$ (Figure 3)	●	100	103		Ω
t_r, t_f	Rise or Fall Time	C_L = 50pF (Figures 4, 14)			15		ns
t_{PLH}	Input to Output Rising	C_L = 50pF (Figures 4, 14)	●		50	90	ns
t_{PHL}	Input to Output Falling	C_L = 50pF (Figures 4, 14)	●		50	90	ns
Δt	Input to Output Difference, $\lvert t_{PLH} - t_{PHL} \rvert$	C_L = 50pF (Figures 4, 14)	●	0	4	25	ns
V.35 Driver							
V_{OD}	Differential Output Voltage	Open Circuit, R_L = 1.95k (Figure 5) With Load, $-4V \le V_{CM} \le 4V$ (Figure 6)	●	 ±0.44	 ±0.55	±1.2 ±0.66	V V
V_{OA}, V_{OB}	Single-Ended Output Voltage	Open Circuit, R_L = 1.95k (Figure 5)	●			±1.2	V
V_{OC}	Transmitter Output Offset	R_L = 50Ω (Figure 5)	●			±0.6	V
I_{OH}	Transmitter Output High Current	V_A, V_B = 0V	●	–9	–11	–13	mA
I_{OL}	Transmitter Output Low Current	V_A, V_B = 0V	●	9	11	13	mA
I_{OZ}	Transmitter Output Leakage Current	$\lvert V_A \rvert$ and $\lvert V_B \rvert \le 0.25V$	●		±1	±100	µA
R_{OD}	Transmitter Differential Mode Impedance		●	50	100	150	Ω
R_{OC}	Transmitter Common Mode Impedance	$-2V \le V_{CM} \le 2V$ (Figure 7)		135	150	165	Ω
t_r, t_f	Rise or Fall Time	(Figures 8, 13)			5		ns
t_{PLH}	Input to Output	(Figures 8, 13)	●	15	35	65	ns
t_{PHL}	Input to Output	(Figures 8, 13)	●	15	35	65	ns
Δt	Input to Output Difference, $\lvert t_{PLH} - t_{PHL} \rvert$	(Figures 8, 13)	●		0	16	ns
t_{SKEW}	Output to Output Skew	(Figures 8, 13)			4		ns
V.35 Receiver							
V_{TH}	Differential Receiver Input Threshold Voltage	$-2V \le V_{CM} \le 2V$ (Figure 9)	●	–0.2		0.2	V
ΔV_{TH}	Receiver Input Hysteresis	$-2V \le V_{CM} \le 2V$ (Figure 9)	●		15	40	mV
R_{ID}	Receiver Differential Mode Impedance	$-2V \le V_{CM} \le 2V$	●	90	103	110	Ω
R_{IC}	Receiver Common Mode Impedance	$-2V \le V_{CM} \le 2V$ (Figure 10)		135	150	165	Ω
t_r, t_f	Rise or Fall Time	C_L = 50pF (Figures 4, 14)			15		ns
t_{PLH}	Input to Output	C_L = 50pF (Figures 4, 14)	●		50	90	ns
t_{PHL}	Input to Output	C_L = 50pF (Figures 4, 14)	●		50	90	ns
Δt	Input to Output Difference, $\lvert t_{PLH} - t_{PHL} \rvert$	C_L = 50pF (Figures 4, 14)	●	0	4	25	ns
V.28 Driver							
V_O	Output Voltage	Open Circuit R_L = 3k (Figure 11)	● ●	 ±5	 ±8.5	±10	V V
I_{SS}	Short-Circuit Current	V_{OUT} = GND	●			±150	mA
R_{OZ}	Power-Off Resistance	$-2V < V_O < 2V$, Power Off or No-Cable Mode	●	300			Ω
SR	Slew Rate	R_L = 7k, C_L = 0 (Figures 11, 15)	●	4		30	V/µs
t_{PLH}	Input to Output	R_L = 3k, C_L = 2500pF (Figures 11, 15)	●		1.5	2.5	µs
t_{PHL}	Input to Output	R_L = 3k, C_L = 2500pF (Figures 11, 15)	●		1.5	2.5	µs

ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_{CC} = 5V, V_{IN} = 3.3V, unless otherwise noted (Notes 2, 3)

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V.28 Receiver							
V_{THL}	Input Low Threshold Voltage	(Figure 12)	●			0.8	V
V_{TLH}	Input High Threshold Voltage	(Figure 12)	●	2			V
ΔV_{TH}	Receiver Input Hysteresis	(Figure 12)	●	0	0.05	0.3	V
R_{IN}	Receiver Input Impedance	$-15V \le V_A \le 15V$	●	3	5	7	kΩ
t_r, t_f	Rise or Fall Time	C_L = 50pF (Figures 12, 16)			15		ns
t_{PLH}	Input to Output	C_L = 50pF (Figures 12, 16)	●		60	300	ns
t_{PHL}	Input to Output	C_L = 50pF (Figures 12, 16)	●		160	300	ns

Note 1: Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

Note 2: All currents into device pins are positive; all currents out of device are negative. All voltages are referenced to device ground unless otherwise specified.

Note 3: All typicals are given for V_{CC} = 5V, V_{IN} = 3.3V, C_{VCC} = C_{VIN} = 10µF, C_{VDD} = 1µF, C_{VEE} = 3.3µF and T_A = 25°C.

TYPICAL PERFORMANCE CHARACTERISTICS

V.11 Mode I_{CC} vs Data Rate

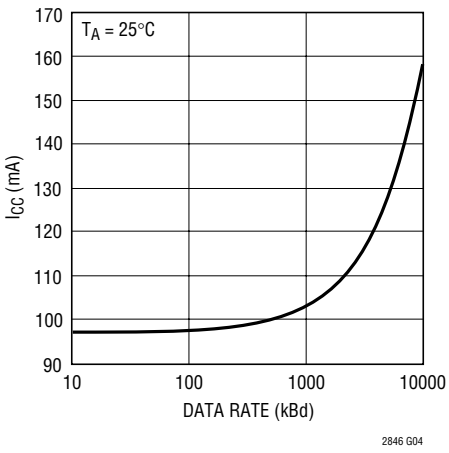

V.35 Mode I_{CC} vs Data Rate

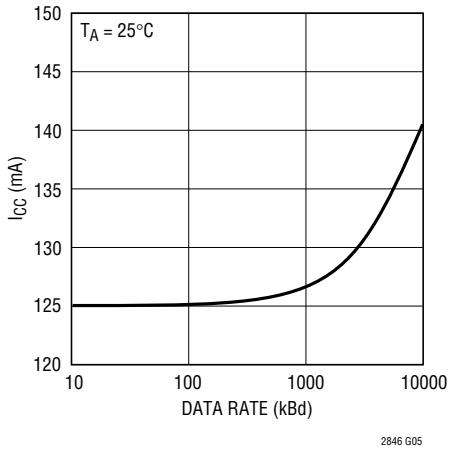

V.28 Mode I_{CC} vs Data Rate

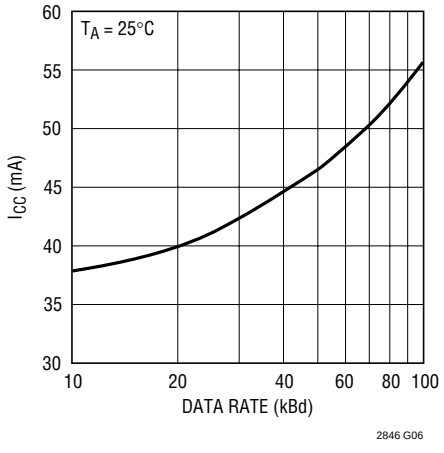

V.11 Mode I_{CC} vs Temperature

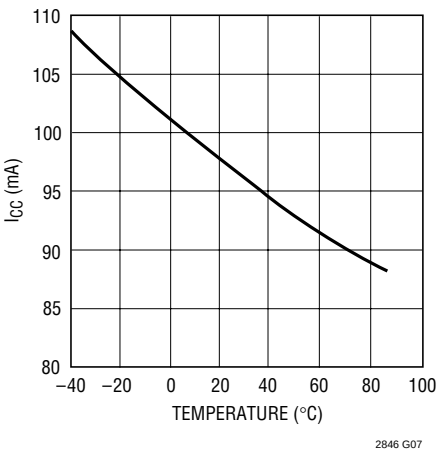

V.35 Mode I_{CC} vs Temperature

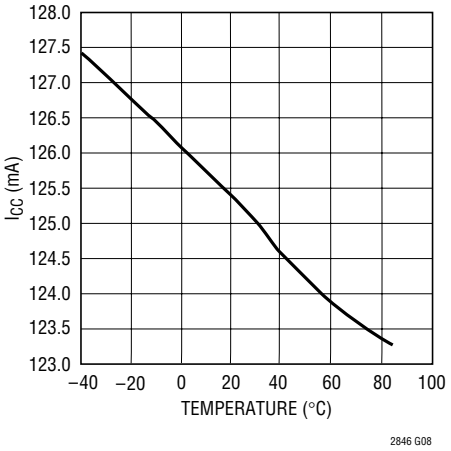

V.28 Mode I_{CC} vs Temperature

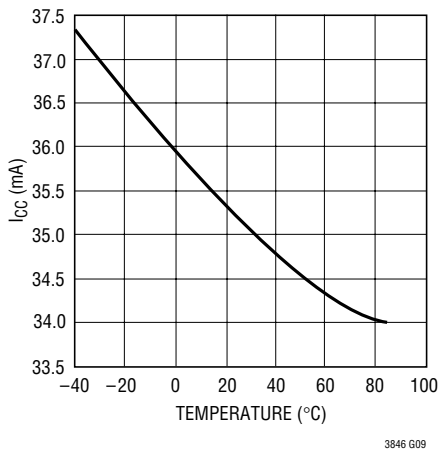

PIN FUNCTIONS

NC (Pins 1,3,18,19,22,23): No Connect.

V_{DD} (Pin 2): Generated Positive Supply Voltage for V.28. Connect a 1µF capacitor to ground.

V_{CC} (Pin 4): Input Supply Pin. Input supply to charge pump and transceiver. 4.75V ≤ V_{CC} ≤ 5.25V. Connect a 1µF capacitor to GND.

D1 (Pin 5): TTL Level Driver 1 Input.

D2 (Pin 6): TTL Level Driver 2 Input.

D3 (Pin 7): TTL Level Driver 3 Input.

R1 (Pin 8): CMOS Level Receiver 1 Output with Pull-Up to V_{IN} when Three-Stated.

R2 (Pin 9): CMOS Level Receiver 2 Output with Pull-Up to V_{IN} when Three-Stated.

R3 (Pin 10): CMOS Level Receiver 3 Output with Pull-Up to V_{IN} when Three-Stated.

M0 (Pin 11): TTL Level Mode Select Input 0 with Pull-Up to V_{IN}. See Table 1.

M1 (Pin 12): TTL Level Mode Select Input 1 with Pull-Up to V_{IN}. See Table 1.

V_{IN} (Pin 13): Input Supply Pin. Input supply to digital interface including receiver output drivers. 3V ≤ V_{IN} ≤ 5.25V. Connect to V_{CC} (Pin 4) or to separate supply for lower receiver output swing. Connect a 1µF capacitor to GND.

M2 (Pin 14): TTL Level Mode Select Input 2 with Pull-Up to V_{IN}. See Table 1.

DCE/$\overline{\text{DTE}}$ (Pin 15): TTL Level Mode Select Input with Pull-Up to V_{IN}. See Table 1.

R3 B (Pin 16): Receiver 3 Noninverting Input.

R3 A (Pin 17): Receiver 3 Inverting Input.

R2 B (Pin 20): Receiver 2 Noninverting Input.

R2 A (Pin 21): Receiver 2 Inverting Input.

D3/R1 B (Pin 24): Receiver 1 Noninverting Input and Driver 3 Noninverting Output.

D3/R1 A (Pin 25): Receiver 1 Inverting Input and Driver 3 Inverting Output.

D2 B (Pin 26): Driver 2 Noninverting Output.

D2 A (Pin 27): Driver 2 Inverting Output.

D1 B (Pin 28): Driver 1 Noninverting Output.

D1 A (Pin 29): Driver 1 Inverting Output.

GND (Pins 30,31): Transceiver Ground.

V_{EE} (Pins 32,33,36): Generated Negative Supply Voltage. Connect a 3.3µF capacitor to GND. Exposed pad can also be connected to V_{EE}.

$C2^-$ (Pin 34): Capacitor C2 Negative Terminal. Connect a 1µF capacitor between $C2^+$ and $C2^-$.

$C2^+$ (Pin 35): Capacitor C2 Positive Terminal. Connect a 1µF capacitor between $C2^+$ and $C2^-$.

$C1^-$ (Pin 37): Capacitor C1 Negative Terminal. Connect a 1µF capacitor between $C1^+$ and $C1^-$.

$C1^+$ (Pin 38): Capacitor C1 Positive Terminal. Connect a 1µF capacitor between $C1^+$ and $C1^-$.

BLOCK DIAGRAM

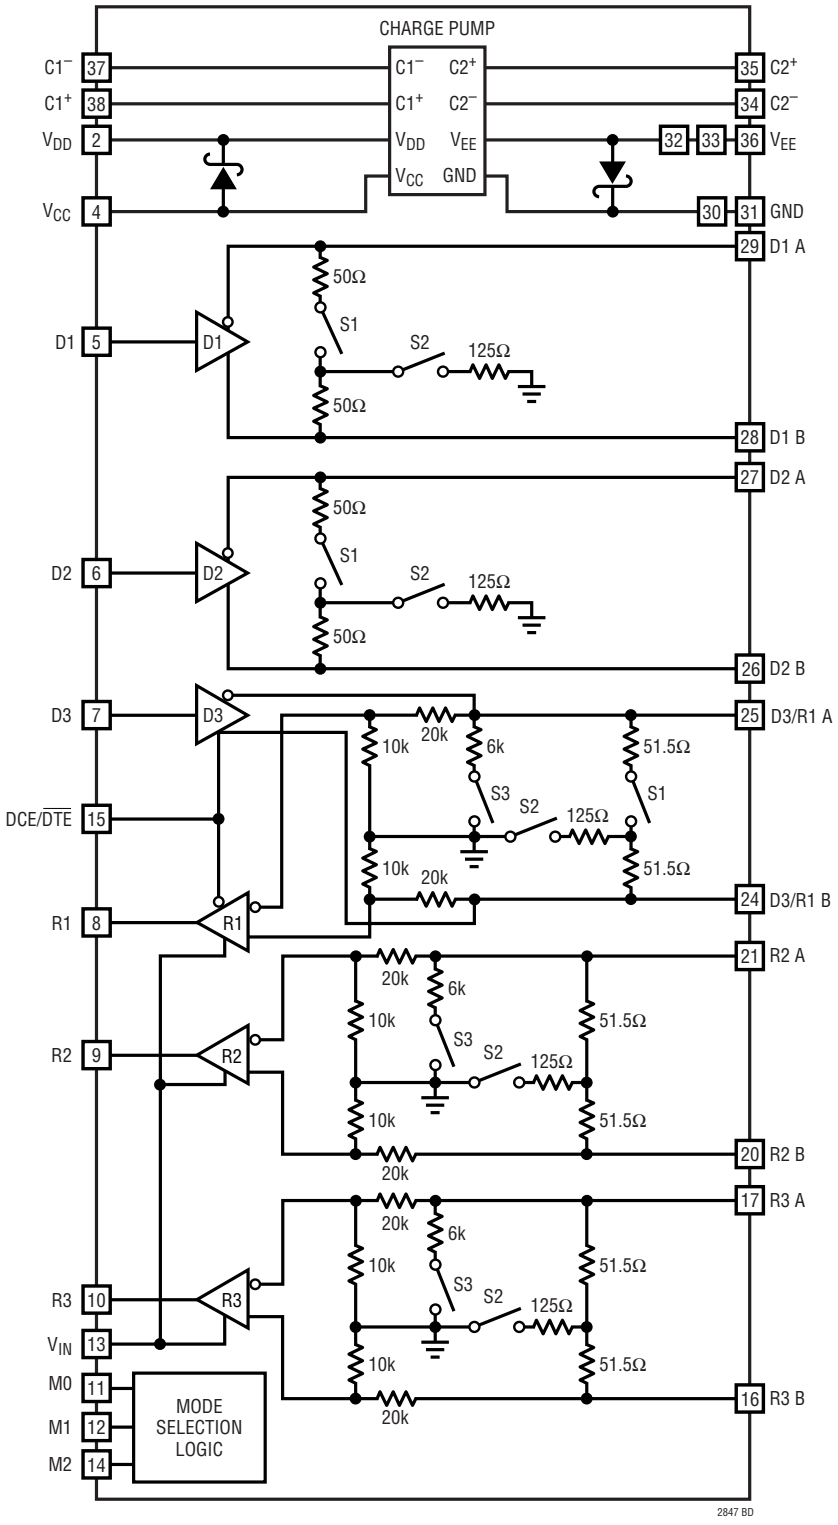

TEST CIRCUITS



Figure 1. V.11 Driver DC Test Circuit



Figure 2. V.11 Driver AC Test Circuit

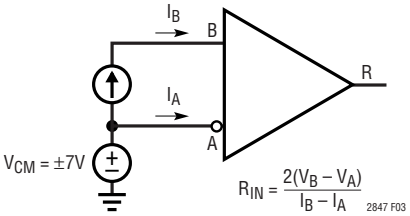

Figure 3. Input Impedance Test Circuit



Figure 4. V.11, V.35 Receiver AC Test Circuit

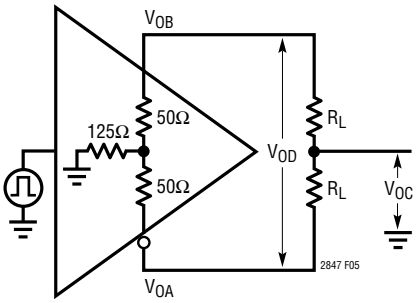

Figure 5. V.35 Driver Open-Circuit Test

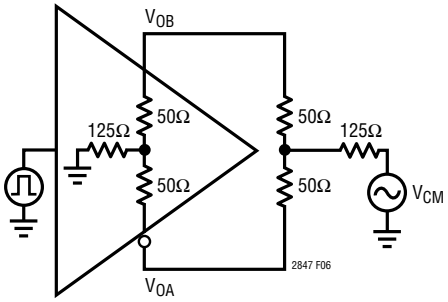

Figure 6. V.35 Driver Test Circuit

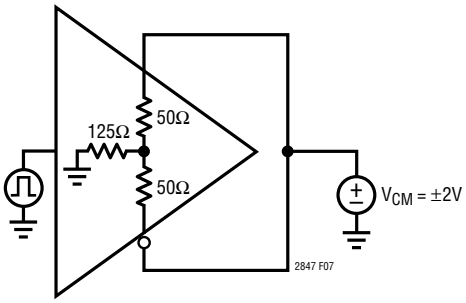

Figure 7. V.35 Driver Common Mode Impedance Test Circuit

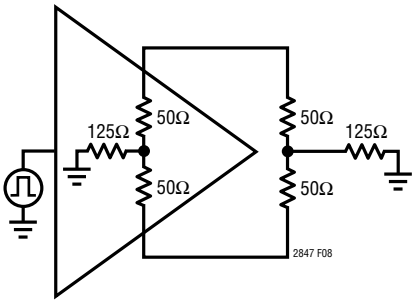

Figure 8. V.35 Driver AC Test Circuit



Figure 9. V.35 Receiver DC Test Circuit

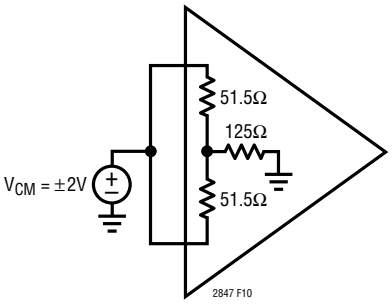

Figure 10. Receiver Common Mode Impedance Test Circuit



Figure 11. V.28 Driver Test Circuit



Figure 12. V.28 Receiver Test Circuit

MODE SELECTION

Table 1

Mode Name	M2	M1	M0	DCE/$\overline{\text{DTE}}$	D1,2 (Note 1)	D3 (Note 1)	D1		D2		D3		R1 (Note 2)		R2 (Note 2)		R3 (Note 2)		R1 (Note 3)	R2,R3 (Note 3)	V_{DD} (Note 4)	V_{EE} (Note 5)
							A	B	A	B	A	B	A	B	A	B	A	B				
Not Used (Default V.11)	0	0	0	0	TTL	X	V.11	V.11	V.11	V.11	Z	Z	V.11	V.11	V.11	V.11	V.11	V.11	CMOS	CMOS	9.3V	–6V
RS530A	0	0	1	0	TTL	X	V.11	V.11	V.11	V.11	Z	Z	V.11	V.11	V.11	V.11	V.11	V.11	CMOS	CMOS	9.3V	–6V
RS530	0	1	0	0	TTL	X	V.11	V.11	V.11	V.11	Z	Z	V.11	V.11	V.11	V.11	V.11	V.11	CMOS	CMOS	9.3V	–6V
X.21	0	1	1	0	TTL	X	V.11	V.11	V.11	V.11	Z	Z	V.11	V.11	V.11	V.11	V.11	V.11	CMOS	CMOS	9.3V	–6V
V.35	1	0	0	0	TTL	X	V.35	V.35	V.35	V.35	Z	Z	V.35	V.35	V.35	V.35	V.35	V.35	CMOS	CMOS	8V	–6.5V
RS449/V.36	1	0	1	0	TTL	X	V.11	V.11	V.11	V.11	Z	Z	V.11	V.11	V.11	V.11	V.11	V.11	CMOS	CMOS	9.3V	–6V
V.28/RS232	1	1	0	0	TTL	X	V.28	Z	V.28	Z	Z	Z	V.28	30k	V.28	30k	V.28	30k	CMOS	CMOS	8.7V	–8.5V
No Cable	1	1	1	0	X	X	Z	Z	Z	Z	Z	Z	30k	30k	30k	30k	30k	30k	Z	Z	4.7V	0.3V
Not Used (Default V.11)	0	0	0	1	TTL	TTL	V.11	V.11	V.11	V.11	V.11	V.11	30k	30k	V.11	V.11	V.11	V.11	Z	CMOS	9.3V	–6V
RS530A	0	0	1	1	TTL	TTL	V.11	V.11	V.11	V.11	V.11	V.11	30k	30k	V.11	V.11	V.11	V.11	Z	CMOS	9.3V	–6V
RS530	0	1	0	1	TTL	TTL	V.11	V.11	V.11	V.11	V.11	V.11	30k	30k	V.11	V.11	V.11	V.11	Z	CMOS	9.3V	–6V
X.21	0	1	1	1	TTL	TTL	V.11	V.11	V.11	V.11	V.11	V.11	30k	30k	V.11	V.11	V.11	V.11	Z	CMOS	9.3V	–6V
V.35	1	0	0	1	TTL	TTL	V.35	V.35	V.35	V.35	V.35	V.35	30k	30k	V.35	V.35	V.35	V.35	Z	CMOS	8V	–6.5V
RS449/V.36	1	0	1	1	TTL	TTL	V.11	V.11	V.11	V.11	V.11	V.11	30k	30k	V.11	V.11	V.11	V.11	Z	CMOS	9.3V	–6V
V.28/RS232	1	1	0	1	TTL	TTL	V.28	Z	V.28	Z	V.28	Z	30k	30k	V.28	30k	V.28	30k	Z	CMOS	8.7V	–8.5V
No Cable	1	1	1	1	X	X	Z	Z	Z	Z	Z	Z	30k	30k	30k	30k	30k	30k	Z	Z	4.7V	0.3V

Note 1: Driver inputs are TTL level compatible.

Note 2: Unused receiver inputs are terminated with 30k to ground. In addition, R2 and R3 are always terminated by a 103Ω differential impedence (see Block Diagram on page 7).

Note 3: Receiver Outputs are CMOS level compatible and have a weak pull up to V_{IN} when Z.

Note 4: V_{DD} values shown are typical values for V_{CC} = 5V, V_{IN} = 3.3V and T_A = 25°C with LTC2847 under full load for each mode.

Note 5: V_{EE} values shown are typical values for V_{CC} = 5V, V_{IN} = 3.3V and T_A = 25°C with LTC2847 under full load for each mode.

SWITCHING TIME WAVEFORMS

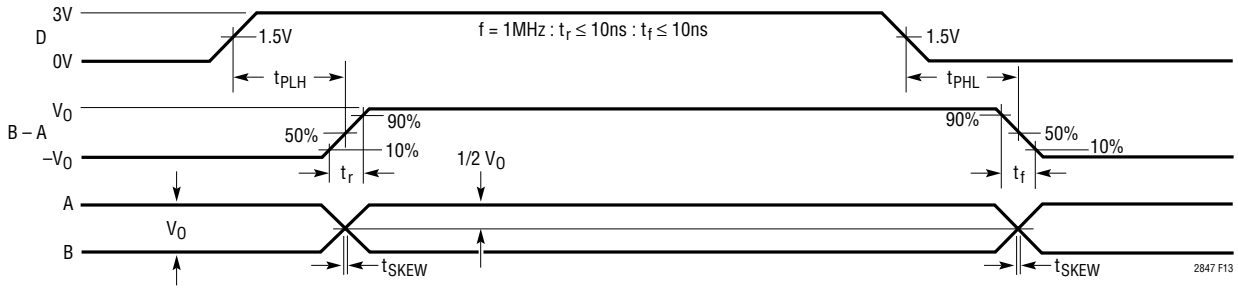

Figure 13. V.11, V.35 Driver Propagation Delays

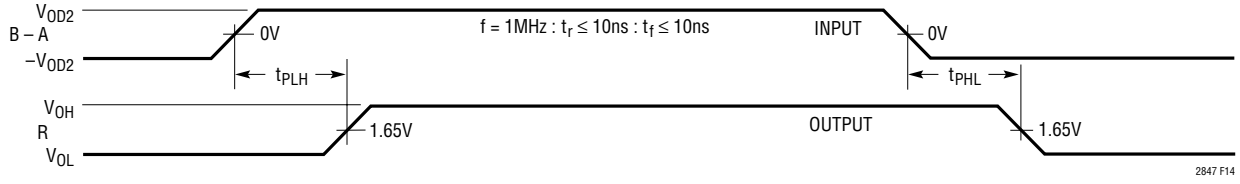

Figure 14. V.11, V.35 Receiver Propagation Delays

SWITCHING TIME WAVEFORMS

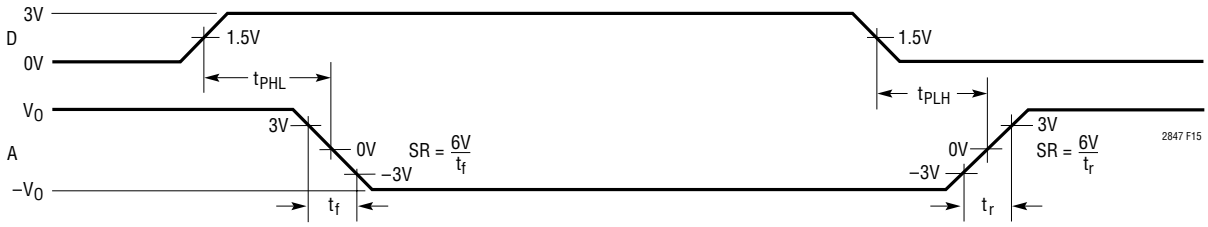

Figure 15. V.28 Driver Propagation Delays

Figure 16. V.28 Receiver Propagation Delays

APPLICATIONS INFORMATION

Overview

The LTC2847 consists of a charge pump and a 3-driver/3-receiver transceiver. The 5V V_{CC} input powers the charge pump and transceiver. The charge pump generates the V_{DD} and V_{EE} supplies. The LTC2847's V_{DD} and V_{EE} supplies can be used to power a companion chip like the LTC2845. The V_{IN} input powers the digital interface including the receiver output drivers. Having a separate pin to power the digital interface allows the flexibility of controlling the receiver output swing to interface with 5V or 3.3V logic.

The LTC2847 and LTC2845 form a complete software-selectable DTE or DCE interface port that supports the RS232, RS449, EIA530, EIA530-A, V.35, V.36 and X.21 protocols. Cable termination is provided on-chip, eliminating the need for discrete termination designs.

A complete DCE-to-DTE interface operating in EIA530 mode is shown in Figure 17. The LTC2847 half of each port is used to generate and appropriately terminate the clock and data signals. The LTC2845 is used to generate the control signals along with LL (local loopback), RL (Remote Loop-Back), TM (Test Mode) and RI (Ring Indicate).

Mode Selection

The interface protocol is selected using the mode select pins M0, M1 and M2 (see Table 1).

For example, if the port is configured as a V.35 interface, the mode selection pins should be M2 = 1, M1 = 0, M0 = 0. For the control signals, the drivers and receivers will operate in V.28 (RS232) electrical mode. For the clock and data signals, the drivers and receivers will operate in V.35 electrical mode. The DCE/$\overline{\text{DTE}}$ pin will configure the port for DCE mode when high, and DTE when low.

The interface protocol may be selected simply by plugging the appropriate interface cable into the connector. The mode pins are routed to the connector and are left unconnected (1) or wired to ground (0) in the cable as shown in Figure 18. The internal pull-up current sources will ensure a binary 1 when a pin is left unconnected.

The mode selection may also be accomplished by using jumpers to connect the mode pins to ground or V_{IN}.

APPLICATIONS INFORMATION

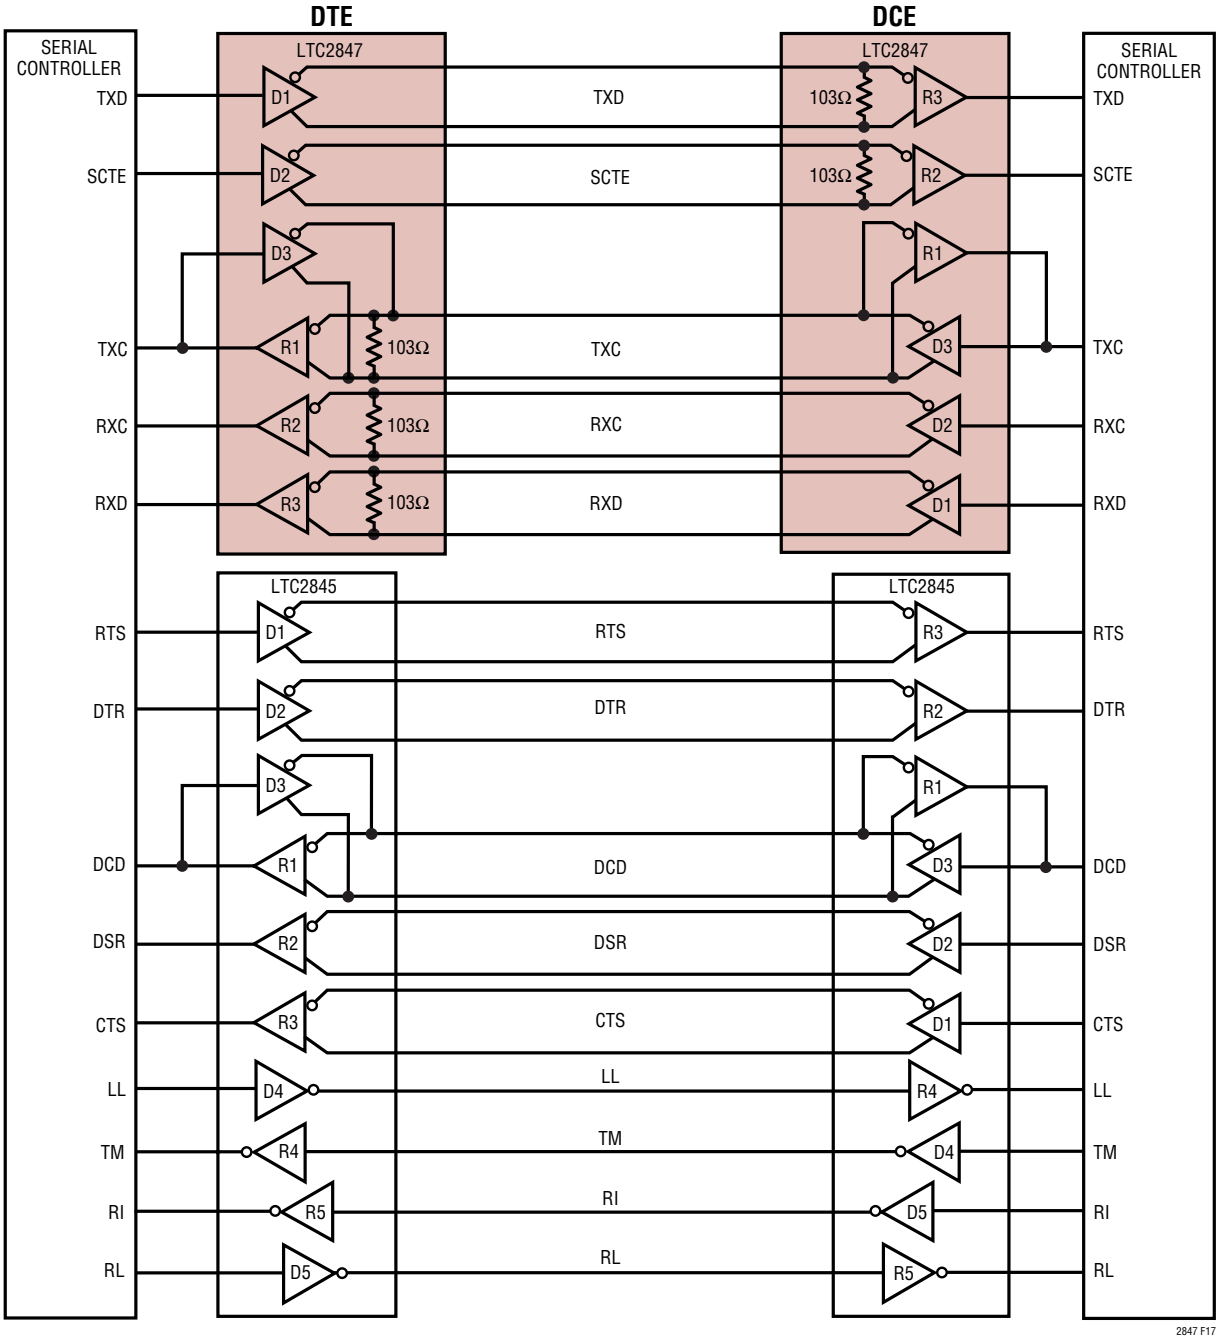

Figure 17. Complete Multiprotocol Interface in EIA530 Mode

When the cable is removed, leaving all mode pins unconnected, the LTC2847/LTC2845 will enter no-cable mode. In this mode the LTC2847/LTC2845 supply current drops to less than 1000µA and the LTC2847/LTC2845 driver outputs are forced into a high impedance state. At the same time, the R2 and R3 receivers of the LTC2847 are differentially terminated with 103Ω and the other receivers on the LTC2847 and LTC2845 are terminated with 30kΩ to ground.

Cable Termination

Traditional implementations used expensive relays to switch resistors or required the user to change termination modules every time a new interface standard was

APPLICATIONS INFORMATION

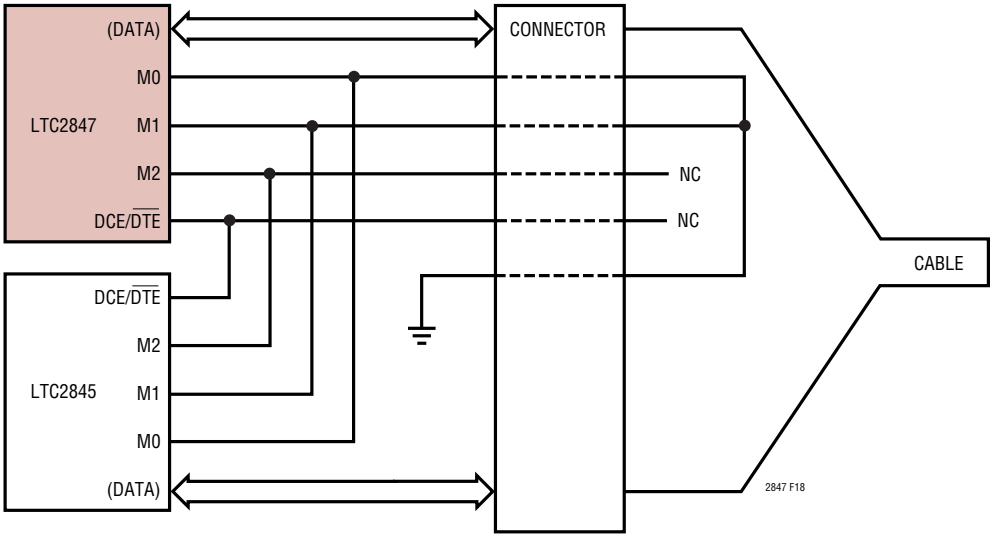

Figure 18. Single Port DCE V.35 Mode Selection in the Cable

selected. Switching the terminations with FETs is difficult because the FETs must remain off when the signal voltage is beyond the supply voltage. Alternatively, custom cables may contain termination in the cable head or route signals to various terminations on the board.

The LTC2847/LTC2845 chip set solves the cable termination switching problem by automatically providing the appropriate termination and switching on-chip for the V.10 (RS423), V.11 (RS422), V.28 (RS232) and V.35 electrical protocols.

V.10 (RS423) Interface

All V.10 drivers and receivers necessary for the RS449, EIA530, EIA530-A, V.36 and X.21 protocols are implemented on the LTC2845.

A typical V.10 unbalanced interface is shown in Figure 19. A V.10 single-ended generator with output A and ground C is connected to a differential receiver with input A' connected to A, and ground C' connected via the signal return to ground C. Usually, no cable termination is required for V.10 interfaces, but the receiver inputs must be compliant with the impedance curve shown in Figure 20.

The V.10 receiver configuration in the LTC2845 is shown in Figure 21. In V.10 mode, switch S3 inside the LTC2845 is turned off. The noninverting input is disconnected inside the LTC2845 receivers and connected to ground.

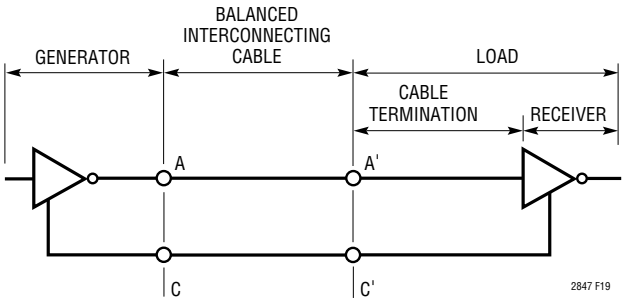

Figure 19. Typical V.10 Interface

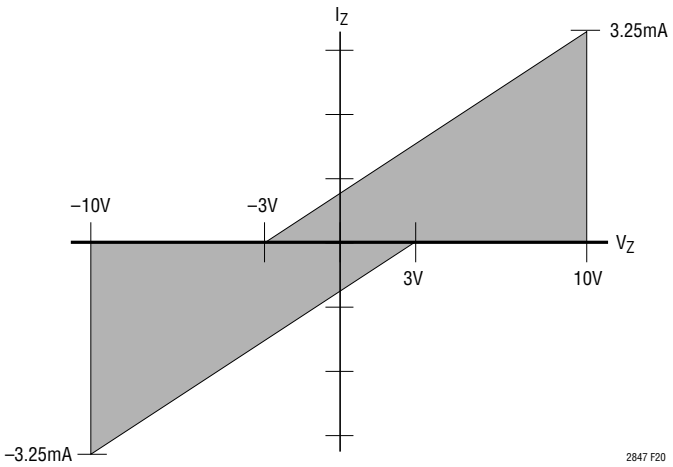

Figure 20. V.10 Receiver Input Impedance

APPLICATIONS INFORMATION

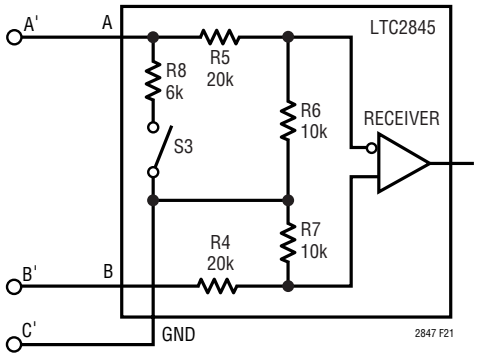

Figure 21. V.10 Receiver Configuration

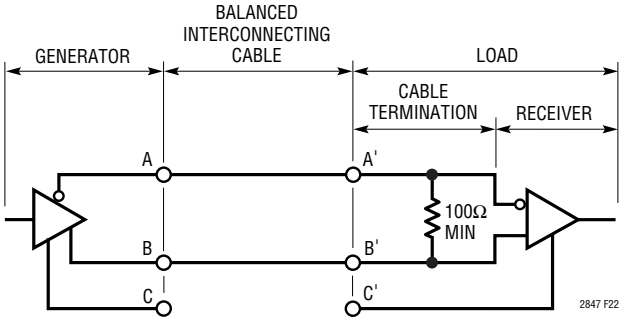

Figure 22. Typical V.11 Interface

The cable termination is then the 30k input impedance to ground of the LTC2845 V.10 receiver.

V.11 (RS422) Interface

A typical V.11 balanced interface is shown in Figure 22. A V.11 differential generator with outputs A and B and ground C is connected to a differential receiver with input A' connected to A, input B' connected to B, and ground C' connected via the signal return to ground C. The V.11 interface has a differential termination at the receiver end that has a minimum value of 100Ω. The termination resistor is optional in the V.11 specification, but for the high speed clock and data lines, the termination is essential to prevent reflections from corrupting the data. The receiver inputs must also be compliant with the impedance curve shown in Figure 20.

In V.11 mode, all switches are off except S1 of the LTC2847's receivers which connects a 103Ω differential termination impedance to the cable as shown in Figure 23[1]. The LTC2845 only handles control signals, so no termination other than its V.11 receivers' 30k input impedance is necessary.

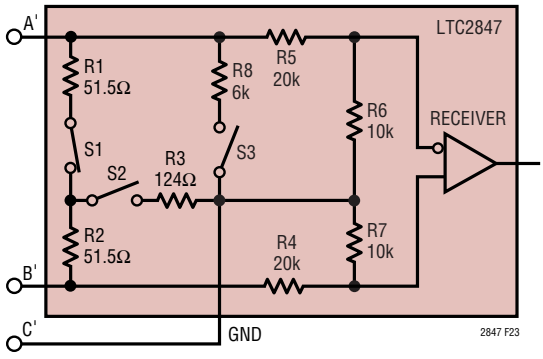

Figure 23. V.11 Receiver Configuration

V.28 (RS232) Interface

A typical V.28 unbalanced interface is shown in Figure 24. A V.28 single-ended generator with output A and ground C is connected to a single-ended receiver with input A' connected to A and ground C' connected via the signal return to ground C.

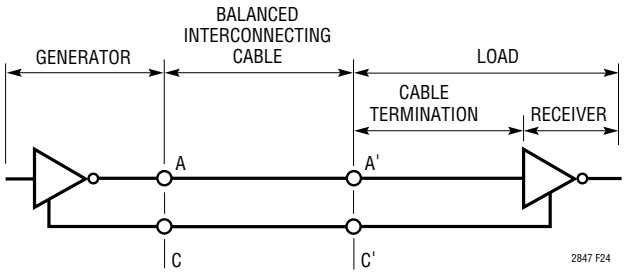

Figure 24. Typical V.28 Interface

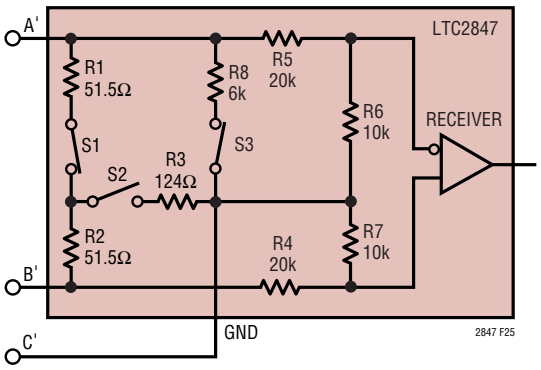

Figure 25. V.28 Receiver Configuration

[1]Actually, there is no switch S1 in receivers R2 and R3. However, for simplicity, all termination networks on the LTC2847 can be treated identically if it is assumed that an S1 switch exists and is always closed on the R2 and R3 receivers.

APPLICATIONS INFORMATION

In V.28 mode, S3 is closed inside the LTC2847/LTC2845 which connects a 6k (R8) impedance to ground in parallel with 20k (R5) plus 10k (R6) for a combined impedance of 5k as shown in Figure 25. Proper termination is only provided when the B input of the receivers is floating, since S1 of the LTC2847's R2 and R3 receivers remains on in V.28 mode[1]. The noninverting input is disconnected inside the LTC2847/LTC2845 receiver and connected to a TTL level reference voltage to give a 1.4V receiver trip point.

V.35 Interface

A typical V.35 balanced interface is shown in Figure 26. A V.35 differential generator with outputs A and B and ground C is connected to a differential receiver with input A' connected to A, input B' connected to B, and ground C' connected via the signal return to ground C. The V.35 interface requires a T or delta network termination at the receiver end and the generator end. The receiver differential impedance measured at the connector must be 100Ω ±10Ω, and the impedance between shorted terminals (A' and B') and ground (C') must be 150Ω ±15Ω.

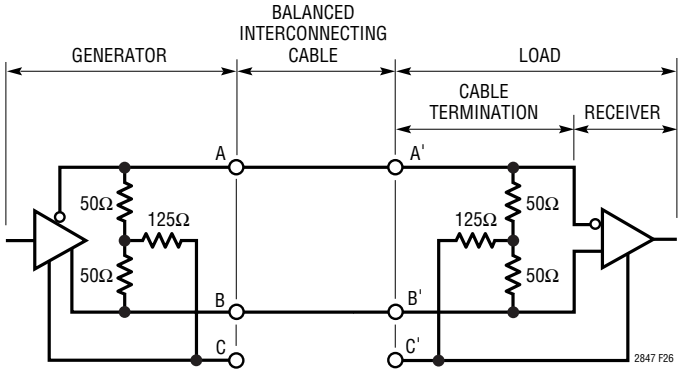

Figure 26. Typical V.35 Interface

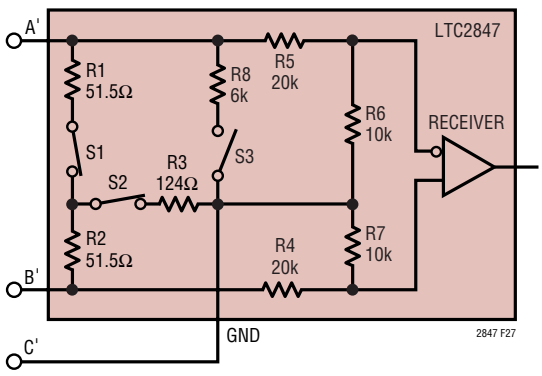

Figure 27. V.35 Receiver Configuration

In V.35 mode, both switches S1 and S2 inside the LTC2847 are on, connecting a T network impedance as shown in Figure 27. The 30k input impedance of the receiver is placed in parallel with the T network termination, but does not affect the overall input impedance significantly.

The generator differential impedance must be 50Ω to 150Ω and the impedance between shorted terminals (A and B) and ground (C) must be 150Ω ±15Ω.

No-Cable Mode

The no-cable mode (M0 = M1 = M2 = 1) is intended for the case when the cable is disconnected from the connector. The charge pump, bias circuitry, drivers and receivers are turned off, the driver outputs are forced into a high impedance state, and the V_{CC} supply current to the transceiver drops to less than 300μA while its V_{IN} supply current drops to less than 10μA. Note that the LTC2847's R2 and R3 receivers continue to be terminated by a 103Ω differential impedance.

Charge Pump

The LTC2847 uses an internal capacitive charge pump to generate V_{DD} and V_{EE} as shown in Figure 28. A voltage doubler generates about 8V on V_{DD} and a voltage inverter generates about –7.5V on V_{EE}. Four 1μF surface mounted tantalum or ceramic capacitors are required for C1, C2, C3 and C5. The V_{EE} capacitor C4 should be a minimum of 3.3μF. All capacitors are 16V and should be placed as close as possible to the LTC2847 to reduce EMI.

Receiver Fail-Safe

All LTC2847/LTC2845 receivers feature fail-safe operation in all modes. If the receiver inputs are left floating or are shorted together by a termination resistor, the receiver output will always be forced to a logic high.

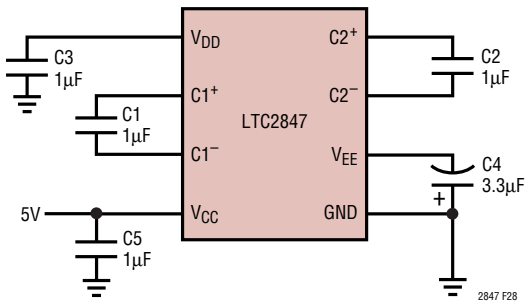

Figure 28. Charge Pump

TYPICAL APPLICATIONS

DTE vs DCE Operation

The DCE/$\overline{DTE}$ pin acts as an enable for Driver 3/Receiver 1 in the LTC2847, and Driver 3/Receiver 1 in the LTC2845.

The LTC2847/LTC2845 can be configured for either DTE or DCE operation in one of two ways: a dedicated DTE or DCE port with a connector of appropriate gender or a port with one connector that can be configured for DTE or DCE operation by rerouting the signals to the LTC2847/LTC2845 using a dedicated DTE cable or dedicated DCE cable.

A dedicated DTE port using a DB-25 male connector is shown in Figure 29. The interface mode is selected by logic outputs from the controller or from jumpers to either V_{IN} or GND on the mode select pins. A dedicated DCE port using a DB-25 female connector is shown in Figure 30.

A port with one DB-25 connector, that can be configured for either DTE or DCE operation is shown in Figure 31. The configuration requires separate cables for proper signal routing in DTE or DCE operation. For example, in DTE mode, the TXD signal is routed to Pins 2 and 14 via the LTC2847's Driver 1. In DCE mode, Driver 1 now routes the RXD signal to Pins 2 and 14.

Power Dissipation Calculations

The LTC2847 takes in 5V V_{CC}. V_{DD} and V_{EE} are in turn produced from V_{CC} with an internal charge pump at approximately 80% and 70% efficiency respectively. Current drawn internally from V_{DD} or V_{EE} translates directly into a higher I_{CC}. The LTC2847 dissipates power according to the equation:

$$P_{DISS(2847)} = V_{CC} \bullet I_{CC} - N_D \bullet P_{RT} + N_R \bullet P_{RT} \quad (1)$$

P_{RT} refers to the power dissipated by each driver in a receiver termination on the far end of the cable while N_D is the number of drivers. Conversely, current from the far end drivers dissipate power $N_R \bullet P_{RT}$ in the internal receiver termination where N_R is the number of receivers.

LTC2847 Power Dissipation

Consider an LTC2847 in X.21, DCE mode (three V.11 drivers and two V.11 receivers). From the Electrical Characteristics Table, I_{CC} at no load = 14mA, I_{CC} at full load = 100mA. Each receiver termination is 100Ω (R_{RT}) and current going into each receiver termination = (100mA – 14mA)/3 = 28.7mA (I_{RT}).

$$P_{RT} = (I_{RT})^2 \bullet R_{RT} \quad (2)$$

From Equation (2), P_{RT} = 82.4mW and from Equation (1), DC power dissipation $P_{DISS(2847)}$ = 5V • 100mA – 3 • 82.4mW + 2 • 82.4mW = 418mW.

Consider the above example running at a baud rate of 10MBd. From the Typical Characteristic for "V.11 Mode I_{CC} vs Data Rate," the I_{CC} at 10MBd is 160mA. I_{CC} increases with baud rate due to driver transient dissipation. From Equation (1), AC power dissipation $P_{DISS(2847)}$ = 5V • 160mA –3 • 82.4mW + 2 • 82.4mW = 718mW.

LTC2845 Power Dissipation

If a LTC2845 is used to form a complete DCE port with the LTC2847, it will be running in the X.21 mode (three V.11 drivers and two V.10 drivers, two V.11 receivers and two V.10 receivers, all with internal 30k termination). In addition to V_{CC}, it uses the V_{DD} and V_{EE} outputs from the LTC2847. Negligible power is dissipated in the large internal receiver termination of the LTC2845 so the $N_R \bullet P_{RT}$ term of Equation (1) can be omitted. Thus Equation (1) is modified as follows:

$$P_{DISS(2845)} = (V_{CC} \bullet I_{CC}) + (V_{DD} \bullet I_{DD}) + (V_{EE} \bullet I_{EE}) - N_D \bullet P_{RT} \quad (3)$$

Since power is drawn from the supplies of the LTC2847 (V_{DD} and V_{EE}) at less than 100% efficiency, the LTC2847 dissipates extra power to source $P_{DISS(2845)}$ and P_{RT} :

$$P_{DISS1(2847)} = 125\% \bullet (V_{DD} \bullet I_{DD}) + 143\% \bullet (V_{EE} \bullet I_{EE}) - P_{DISS(2845)} - N_D \bullet P_{RT} = 25\% \bullet (V_{DD} \bullet I_{DD}) + 43\% \bullet (V_{EE} \bullet I_{EE}) \quad (4)$$

From the LTC2845 Electrical Characteristics Table, for V_{CC} = 5V, V_{DD} = 8V and V_{EE} = –5.5V:

I_{CC} at no load	2.7mA
I_{CC} at full load with all drivers high	110mA
I_{EE} at no load	2mA
I_{EE} at full load with both V.10 drivers low	23mA
I_{DD} at no load	0.3mA
I_{DD} at full load	0.3mA

TYPICAL APPLICATIONS

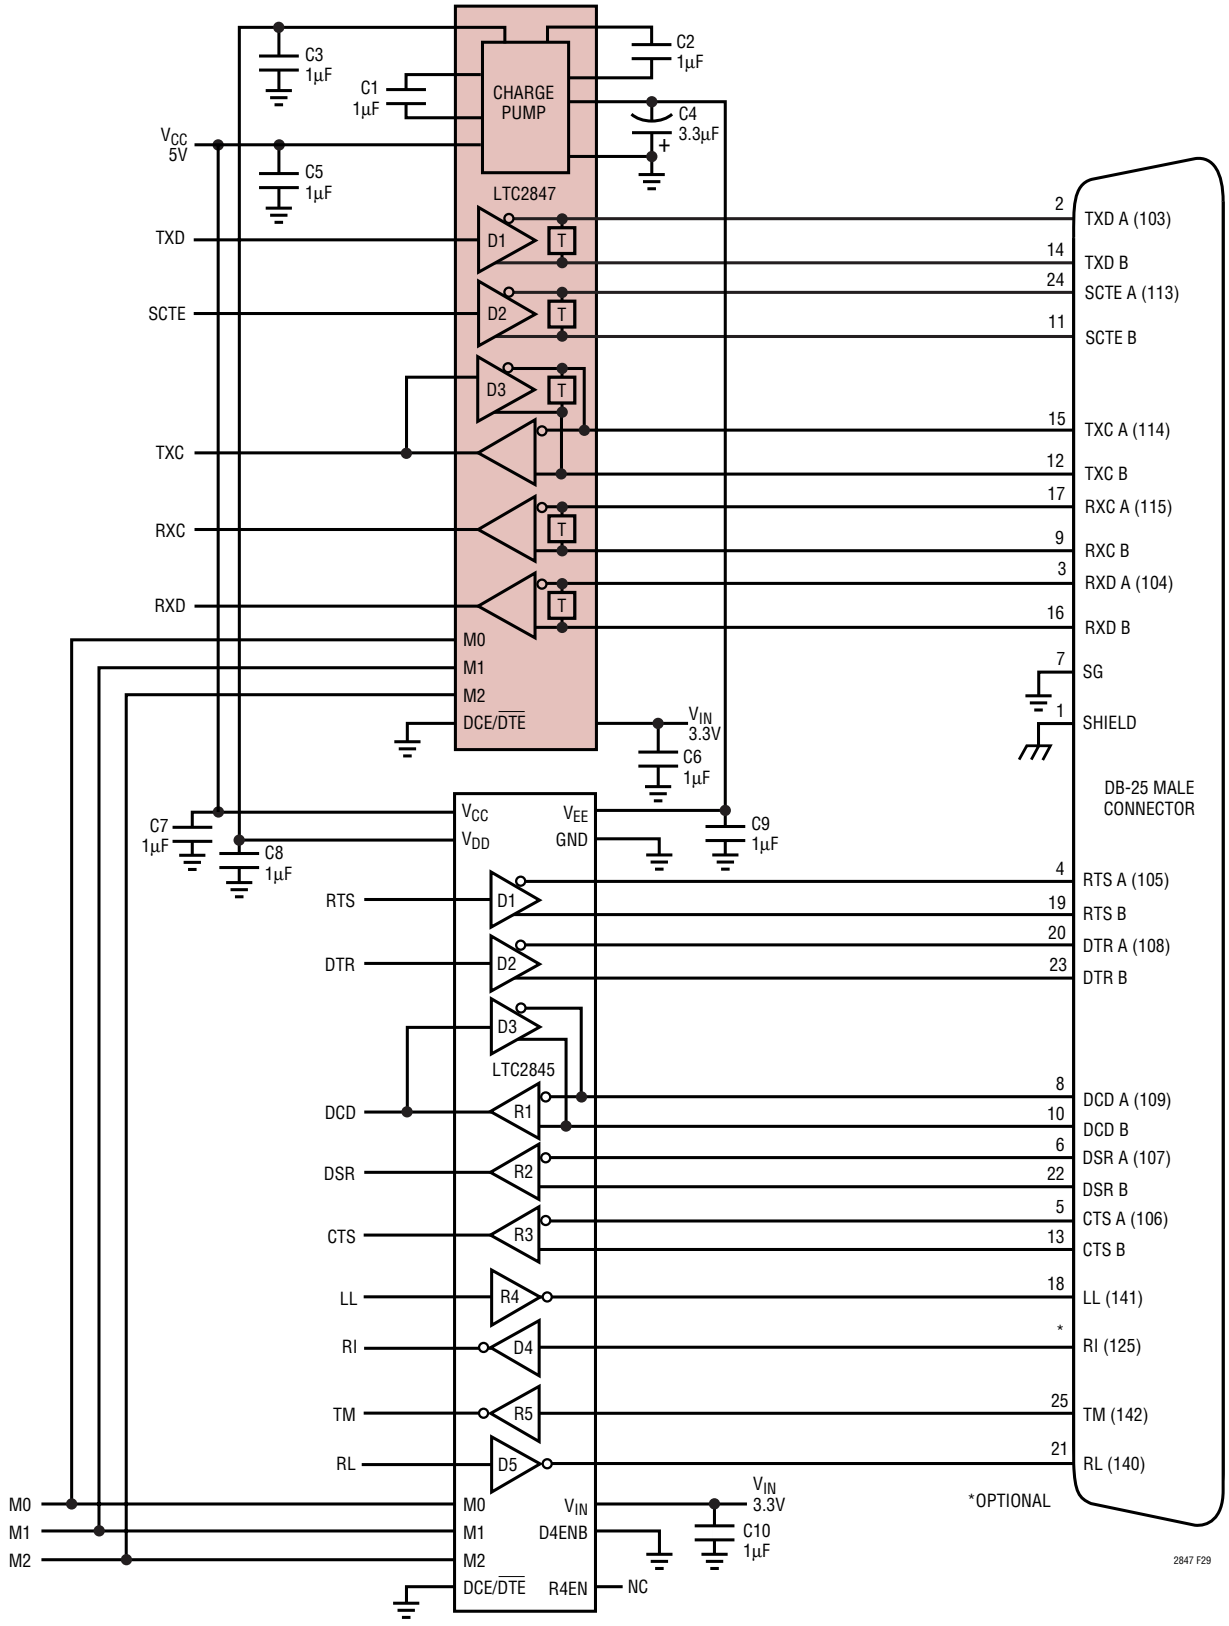

Figure 29. Controller-Selectable Multiprotocol DTE Port with DB-25 Connector

TYPICAL APPLICATIONS

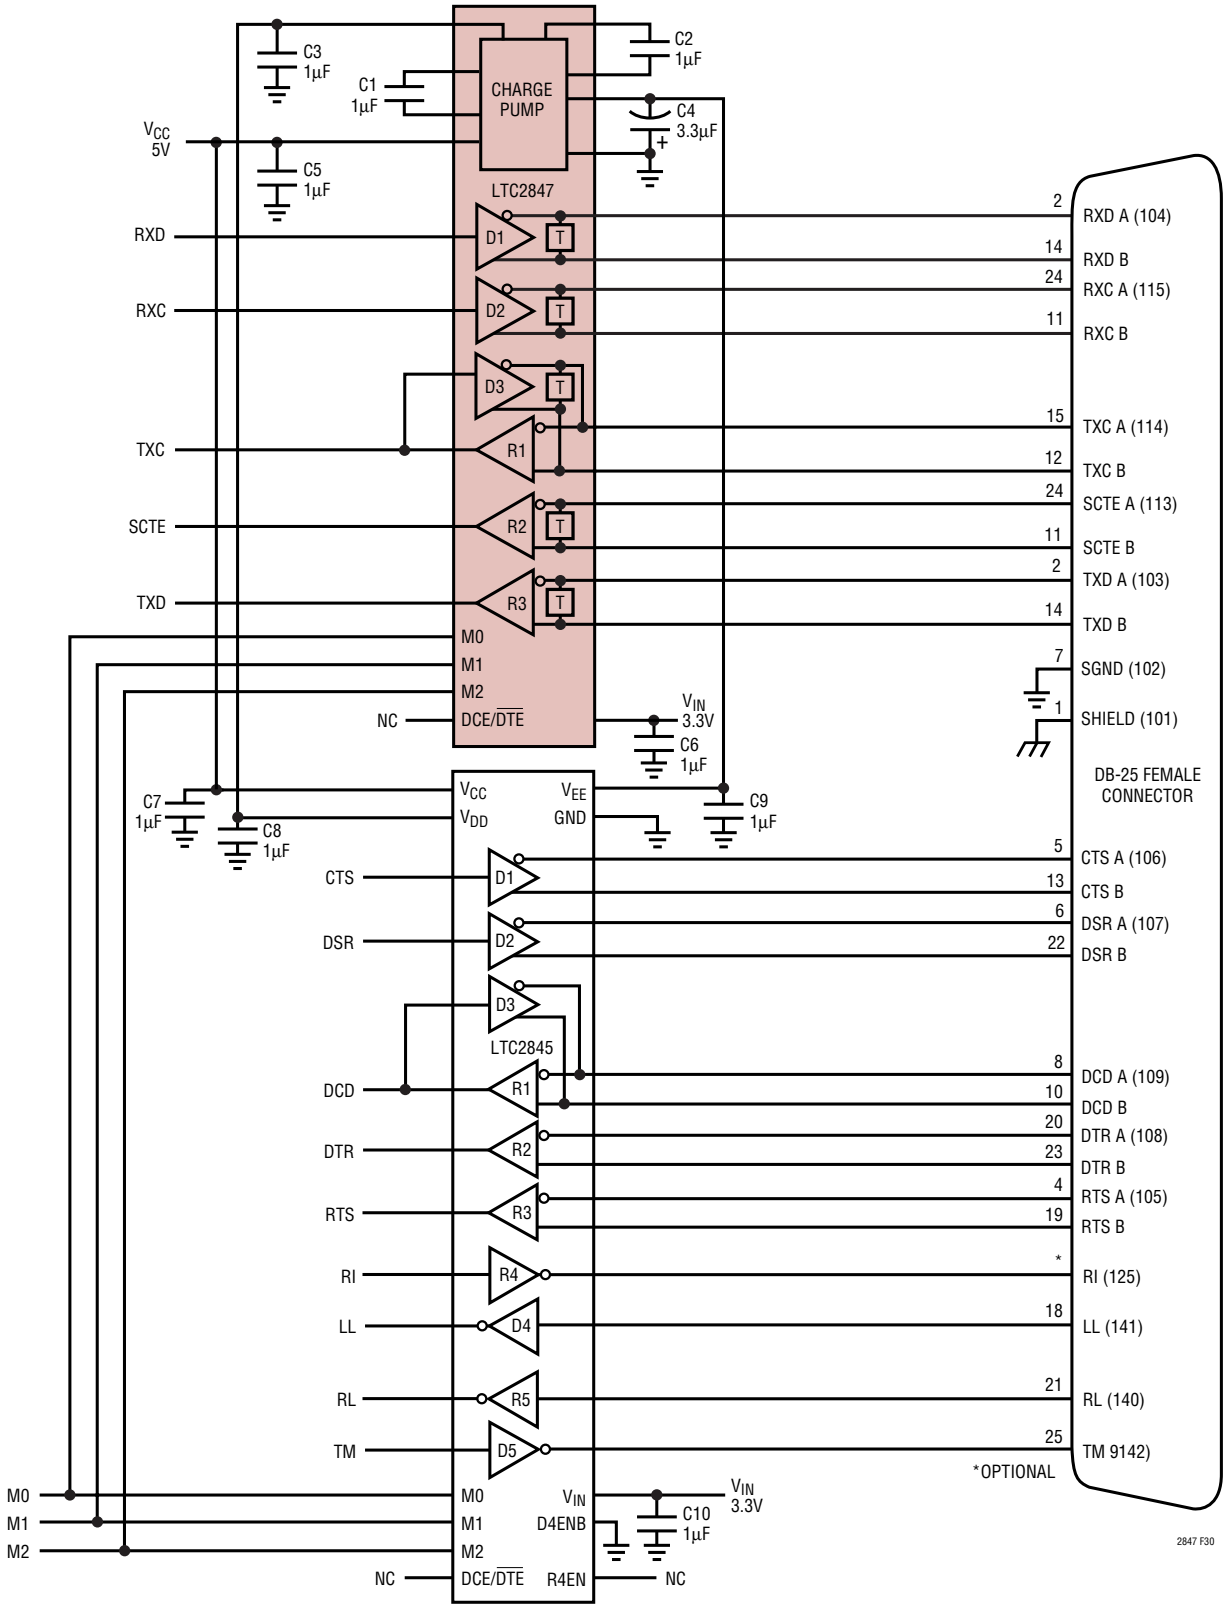

Figure 30. Controller-Selectable DCE Port with DB-25 Connector

TYPICAL APPLICATIONS

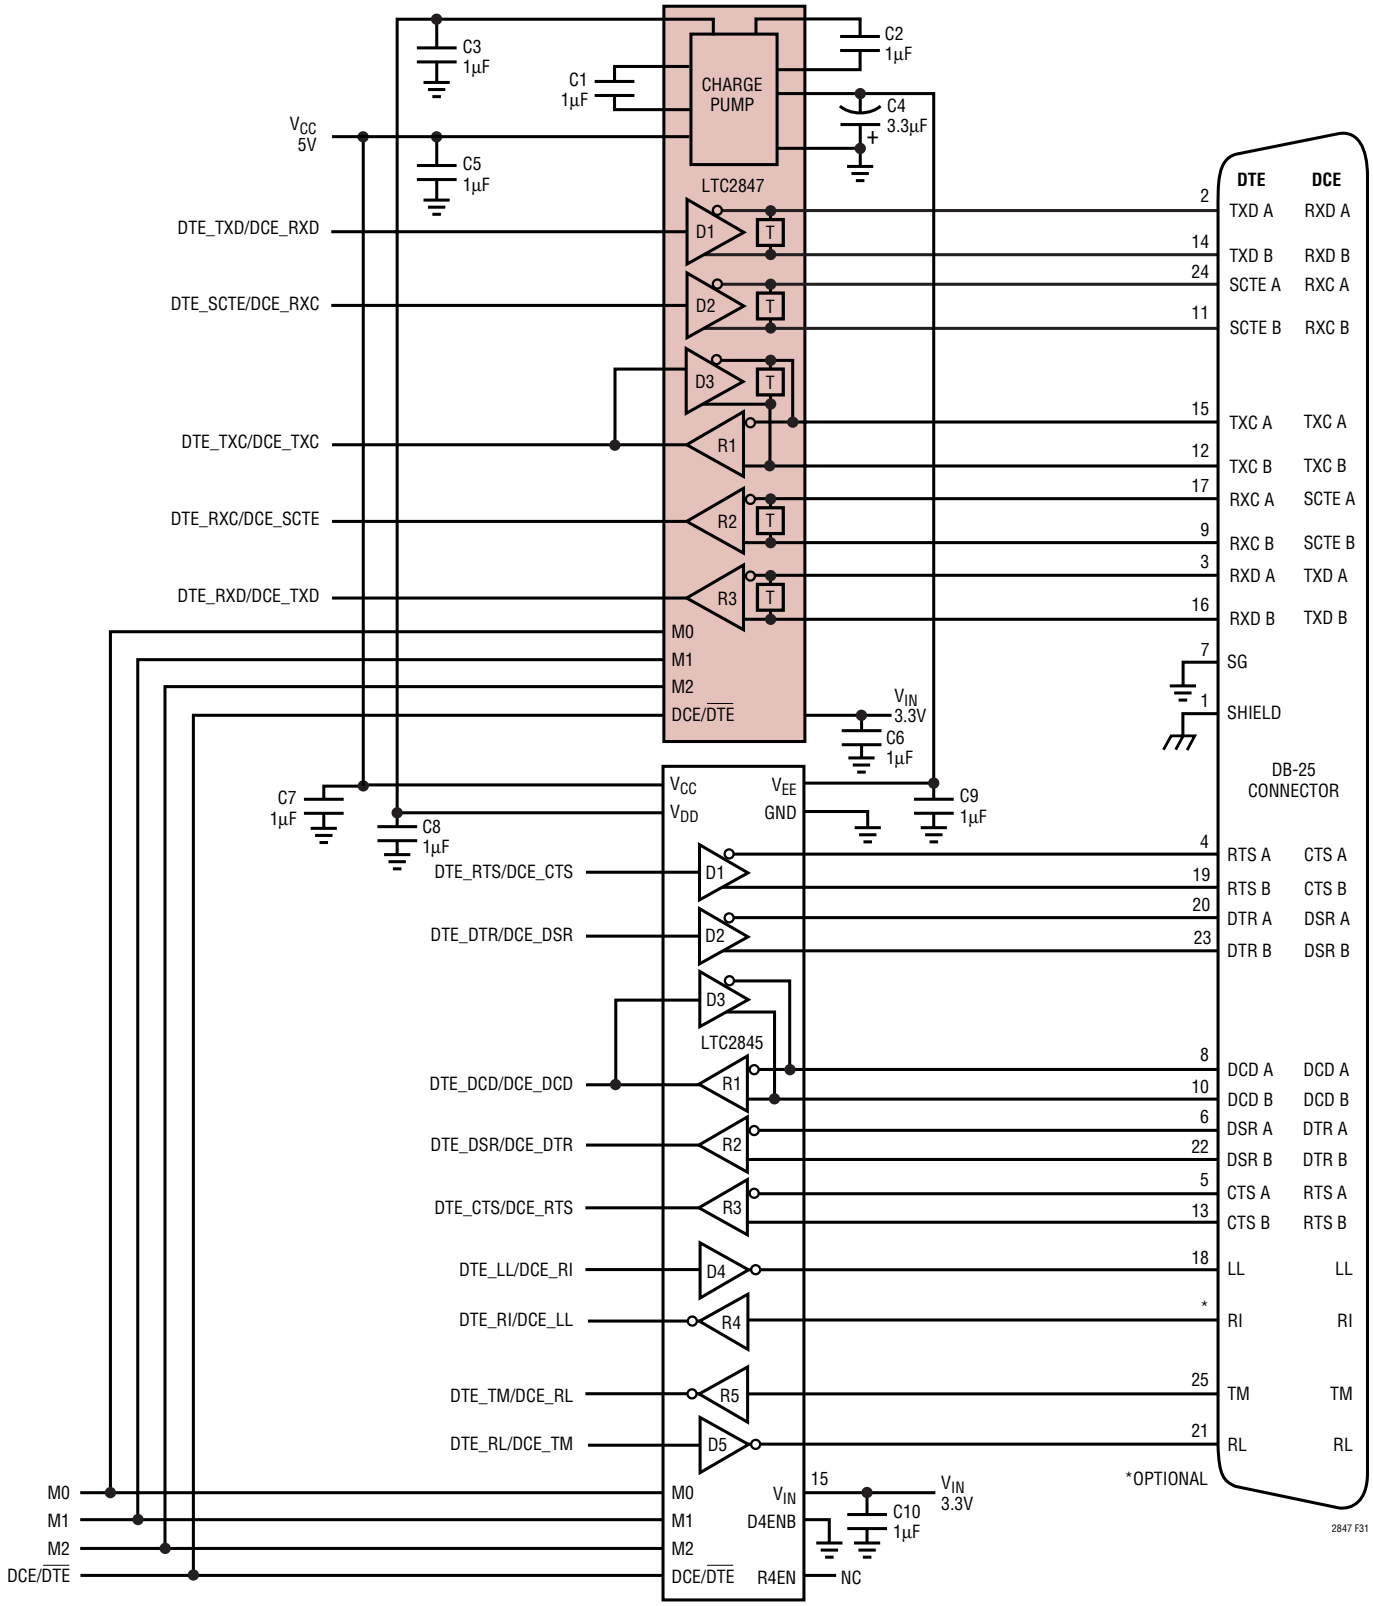

Figure 31. Controller-Selectable Multiprotocol DTE/DCE Port with DB-25 Connector

PACKAGE DESCRIPTION

UHF Package
38-Lead Plastic QFN (5mm × 7mm)
(Reference LTC DWG # 05-08-1701)

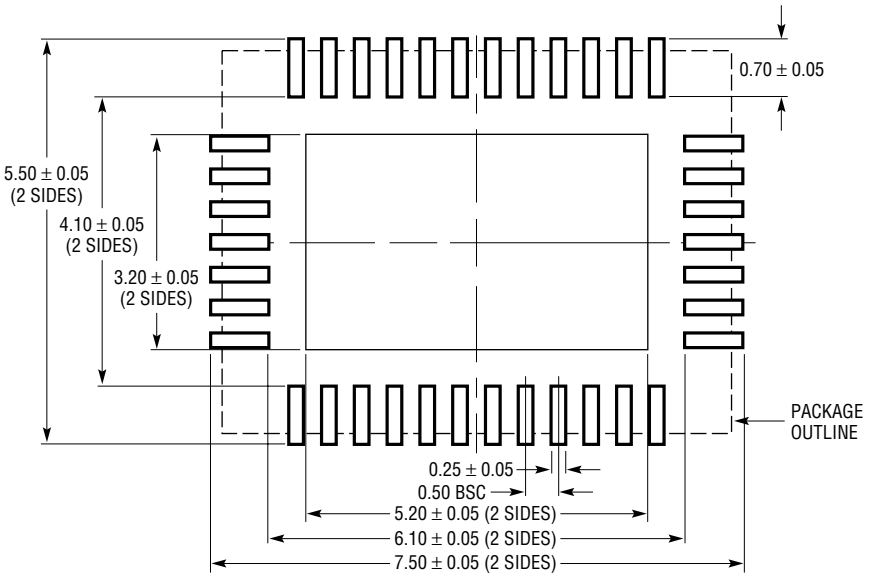

RECOMMENDED SOLDER PAD LAYOUT

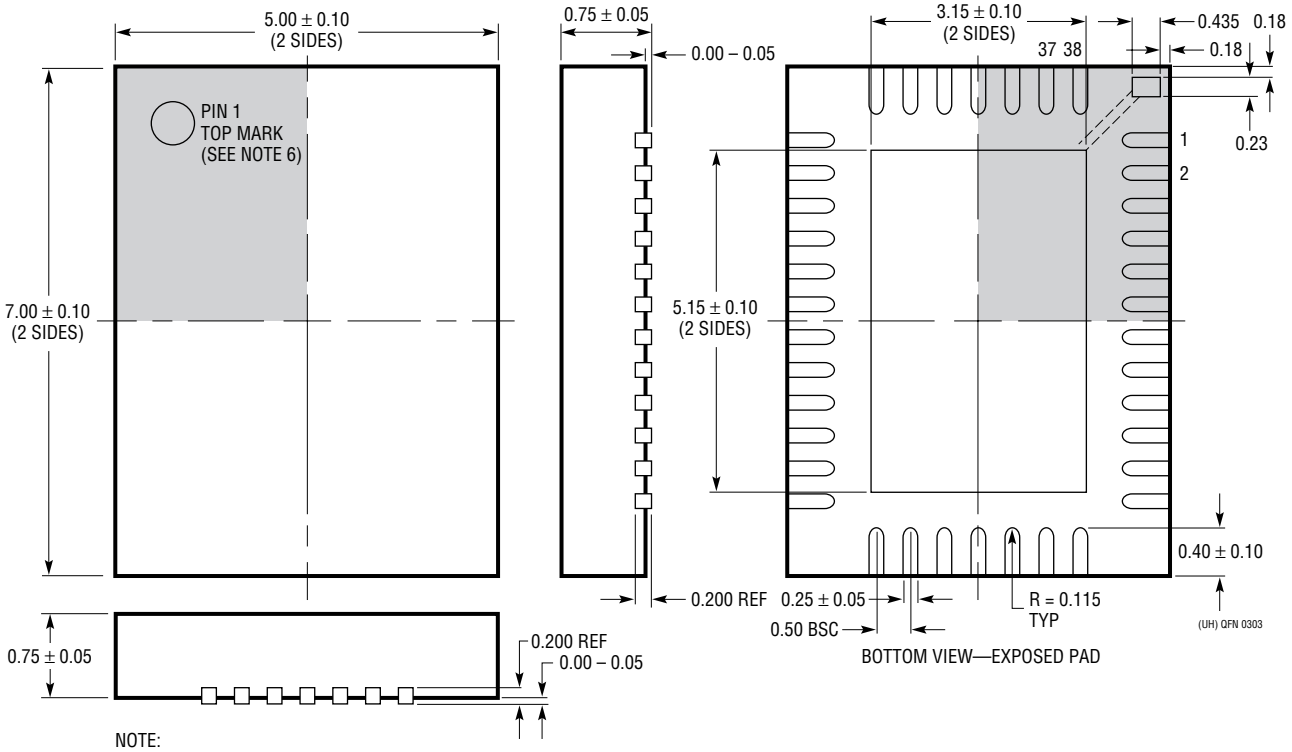

BOTTOM VIEW—EXPOSED PAD

NOTE:
1. DRAWING CONFORMS TO JEDEC PACKAGE OUTLINE M0-220 VARIATION WHKD
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.20mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

TYPICAL APPLICATIONS

The V.11 drivers are driven between V_{CC} and GND while the V.10 drivers are driven between V_{CC} and V_{EE}. Assume that the V.11 driver outputs are high and V.10 driver outputs low. Current going into each 100Ω V.11 receiver termination = (110mA – 2.7mA) – 23mA/3 = 28.1mA. Current going into each 450Ω V.10 receiver termination = 23mA – 2mA/2 = 10.5mA. From Equation (2), V.11 P_{RT} = 79mW and V.10 P_{RT} = 49.6mW.

From Equation (3), $P_{DISS(2845)}$ = 5V • (110mA – 23mA) + (8V • 0.3mA) + 5.5V • 23mA – 3 • 79mW – 2 • 49.6mW = 228mW. Since the LTC2845 runs slow control signals, the AC power dissipation can be assumed to be equal to the DC power dissipation.

The extra power dissipated in the LTC2847 due to LTC2845 is given by Equation(4), $P_{DISS1(2847)}$ = 25% • (8V • 0.3mA) + 43% • (5.5V • 23mA) = 55mW. So for an X.21 DCE port running at 10MBd, the LTC2847 dissipates approximately 718mW + 55mW = 773mW while the LTC2845 dissipates 228mW.

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC1321	Dual RS232/RS485 Transceiver	Two RS232 Driver/Receiver Pairs or Two RS485 Driver/Receiver Pairs
LTC1334	Single 5V RS232/RS485 Multiprotocol Transceiver	Two RS232 Driver/Receiver or Four RS232 Driver/Receiver Pairs
LTC1343	Software-Selectable Multiprotocol Transceiver	4-Driver/4-Receiver for Data and Clock Signals
LTC1344A	Software-Selectable Cable Terminator	Perfect for Terminating the LTC1543 (Not Needed with LTC1546)
LTC1345	Single Supply V.35 Transceiver	3-Driver/3-Receiver for Data and Clock Signals
LTC1346A	Dual Supply V.35 Transceiver	3-Driver/3-Receiver for Data and Clock Signals
LTC1543	Software-Selectable Multiprotocol Transceiver	Terminated with LTC1344A for Data and Clock Signals, Companion to LTC1544 or LTC1545 for Control Signals
LTC1544	Software-Selectable Multiprotocol Transceiver	Companion to LTC1546 or LTC1543 for Control Signals Including LL
LTC1545	Software-Selectable Multiprotocol Transceiver	5-Driver/5-Receiver Companion to LTC1546 or LTC1543 for Control Signals Including LL, TM and RL
LTC1546	Software-Selectable Multiprotocol Transceiver	3-Driver/3-Receiver with Termination for Data and Clock Signals
LTC2844	3.3V Software-Selectable Multiprotocol Transceiver	Companion to LTC2846 for Control Signals Including LL
LTC2845	3.3V Software-Selectable Multiprotocol Transceiver	5-Driver/5-Receiver Companion to LTC2846 or LTC2847 for Control Signals Including LL, TM and RL
LTC2846	3.3V Software-Selectable Multiprotocol Transceiver	3.3V Supply, 3-Driver/3-Receiver with Termination for Data and Clock Signals, Generates the Required 5V and ±8V Supplies for LTC2846 Companion Parts

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408) 432-1900 • FAX: (408) 434-0507 • www.linear.com

LT/TP 0603 1K • PRINTED IN USA

© LINEAR TECHNOLOGY CORPORATION 2003

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View LTC2847IUHF#TRPBF on WIN SOURCE
- Linear Technology Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management