



**THE DATASHEET OF
OSTT7050350**



1

2


3

4

5


SIGN	DATE

THIS IS CAD DRAWING



- Material**
- Terminal body
 - (metal housing): Brass
 - Terminal screw: Steel
 - Contacts: Brass
 - Surface of solder tail
 - Insulator (housing): T

Electrical



- Voltage rating: 300V
- Current rating: 25A
- Wire range: Solid wire(AWG): 12-2 Stranded wire(AWG): 16-20
- Torque(Lb-In): 4.3
- Screw: M3
- Wire strip length: 6'
- Withstanding Voltage
- Operating temperature
- Soldering temperature
- Safety Approval: 

RoHS Compliant

PART NUMBER:


OSTT7XX03

- No. of Pole:
- 02 2 Pole
 - 03 3 Pole
 -
 - 24 24 Pole

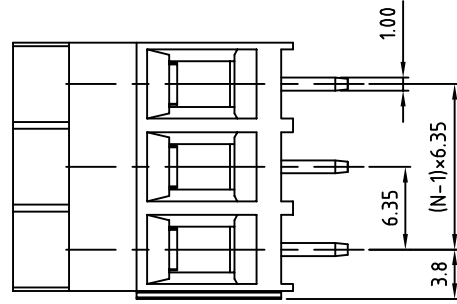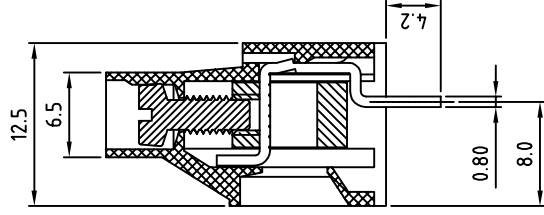

N=Number of contacts

P.C.B LAYOUT

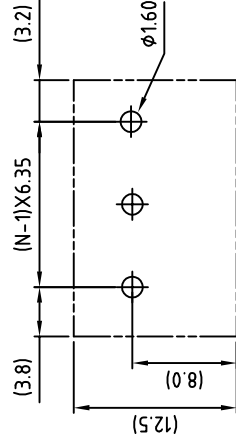

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



OSTT7 6.35mm Series

TITLE	OSTT7 6.35mm Series
PART NO.	OSTT7XX0350
APPROVED	DESIGNED
Shi Jun 2006.10.21	Marvin 2006.10.21
CHECKED	DRAWN
Marvin 2006.10.21	Marvin 2006.10.21

1

2

3

4

5

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View OSTT7050350 on WIN SOURCE](#)
- ⊖ [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management