





# THE DATASHEET OF BCV61BE6327HTSA1



**NPN Silicon Double Transistor**

- To be used as a current mirror
- Good thermal coupling and  $V_{BE}$  matching
- High current gain
- Low collector-emitter saturation voltage
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

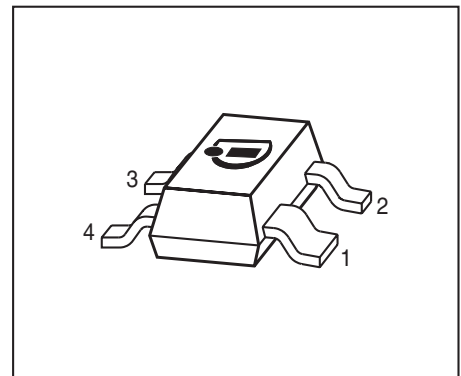

| Type   | Marking | Pin Configuration |        |        |        | Package |
|--------|---------|-------------------|--------|--------|--------|---------|
| BCV61B | 1Ks     | 1 = C2            | 2 = C1 | 3 = E1 | 4 = E2 | SOT143  |
| BCV61C | 1Ls     | 1 = C2            | 2 = C1 | 3 = E1 | 4 = E2 | SOT143  |

**Maximum Ratings**

| Parameter                                                | Symbol    | Value       | Unit |
|----------------------------------------------------------|-----------|-------------|------|
| Collector-emitter voltage<br>(transistor T1)             | $V_{CEO}$ | 30          | V    |
| Collector-base voltage (open emitter)<br>(transistor T1) | $V_{CBO}$ | 30          |      |
| Emitter-base voltage                                     | $V_{EBS}$ | 6           |      |
| DC collector current                                     | $I_C$     | 100         | mA   |
| Peak collector current, $t_p < 10$ ms                    | $I_{CM}$  | 200         |      |
| Base peak current (transistor T1)                        | $I_{BM}$  | 200         |      |
| Total power dissipation, $T_S = 99$ °C                   | $P_{tot}$ | 300         | mW   |
| Junction temperature                                     | $T_j$     | 150         | °C   |
| Storage temperature                                      | $T_{stg}$ | -65 ... 150 |      |

**Thermal Resistance**

|                                          |            |      |     |
|------------------------------------------|------------|------|-----|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ | ≤170 | K/W |
|------------------------------------------|------------|------|-----|

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note AN077 (Thermal Resistance Calculation)

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter                                                                                                                                           | Symbol        | Values     |            |            | Unit          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|------------|------------|---------------|
|                                                                                                                                                     |               | min.       | typ.       | max.       |               |
| <b>DC Characteristics of T1</b>                                                                                                                     |               |            |            |            |               |
| Collector-emitter breakdown voltage<br>$I_C = 10\text{ mA}, I_B = 0$                                                                                | $V_{(BR)CEO}$ | 30         | -          | -          | V             |
| Collector-base breakdown voltage<br>$I_C = 10\text{ }\mu\text{A}, I_E = 0$                                                                          | $V_{(BR)CBO}$ | 30         | -          | -          |               |
| Emitter-base breakdown voltage<br>$I_E = 10\text{ }\mu\text{A}, I_C = 0$                                                                            | $V_{(BR)EBO}$ | 6          | -          | -          |               |
| Collector cutoff current<br>$V_{CB} = 30\text{ V}, I_E = 0$                                                                                         | $I_{CBO}$     | -          | -          | 15         | nA            |
| Collector cutoff current<br>$V_{CB} = 30\text{ V}, I_E = 0, T_A = 150\text{ }^\circ\text{C}$                                                        | $I_{CBO}$     | -          | -          | 5          | $\mu\text{A}$ |
| DC current gain <sup>1)</sup><br>$I_C = 0.1\text{ mA}, V_{CE} = 5\text{ V}$                                                                         | $h_{FE}$      | 100        | -          | -          | -             |
| DC current gain <sup>1)</sup><br>$I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, \text{BCV61B}$<br>$I_C = 2\text{ mA}, V_{CE} = 5\text{ V}, \text{BCV61C}$ | $h_{FE}$      | 200<br>420 | 290<br>520 | 450<br>800 |               |
| Collector-emitter saturation voltage <sup>1)</sup><br>$I_C = 10\text{ mA}, I_B = 0.5\text{ mA}$<br>$I_C = 100\text{ mA}, I_B = 5\text{ mA}$         | $V_{CEsat}$   | -<br>-     | 90<br>200  | 250<br>600 | mV            |
| Base-emitter saturation voltage <sup>1)</sup><br>$I_C = 10\text{ mA}, I_B = 0.5\text{ mA}$<br>$I_C = 100\text{ mA}, I_B = 5\text{ mA}$              | $V_{BEsat}$   | -<br>-     | 700<br>900 | -<br>-     |               |
| Base-emitter voltage <sup>1)</sup><br>$I_C = 2\text{ mA}, V_{CE} = 5\text{ V}$<br>$I_C = 10\text{ mA}, V_{CE} = 5\text{ V}$                         | $V_{BE(ON)}$  | 580<br>-   | 660<br>-   | 700<br>770 |               |

<sup>1)</sup>Puls test:  $t \leq 300\text{ }\mu\text{s}, D = 2\%$

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.


| Parameter                                                                                                                                                               | Symbol            | Values          |             |                 | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-------------|-----------------|------|
|                                                                                                                                                                         |                   | min.            | typ.        | max.            |      |
| <b>Characteristics</b>                                                                                                                                                  |                   |                 |             |                 |      |
| Base-emitter forward voltage<br>$I_E = 10 \mu\text{A}$<br>$I_E = 250 \text{ mA}$                                                                                        | $V_{\text{BES}}$  | 0.4<br>-        | -<br>-      | -<br>1.8        | V    |
| Matching of transistor T1 and transistor T2<br>at $I_{E2} = 0.5 \text{ mA}$ and $V_{\text{CE1}} = 5 \text{ V}$<br>$T_A = 25^\circ\text{C}$<br>$T_A = 150^\circ\text{C}$ | $I_{C1} / I_{C2}$ | -<br>0.7<br>0.7 | -<br>-<br>- | -<br>1.3<br>1.3 | -    |
| Thermal coupling of transistor T1 and transistor T2 1) T1: $V_{\text{CE}} = 5 \text{ V}$<br>Maximum current of thermal stability of $I_{C1}$                            | $I_{E2}$          | -               | 5           | -               | mA   |

**AC characteristics for transistor T1**

|                                                                                                                                                            |                 |     |      |     |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----|------|-----|---------------|
| Transition frequency<br>$I_C = 10 \text{ mA}$ , $V_{\text{CE}} = 5 \text{ V}$ , $f = 100 \text{ MHz}$                                                      | $f_T$           | -   | 250  | -   | MHz           |
| Collector-base capacitance<br>$V_{\text{CB}} = 10 \text{ V}$ , $f = 1 \text{ MHz}$                                                                         | $C_{\text{cb}}$ | -   | 0.95 | -   | pF            |
| Emitter-base capacitance<br>$V_{\text{EB}} = 0.5 \text{ V}$ , $f = 1 \text{ MHz}$                                                                          | $C_{\text{eb}}$ | -   | 9    | -   |               |
| Noise figure<br>$I_C = 200 \mu\text{A}$ , $V_{\text{CE}} = 5 \text{ V}$ , $R_S = 2 \text{ k}\Omega$ ,<br>$f = 1 \text{ kHz}$ , $\Delta f = 200 \text{ Hz}$ | $F$             | -   | 2    | -   | dB            |
| Short-circuit input impedance<br>$I_C = 1 \text{ mA}$ , $V_{\text{CE}} = 10 \text{ V}$ , $f = 1 \text{ kHz}$                                               | $h_{11e}$       | -   | 4.5  | -   | k $\Omega$    |
| Open-circuit reverse voltage transf.ratio<br>$I_C = 1 \text{ mA}$ , $V_{\text{CE}} = 10 \text{ V}$ , $f = 1 \text{ kHz}$                                   | $h_{12e}$       | -   | 2    | -   | $10^{-4}$     |
| Short-circuit forward current transf.ratio<br>$I_C = 1 \text{ mA}$ , $V_{\text{CE}} = 10 \text{ V}$ , $f = 1 \text{ kHz}$                                  | $h_{21e}$       | 100 | -    | 900 | -             |
| Open-circuit output admittance<br>$I_C = 1 \text{ mA}$ , $V_{\text{CE}} = 10 \text{ V}$ , $f = 1 \text{ kHz}$                                              | $h_{22e}$       | -   | 30   | -   | $\mu\text{S}$ |


1) Witout emitter resistor. Device mounted on alumina 15mm x 16.5mm x 0.7mm

**Test circuit for current matching**

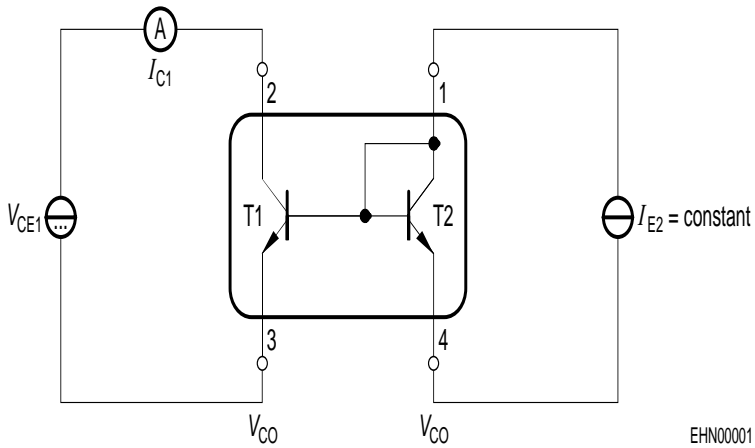

Note: Voltage drop at contacts:  $V_{CO} < 2/3 V_T = 16\text{mV}$

**Characteristic for determination of  $V_{CE1}$  at specified  $R_E$  range with  $I_{E2}$  as parameter under condition of  $I_{C1}/I_{E2} = 1.3$**


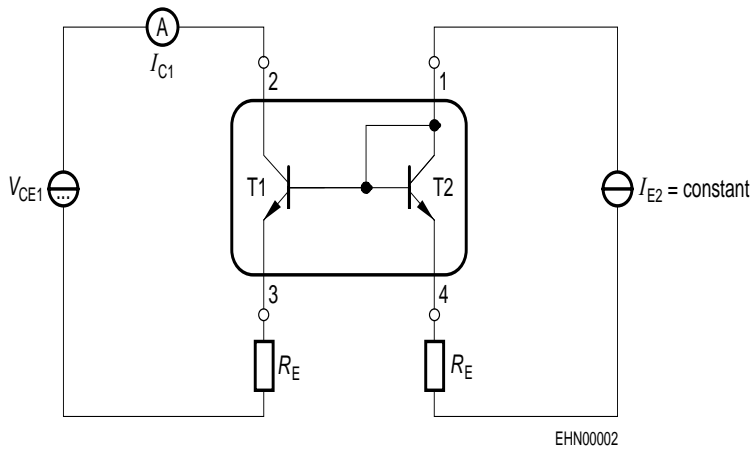


Note: BCV61 with emitter resistors

Collector-base capacitance  $C_{cb} = f(V_{CB})$


Emitter-base capacitance  $C_{eb} = f(V_{EB})$

Total power dissipation  $P_{tot} = f(T_S)$

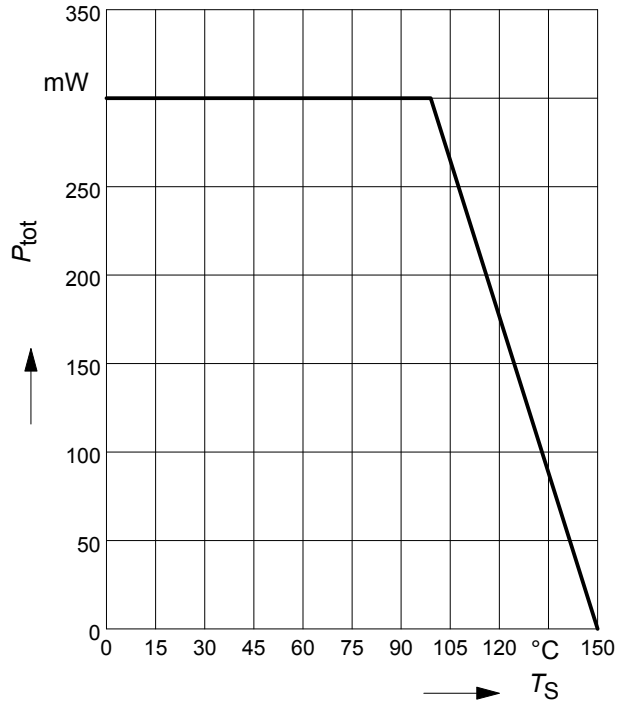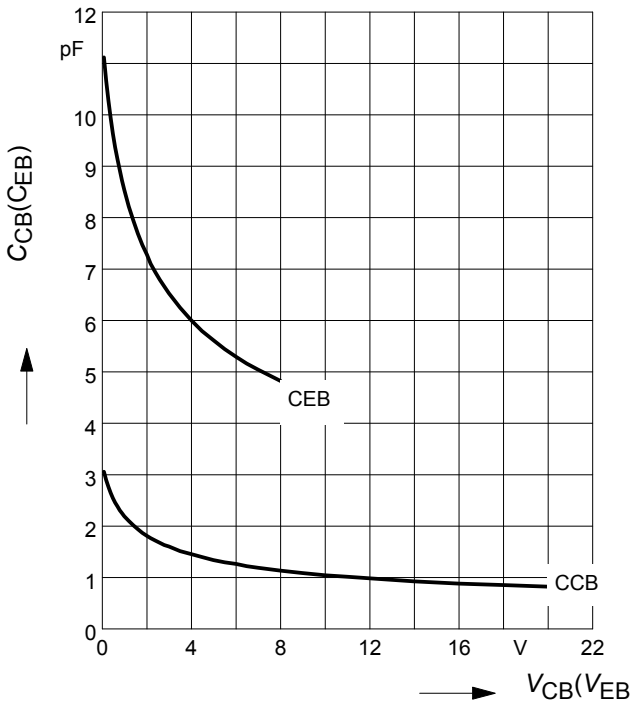


**Permissible pulse load**


$P_{totmax} / P_{totDC} = f(t_p)$

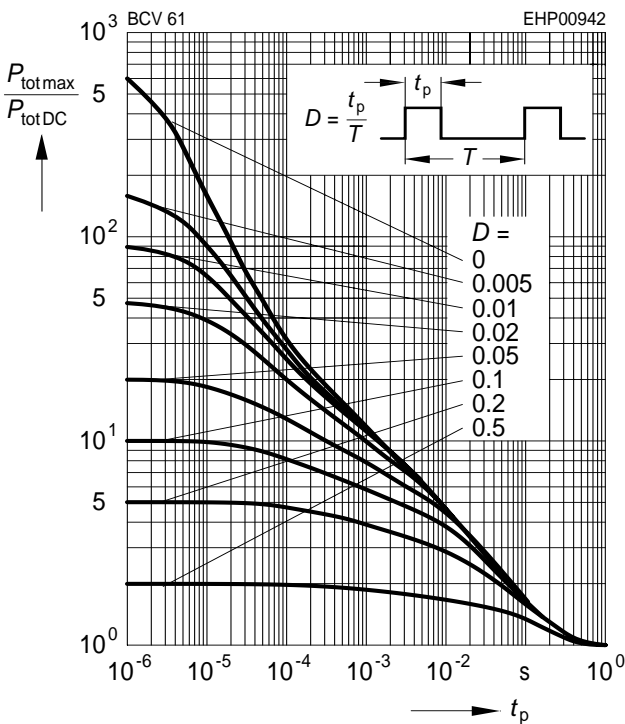


Package Outline

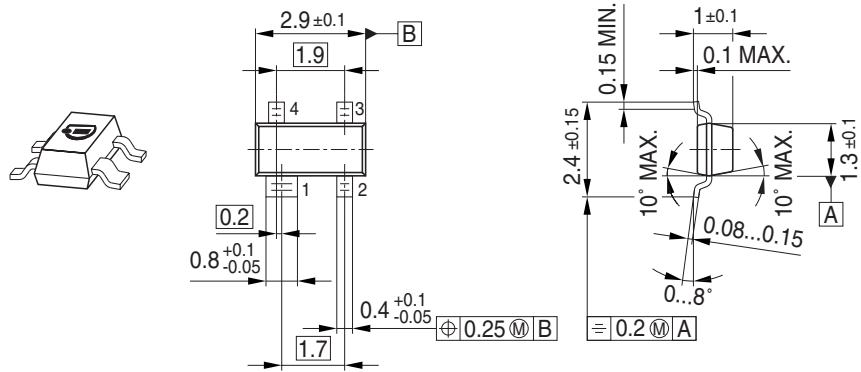

Foot Print




Marking Layout (Example)

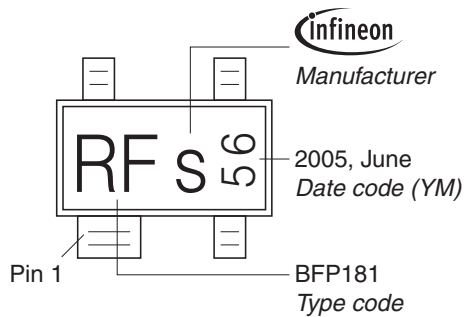

Standard Packing

Reel  $\phi$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\phi$ 330 mm = 10.000 Pieces/Reel

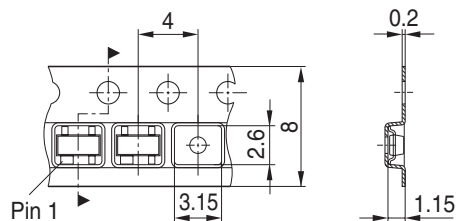

**Edition 2009-11-16**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [⊖ View \*\*BCV61BE6327HTSA1\*\* on WIN SOURCE](#)
- [⊖ \*\*Infineon Technologies\*\* Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management