



**THE DATASHEET OF  
0ZCD0150FF2C**



# Surface Mount PTC

## 0ZCD Series

2920 Chip  
RoHS6 Compliant & Halogen-Free

0ZCD Apr2013D

Not recommended for new applications. Please use 0ZCF



### 0ZCD Series Fuse



#### Maximum Voltage

6-60V (per table)

#### Temperature Range

-40°C to 85°C

#### Agency Approval

TUV (Std. EN60738-1-1 , Cert. R50102117)  
UL Component (Std. UL1434, File E305051)  
UL Conditions of Acceptability:

1. These devices have been investigated for use in safety circuits and are suitable as a limiting device.

2. These devices have been calibrated to limit the current to 8 amps within 5 seconds , per ANSI/NFPA 70, "National Electrical Code"

#### Application


All high-density boards

#### Product Features

2920 Chip Size, Fast Trip Time, High Hold Currents

#### Operating (Hold Current) Range

300mA - 3A



#### Electrical Characteristics (23°C)

	Part Number	Hold Current I <sub>H</sub> , A	Trip Current I <sub>T</sub> , A	Max Time to Trip		Maximum Current I <sub>max</sub> , A	Rated Voltage V <sub>max</sub> , Vdc	Typical Power P <sub>d</sub> , W	Resistance Tolerance		Agency Approvals	
				Current A	Time Sec				R <sub>min</sub> Ohms	R <sub>1max</sub> Ohms	UL US	TUV
A	0ZCD0030FF2C	0.30	0.60	1.5	3.0	10	60	1.5	1.000	4.800	Y	Y
B	0ZCD0050FF2C	0.50	1.00	2.5	4.0	10	60	1.5	0.300	1.400	Y	
C	0ZCD0075FF2C	0.75	1.50	8.0	0.3	40	33	1.5	0.180	1.000	Y	Y
D	0ZCD0100FF2C	1.10	2.20	8.0	0.5	40	33	1.5	0.090	0.410	Y	Y
E	0ZCD0125FF2C	1.25	2.50	8.0	2.0	40	33	1.5	0.050	0.250	Y	Y
F	0ZCD0150FF2C	1.50	3.00	8.0	2.0	40	33	1.5	0.050	0.230	Y	Y
G	0ZCD0185FF2C	1.85	3.70	8.0	2.5	40	33	1.5	0.040	0.150	Y	Y
H	0ZCD0200FF2C	2.00	4.00	8.0	4.5	40	16	1.5	0.035	0.120	Y	Y
I	0ZCD0250FF2C	2.50	5.00	8.0	16.0	40	16	1.5	0.025	0.085	Y	Y
J	0ZCD0260FF2C	2.60	5.20	8.0	20.0	40	6	1.5	0.020	0.075	Y	Y
K	0ZCD0300FF2C	3.00	5.20	8.0	25.0	40	6	1.5	0.010	0.048	Y	Y

- I<sub>H</sub> Hold Current-maximum current at which the device will not trip in still air at 23°C.  
I<sub>T</sub> Trip current-minimum current at which the device will always trip in still air at 23°C.  
I<sub>max</sub> Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).  
V<sub>max</sub> Maximum voltage device can withstand without damage at its rated current.  
P<sub>d</sub> Typical power dissipated by device when in tripped state in 23°C still air environment.  
R<sub>min</sub> Minimum device resistance at 23°C.  
R<sub>1max</sub> Maximum device resistance at 23°C, 1 hour after initial device trip, or after being soldered to PCB in end application.

Specifications subject to change without notice

# Surface Mount PTC

## 0ZCD Series

2920 Chip  
RoHS6 Compliant & Halogen-Free  
HF 



0ZCD Apr2013C

### PTC's – Basic Theory of Operation / "Tripped" Resistance Explanation

Fundamentally, a Bel PTC consists of a block of polymeric material containing conductive filler and bonded between two conductive, planar terminations.

At currents below the device I<sub>HOLD</sub> rating, AND at temperatures below 100C, the PTC maintains a resistance value below its R<sub>1 MAX</sub> rating.

As the device's temperature approaches 130C, either due to an increase in ambient temperature or a current exceeding its I<sub>TRIP</sub> rating, volumetric expansion of the filled polymer breaks apart the majority of conductive pathways across the terminals created by chain contact of adjacent filler particles and device resistance increases sharply by several orders of magnitude.

At the much higher "Tripped" resistance, there is just enough leakage current to allow internal heating to "hold" the device in its tripped state (around 125C) until power is interrupted. Once power is removed, the PTC's core cools and contracts allowing conductive chains to reform and return the device to its low resistance state.

The catalog data for each device specifies a "Typical Power" value. This is the power required to exactly match the heat lost by the tripped device to its ambient surroundings at 23C. By Ohm's Law, power can be stated as:  $W = E^2/R$ . Thus the approximate resistance of a "Tripped" PTC can be determined by:

$R = E^2/W$ , where "E" is the voltage appearing across the PTC (usually the supply's open circuit voltage), and "W" is the **Typical Power** value for the particular PTC.

Since the PPTC acts to maintain a constant internal temperature, its apparent resistance will change based upon applied voltage and, to a lesser degree, ambient conditions. Consider the following example....

A PTC with a **Typical Power** of 1 watt protecting a circuit using a 60V supply will demonstrate an apparent, tripped resistance "R" of:


$$R = 60^2/1 = 3,600 \text{ ohms}$$

This same tripped device when used to protect a 12V circuit would now present an apparent resistance of:


$$R = 12^2/1 = 144 \text{ ohms}$$

The value for Typical Power is "typical" because any physical factors that affect heat loss (such as ambient temperature or air convection) will somewhat alter the level of power that the PTC needs to maintain its internal temperature. In short, PTCs do not exhibit a constant, quantifiable tripped resistance value.

### Typical Time - To - Trip at 23°C

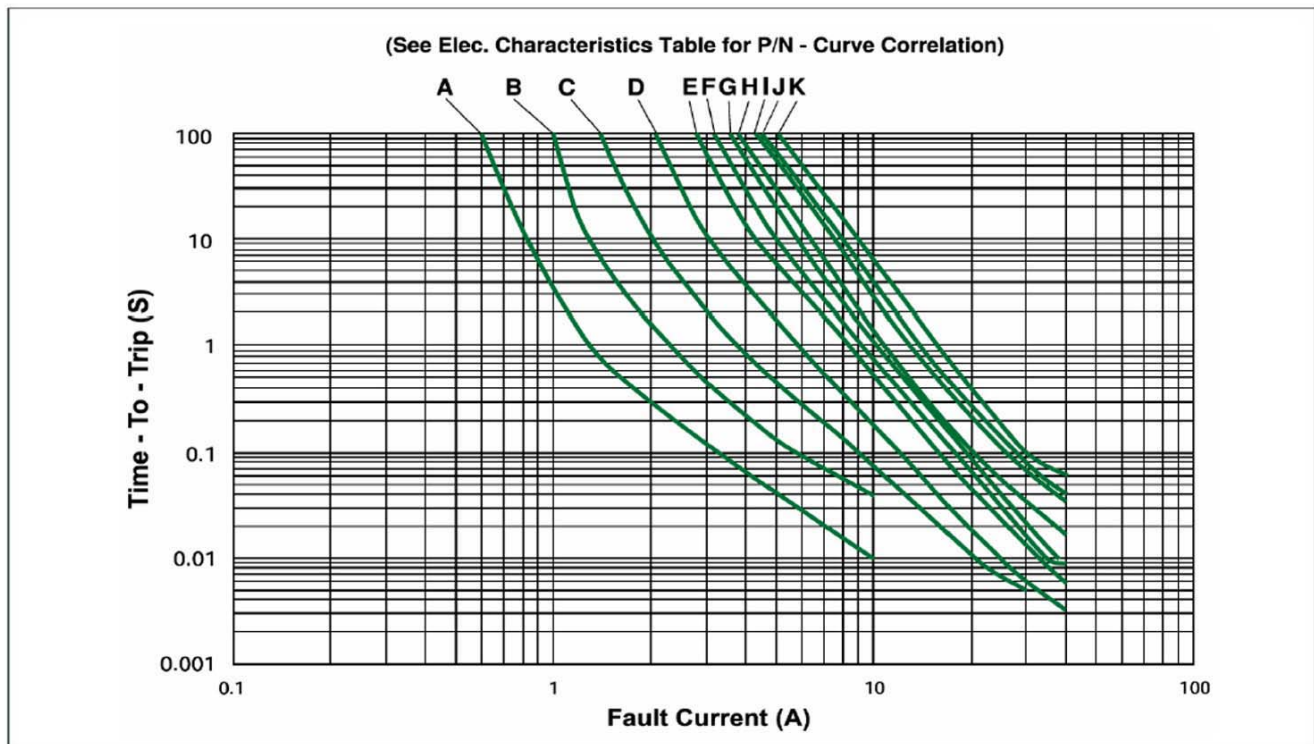


**Thermal Derating Curve**

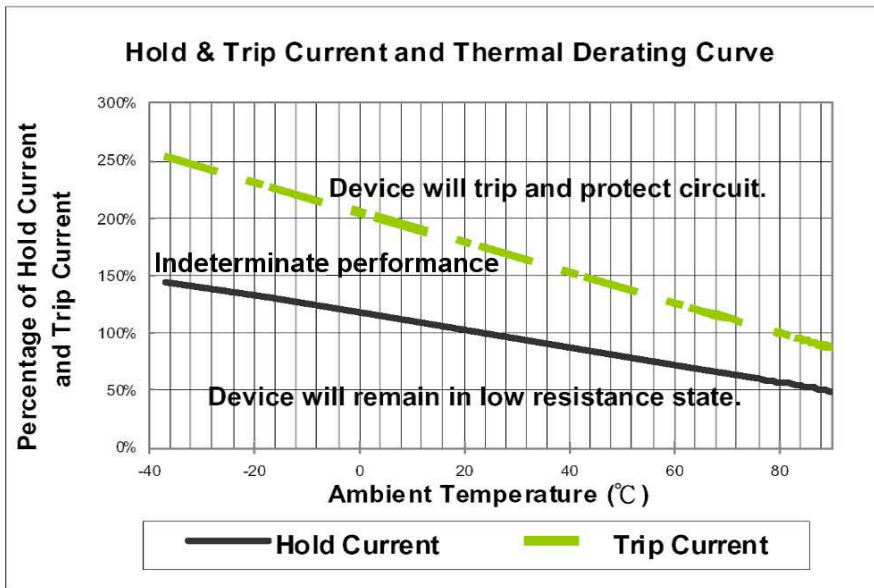

**Cautionary Notes**

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.
5. These devices are intended for use in DC voltage applications only. Use in AC voltage applications should be first discussed with Bel Fuse engineering.
6. Not recommended for use on potted or conformal coated PCB's. Restriction of free air flow could affect electrical performance and/or result in device failure. Consult Bel Fuse engineering.
7. In the "Indeterminate Performance / grey zone", tripping may occur but cannot be relied upon. For special circumstances considering use within this region, consult Bel Fuse Engineering.

**Mechanical Dimensions**

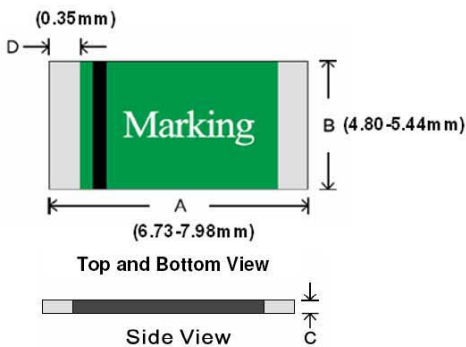

All dimensions in mm.

C		
Part Number	Min	Max
OZCD0030FF2C	0.60	1.55
OZCD0050FF2C	0.60	1.55
OZCD0075FF2C	0.40	1.15
OZCD0110FF2C	0.40	1.00
OZCD0125FF2C	0.40	0.90
OZCD0150FF2C	0.40	0.90
OZCD0185FF2C		
Thru	0.30	0.90
OZCD0300FF2C		

**PTC Marking**




"b", H code.

Part Number	H Code
OZCD0030FF2C	0030
OZCD0050FF2C	0050
OZCD0075FF2C	0075
OZCD0100FF2C	0110
OZCD0125FF2C	0125
OZCD0150FF2C	0150
OZCD0185FF2C	0185
OZCD0200FF2C	0200
OZCD0250FF2C	0250
OZCD0260FF2C	0260
OZCD0300FF2C	0300

**Pad Layout**

The dimensions in the table below provide the recommended pad layout.

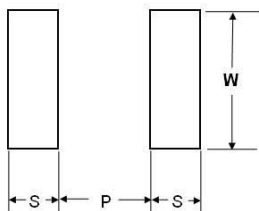

P		S		W	
Nominal	Nominal	Nominal	Nominal	Nominal	Nominal
mm	Inch	mm	Inch	mm	Inch
5.10	0.201	2.30	0.091	5.60	0.221

**Termination Pad Materials**

**Matte Tin-plated Copper**

# Surface Mount PTC

## 0ZCD Series


2920 Chip  
RoHS6 Compliant & Halogen-Free



0ZCD Apr2013D

### Solder Reflow and Rework Recommendations

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (T <sub>smax</sub> to T <sub>p</sub> )	3 °C/second max.
<b>Preheat :</b>	
Temperature Min (T <sub>smin</sub> )	150 °C
Temperature Max (T <sub>smax</sub> )	200 °C
Time (t <sub>smin</sub> to t <sub>smax</sub> )	60-180 seconds
<b>Time maintained above:</b>	
Temperature (T <sub>L</sub> )	217 °C
Time (t <sub>L</sub> )	60-150 seconds
<b>Peak/Classification Temperature (T<sub>p</sub>) :</b>	260 °C
<b>Time within 5°C of actual Peak :</b>	
Temperature (t <sub>p</sub> )	20-40 seconds
<b>Ramp-Down Rate :</b>	6 °C/second max.
<b>Time 25 °C to Peak Temperature :</b>	8 minutes max.

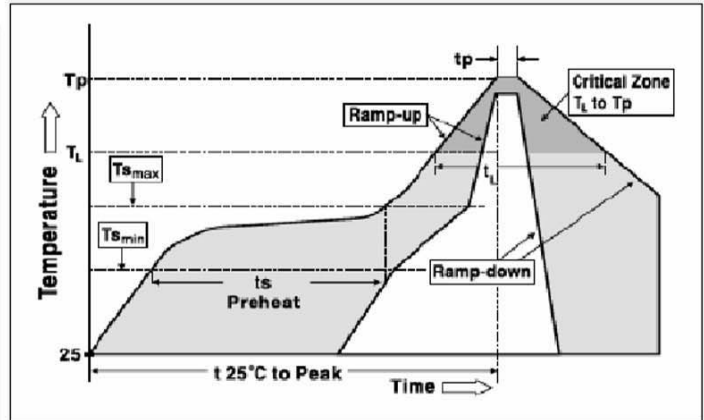

### Solder Reflow

Due to "lead free / RoHS6" construction of these PTC devices, the required Temperature and Dwell Time in the "Soldering" zone of the reflow profile are greater than those used for non-RoHS devices.

1. Recommended reflow methods ; IR , vapor phase oven , hot air oven.
2. Not Recommended For Wave Solder / Direct Immersion.
3. Recommended maximum ; paste thickness is 0.25mm.
4. Devices are compatible with standard industry cleaning solvents and methods.

### Caution

If reflow temperature / dwell times exceed the recommended profile, the electrical performance of the PTC may be affected.

Rework : MIL-STD-202G Method 210F. Test Condition A.

### Standard Packaging

Part Number	Tape/Reel Qty
0ZCD0030FF2C	2,000
0ZCD0050FF2C	
0ZCD0075FF2C	
0ZCD0100FF2C	
0ZCD0125FF2C	
0ZCD0150FF2C	
0ZCD0185FF2C	
0ZCD0200FF2C	
0ZCD0250FF2C	
0ZCD0260FF2C	
0ZCD0300FF2C	

2000 fuses in 7 inches dia. Reel, 8mm wide tape, 4mm pitch, per EIA-481 (equivalent IEC-286 part 3).

### P/N Explanation and Ordering Information

	0ZCD	0XXX	X	X	XX
<b>PTC series</b>	0ZCD, 2920 Size				
<b>I HOLD Rating</b>					
Refer to Part Number and IH Rating in Electrical Characteristics Table on P.1.					
<b>Electrical Characteristics</b>	F = Standard Design	A to Z (except F) = Special, customer spec, DCR sort, etc.			
<b>Mechanical Features</b>	F = Standard Design	A to Z (except F) = Special, customer spec, lead forming, etc.			
<b>Tape &amp; Reel Qty</b>	See standard packaging				

Specifications subject to change without notice

### CORPORATE OFFICE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
E-Mail: belfuse@belf.com  
Website: www. belfuse.com

### FAR EAST OFFICE

**Bel Fuse Ltd.**  
8/F Luk Hop Industrial Building  
8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706

### EUROPE OFFICE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite F15  
Preston, Lancashire, PR1 8UQ  
United Kingdom  
Tel 44-1772-556601  
Fax 44-1772-561008

### EUROPE

**Bel Stewart GmbH**  
Industriestrasse 20  
61381 Friedrichsdorf  
Germany  
Tel 49-6172-9552-0  
Fax 49-6172-9552-40

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 0ZCD0150FF2C on WIN SOURCE](#)
- [Bel Fuse Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management