




**THE DATASHEET OF
MMS-126-02-L-SV**



TIGER CLAW™ SOCKET STRIP

(2.00 mm) .0787" PITCH • MMS SERIES

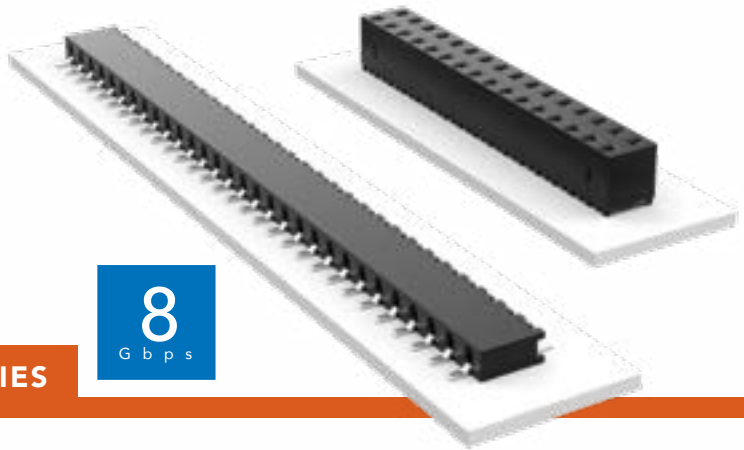

MMS

Board Mates:
TMMH, TMM, MTMM, MMT,
TW, LTMM, ZLTMM, TSH

Cable Mates:
TCMD

SPECIFICATIONS

Insulator Material:

Black LCP

Contact Material:

Phosphor Bronze

Plating:

Sn or Au over

50 μ" (1.27 μm) Ni

Current Rating (MMS/TMM):

3.9 A per pin

(2 pins powered)

Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

Insertion Depth:

DH = (2.13 mm) .084" to

(2.79 mm) .110"

SH = (2.13 mm) .084"

minimum or pass-through

Top Entry DV/SV =

(2.13 mm) .084" to

(4.32 mm) .170"

Bottom Entry DV/SV =

(4.27 mm) .168" minimum

(Plus board)

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.15 mm) .006" max*

*(.004" stencil solution may be available; contact ipg@samtec.com)

ALSO AVAILABLE

MOQ Required

Alignment Pin (-DV only)

Locking clips and Through-hole pass-through options




Other platings

Note:

Some lengths, styles and options are non-standard, non-returnable.

| MMS | 1 | NO. PINS PER ROW | 01 | PLATING OPTION | ROW OPTION | OPTION |
|-----|---|------------------|----|----------------|------------|--------|
|-----|---|------------------|----|----------------|------------|--------|

02 thru 40



-F
= Gold flash on contact,
Matte Tin on tail

-L
= 10 μ" (0.25 μm)
Gold contact,
Matte Tin on tail


-SV
= Single
Vertical

-SH
= Single
Horizontal

-DV
= Double
Vertical




-DH
= Double
Horizontal

-XX
= Polarized
Position

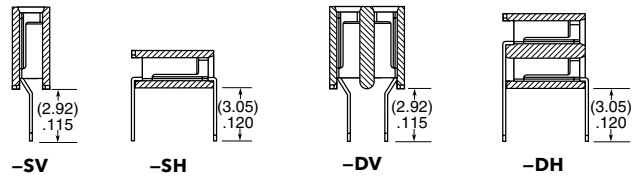

| MMS | 1 | NO. PINS PER ROW | 02 | PLATING OPTION | ROW OPTION | OTHER OPTION |
|-----|---|------------------|----|----------------|------------|--------------|
|-----|---|------------------|----|----------------|------------|--------------|

02 thru 40

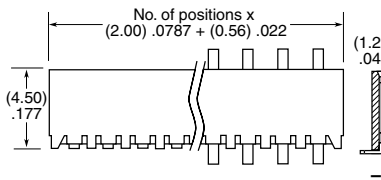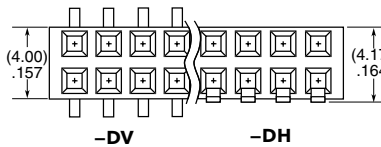

-F
= Gold flash
on contact,
Matte Tin on tail

-L
= 10 μ" (0.25 μm)
Gold contact,
Matte Tin on tail

-SV
= Single
Vertical

-SH
= Single
Horizontal

-DV
= Double
Vertical

-DH
= Double
Horizontal

-XX
= Polarized Position

-K
= (5.50 mm) .217" DIA
Polyimide Film
Pick & Place Pad
(3 positions min.)
(-SV & -DV only)

-M
= Metal Pick & Place Pad
(4 positions min.)
(-DV only)

-P
= Plastic Pick & Place Pad
(4 positions min.)
(-SV & -DV only)





-TR
= Tape & Reel

-FR
= Full Reel
Tape & Reel
(must order max.
quantity per reel;
contact Samtec for
quantity breaks)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View MMS-126-02-L-SV on WIN SOURCE](#)
-  [Samtec Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management