



**THE DATASHEET OF  
GS1011MEP-EVB2-S2W-WEB**





# GainSpan GS1011M / GS1500M Evaluation Board Mrk II




## PRODUCT OVERVIEW

The GS1011M/GS1500M Evaluation Board supports the GS1011M (802.11b) or GS1500M (802.11b/g/n) module family which provides customers the mean to evaluate the capabilities of GainSpan’s ultra-low power wireless solutions for Wi-Fi networks. The Serial to Wi-Fi embedded software on the modules allows devices and appliances manufacturers to easily add Wi-Fi capabilities to their products with minor impact on the host microcontroller firmware.

The evaluation board comes with pre-loaded serial to Wi-Fi firmware that supports a Limited AP mode, with built-in web-server for provisioning the device. The evaluation board works in conjunction with the serial to Wi-Fi evaluation kit software and firmware.

The evaluation board has various jumpers, switches, push buttons and LED’s that provide support for evaluating different features and configuration based on the firmware loaded from the evaluation kit.. For details see the product briefs of the GS1011M or GS1500M modules.

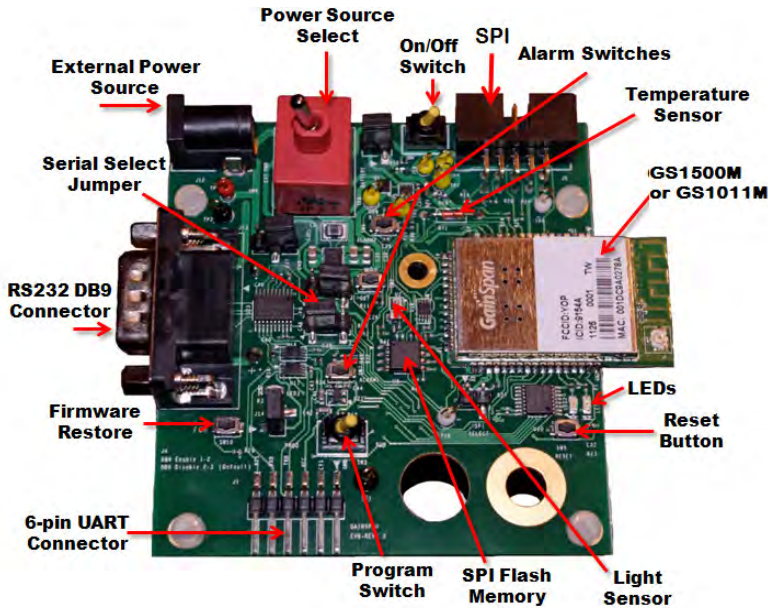

## EVALUATION BOARD DETAILS:

Feature	Description
<b>Radio Protocol</b>	IEEE 802.11b/g/n
<b>RF Module(s)</b>	GS1011M (802.11b) or GS1500M (802.11b/g/n)
<b>Radio Frequency</b>	2.4 – 2.497 GHz
<b>Antenna Type</b>	On-board PCB Trace or External (u.FL)
<b>I/O Port</b>	6-pin serial UART ( 3.3V TTL), RS232 DB9 Connector, SPI Connector
<b>LED</b>	2 LED's to indicate state
<b>Memory</b>	External SPI Flash Memory for Firmware Upgrade and Restore
<b>Switches</b>	Push button for Alarms, Reset, WPS, and Configuration
<b>Program Switch</b>	For programming the module
<b>On/Off Switch</b>	Power on/off switch
<b>Serial Select Jumper</b>	Jumper to select between UART or RS232 interface or SPI
<b>Sensors</b>	Temperature and Light
<b>Power Source</b>	Battery or External Power Adapter
<b>Battery</b>	Two 1.5V AA Battery (Alkaline or Lithium) Lithium is recommended for longer battery life
<b>Power Source Select</b>	Select power source as either battery or external power adapter
<b>Power Adapter</b>	3.3V
<b>Dimensions (in)</b>	3.5 x 3.0 (includes module and RS232 connector)

## EVAl BOARD ORDERING INFORMATION

PART NUMBER	Description
GS1011MIP-EVB2-S2W-WEB	Serial to Wi-Fi Evaluation Board with – GS1011MIP module
GS1011MIE-EVB2-S2W-WEB	Serial to Wi-Fi Evaluation Board with – GS1011MIE module
GS1011MEP-EVB2-S2W-WEB	Serial to Wi-Fi Evaluation Board with – GS1011MEP module
GS1011MEE-EVB2-S2W-WEB	Serial to Wi-Fi Evaluation Board with – GS1011MEE module
GS1500M-EVB-S2W-WEB	Serial to Wi-Fi Evaluation Board with – GS1500M module



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View GS1011MEP-EVB2-S2W-WEB on WIN SOURCE](#)

 [Telit Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management