



**THE DATASHEET OF
R1LV0208BSA-7SI#B0**



R1LV0208BSA

2Mb Advanced LPSRAM (256k word x 8bit)

R10DS0272EJ0101
Rev.1.01
2020.2.20

Description

The R1LV0208BSA is a family of low voltage 2-Mbit static RAMs organized as 262,144-word by 8-bit, fabricated by Renesas's high-performance 0.15um CMOS and TFT technologies. The R1LV0208BSA has realized higher density, higher performance and low power consumption. The R1LV0208BSA is suitable for memory applications where a simple interfacing, battery operating and battery backup are the important design objectives. The R1LV0208BSA has been packaged in 32-pin sTSSOP.


Features

- Single 2.7V~3.6V power supply
- Small stand-by current: 1μA (3.0V, typical)
- No clocks, No refresh
- All inputs and outputs are TTL compatible.
- Easy memory expansion by CS1# and CS2
- Common Data I/O
- Three-state outputs: OR-tie Capability
- OE# prevents data contention on the I/O bus

Ordering Information

| Orderable part name | Access time | Temperature range | Package | Shipping container |
|---------------------|-------------|-------------------|----------------------------------|--------------------|
| R1LV0208BSA-5SI#B1 | 55 ns | -40 ~ +85°C | 8mm×13.4mm 32-pin plastic sTSSOP | Tray |
| R1LV0208BSA-5SI#S1 | | | | Embossed tape |


Pin Arrangement

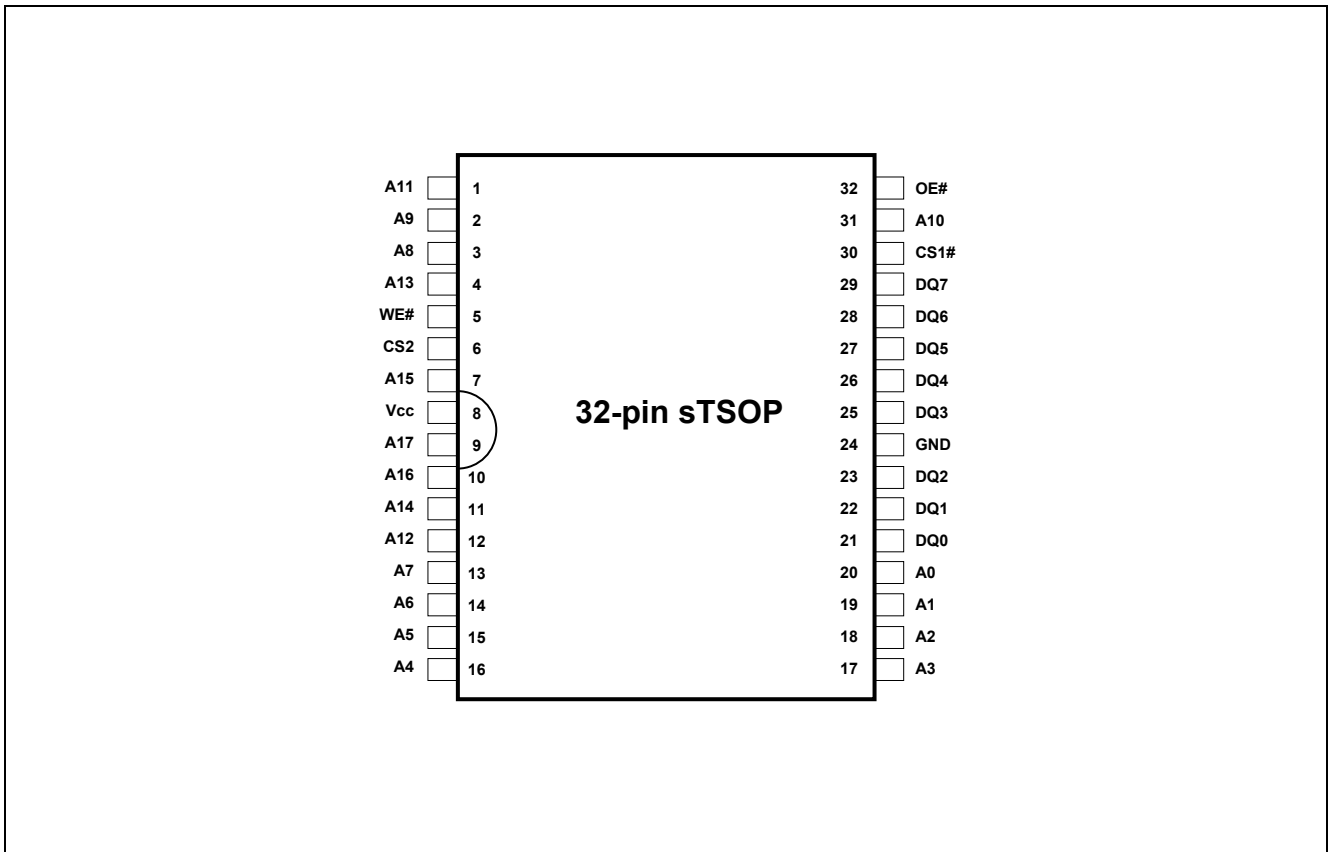

Pin Description

| Pin name | Function |
|------------|-------------------|
| Vcc | Power supply |
| Vss (GND) | Ground |
| A0 to A17 | Address input |
| DQ0 to DQ7 | Data input/output |
| CS1# | Chip select 1 |
| CS2 | Chip select 2 |
| WE# | Write enable |
| OE# | Output enable |

Block Diagram

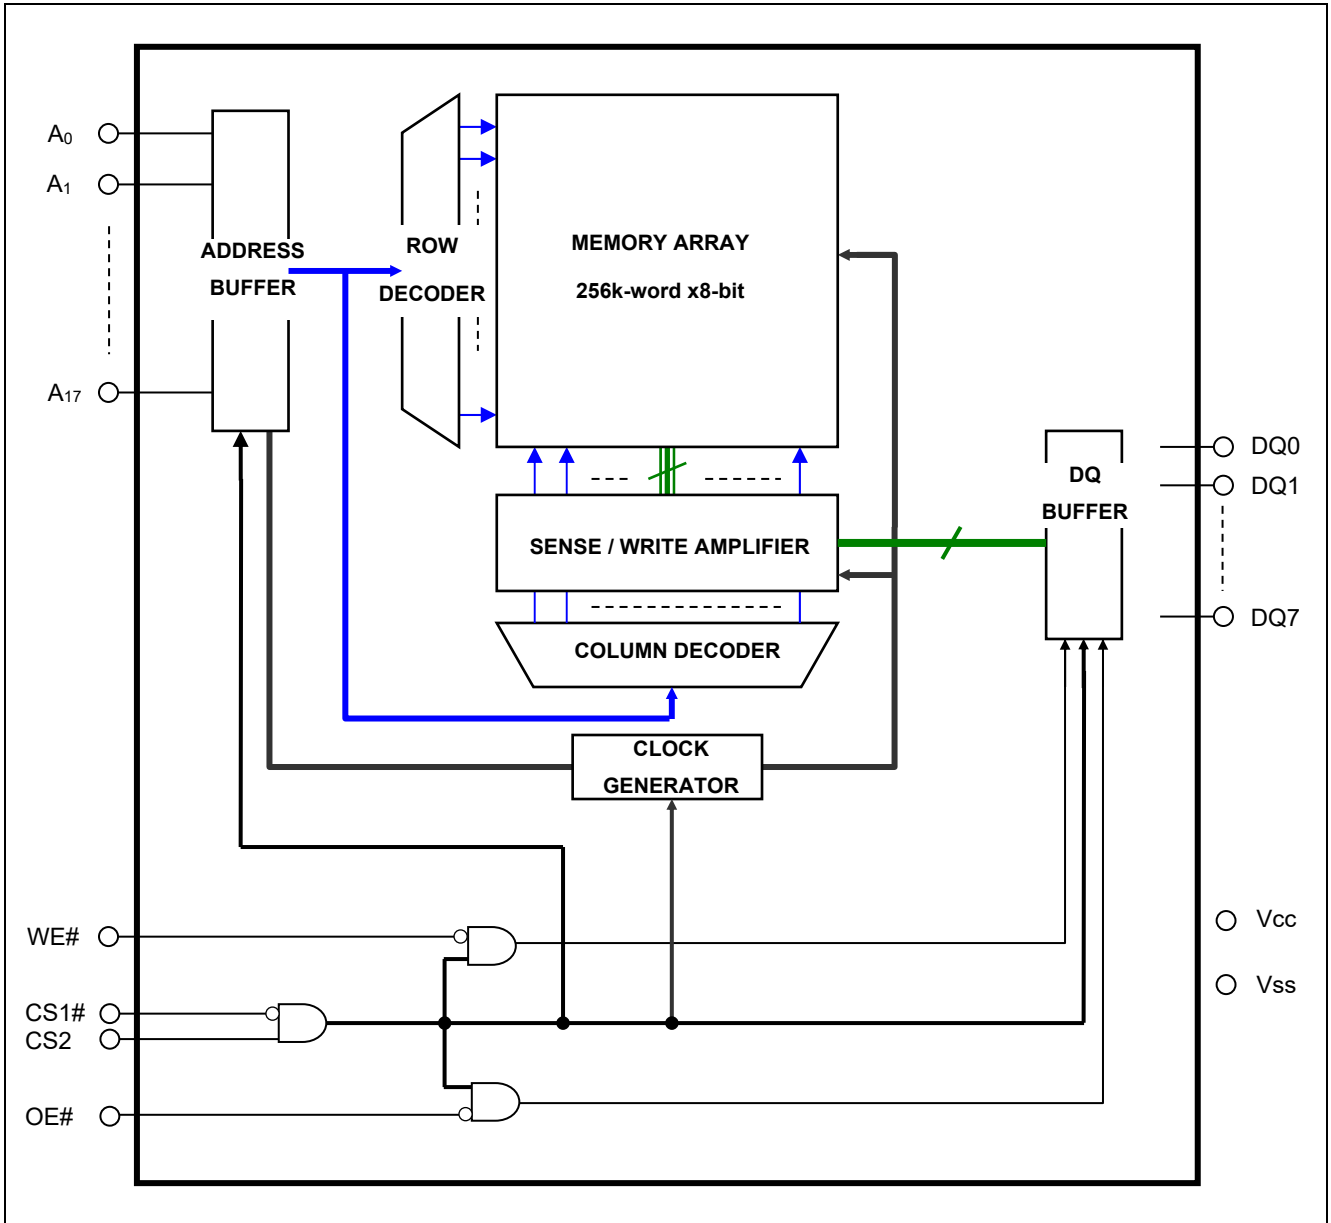

Operation Table

| CS1# | CS2 | WE# | OE# | DQ0~7 | Operation |
|------|-----|-----|-----|--------|----------------|
| X | L | X | X | High-Z | Stand-by |
| H | X | X | X | High-Z | Stand-by |
| L | H | L | X | Din | Write |
| L | H | H | L | Dout | Read |
| L | H | H | H | High-Z | Output disable |

Note 1. H: V_{IH} L: V_{IL} X: V_{IH} or V_{IL}

Absolute Maximum

| Parameter | Symbol | Value | unit |
|--------------------------------------------------|------------|----------------------------------|------|
| Power supply voltage relative to V_{SS} | V_{CC} | -0.5 to +4.6 | V |
| Terminal voltage on any pin relative to V_{SS} | V_T | -0.5^{*1} to $V_{CC}+0.5^{*2}$ | V |
| Power dissipation | P_T | 0.7 | W |
| Operation temperature | T_{opr} | -40 to +85 | °C |
| Storage temperature range | T_{stg} | -65 to 150 | °C |
| Storage temperature range under bias | T_{bias} | -40 to +85 | °C |

Note 1. -3.0V for pulse ≤ 30 ns (full width at half maximum)

2. Maximum voltage is +4.6V.

DC Operating Conditions

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Note |
|---------------------------|-----------------|------|------|----------------------|------|------|
| Supply voltage | V _{CC} | 2.7 | 3.0 | 3.6 | V | |
| | V _{SS} | 0 | 0 | 0 | V | |
| Input high voltage | V _{IH} | 2.0 | - | V _{CC} +0.3 | V | |
| Input low voltage | V _{IL} | -0.3 | - | 0.6 | V | 1 |
| Ambient temperature range | T _a | -40 | - | +85 | °C | |

Note 1. -3.0V for pulse ≤ 30ns (full width at half maximum)

DC Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test conditions | |
|---------------------------|------------------|--------------------------|-----------------|------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Input leakage current | I _{LI} | - | - | 1 | μA | V _{in} = V _{SS} to V _{CC} | |
| Output leakage current | I _{LO} | - | - | 1 | μA | CS1# =V _{IH} or CS2 =V _{IL} or OE# =V _{IH} , V _{I/O} =V _{SS} to V _{CC} | |
| Average operating current | I _{CC1} | - | 15 | 25 | mA | Min. cycle, duty =100%, I _{I/O} = 0mA, CS1# =V _{IL} , CS2 =V _{IH} , Others = V _{IH} /V _{IL} | |
| | I _{CC2} | - | 2 | 5 | mA | Cycle =1μs, duty =100%, I _{I/O} = 0mA, CS1# ≤ 0.2V, CS2 ≥ V _{CC} -0.2V, V _{IH} ≥ V _{CC} -0.2V, V _{IL} ≤ 0.2V | |
| Standby current | I _{SB} | - | - | 0.33 | mA | (1) CS1# =V _{IH} , Others =V _{IH} /V _{IL} or (2) CS2 =V _{IL} , Others =V _{IH} /V _{IL} | |
| Standby current | I _{SB1} | - | 1 ^{*1} | 2 | μA | ~+25°C | V _{in} = V _{SS} to V _{CC} , (1) CS2 ≤ 0.2V or (2) CS1# ≥ V _{CC} -0.2V, CS2 ≥ V _{CC} -0.2V |
| | | - | - | 3 | μA | ~+40°C | |
| | | - | - | 8 | μA | ~+70°C | |
| | | - | - | 10 | μA | ~+85°C | |
| Output high voltage | V _{OH} | 2.4 | - | - | V | I _{OH} = -0.5mA | |
| | V _{OH2} | V _{CC} - 0.5 | - | - | V | I _{OH} = -0.05mA | |
| Output low voltage | V _{OL} | - | - | 0.4 | V | I _{OL} = 2mA | |

Note 1. Typical parameter indicates the value for the center of distribution at 3.0V (T_a = 25°C), and not 100% tested.

Capacitance

(V_{CC} = 2.7V ~ 3.6V, f = 1MHz, T_a = -40 ~ +85°C)


| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test conditions | Note |
|----------------------------|------------------|------|------|------|------|-----------------------|------|
| Input capacitance | C _{in} | - | - | 8 | pF | V _{in} = 0V | 1 |
| Input / output capacitance | C _{I/O} | - | - | 10 | pF | V _{I/O} = 0V | 1 |

Note 1. This parameter is sampled and not 100% tested.

AC Characteristics

Test Conditions ($V_{cc} = 2.7V \sim 3.6V$, $T_a = -40 \sim +85^{\circ}C$)

- Input pulse levels: $V_{IL} = 0.4V$, $V_{IH} = 2.2V$
- Input rise and fall time: 5ns
- Input and output timing reference level: 1.5V
- Output load: See figures (Including scope and jig)

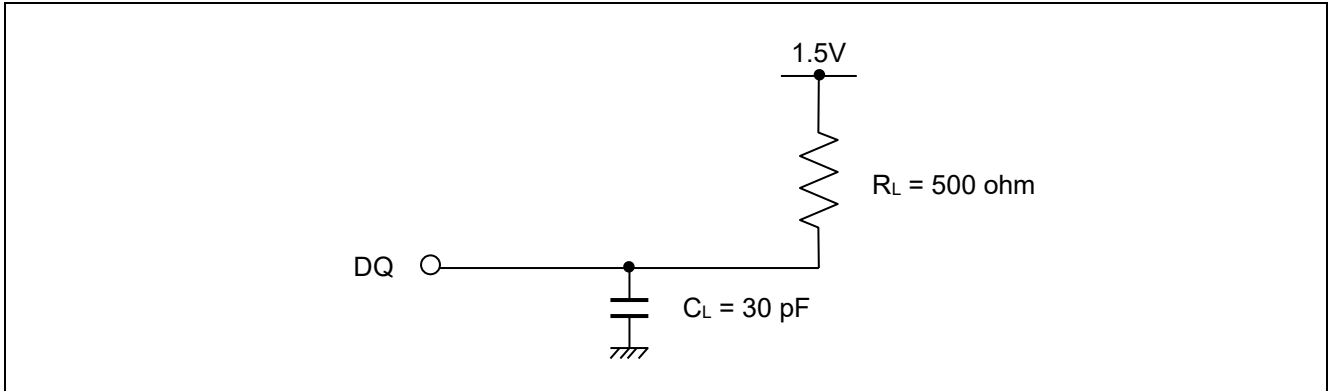

Read Cycle

| Parameter | Symbol | Min. | Max. | Unit | Note |
|------------------------------------|-------------------|------|------|------|-------|
| Read cycle time | t _{RC} | 55 | - | ns | |
| Address access time | t _{AA} | - | 55 | ns | |
| Chip select access time | t _{ACS1} | - | 55 | ns | |
| | t _{ACS2} | - | 55 | ns | |
| Output enable to output valid | t _{OE} | - | 30 | ns | |
| Output hold from address change | t _{OH} | 10 | - | ns | |
| Chip select to output in low-Z | t _{CLZ1} | 10 | - | ns | 2,3 |
| | t _{CLZ2} | 10 | - | ns | 2,3 |
| Output enable to output in low-Z | t _{OLZ} | 5 | - | ns | 2,3 |
| Chip deselect to output in high-Z | t _{CHZ1} | 0 | 20 | ns | 1,2,3 |
| | t _{CHZ2} | 0 | 20 | ns | 1,2,3 |
| Output disable to output in high-Z | t _{OHZ} | 0 | 20 | ns | 1,2,3 |


Write Cycle

| Parameter | Symbol | Min. | Max. | Unit | Note |
|------------------------------------|------------------|------|------|------|------|
| Write cycle time | t _{WC} | 55 | - | ns | |
| Address valid to end of write | t _{AW} | 50 | - | ns | |
| Chip select to end of write | t _{CW} | 50 | - | ns | 5 |
| Write pulse width | t _{WP} | 45 | - | ns | 4 |
| Address setup time | t _{AS} | 0 | - | ns | 6 |
| Write recovery time | t _{WR} | 0 | - | ns | 7 |
| Data to write time overlap | t _{DW} | 25 | - | ns | |
| Data hold from write time | t _{DH} | 0 | - | ns | |
| Output enable from end of write | t _{OW} | 5 | - | ns | 2 |
| Output disable to output in high-Z | t _{OHZ} | 0 | 20 | ns | 1,2 |
| Write to output in high-Z | t _{WHZ} | 0 | 20 | ns | 1,2 |


- Note
1. t_{CHZ}, t_{OHZ} and t_{WHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referred to output voltage levels.
 2. This parameter is sampled and not 100% tested.
 3. At any given temperature and voltage condition, t_{HZ} max is less than t_{LZ} min both for a given device and from device to device.
 4. A write occurs during the overlap of a low CS1#, a high CS2, a low WE#.
A write begins at the latest transition among CS1# going low, CS2 going high and WE# going low.
A write ends at the earliest transition among CS1# going high, CS2 going low and WE# going high.
t_{WP} is measured from the beginning of write to the end of write.
 5. t_{CW} is measured from the later of CS1# going low or CS2 going high to end of write.
 6. t_{AS} is measured the address valid to the beginning of write.
 7. t_{WR} is measured from the earliest of CS1# or WE# going high or CS2 going low to the end of write cycle.
 8. Don't apply inverted phase signal externally when DQ pin is output mode.

Timing Waveforms


Read Cycle

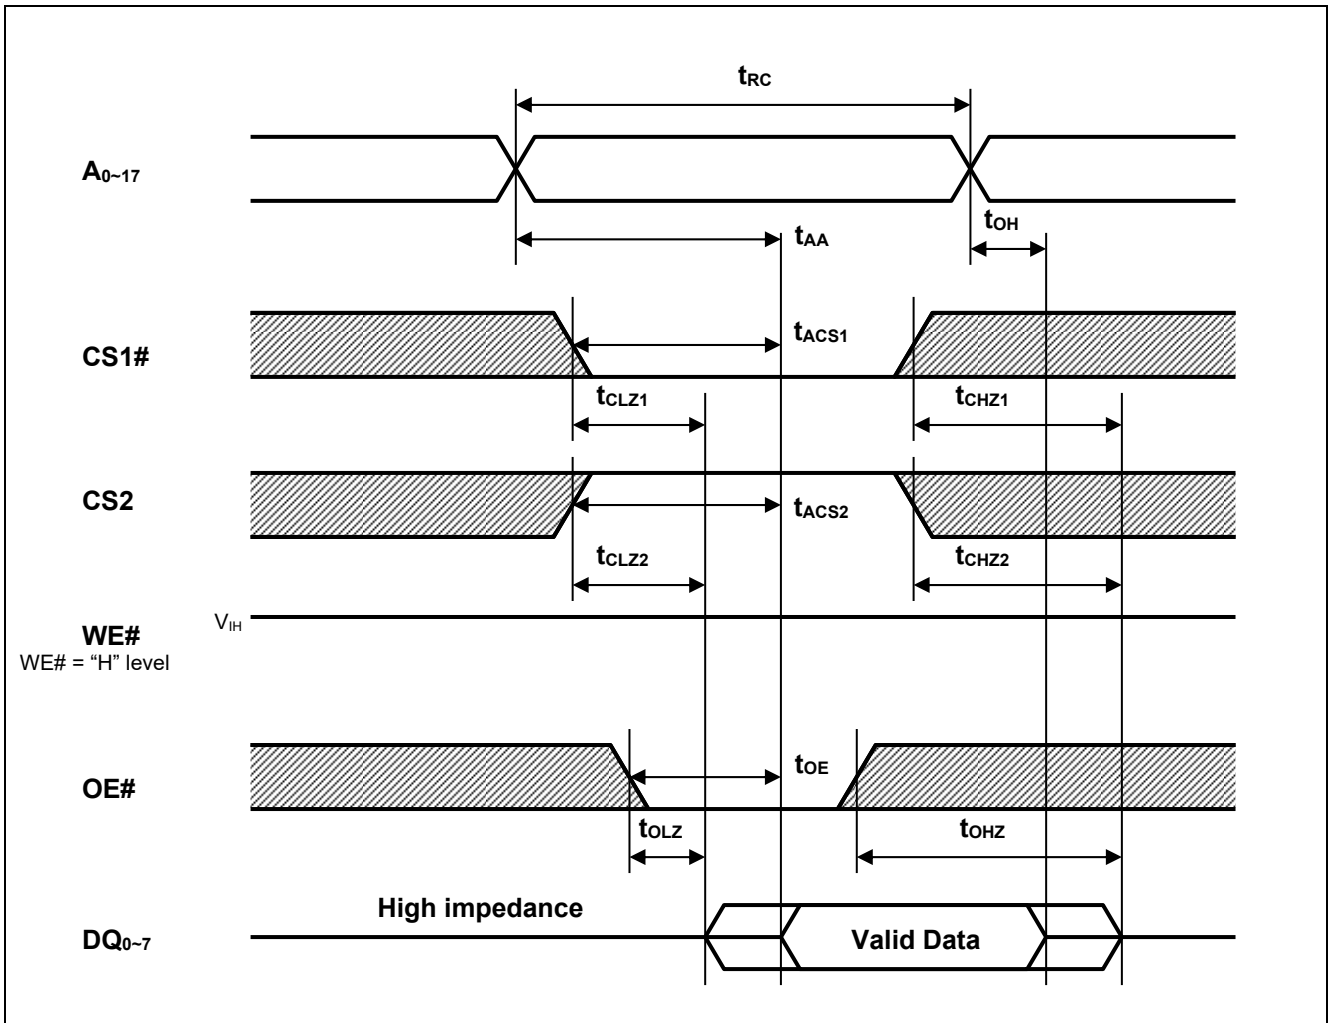

Write Cycle (1) (WE# CLOCK)

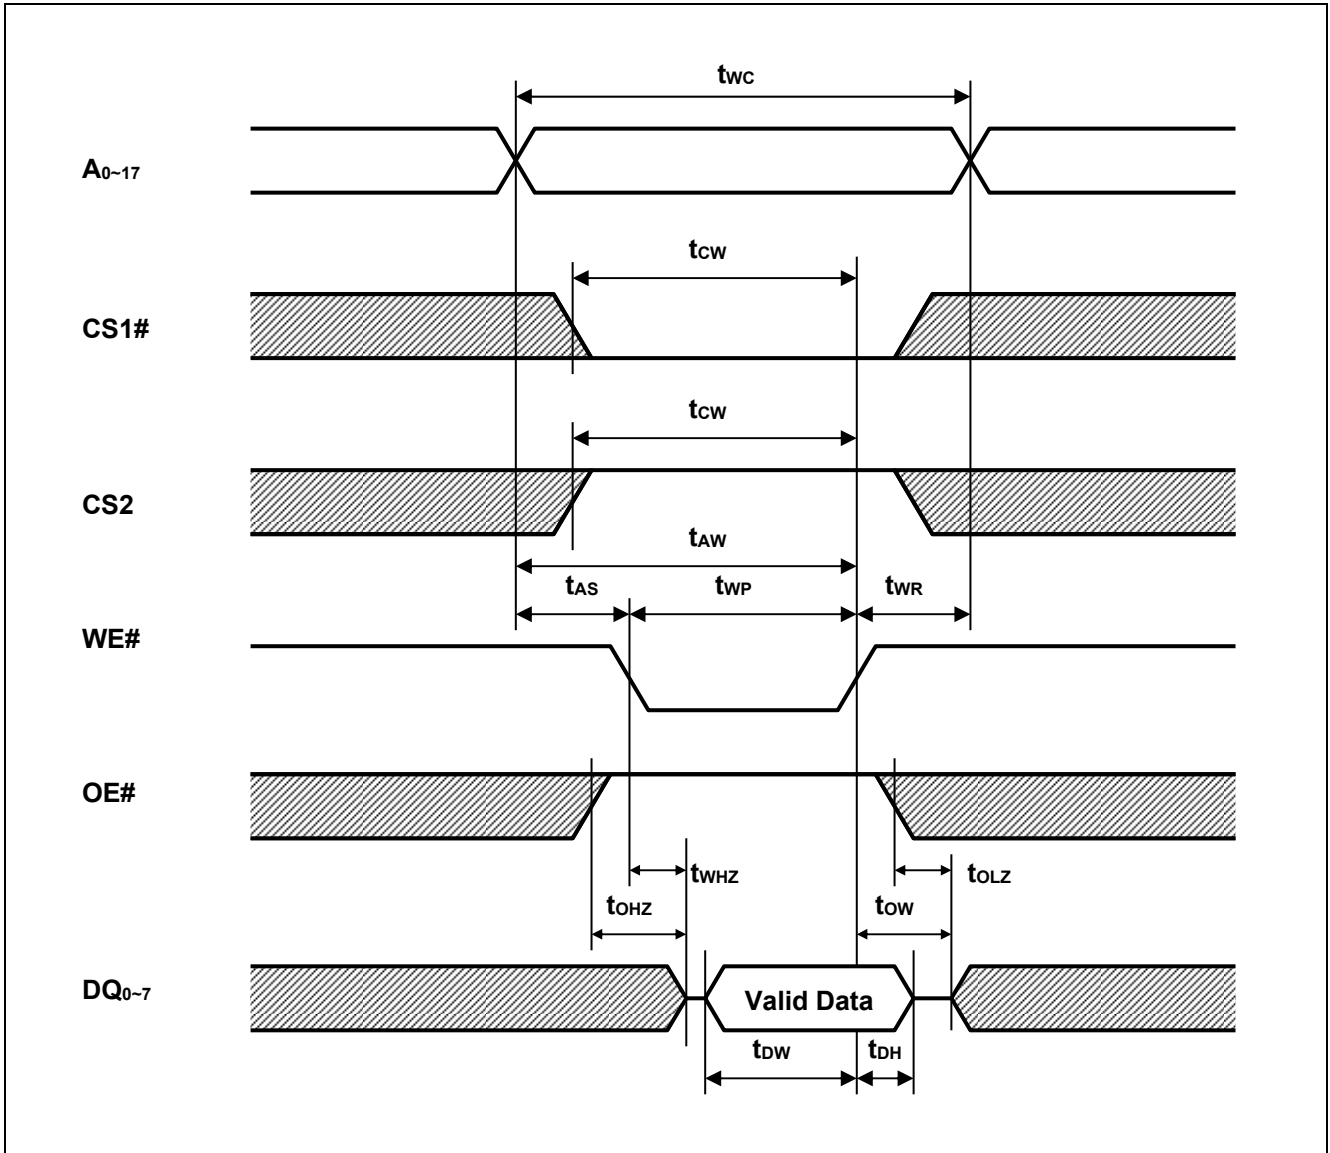

Write Cycle (2) (CS1#, CS2 CLOCK)

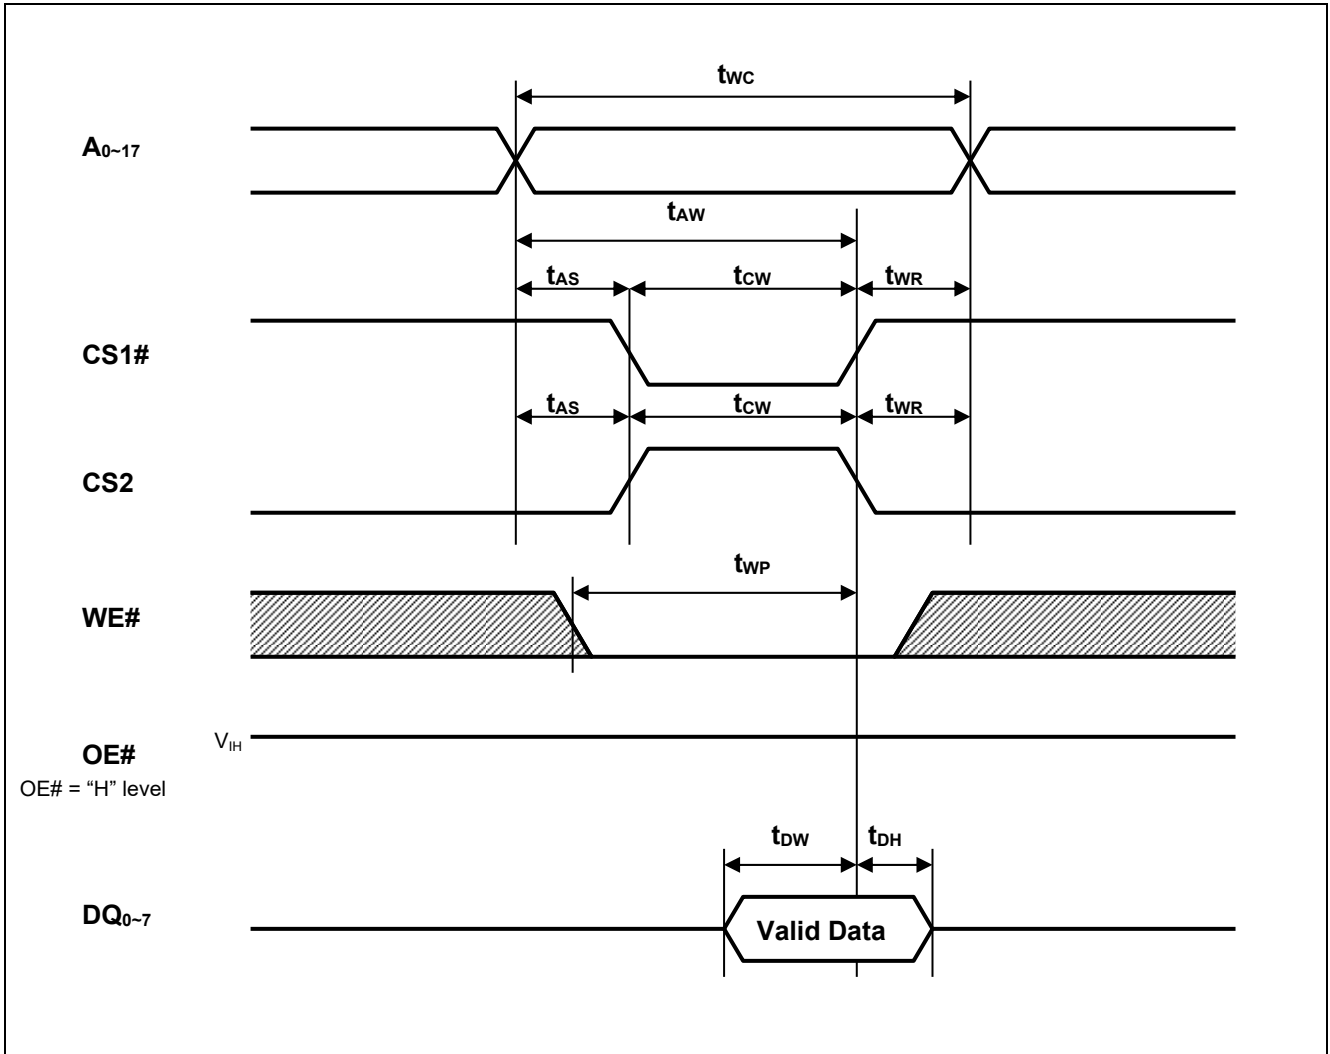


Low Vcc Data Retention Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test conditions ² | |
|--------------------------------------|-------------------|------|-----------------|------|------|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| V _{CC} for data retention | V _{DR} | 2.0 | - | 3.6 | V | V _{in} ≥ 0V, (1) 0V ≤ CS2 ≤ 0.2V or (2) CS1# ≥ V _{CC} -0.2V, CS2 ≥ V _{CC} -0.2V | |
| Data retention current | I _{CCDR} | - | 1 ^{*1} | 2 | μA | ~+25°C | V _{CC} =3.0V, V _{in} ≥ 0V, (1) 0V ≤ CS2 ≤ 0.2V or (2) CS1# ≥ V _{CC} -0.2V, CS2 ≥ V _{CC} -0.2V |
| | | - | - | 3 | μA | ~+40°C | |
| | | - | - | 8 | μA | ~+70°C | |
| | | - | - | 10 | μA | ~+85°C | |
| Chip deselect time to data retention | t _{CDR} | 0 | - | - | ns | See retention waveform. | |
| Operation recovery time | t _R | 5 | - | - | ms | | |

- Note
- Typical parameter indicates the value for the center of distribution at 3.0V (T_a = 25°C), and not 100% tested.
 - CS2 controls address buffer, WE# buffer, CS1# buffer, OE# buffer and Din buffer. If CS2 controls data retention mode, V_{in} levels (address, WE#, CS1#, OE#, DQ) can be in the high impedance state. If CS1# controls data retention mode, CS2 must be CS2 ≥ V_{CC}-0.2V or 0V ≤ CS2 ≤ 0.2V. The other input levels (address, WE#, OE#, DQ) can be in the high impedance state.

Low Vcc Data Retention Timing Waveforms

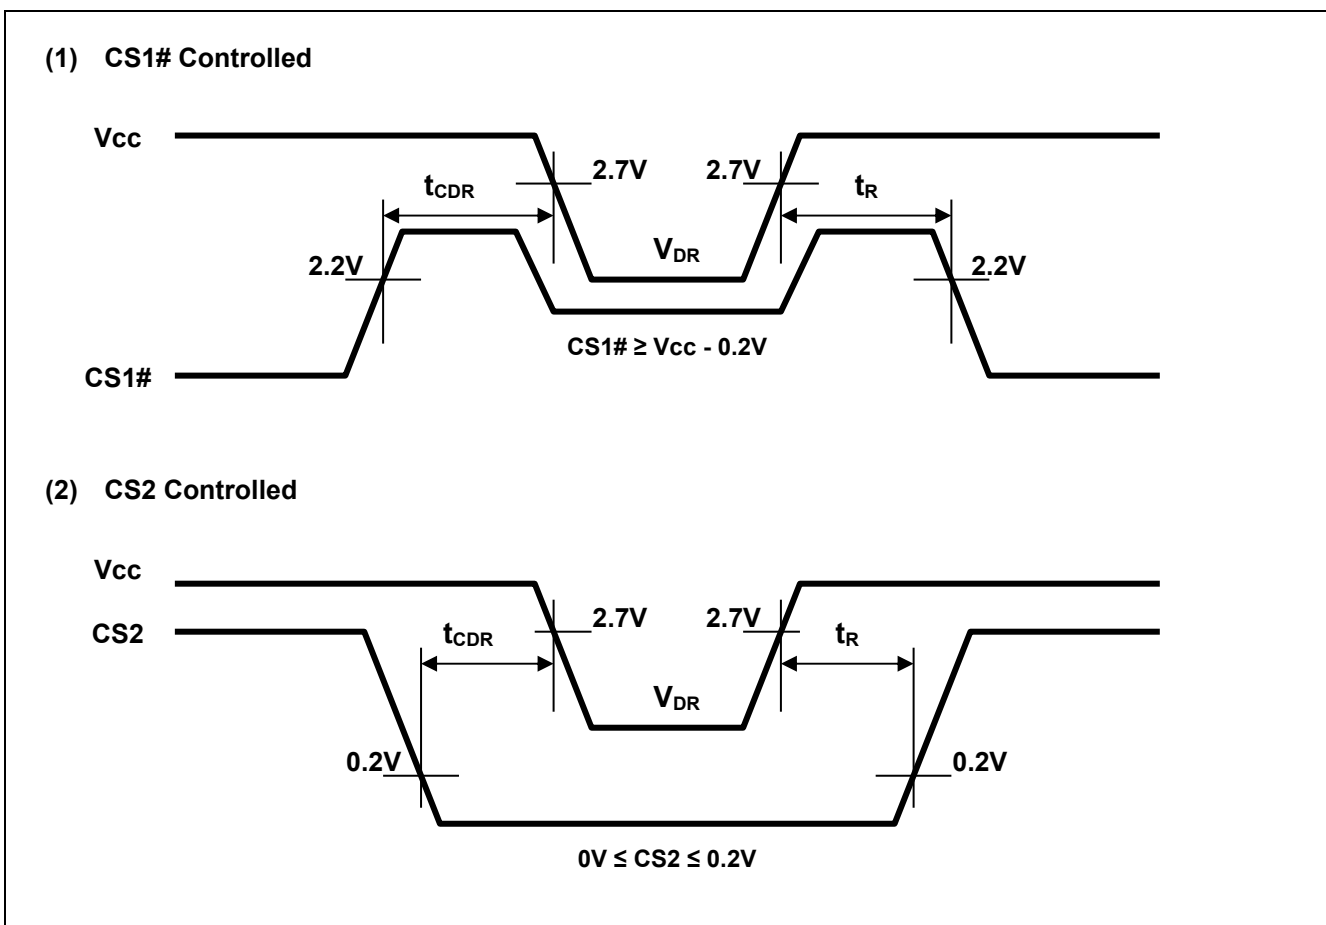

| | |
|------------------|------------------------|
| Revision History | R1LV0208BSA Data Sheet |
|------------------|------------------------|

| Rev. | Date | Description | |
|------|-----------|-------------|------------------------------------------|
| | | Page | Summary |
| 1.00 | 2017.1.27 | - | First Edition issued |
| 1.01 | 2020.2.20 | Last page | Updated the Notice to the latest version |
| | | | |

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information



For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View R1LV0208BSA-7SI#B0 on WIN SOURCE](#)
-  [Renesas Electronics America Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management