



**THE DATASHEET OF
PE-65848NLT**



TRANSFORMERS FOR ECHELON[®] NEURON[®] ICs For Use with 3120[™] and 3150[™] Chips Produced by Motorola and Toshiba



- For 1.25Mbps twisted pair applications
- Provides 1500Vrms isolation for 1 minute
- 40°C to +80°C operating temperature range

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C



Standard Part Number	RoHS-6 Compliant Part No.	Turns Ratio (±2%)	Primary Inductance (mH)	DCR Primary (Ω MAX)	DCR Secondary (Ω MAX)	Primary Pins (Network Side)	Package
PE-65848	PE-65848NL	1CS:1CS	3.5 - 6.5	1.0	1.0	8 - 5	SMT
PE-65948	PE-65948NL	1CT:1CT	3.5 - 6.5	1.0	1.0	2 - 6	THT

NOTE: CS = Center Split, CT = Center Tap

Mechanicals



Schematics

PE-65848

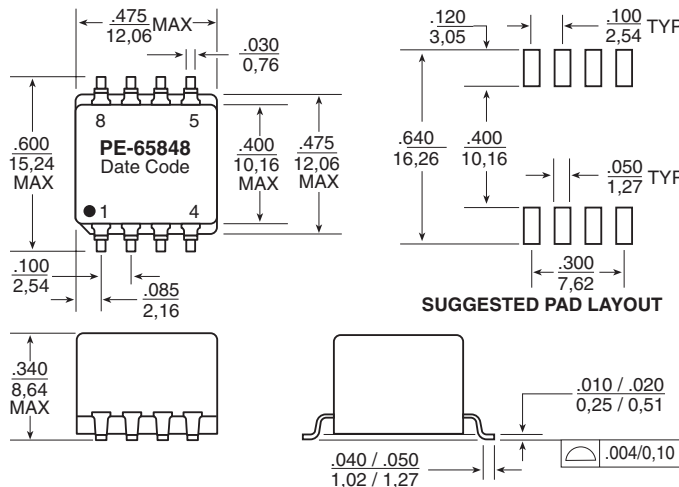

	PE-65848	PE-65812
Weight	.20 grams	.12 grams
Tape & Reel	.250/reel	N/A
Tube	.30/tube	.60/tube
Dimensions:	Inches / mm	
	Unless otherwise specified all tolerances are ±.010 / 0,25	

PE-65948

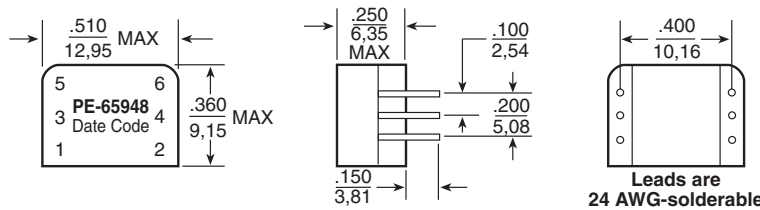

Lon[®] technology makes possible a new generation of smart, low-cost products that communicate with one another and that can be linked together to serve applications in consumer electronics, factory automation, vehicle controls, commercial building controls, home automation, and other industries. The PE-65848 and PE-65948 transformers are designed specifically for use with Echelon's Neuron[®] 3120[™] and Neuron[®] 3150[™] chips in 1.25 Mbps, twisted pair bus applications. The transformers provide DC isolation

and common mode noise rejection. Their characteristics have been optimized to assure the proper pulse waveform is transmitted onto the twisted pair cable when used in conjunction with the recommended circuitry. The transformers provide 1500Vrms high voltage isolation for one minute, but are not intended for use as a hazardous voltage safety barrier. Order PE-65848T for optional Tape & Reel packaging. When using PE-65948, center taps can be created by connecting winding ends together on the PCB.

For More Information:

Pulse Worldwide Headquarters	Pulse Northern Europe	Pulse Southern Europe	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
12220 World Trade Drive San Diego, CA 92128 U.S.A. www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	3 Huxley Road Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	No. 1 Industrial District Changan, Dongguan China TEL: 86 769 5538070 FAX: 86 769 5538870	Room 1503 XinYin Building No. 888 YiShan Road Shanghai 200233 China TEL: 86 21 54643211/2 FAX: 86 21 54643210	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	No. 26 Kao Ching Road Yang Mei Chen Taoyuan Hsien Taiwan, R. O. C. TEL: 886 3 4641811 FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

T602.B (2/06)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PE-65848NLT on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management