



**THE DATASHEET OF
EVAL6585D-230V**



Combo IC for PFC and ballast control

Data Brief

General description

A new control IC, the L6585, has been designed to manage electronic ballasts for fluorescent lamps; it includes both Power Factor Correction and half-bridge sections and embeds a wide range of features to provide an energy saving and cost effective solution.

The high-voltage single chip approach optimizes the management of lamp critical conditions like start-up (pre-heating and ignition), fault and lamp replacement. In fact, the internal logic is able to carry out all of these phases being steered by precise internal references and timings.

The PFC section has superior performance in terms of harmonic content mitigation. High Power Factor (PF) and Total Harmonic Distortion (THD)


reduction are obtained as required by international norms, especially in case of Universal input voltage operation.

Particular care has been dedicated to pre-heating and ignition phases prior to lamp starting, in order to ensure the proper filament warming up and extend lamp life.

Innovative circuitry allows an improved control of the lamp voltage during ignition as well protection against failures due to lamp ageing. The use of this new control IC simplifies the industrialization of electronic ballasts increasing the application reliability and reducing its dimensions and cost.

For more info about the L6585D please refer to the related datasheet available at www.st.com.

Evaluation board

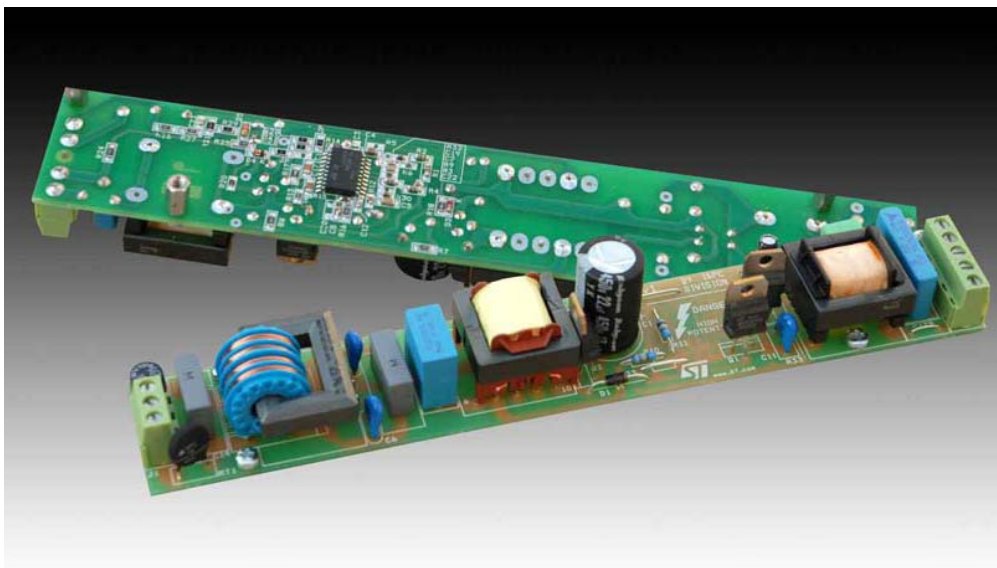

1 230V Demo application description

The design has been developed to drive a 54W TL fluorescent lamp. Specifically created to drive a T5 lamp, the demo board implements the end of life and the open lamp protections on the half bridge side, and the over-voltage and feedback disconnection protections on the PFC side. This circuit is intended to be used with 230V AC mains.

Figure 1. Evaluation board schematic

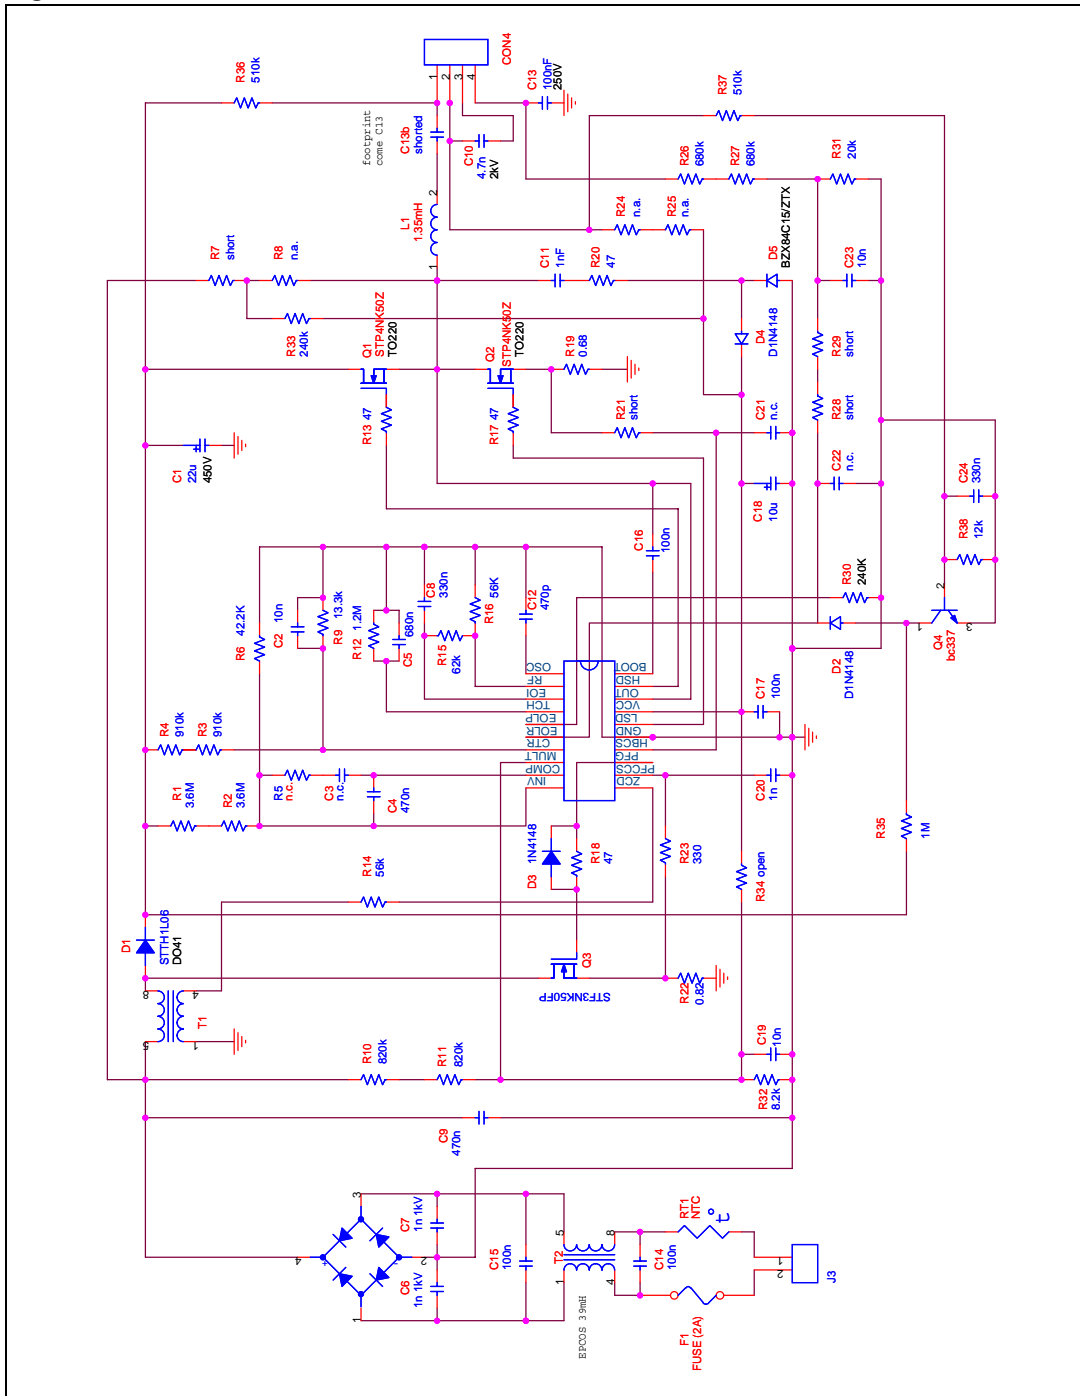


Table 1. Part list

Name	Value
BR1	DF06S
R1, R2	3.6M Ω
R3, R4	910K
R5	n.c
R6	42.2K Ω
R7	short
R8	n.c
R9	13.3K Ω
R10, R11	820K Ω
R12	1.2M Ω
R13	47 Ω
R14	47K Ω
R15	62K Ω
R16	56K Ω
R17, R18	47 Ω
R19	0.68, 1W
R20	47 Ω
R21	short
C1	22 μ F, 450V, EPCOS B43888A5226M9
C2	10nF
C3	n.c
C4	470nF
C5	680nF
C6, C7	1nF, 1KV
C8	330nF
C9	470nF, 630V, EPCOS B32652
C10	4.7nF, 2kV EPCOS B32653
C11	1nF, 630V
C12	470pF
C13	100nF, 250V
C13b	short
C14, C15	100nF, X2, 275Vac, EPCOS
C16	100nF
C17	100nF

Table 1. Part list (continued)

Name	Value
C18	10 μ F, 35V
C19	10nF
R22	0.82
R23	330
R24	n.c
R25	n.c
R26, R27	680K Ω
R28, R29	short
R30	240K Ω
R31	20K Ω
R32	8.2K Ω
R33	240K Ω
R43	open
R35	1M Ω
R36, R37	510K Ω
R38	12K Ω
Q1	STP4NK50ZD
Q2	STP4NK50ZD
Q3	STD3NK50Z1
Q4	BC817
IC1	L6585D
C20	1nF
C21	n.c
C22	n.c
C23	10nF
C24	330nF
T1	E25, 2.1mH, EPCOS T2363
T2	39mH, EPCOS B822731
F1	2A fuse
RT1	NTC, 16R
D1	STTH1L06
D2	1N4148
D3	1N4148
D4	1N4148

Table 1. Part list (continued)

Name	Value
D5	BZX84C15ZTX
L1	ITACOIL, 1.3mH

2 Revision history

Table 2. Revision history

Date	Revision	Changes
22-Nov-2006	1	First issue

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved



STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View EVAL6585D-230V on WIN SOURCE](#)
-  [STMicroelectronics](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management