





**THE DATASHEET OF  
OSTYK51105030**



Technical data

1. Nominal voltage: 250V
- PITCH: 9.5mm
2. Connection code: AWG 22-10
3. Insulation Width: 16.1mm
- AC 2000V/MIN
4. Insulation Resistance: 1000MΩ or more
5. Tightening torque: 10.0kgf.cm (1.0N.m)
6. Screw thread: M2.5
7. Operating temperature: -40°C to +105°C
- Soldering temperature: 260°C
8. Undimensions:
  - Dim.L=(P-1)x9.5
  - Dim.B=(P-1)x9.5
  - P= number of poles
  - 0-30mm over 30mm-60mm over 60mm-90mm over 90mm-160mm over 160mm
9. Safety approval: CE, RoHS
10. RoHS Compliant

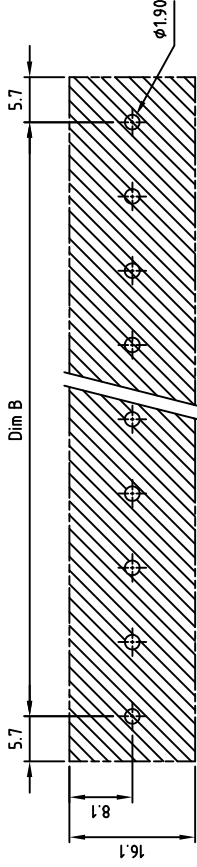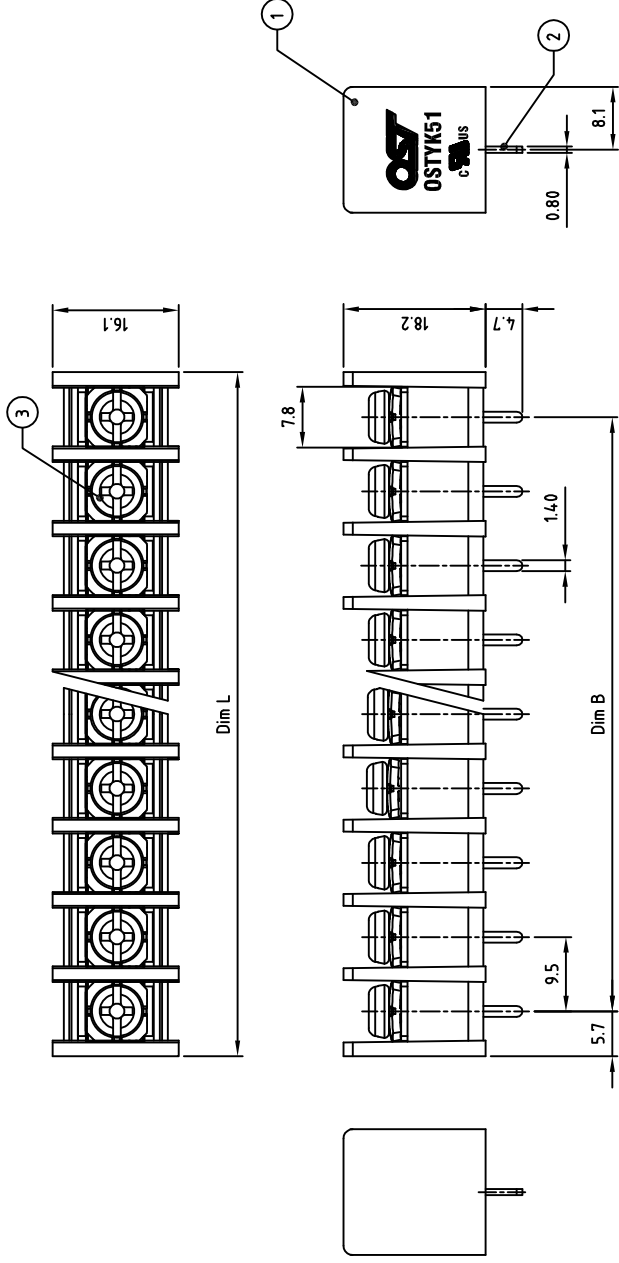

PCB LAYOUT

Part

3	SCREW+WASHER	STEEL
2	CONTACT	BRASS
1	BODY	PA66 UL94V-0
ITEM	NAME OF PART	MATERIAL
DWG.	WF. Zhang	DATE 2016.04.20
CHK.	WF. Zhang	DATE 2016.04.20
APP.		DATE



ON-SHORE TECHNOLOGY, INC.

△	SIGN	DESCRIPTION	CHK.	DATE

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OSTYK51105030 on WIN SOURCE](#)
-  [On Shore Technology Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management