



**THE DATASHEET OF  
BK60-030-DZ**



# DATA SHEET

## POSITIVE TEMPERATURE COEFFICIENT AC/DC POWER SUPPLY

BK60 series

RoHS compliant & Halogen free



Product specification— August 25, 2023 V.4



## Positive Temperature Coefficient (PTC) Data Sheet

### Description

The 60V series provides radial resettable overcurrent protection with holding current from 0.05A to 5.0A. This series is suitable for applications with higher working voltage up to 60V.

### Features


- Radial leaded devices.
- Over-current protection
- High voltage surge capabilities
- Flame retardant epoxy polymer insulating material meets UL94 V-0 requirement.
- Available in lead-free version.
- Meets MSL level 1, per J-STD-020
- Operating Temperature: -40°C~+85°C




### Applications


- Powered supplies
- Industrial controls
- General electronics
- Security systems
- Automotive applications
- Motor protection

### Part Number Code and Making

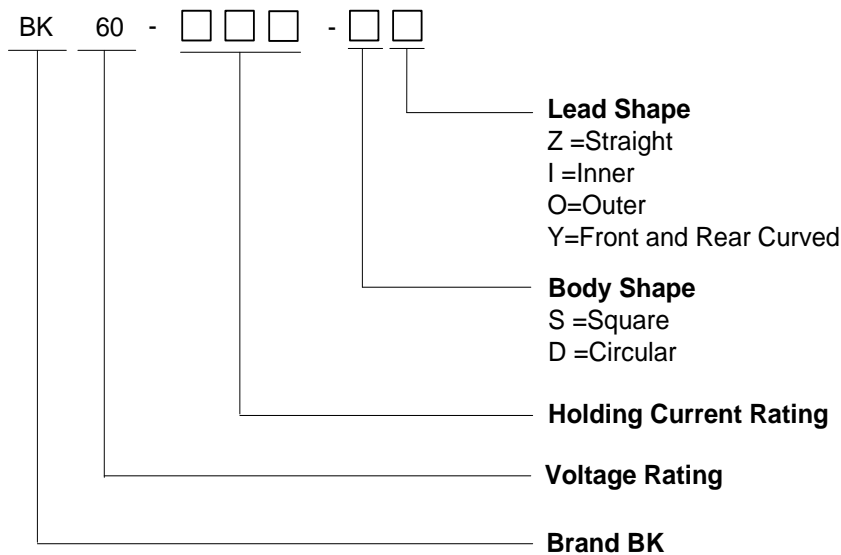

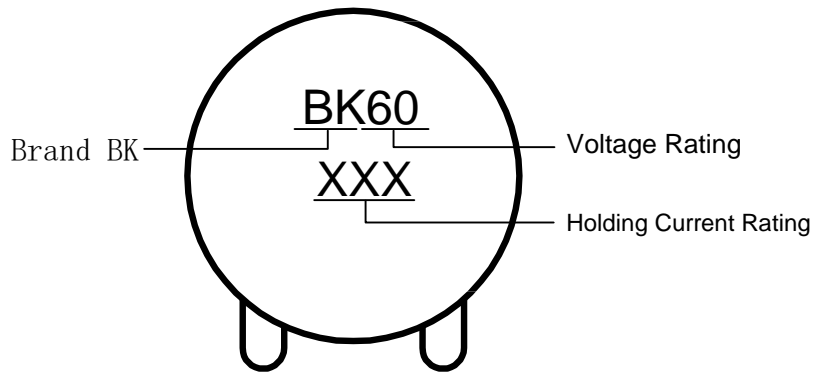

**Dimensions (Unit: mm)**

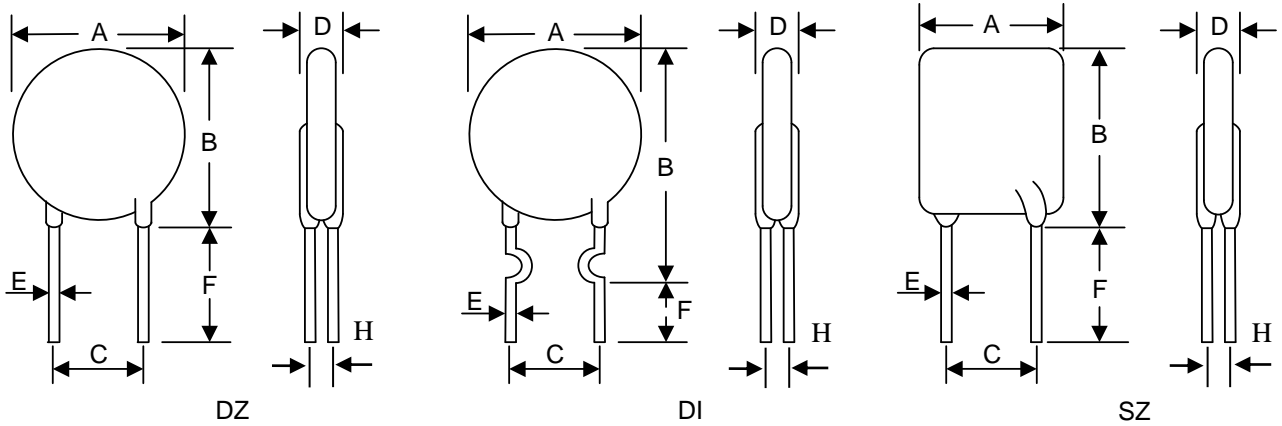

Part Number	A	B	C	D	E	F	H	Style.
	Max.	Max.	±0.6	Max.	Typ.	Min.	±0.5	
BK60-005	6.0	8.5/13.5	5.1	3.1	0.5	7.6/4.6	1.4	DZ/DI
BK60-010	6.0	9.5/13.5	5.1	3.1	0.5	7.6/4.6	1.4	DZ/DI
BK60-017	7.4	12.7/13.5	5.1	3.1	0.5	7.6/4.6	1.4	DZ/DI
BK60-020	7.4	12.7/13.5	5.1	3.1	0.5	7.6/4.6	1.4	DZ/DI
BK60-025	7.4	12.7/13.5	5.1	3.1	0.5	7.6/4.6	1.4	DZ/DI
BK60-030	7.4	13.0/15.7	5.1	3.1	0.5	7.6/4.6	1.4	DZ/DI
BK60-040	7.4	13.2/14.2	5.1	3.1	0.5	7.6/4.6	1.1	DZ/DI
BK60-050	7.5	14.5	5.1	3.1	0.5	7.6/4.6	1.1	DZ/DI
BK60-065	9.4	15.1/16.1	5.1	3.1	0.5	7.6/4.6	1.1	DZ/DI
BK60-075	10.2	16.8	5.1	3.1	0.5	7.6/4.6	1.1	DZ/ DI
BK60-090	11.2	18.0	5.1	3.1	0.5	7.6/4.6	1.1	DZ /DI
BK60-110	15.0 / 13.0	15.0 / 18.0	5.1	3.1	0.8	7.6	1.4	SZ / (DZ/DI)
BK60-135	14.5	19.6	5.1	3.1	0.8	7.6	1.4	DZ
BK60-160	16.3	21.3	5.1	3.1	0.8	7.6	1.4	DZ
BK60-185	17.5	22.9	5.1	3.1	0.8	7.6	1.4	DZ

**POSITIVE TEMPERATURE COEFFICIENT**

BK60

Part Number	A	B	C	D	E	F	H	Style.
	Max.	Max.	±0.6	Max.	Typ.	Min.	±0.5	
BK60-200	17.4	22.4	5.1	3.1	0.8	7.6	1.4	DZ
BK60-250	21.6	26.6	10.5	3.1	0.8	7.6/4.6	1.4	DZ/ DI
BK60-300	24.8	30.0	10.5	3.1	0.8	7.6	1.4	DZ
BK60-375	27.2	32.0	10.5	3.1	0.8	7.6	1.4	DZ
BK60-500	26.0	29.5	10.2	3.1	0.8	7.6	1.4	DZ

**Electrical Characteristics**

Part Number	I <sub>H</sub>	I <sub>T</sub>	V <sub>max</sub>	I <sub>max</sub>	P <sub>d typ.</sub>	Max. Time-to-trip		R <sub>min</sub>	R <sub>max</sub>
	(A)	(A)	(V <sub>DC</sub> )	(A)	(W)	(A)	(S)	(Ω)	(Ω)
BK60-005	0.05	0.10	60	40	0.30	0.25	5.00	7.50	25.00
BK60-010	0.10	0.20	60	40	0.38	0.50	4.00	2.50	7.50
BK60-017	0.17	0.34	60	40	0.48	0.85	3.00	1.80	5.80
BK60-020	0.20	0.40	60	40	0.41	1.00	2.20	1.50	3.30
BK60-025	0.25	0.50	60	40	0.45	1.25	2.50	1.00	2.20
BK60-030	0.30	0.60	60	40	0.49	1.50	3.00	0.70	1.55
BK60-040	0.40	0.80	60	40	0.56	2.00	3.80	0.50	1.10
BK60-050	0.50	1.00	60	40	0.77	2.50	4.00	0.35	0.85
BK60-065	0.65	1.30	60	40	0.88	3.25	5.30	0.30	0.65
BK60-075	0.75	1.50	60	40	0.92	3.75	6.30	0.25	0.55
BK60-090	0.90	1.80	60	40	0.99	4.50	7.20	0.20	0.45
BK60-110	1.10	2.20	60	40	1.50	5.50	8.20	0.15	0.33
BK60-135	1.35	2.70	60	40	1.70	6.75	9.60	0.12	0.27
BK60-160	1.60	3.20	60	40	1.90	8.00	11.40	0.09	0.22
BK60-185	1.85	3.70	60	40	2.10	9.25	12.60	0.08	0.18
BK60-200	2.00	4.00	60	40	2.10	10.00	14.50	0.08	0.19
BK60-250	2.50	5.00	60	40	2.50	12.50	15.60	0.05	0.11
BK60-300	3.00	6.00	60	40	2.80	15.00	19.80	0.04	0.09
BK60-375	3.75	7.50	60	40	3.20	18.50	24.00	0.03	0.08
BK60-500	5.00	10.00	60	40	3.20	25.00	35.00	0.025	0.05

- I<sub>H</sub> = Hold current: maximum current device will pass without tripping in 25°C still air.
- I<sub>T</sub> = Trip current: minimum current at which the device will trip in 25°C still air.
- V<sub>MAX</sub> = Maximum voltage device can withstand without damage at rated current.
- I<sub>MAX</sub> = Maximum fault current device can withstand without damage at rated voltage.
- R<sub>MAX</sub> = Maximum resistance of device in initial (un-soldered) state.
- R<sub>MIN</sub> = Minimum resistance of device in initial (un-soldered) state.
- P<sub>d typ.</sub> = Typical power dissipation from device when in the tripped state at 25°C still air.

## Polymeric PTC Selecting Guide

### ■ Determine the following operating parameters for the circuits:

- Normal operating current ( $I_{hold}$ )
- Maximum interrupt current ( $I_{max}$ )
- Maximum circuit voltage ( $V_{max}$ )
- Normal operating temperature surrounding device (min °C/max °C)

### ■ Select the device from factor and dimension suitable for the application

### ■ Compare the maximum rating for $V_{max}$ and $I_{max}$ of the PPTC device with the circuit in application and make sure the circuit's requirement does not exceed the device rating.

### ■ Check that PPTC device's trip time (time-to-trip) will protect the circuit.

### ■ Verify that the circuit operating temperature is within the PPTC device's normal operating temperature range.

### ■ Verify that performance and suitability of the chosen PPTC device in the application.

## WARNING

### ■ Mechanical Stress

- PPTC devices will undergo a thermal expansion during fault condition. If PPTC devices are installed or placed in an application where the space between PPTC devices and the surrounding materials (e.g., covering materials, packaging materials, encapsulate materials and the like) is insufficient, it will cause an inhibiting effect upon the thermal expansion. Pressing, twisting, bending and other kinds of mechanical stress will also adversely affect the performance of the PPTC devices, and shall not be used or applied.

### ■ Chemical Pollutants

- Silicone-based oils, oils, solvents, gels, electrolytes, fuels, acids, and the like will adversely affect the properties of PPTC devices, and shall not be used or applied.


### ■ Electronic and Thermal Effect

- PPTC devices are secondary protection devices and are used solely for sporadic, accidental over-current or over-temperature error condition, and shall NOT be used if or when constant or repeated fault conditions (such fault conditions may be caused by, among others, incorrect pin-connection of a connector) or over-extensive trip events may occur.
- PPTC devices are different from fuses and, when a fault condition occurs, will go into high-resistance state and do not open circuit, in which case the voltage at such PPTC devices may reach a hazardous level.
- Operation over the maximum rating or other forms of improper use may cause failure, arcing, flame and/or other damage to the PPTC devices.
- Conductive material contamination, such as metal particle, may induce shortage, flame or arcing.
- Due to the inductance, the operation circuits may generate a circuit voltage ( $Ldi/dt$ ) above the rated voltage of PPTC devices, which shall not be used under such circumstances.

### ■ General

- Customers shall evaluate and test the properties of PPTC devices independently to verify and ensure that their individual applications will be met.
- The performance of PPTC devices will be adversely affected if they are improperly used under electronic, thermal and/or mechanical procedures and/or conditions non-conformant to those recommended by manufacturer.
- Customers shall be responsible for determining whether it is necessary to have back-up, failsafe and/or fool-proof protection To avoid or minimize damage that may result from extra-ordinary, irregular function or failure of PPTC devices.
- Any and all responsibilities and liabilities are disclaimed if any item under this notice of warning is not complied with.

**Thermal Derating Curve**

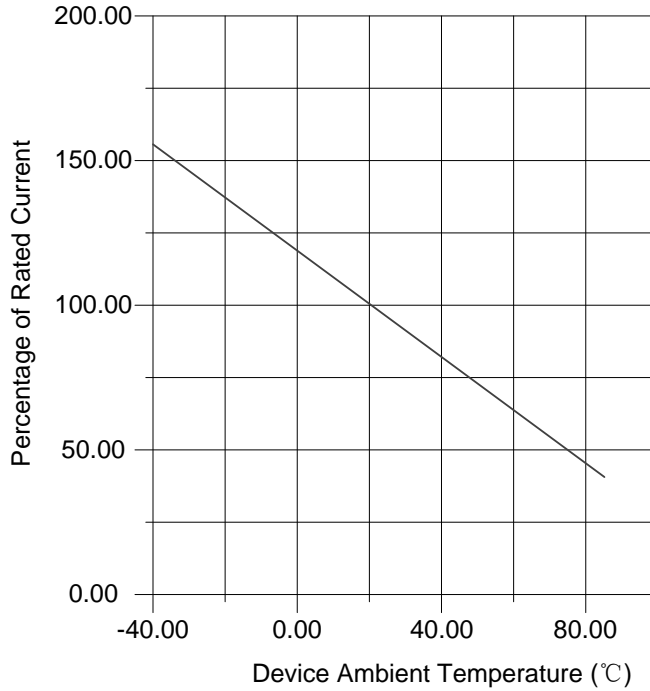


**Thermal Derating Chart – I<sub>H</sub> (A)**

Part Number	Maximum Ambient Operating Temperatures (°C)									
	-40	-20	0	25	30	40	50	60	70	85
BK60-005	0.078	0.07	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.02
BK60-010	0.16	0.14	0.12	0.10	0.09	0.08	0.07	0.06	0.05	0.04
BK60-017	0.25	0.23	0.20	0.17	0.15	0.14	0.12	0.11	0.09	0.07
BK60-020	0.30	0.27	0.24	0.20	0.18	0.16	0.14	0.13	0.11	0.08
BK60-025	0.38	0.34	0.30	0.25	0.23	0.20	0.18	0.16	0.14	0.10
BK60-030	0.46	0.41	0.36	0.30	0.27	0.24	0.22	0.19	0.16	0.12
BK60-040	0.60	0.54	0.48	0.40	0.36	0.32	0.29	0.25	0.22	0.16
BK60-050	0.75	0.68	0.60	0.50	0.45	0.41	0.36	0.32	0.27	0.20
BK60-065	1.00	0.88	0.77	0.65	0.59	0.53	0.47	0.41	0.35	0.26
BK60-075	1.15	1.02	0.89	0.75	0.68	0.61	0.54	0.47	0.41	0.30
BK60-090	1.40	1.22	1.07	0.90	0.81	0.73	0.65	0.57	0.49	0.36
BK60-110	1.70	1.50	1.31	1.10	0.99	0.89	0.79	0.69	0.59	0.44
BK60-135	2.05	1.84	1.61	1.35	1.22	1.09	0.97	0.85	0.73	0.54
BK60-160	2.45	2.18	1.90	1.60	1.44	1.30	1.15	1.01	0.86	0.64
BK60-185	2.85	2.52	2.20	1.85	1.67	1.50	1.33	1.17	1.00	0.74
BK60-250	3.85	3.40	2.98	2.50	2.25	2.03	1.80	1.58	1.35	1.00
BK60-300	4.65	4.08	3.57	3.00	2.70	2.43	2.18	1.89	1.62	1.20
BK60-375	5.80	5.10	4.46	3.75	3.38	3.04	2.70	2.36	2.03	1.50
BK60-500	7.75	6.80	5.95	5.00	4.50	4.05	3.60	3.15	2.70	2.00

**Test Procedures and Requirement**

Items	Test Conditions	Accept/Reject Criteria
Resistance	In still air @25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, $V_{max}$ , 25°C	$T \leq \text{max. Time to trip } (T_{trip})$
Hold Current	30 min, at $I_H$	No trip
Trip Cycle Life	$V_{max}$ , $I_{max}$ , 100 cycles	No arcing or burning
Trip Endurance	$V_{max}$ , 24hours	No arcing or burning

**Typical Time-to-Trip Charts @25°C**

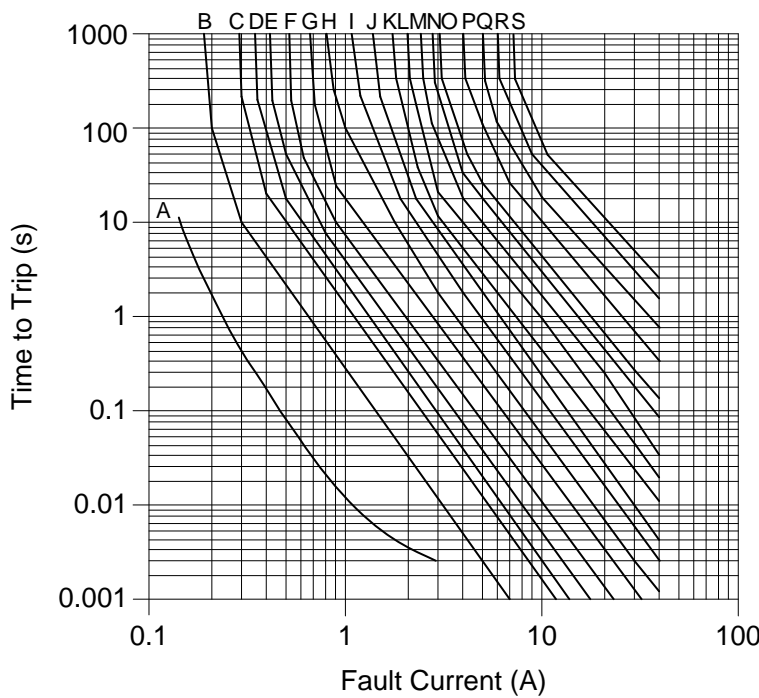


- A=BK60-005
- B=BK60-010
- C=BK60-017
- D=BK60-020
- E=BK60-025
- F=BK60-030
- G=BK60-040
- H=BK60-050
- I=BK60-065
- J=BK60-075
- K=BK60-090
- L=BK60-110
- M=BK60-135
- N=BK60-160
- O=BK60-185
- P=BK60-250
- Q=BK60-300
- R=BK60-375
- S=BK60-500

**Storage Recommendations**

- Storage Temperature: -10°C~+40°C
- Relative Humidity: ≤80%RH
- Keep away from corrosive atmosphere and sunlight.
- Period of Storage: 1 year.

## Wave Soldering Recommendation Parameters

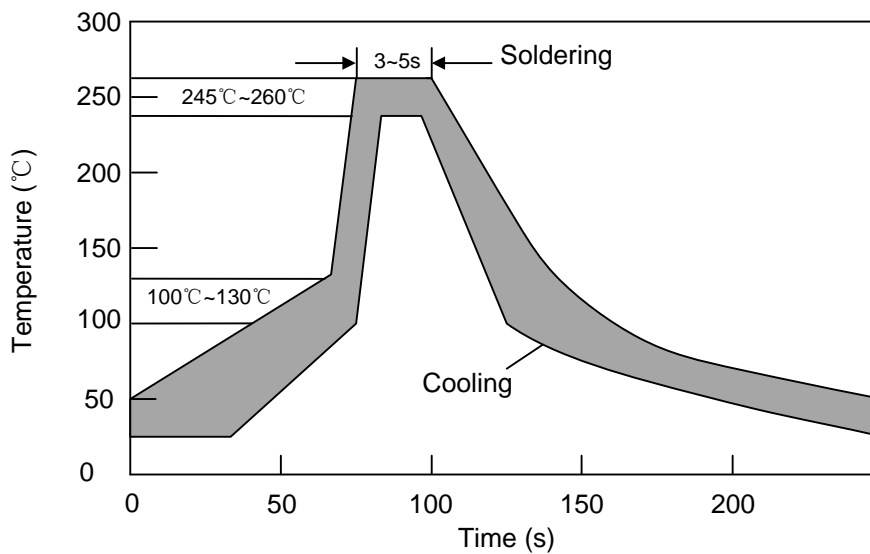

Items	Conditions
Pre-Heating Zone	Refer to the condition recommended by the flux manufacturer. Maximum ramping rate should not exceed 4°C/sec.
Soldering Zone	Maximum solder temperature should not exceed 260°C
Cooling Zone	Forced cooling

## Manual Soldering Recommendation Parameters

Items	Conditions
Soldering condition	The highest power of the manual soldering iron should be 30W or less, soldering temperature should not be higher than 280°C.
Soldering time	The soldering time should be kept within 3 seconds, otherwise it might cause insulation layer cracking, and increased part resistance.
Soldering position	The distance on the leads between the soldering point and bottom of the PPTC body should be equal or greater than 4mm.
Other	The soldering iron should not contact the PPTC body except the leads. If the soldering conditions are kept to lower temperature, less time and larger distance, the outcome of the soldering will be better.



## Mechanical Characteristics

Items	Specifications	Test Conditions/Methods
Tensile strength	No visible damage	1.0Kgf, 10 seconds
Bending strength	No visible damage	0.5Kgf, 90° , 3 times
Vibration	No visible damage	Freq: 10-55Hz, Amp: 0.75mm, 1min

**Reliability Test**

Items	Specifications	Test Conditions/Methods
Solder ability	No visible damage, Solder OK, Solder area ≥95%	245±5°C, 2±1s, dipping depth=0.5inch max from the body
Resistance to soldering heat	No visible damage, Electrical OK,  ΔR/R0  ≦ 50%	260±5°C, 10+2/-0s
Damp heat, steady state	No visible damage, Electrical OK,  ΔR/R0  ≦ 20%	40±2°C, 90~95 % RH, total 48Hrs, after 4Hrs test electrical parameter
Temperature cycling	No visible damage, Electrical OK,  ΔR/R0  ≦ 20%	Ta=-10+0/-1°C 30min, Ta=70+1/-0°C 30min, 5cycles, after 1hr test electrical parameter

**Packaging**

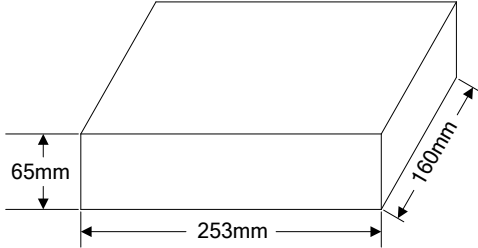Bag	Part Number	Dimension AxB (mm)	Quantity
	BK60-005	120x150	1000pcs/bag 6000pcs/box
	BK60-010		
	BK60-017		
	BK60-020		
	BK60-025		
	BK60-030		
	BK60-040		
	BK60-050		
	BK60-065		
	BK60-075	120x150	500pcs/bag 3000pcs/box
	BK60-090		
	BK60-110		
	BK60-135		
	BK60-160	150x200	500pcs/bag 2000pcs/box
	BK60-185		
	BK60-250		
	BK60-300	150x200	200pcs/bag 800p cs/box
	BK60-375		
BK60-500			

## LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.



YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly **YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.**

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BK60-030-DZ on WIN SOURCE](#)
-  [Yageo Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management