



**THE DATASHEET OF  
CR6210-500-5**



# AC Power Transducer

DIN RAIL / PANEL MOUNT, ACTIVE / REACTIVE



CR Magnetics has a wide selection of Current and Potential Transformers to extend the range of any part.

The **CR6200** Series, Power Transducers and Transmitters are designed to provide a controlled output that is proportional to the average power. These devices are specifically targeted to provide an efficient solution to most power sensing needs. Units are designed for operation in systems with sinusoidal voltage and current wave forms.

## Applications


- Energy Management
- Motor Efficiency
- Multi-point power sensing
- Remote power sensing over long distances

## Features

- 35mm DIN Rail or Panel Mount
- Ranges available for any power sensing need
- Active and Reactive power sensing
- 0 - 5 VDC and 4 - 20 mA DC outputs
- Connection diagram printed on case

## Regulatory Agencies

- Recognized to meet UL 61010B-1
- Constructed to meet CAN/CSA-C22.2, No. 61010-1-2004
- Meets requirement of IEC 61010-1 and BS EN 61010-1

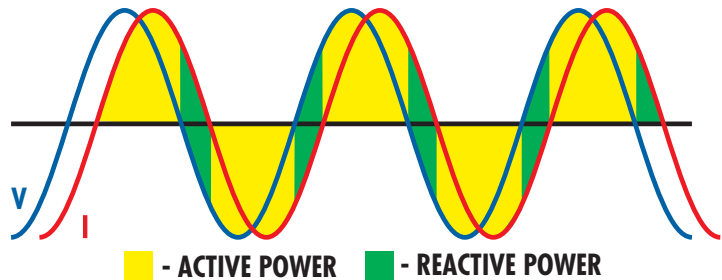


POWER TRANSDUCERS CAN BE ORDERED TO MEASURE ACTIVE OR REACTIVE POWER

# AC Power Transducer

DIN RAIL / PANEL MOUNT, ACTIVE / REACTIVE

Add suffix for input range

PART NUMBERS				
CR6210	-	-	-	1 Phase, Active Power with 0 - 5 VDC Output
CR6211	-	-	-	1 Phase, Reactive Power with 0 - 5 VDC Output
CR6220	-	-	-	1 Phase, Active Power with 4 - 20 mADC Output
CR6221	-	-	-	1 Phase, Reactive Power with 4 - 20 mADC Output
CR6230	-	-	-	2-Phase, 3-Wire, Active Power with 0 - 5 VDC Output
CR6231	-	-	-	2-Phase, 3-Wire, Reactive Power with 0 - 5 VDC Output
CR6240	-	-	-	2-Phase, 3-Wire, Active Power with 4 - 20 mADC Output
CR6241	-	-	-	2-Phase, 3-Wire, Reactive Power with 4 - 20 mADC Output
CR6250	-	-	-	3-Phase, 4-Wire, Active Power with 0 - 5 VDC Output
CR6251	-	-	-	3-Phase, 4-Wire, Reactive Power with 0 - 5 VDC Output
CR6260	-	-	-	3-Phase, 4-Wire, Active Power with 4 - 20 mADC Output
CR6261	-	-	-	3-Phase, 4-Wire, Reactive Power with 4 - 20 mADC Output

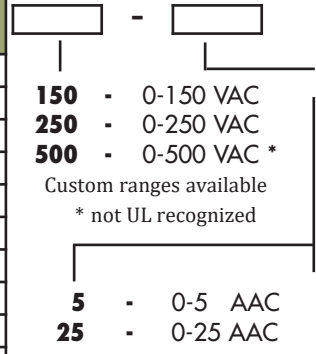


CR Magnetics has a wide selection of current and potential transformers to extend the range of any part.

## SPECIFICATIONS

Basic Accuracy:.....	0.5%	Cleaning:.....	Water-dampened cloth
Linearity:.....	10% to 100% FS	Relative Humidity:...	5% to 95%, Non-Condensing
Thermal Drift:.....	500 PPM/°C	Supply Current:	
Operating Temperature:.....	0°C to +60°C	CR6210:.....	Typical 35mA      Max 45mA
Installation Category:.....	CAT II	CR6220:.....	Typical 75mA      Max 110mA
Vibration Tested To:.....	IEC 60068-2-6,1995	CR6230:.....	Typical 50mA      Max 70mA
Pollution Degree:.....	2	CR6240:.....	Typical 75mA      Max 110mA
Response Time: .....	250 ms max. 0-90% FS	CR6250:.....	Typical 50mA      Max 70mA
Supply Voltage:.....	24 VDC +/- 10%	CR6260:.....	Typical 75mA      Max 120mA
MTBF:.....	Greater than 100 K hours	Torque Specs:.....	3.0 inch lbs. (0.4Nm)
Frequency Range:.....	50 Hz - 400 Hz, sine wave	Weight:.....	0.5 lbs.
Insulation Voltage:.....	2500 VDC		
Altitude:.....	2000 meter max. Output		
Load:.....	4-20 mADC -0 to 500 Ω 0-5 VDC - 2K Ω or Greater		

Transducers

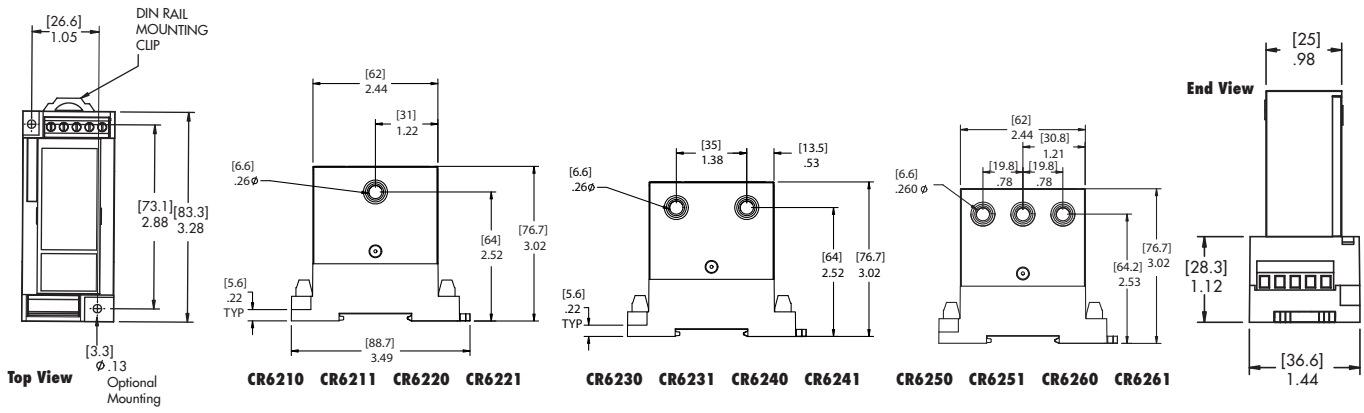

## OUTLINE DRAWING

NOTE: The building installation must have a switch or circuit-breaker that is in close proximity and within easy reach of the operator. The switch or circuit breaker shall be marked as the disconnecting device for the equipment.



3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119


Web: <http://www.crmagnetics.com>

53


E-mail: [sales@crmagnetics.com](mailto:sales@crmagnetics.com)

# AC Power Transducer


## DIN RAIL / PANEL MOUNT, AVERAGE SENSING

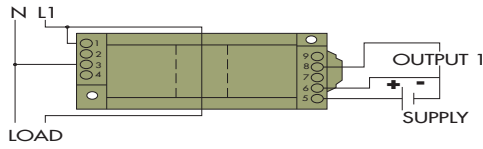


**CR6210 CR6211**  
Single element, 0 - 5 VDC Output

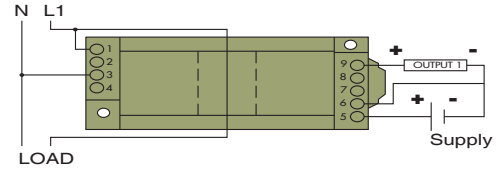


**CR6220 CR6221**  
Single element, 4 - 20 mADC Output

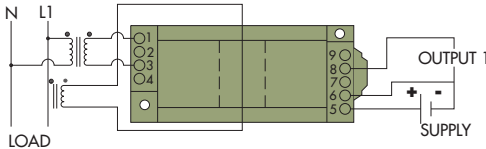


**CR6210 CR6211**  
Single element, 0 - 5 VDC Output with external voltage transformers

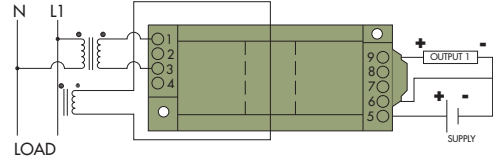


**CR6220 CR6221**  
Single element, 4 - 20 mADC Output with external voltage transformers

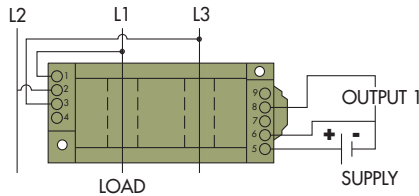


**CR6230 CR6231**  
2 element - 3 Wire, 0 - 5 VDC Output

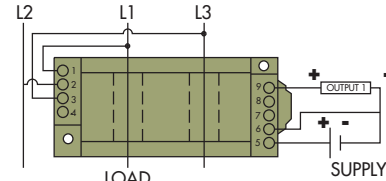


**CR6240 CR6241**  
2 element - 3 Wire, 4 - 20 mADC output

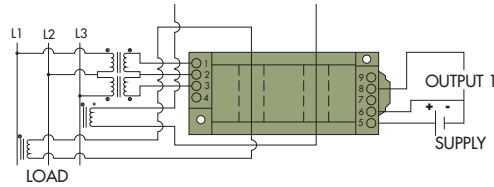


**CR6230 CR6231**  
2 element - 3 Wire, 0 - 5 VDC Output shown with external voltage and current transformers

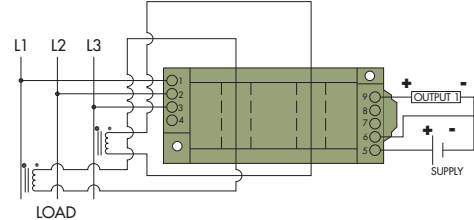

**CR6240 CR6241**  
2 element - 3 Wire, 4 - 20 mADC Output shown with external current transformer

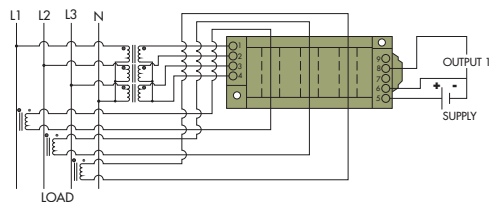

**CR6250 CR6251**  
3 element - 4 Wire, 0 - 5 VDC Output shown with external voltage and current transformers

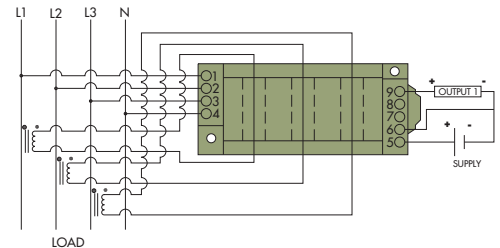


**CR6260 CR6261**  
3 element - 4 Wire, 4 - 20 mADC Output shown with external current transformers

## CONNECTION DIAGRAMS

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CR6210-500-5 on WIN SOURCE](#)
-  [CR Magnetics Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management