





**THE DATASHEET OF
XFHCL6-220M**



1. Mechanical Dimensions:

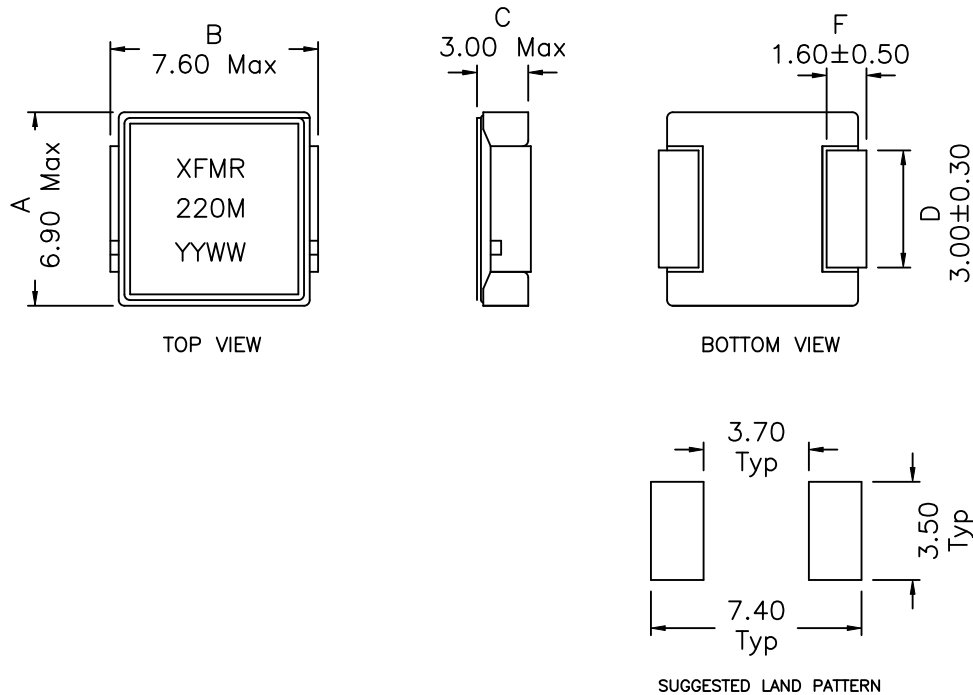

2. Schematic:



3. Electrical Specifications: @25°C

OCL: $22\mu\text{H} \pm 20\%$ @100KHz 1.0V
 Q: 20 Min @100KHz 1.0V
 DCR: 135.0 mOhms Max 128.9mOhms Typ
 Irms: 2.9A (Based on 40°C Temp Rise)
 Isat: 2.5Adc (Based on 30% Typ drop in OCL)
 SRF: 7.5MHz Typ

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature: -55°C to +125°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- SMD Lead Coplanarity: 0.004"(0.102mm) Max
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component
- Recommended IR Reflow peak temp of 260C Max.
- Outsourced item processed & controlled under XFMRs QA system
- AEC-Q200 Certified Product

DOC. REV: A/2

XFMRs Inc www.XFMRs.com	Title: SMD INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: XFHCL6-220M	REV. A
TOLERANCES: .xx ± 0.25	DWN.	Huo	Nov-28-22
Dimensions in mm	CHK.	YK Liao	Nov-28-22
SHEET 1 OF 1	APP.	AM	Nov-28-22

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View XFHCL6-220M on WIN SOURCE](#)

 [XFMRS Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management