





COAXIAL

# Adapter

## NM-NM50-18+

50Ω DC to 18 GHz N-Male to N-Male

### THE BIG DEAL

- Ultra-wideband, DC-18 GHz
- Flat response
- Low Insertion Loss, 0.11 dB
- Excellent VSWR, 1.04:1



Generic photo used for illustration purposes only

Model No.	NM-NM50-18+
Case Style	DJ2460
Connectors	N-Male to N-Male

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### APPLICATIONS

- Interconnection of RF cables and equipment
- Test setup

### PRODUCT OVERVIEW

Mini-Circuits' NM-NM50-18+ is a coaxial N-Male to N-Male adapter supporting a wide range of applications from DC to 18 GHz. This model provides excellent VSWR, low insertion loss, and flat response versus frequency. The NM-NM50-18+ features passivated stainless steel construction and measures only 0.72" (l) x 0.80" (dia.).

### KEY FEATURES

Feature	Advantages
Wideband, DC to 18 GHz	Wide frequency range provides application flexibility and makes this model ideal for broadband and multi-band use.
Excellent VSWR, 1.04:1	Provides good matching for 50Ω systems and minimizes signal reflections across wide frequency range.
Low Insertion Loss, 0.11 dB	Provides excellent signal power transmission from input to output.
Passivated stainless steel construction.	Stands up to wear and tear in demanding environments and provides excellent reliability.
Very wide operating temperature range, -55 to +100 °C	Withstands extreme operating conditions and is suitable for use near high power componentry where heat rise is common.

REV. A  
ECO-016681  
NM-NM50-18+  
MCL NY  
23/02/01





COAXIAL

# Adapter

## NM-NM50-18+

50Ω DC to 18 GHz N-Male to N-Male

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		18	GHz
Insertion Loss	DC - 18	–	0.11	–	dB
VSWR	DC - 6	–	1.03	1.2	:1
	DC - 12	–	1.04	1.3	
	DC - 18	–	1.04	1.3	

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded.



COAXIAL

# Adapter


## NM-NM50-18+

Mini-Circuits

50Ω DC to 18 GHz N-Male to N-Male

### OUTLINE DRAWING

2x "N" MALE CONN

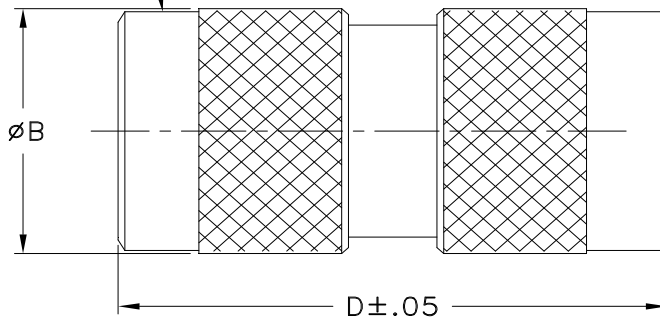

### OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	wt
--	0.791	--	1.470	--	grams
--	20.1	--	37.35	--	48.4



COAXIAL

# Adapter



## NM-NM50-18+

Mini-Circuits

50Ω DC to 18 GHz N-Male to N-Male

### TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		N-Male	N-Male
10	0.00	1.01	1.00
100	0.01	1.00	1.00
1000	0.06	1.01	1.02
2000	0.08	1.02	1.01
4000	0.06	1.03	1.03
6000	0.08	1.05	1.05
8000	0.10	1.05	1.04
9000	0.09	1.04	1.03
10000	0.08	1.03	1.02
11000	0.09	1.02	1.01
12000	0.07	1.00	1.01
15000	0.09	1.03	1.02
16000	0.09	1.02	1.01
18000	0.08	1.07	1.08

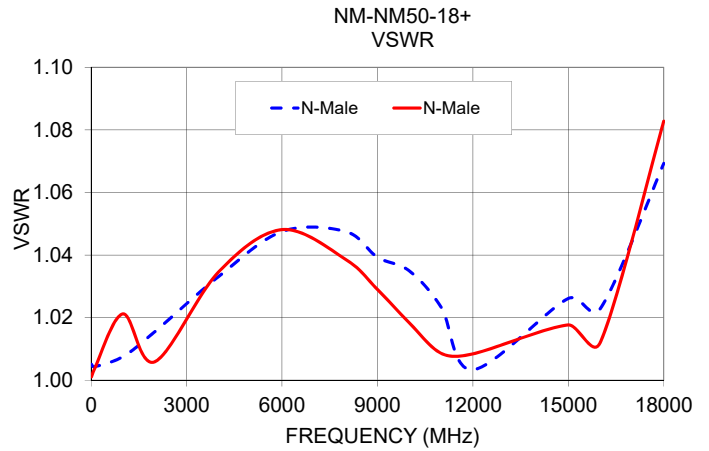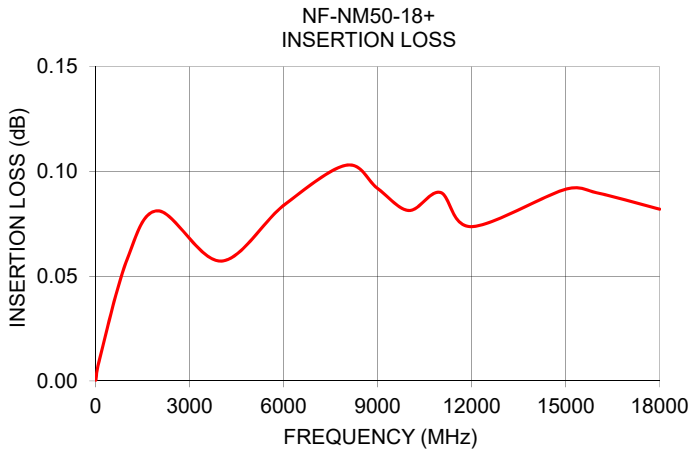



#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View NM-NM50-18+ on WIN SOURCE](#)
-  [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management