





THE DATASHEET OF DSSK50-01A



Power Schottky Rectifier with common cathode

$I_{FAV} = 2 \times 25 \text{ A}$
 $V_{RRM} = 100 \text{ V}$
 $V_F = 0.65 \text{ V}$

V_{RSM}	V_{RRM}	Type
V	V	
100	100	DSSK 50-01A

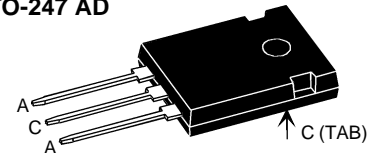
TO-247 AD


A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		70	A
I_{FAV}	$T_C = 155^\circ\text{C}$; rectangular, $d = 0.5$	25	A
I_{FAV}	$T_C = 155^\circ\text{C}$; rectangular, $d = 0.5$; per device	50	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	450	A
E_{AS}	$I_{AS} = 11 \text{ A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	13	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	1.1	A
$(dv/dt)_{cr}$		5000	V/ μs
T_{VJ}		-55...+175	$^\circ\text{C}$
T_{VJM}		175	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	135	W
M_d	mounting torque	0.8...1.2	Nm
Weight	typical	6	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$		1 mA
	$T_{VJ} = 125^\circ\text{C}$ $V_R = V_{RRM}$		10 mA
V_F	$I_F = 25 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.65 V
	$I_F = 25 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$		0.80 V
	$I_F = 50 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.77 V
R_{thJC}		0.25	1.1 K/W
R_{thCH}			K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.

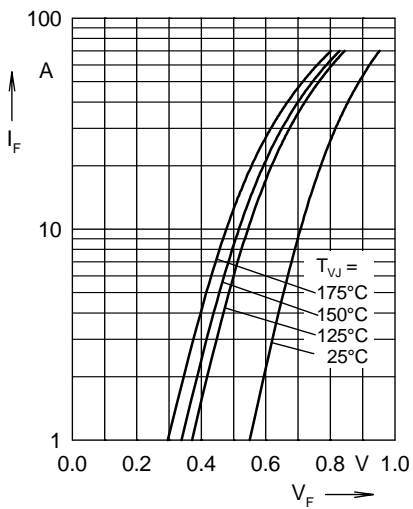


Fig. 1 Maximum forward voltage drop characteristics

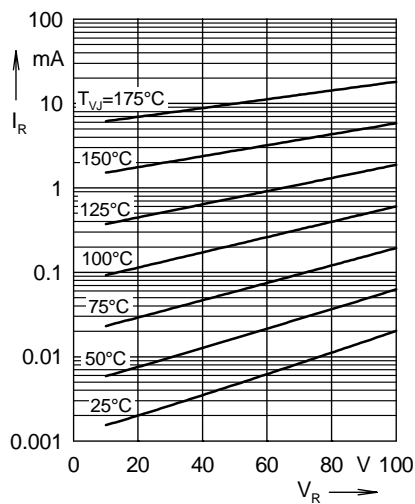


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

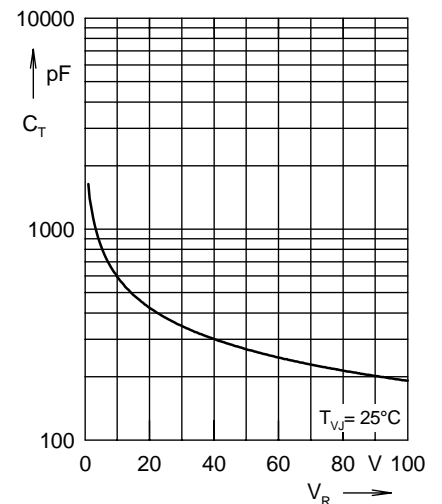


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

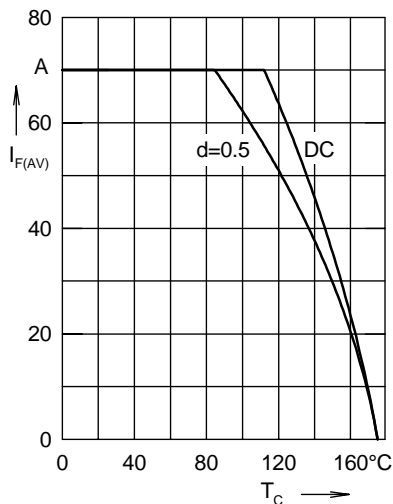


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

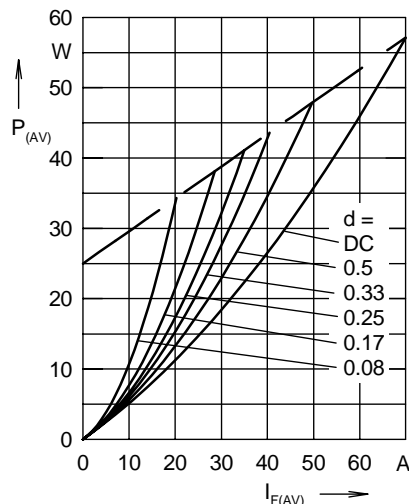


Fig. 5 Forward power loss characteristics

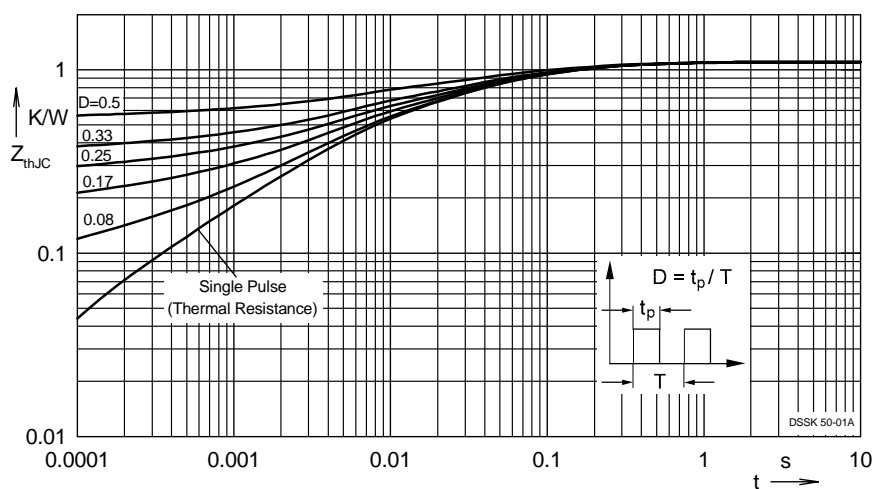




Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DSSK50-01A on WIN SOURCE](#)
-  [IXYS Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management