



**THE DATASHEET OF
TL-2300/S**



MODEL TL-2300


International size reference: D, ER32L615

TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




■ Nominal capacity @ 2 mA, to 2V	16.5 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	250 mA
■ Maximum pulse current capability	500 mA
■ Weight	92.5g (3.26 oz)
■ Volume	51 cc
■ Operating temperature range	-55°C to +85°C
■ U.L. Component Recognition, MH 12193	

TADIRAN LITHIUM BATTERIES

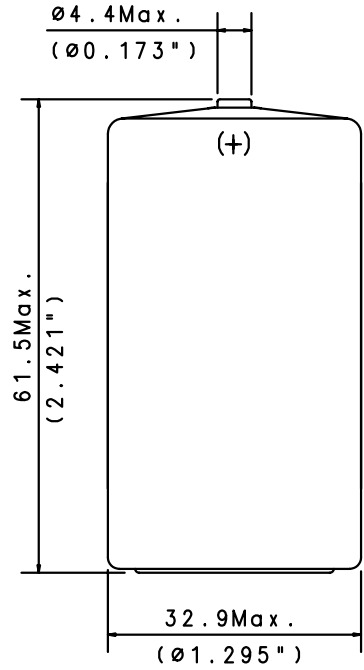

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-5130-21500
SUFFIX- /T SOLDER TABS	15-5130-31500

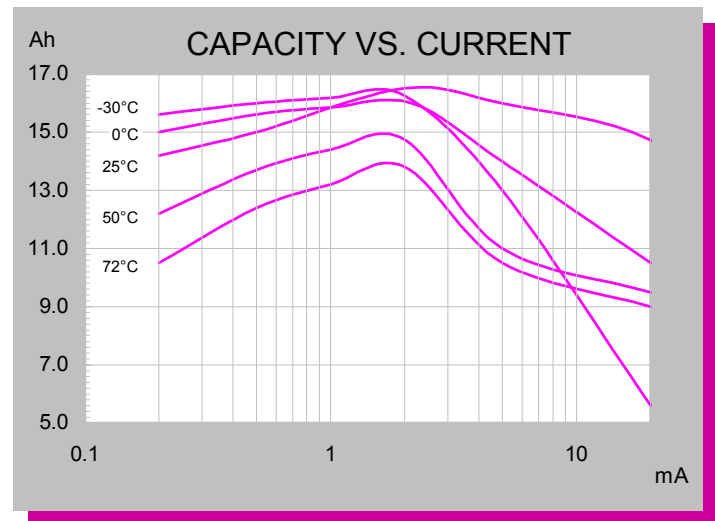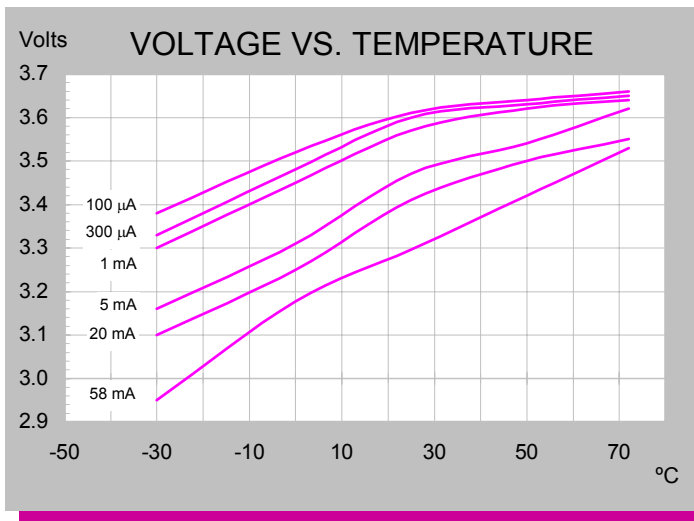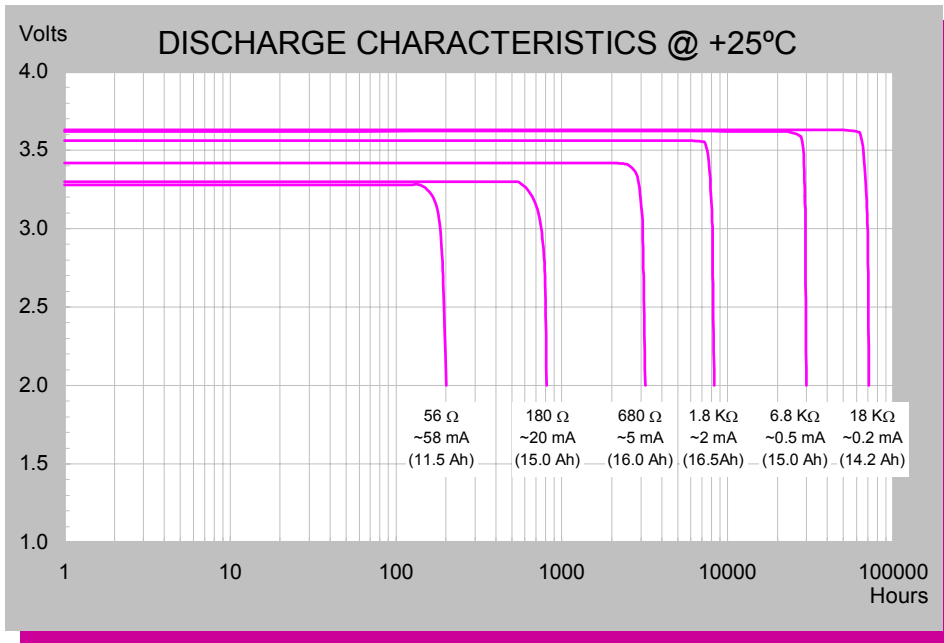



LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. B 05/03

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View TL-2300/S on WIN SOURCE](#)
-  [Tadiran Batteries](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management