

To _____

No. ZWCD-040403M-01

Date 29th Aug. '03

Type No.
WTDA1

Data Sheet

WCDMA Tx SAW Filter	
Application	: Tx Filter for WCDMA
Center Frequency	: 1950MHz
Size	: 2.0x1.4mm, 5pin-layout
Impedance	: 50-50ohms unbalance-unbalance
Part No.	: EFCH1950TCD1

Issued *A. Tsunekawa*
Check *K. Nishimura*

CIRCUIT COMPONENTS BUSINESS UNIT
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD
KADOMA, OSAKA, JAPAN

WCDMA Tx SAW Filter

----- Unbalanced input and unbalanced output -----


Part No. :

Design No. : T1950F1

Parameter	Frequency	Your request			Our Target			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Passband					1920 ... 1980			MHz
Insertion loss	1920 ... 1980MHz					2.3	2.9	dB
Ripple in passband	1920 ... 1980MHz					0.6	1.3	dB
Attenuation	Att1	0.1 ... 1805MHz				31	36	dB
	Att2	1805 ... 1880MHz				20	24	dB
	Att3	2110 ... 2170MHz				35	37	dB
	Att4	2170 ... 3840MHz				24	30	dB
	Att5	3840 ... 3960MHz				30	48	dB
	Att6	5760 ... 5940MHz				30	45	dB
VSWR	Input	1920 ... 1980MHz				1.9	2.1	
	Output	1920 ... 1980MHz				1.9	2.1	
Input impedance (Single Ended)					50			Ohm
Output impedance (Single Ended)					50			Ohm
Maximum drive level							+12	dBm
Operating temperature					-30		+85	deg. C
Storage temperature					-40		+85	deg. C

WCDMA Tx SAW Filter

----- Unbalanced input and unbalanced output -----

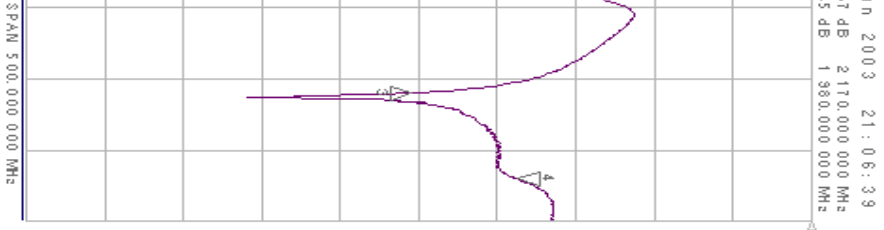


CH1 Markers

1:-	45.771 dB
1:	80500 GHz
2:-	25.478 dB
2:	88000 GHz
3:-	51.015 dB
3:	11000 GHz

CH2 Markers

1:-	2.3382 dB
1:	32000 GHz

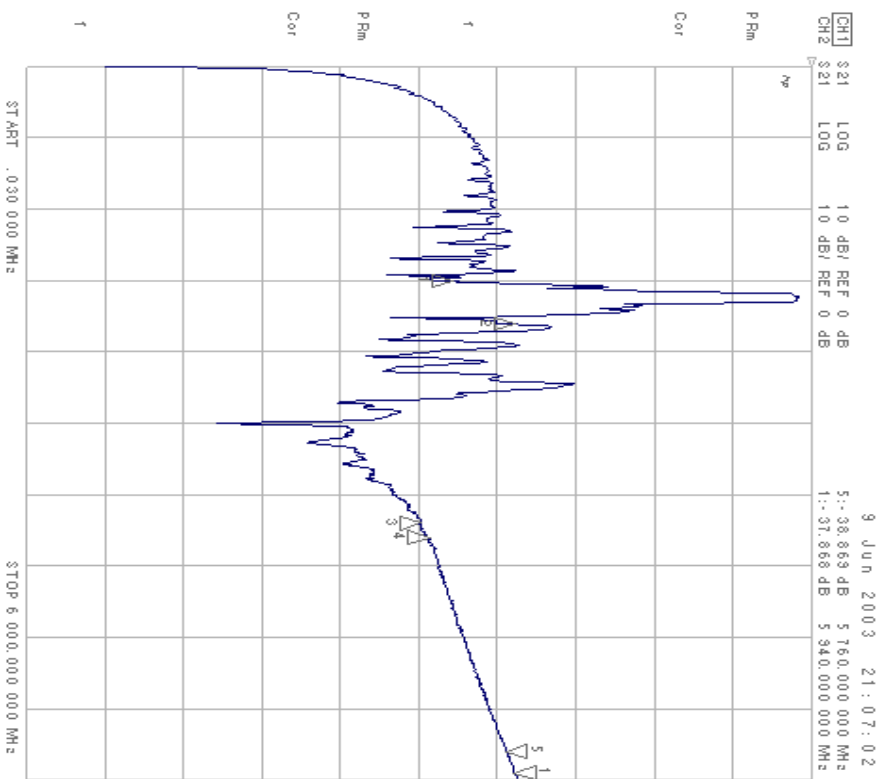


CH1 Markers



1:-	45.650 dB
1:	80500 GHz
2:-	37.818 dB
2:	17000 GHz
3:-	43.752 dB
3:	84000 GHz
4:-	48.667 dB
4:	36000 GHz

WCDMA Tx SAW Filter

----- Unbalanced input and unbalanced output -----

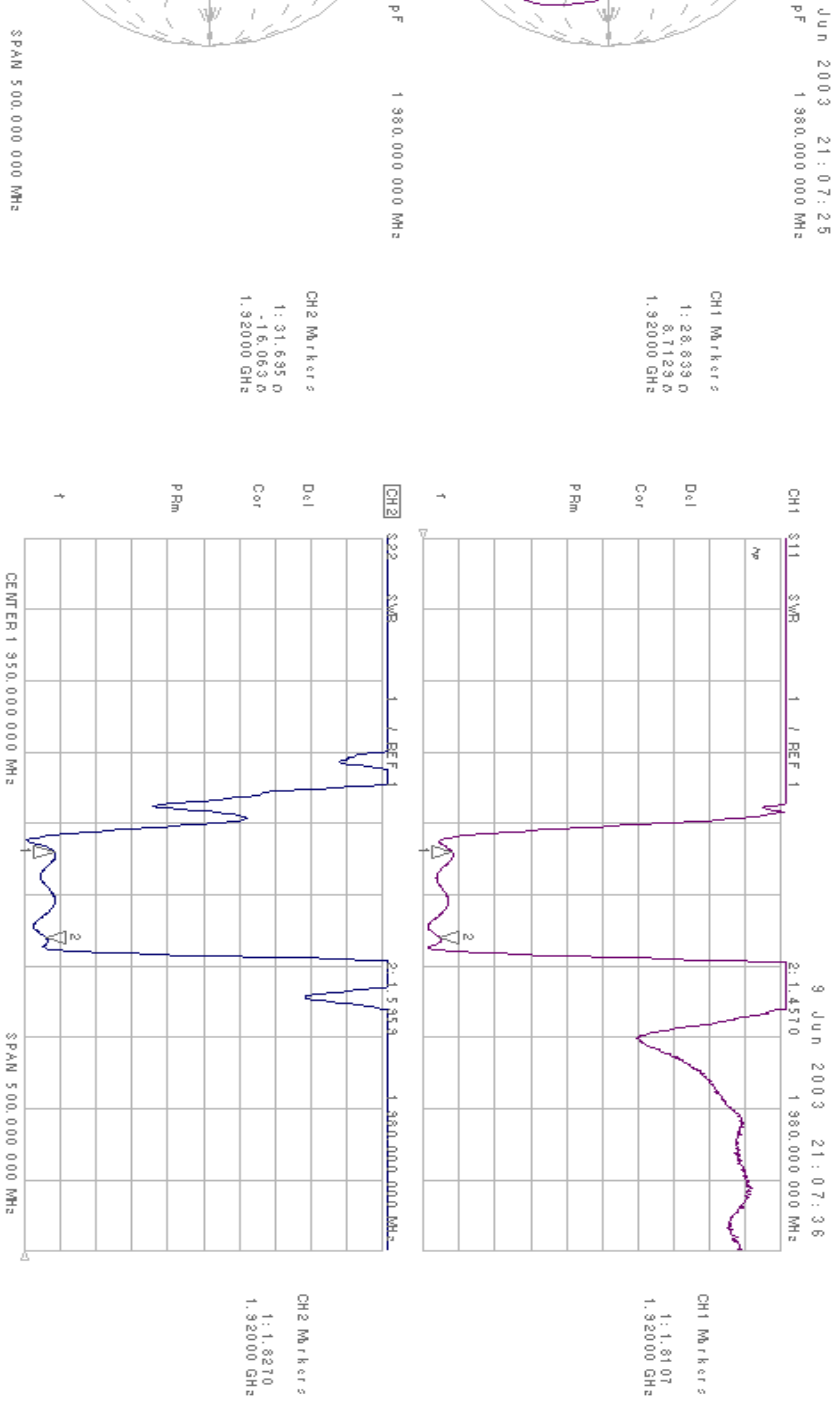

UNLESS OTHERWISE SPECIFIED	
BASIC DIMENSIONS	TOLERANCE
UP TO	INCL
TO	INCL
TO	INCL
TO	INCL
ABOVE	

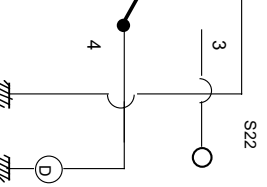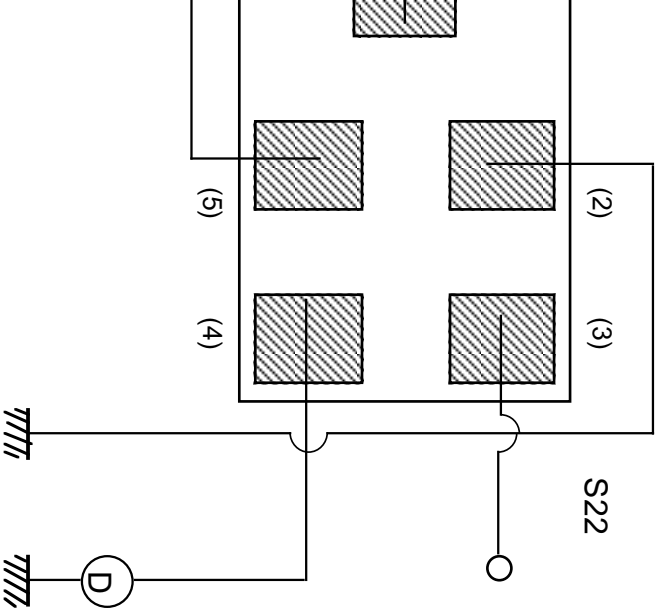

S : Standard Signal Generator
 (Output Impedance 50 ohm)
 C : Frequency Counter
 D : Detector
 (Input Impedance 50 ohm)

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		



NAME	TYPE NO.
SAW filter	

CERAMIC BUSINESS UNIT , LCR DEVICE COMPANY
 MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
 KADOMA, OSAKA, JAPAN

Fig. 2

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View EFCH1950TCD1](#) on WIN SOURCE
-  [Panasonic](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management