




**THE DATASHEET OF
RPSMA-BJ-1.13AS(AU)**



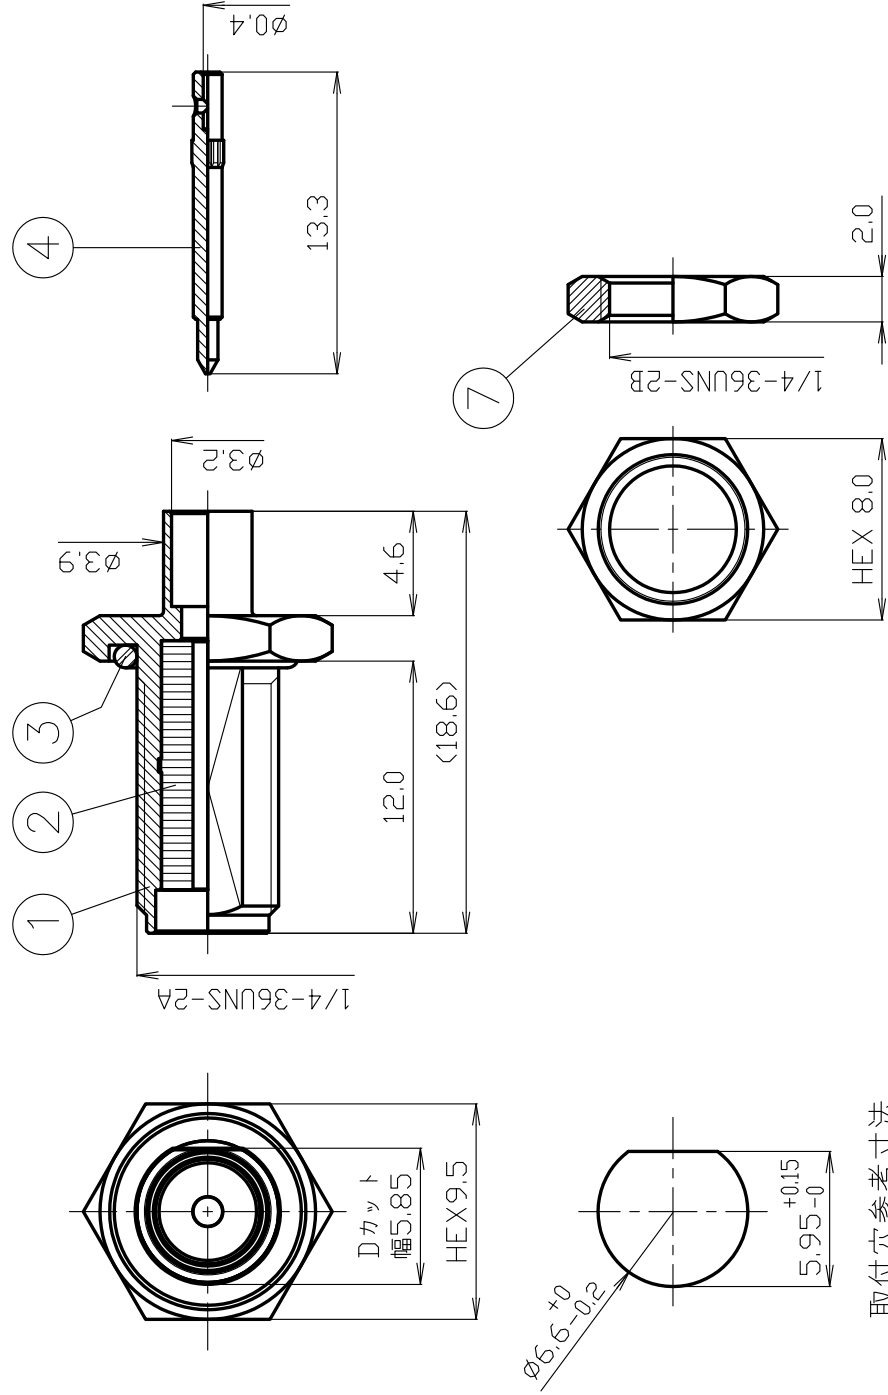

取付穴参考寸法

8	歯付盛金	リン青銅	1	Au	
7	六角ナット	黄銅	1	Au	
6	インサートスリーブ	黄銅	1	Au	
5	テフロンスベーター	テフロン	1	--	
4	中心コンタクト	黄銅	1	Au	
3	□リング	シリコンゴム	1	--	
2	絶縁体	テフロン	1	--	
1	シエル	黄銅	1	Au	
番号	部品名	材質	数量	処理	備考

尺度 3/1

単位 mm

日付 2015.03.26

製図
榎澤
'15.03.26

検図
山本
'15.03.26



承

CONNECTOR TERM TRANSLATION

■Parts List

部品名	DESCRIPTION
接続スリーブ	SHELL
絶縁体	INSULATOR
ガスケット	GASKET
ウェーブワッシャー	WAVE WASHER
ワッシャー	WASHER
本体、シェル	BODY
中心コンタクト	CENTER PIN
圧着スリーブ	FERRULE
締付ナット	NUT
保持リング	HOLDING RING
ブッシング	BUSHING
平ワッシャー	FLAT WASHER
半円平ワッシャー	HALF FLAT WASHER
スペーサー	SPACER
接続ナット	COUPLING NUT
外部コンタクト	OUTER CONTACT
Oリング	O-RING
六角ナット	HEX NUT
クランプ	CLAMP
ホルダー	BARREL
フタ	COVER
割りクランプ	SPLIT CLAMP
留めネジ	SCREW
バネリング	SPRING
ヒートシンク	HEAT SINK
抵抗器、抵抗素子	RESISTOR
スプリングワッシャー	SPRING WASHER
六角穴留めネジ	SOCKET HEAD CAP SCREW
ブラケット	BRACKET
ブッシュ	BUSH
同軸型避雷管	COAXIAL LIGHTNING ARRESTER
丸型端子	ROUND TERMINAL
減衰素子	ATTENUATION TERMINAL

■Parts List

部品名	DESCRIPTION
表示シール	STICKER
熱収縮チューブ	HEAT SHRINK TUBE
丸ナット	RING NUT

■Material List

材質	MATERIAL
亜鉛ダイカスト	ZnDC
ジラコン	POM
シリコンゴム	SILICONE
テフロン	PTFE
鉄、炭素工具鋼	CARBON STEEL
黄銅	BRASS
ベリリウム銅	BERYLLIUM COPPER
リン青銅	PHOSPHOR BRONZE
無酸素銅	OXYGEN-FREE COPPER
アルミニウム	ALUMINUM
ステンレス	STAINLESS STEEL

■List of Notations on Drawings

取付穴参考寸法	MOUNTING HOLE
最大パネル厚さ、使用可能パネル厚	PANEL THICKNESS
識別No.	SERIAL No.
刻印	STAMP
Dカット幅	D FLAT
Hカット幅	H FLAT
アヤメローレット	DIAMOND KNURL
タテメローレット	STRAIGHT KNURL
識別溝、目印、溝	GROOVE

■Surface List

処理	FINISH
三元めっき	TERNARY PLATING
黒色アルマイト	ANODAIZING(BLACK)
パッシベイト	PASSIVATE

PRODUCT SPECIFICATIONS

Part No. RPSMA-BJ-1.13AS (Au)




DWG No. X-1124516

Nominal 1 Impedance

50 Ω

No. 1121677

To-Conne Co., Ltd. (TYC)

Checked	Inspected	Prepared
		

		Test Items	Procedures/Test method	Requirements
1	DESIGN	Design & construction	Specified on relevant product drawing (DWG No. X-1124516)	No defects or abnormalities
2		Materials		
3		Finishes		
4	ELECTRICAL	Insulation Resistance	DC 500V	5000MΩ (Min.)
5		Withstanding voltage	AC 750V (1 minute.)	No defects or abnormalities
6		Contact resistance	The method of which, the voltage drop of the contact duration should not exceed 1-kHz AC or 1mV DC	3mΩ (Max.)
7		V. S. W. R	DC~6GHz	1.2 (Max.)
8	MECHANICAL	Compatibility	Connecting with a standard-compliant connector	No defects or abnormalities
9		Cable tensile strength	At axial tensile force 30N (Min.)	No defects or abnormalities
10		Tensile strength of coupling mechanism	At axial tensile force 180N	No defects or abnormalities

GKQM-19-1

	Remarks	Date
1		
2		
3		

RPSMA-BJ-1.13AS(Au) Cable Assembly Instructions

DRAWING NO. X-1124516

DRAWN	INSPECTED	APPROVED	CHECKED
渡邊 直弘 '23.12.25	檜 澤 '23.12.25	山 本 '23.12.25	三 村 '23.12.25



Cable group 1X32AWG(7/0.08)
Sheath outer diameter 1.13


All parts of the connector as shown in this drawing are standard parts.

CENTER PIN



BODY A

SPACER

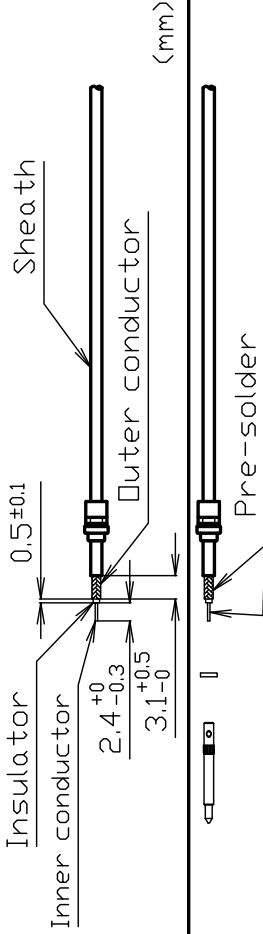

1 Slide the body B over the inner conductor to dimension shown in this drawing.


2 Pre-solder the inner conductor.

ATTENTION
The outer diameter after pre-soldering should not be too large.

3 Attach the spacer and solder to the body B and press it while soldering, and after installation, flush with the body B.

ATTENTION
Install the spacer so that it is flush with the body B. There should be no gap between the spacer and the body B.


4 Confirm that BODY A is crimped with part A completely. If BODY A is not at the same level as BODY B, the crimp height should be about 0.4mm. Measure the dimension of BODY A in the diagram, and adjust the crimp height to meet the crimp height.

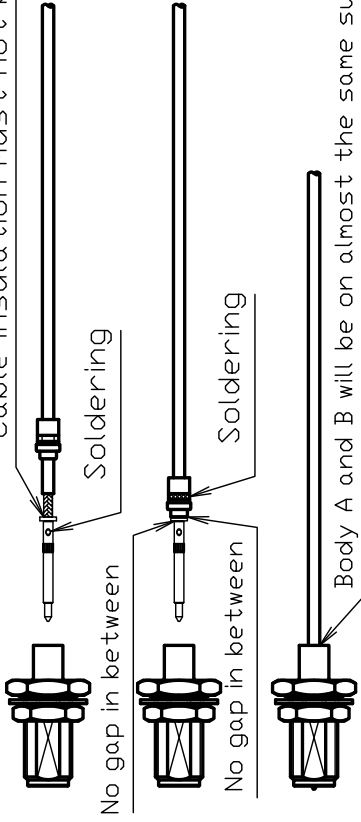

Center pin position (About 0.4mm protrudes)

Body A and B will be on almost the same surface

BODY A

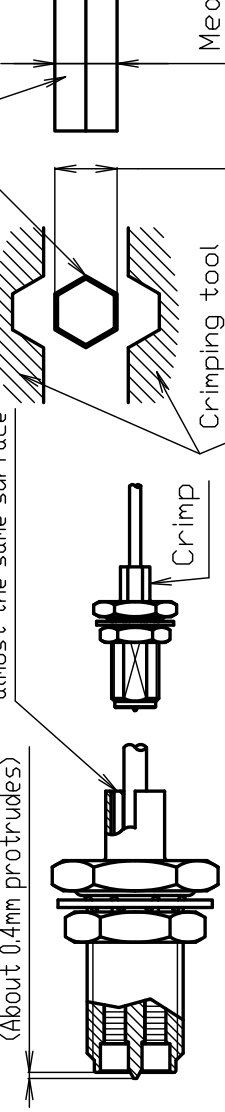

Measuring position

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View RPSMA-BJ-1.13AS\(Au\) on WIN SOURCE](#)
- ⊖ [TYCLON Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management