



# THE DATASHEET OF CSPESD304G



# CSPESD304

## 4-Channel ESD Array in CSP

### Product Description

The CSPESD304 is a quad ESD transient voltage suppression diode array. Each diode provides a very high level of protection for sensitive electronic components that may be subjected to electrostatic discharge (ESD). These diodes safely dissipate ESD strikes of  $\pm 15$  kV, exceeding the maximum requirement of the IEC 61000-4-2 international standard. Using the MIL-STD-883 (Method 3015) specification for Human Body Model (HBM) ESD, the device provides protection for contact discharges to greater than  $\pm 30$  kV.

The CSPESD304 is particularly well-suited for portable electronics (e.g., cellular telephones, PDAs, notebook computers) because of its small package and low weight.

The CSPESD304 is available in a space-saving, low-profile Chip Scale Package with lead-free finishing.

### Features

- Four Channels of ESD Protection
- $\pm 15$  kV ESD Protection on each Channel (IEC 61000-4-2 Level 4, Contact Discharge)
- $\pm 30$  kV ESD Protection on each Channel (HBM)
- Chip Scale Package Features Extremely Low Lead Inductance for Optimum ESD Protection
- 5-Bump, 0.960 mm x 1.330 mm Footprint Chip Scale Package (CSP)
- These Devices are Pb-Free and are RoHS Compliant

### Applications

- ESD Protection for Sensitive Electronic Equipment
- I/O Port and Keypad and Button Circuitry Protection for Portable Devices
- Can be Used for EMI Filtering when Combined with External Series Resistance
- Wireless Handsets
- Handheld PCs / PDAs
- MP3 Players
- Digital Camcorders
- Notebooks
- Desktop PCs




ON Semiconductor®

<http://onsemi.com>




WLCSP5  
CASE 567AY

### ELECTRICAL SCHEMATIC

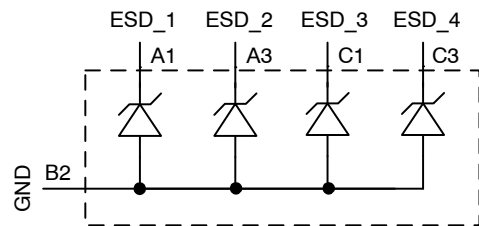

### MARKING DIAGRAM



E = CSPESD304

### ORDERING INFORMATION

| Device    | Package         | Shipping†        |
|-----------|-----------------|------------------|
| CSPESD304 | CSP-5 (Pb-Free) | 3500/Tape & Reel |


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# CSPESED304

**Table 1. PIN DESCRIPTIONS**

| 5-bump CSP Package |       |               |
|--------------------|-------|---------------|
| Pin                | Name  | Description   |
| A1                 | ESD_1 | ESD Channel 1 |
| A3                 | ESD_2 | ESD Channel 2 |
| B2                 | GND   | Device Ground |
| C1                 | ESD_3 | ESD Channel 3 |
| C3                 | ESD_4 | ESD Channel 4 |

## PACKAGE / PINOUT DIAGRAMS

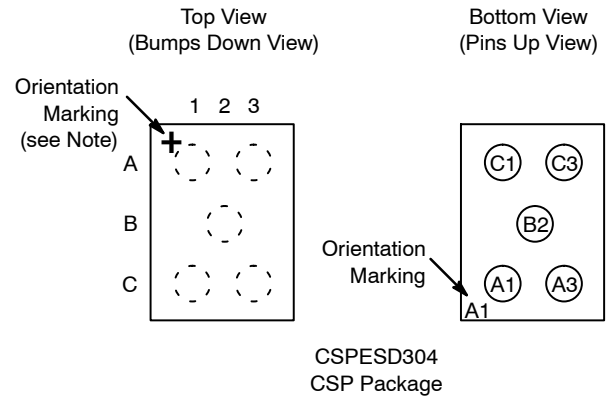

Note: Lead-free devices are specified by using a "+" character for the top side orientation mark.

## SPECIFICATIONS

**Table 2. ABSOLUTE MAXIMUM RATINGS**

| Parameter                 | Rating      | Units |
|---------------------------|-------------|-------|
| Storage Temperature Range | -65 to +150 | °C    |
| DC Package Power Rating   | 200         | mW    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

**Table 3. STANDARD OPERATING CONDITIONS**

| Parameter                   | Rating     | Units |
|-----------------------------|------------|-------|
| Operating Temperature Range | -40 to +85 | °C    |

**Table 4. ELECTRICAL OPERATING CHARACTERISTICS** (Note 1)

| Symbol      | Parameter  | Conditions                                 | Min                  | Typ         | Max         | Units |
|-------------|--|--|----------------------|-------------|-------------|-------|
| $V_{DIODE}$ | Diode Reverse Breakdown Voltage  | $I_{DIODE} = 10 \mu A$                     | 5.5                  |             |             | V     |
| $I_{LEAK}$  | Diode Leakage Current  | $V_{IN} = 3.3 V, T_A = 25^\circ C$         |                      |             | 100         | nA    |
| $V_{SIG}$   | Signal Voltage<br>Positive Clamp<br>Negative Clamp   | $I_{DIODE} = 10 mA$                        | 5.6<br>-0.4          | 6.8<br>-0.8 | 9.0<br>-1.5 | V     |
| $V_{ESD}$   | In-system ESD Withstand Voltage<br>a) Human Body Model, MIL-STD-883, Method 3015<br>b) Contact Discharge per IEC 61000-4-2 Level 4 | (Note 2)                                   | $\pm 30$<br>$\pm 15$ |             |             | kV    |
| $V_{CL}$    | Clamping Voltage during ESD Discharge<br>MIL-STD-883 (Method 3015), 8 kV<br>Positive Transients<br>Negative Transients             | (Note 2)                                   |                      | +15<br>-8   |             | V     |
| $C_{DIODE}$ | Diode Capacitance  | At 2.5 VDC Reverse Bias,<br>1 MHz, 30 mVAC | 22                   | 27          | 32          | pF    |

- $T_A = -40$  to  $+85^\circ C$  unless otherwise specified.
- ESD applied to input and output pins with respect to GND, one at a time.

# CSPE3D304

## PERFORMANCE INFORMATION

Diode Characteristics (nominal conditions unless specified otherwise)

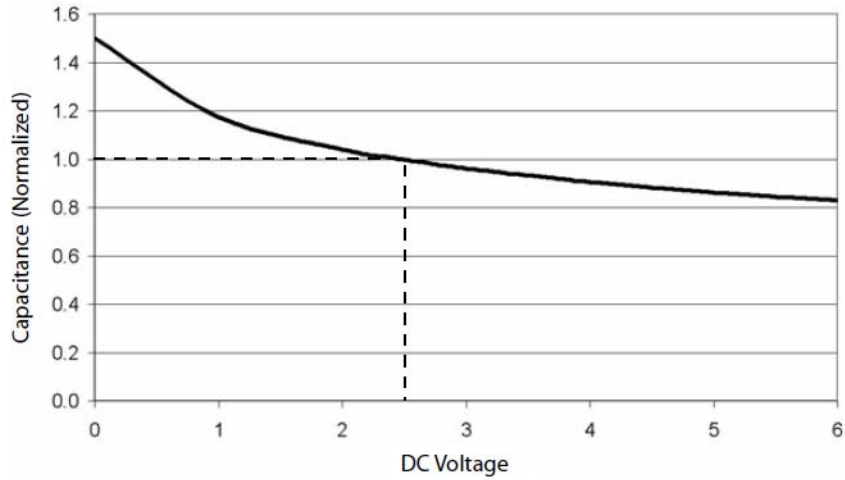


Figure 1. Typical Diode Capacitance vs. Input Voltage (normalized to 2.5 VDC)

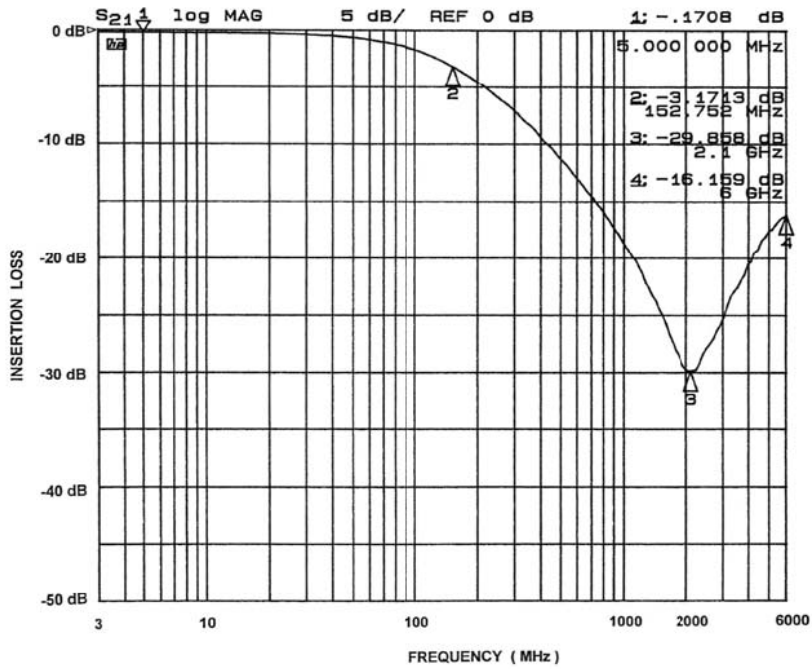


Figure 2. Frequency Response (single channel vs. GND, in 50 Ω system)

# CSPE304

## APPLICATION INFORMATION

| Parameter  | Value                        |
|--|------------------------------|
| Pad Size on PCB  | 0.240 mm                     |
| Pad Shape  | Round                        |
| Pad Definition   | Non-Solder Mask defined pads |
| Solder Mask Opening  | 0.290 mm Round               |
| Solder Stencil Thickness   | 0.125 mm – 0.150 mm          |
| Solder Stencil Aperture Opening (laser cut, 5% tapered walls)                      | 0.300 mm Round               |
| Solder Flux Ratio  | 50/50 by volume              |
| Solder Paste Type  | No Clean                     |
| Pad Protective Finish  | OSP (Entek Cu Plus 106A)     |
| Tolerance – Edge To Corner Ball  | ±50 µm                       |
| Solder Ball Side Coplanarity   | ±20 µm                       |
| Maximum Dwell Time Above Liquidous   | 60 seconds                   |
| Maximum Soldering Temperature for Lead-free Devices using a Lead-free Solder Paste | 260°C                        |

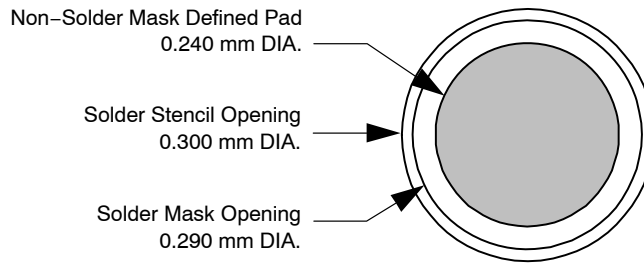


Figure 3. Recommended Non-Solder Mask Defined Pad Illustration


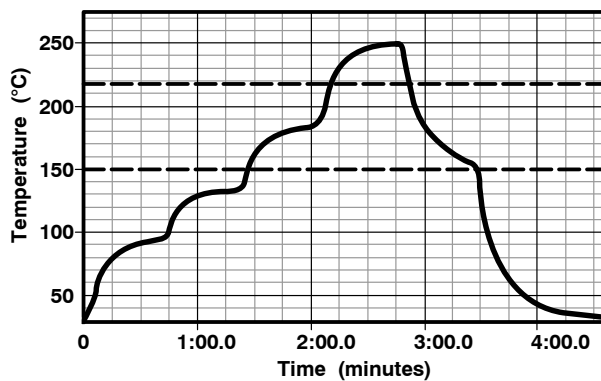


Figure 4. Lead-free (SnAgCu) Solder Ball Reflow Profile

# CSPESD304

## PACKAGE DIMENSIONS

WLCSP5, 0.96x1.33  
CASE 567AY-01  
ISSUE 0

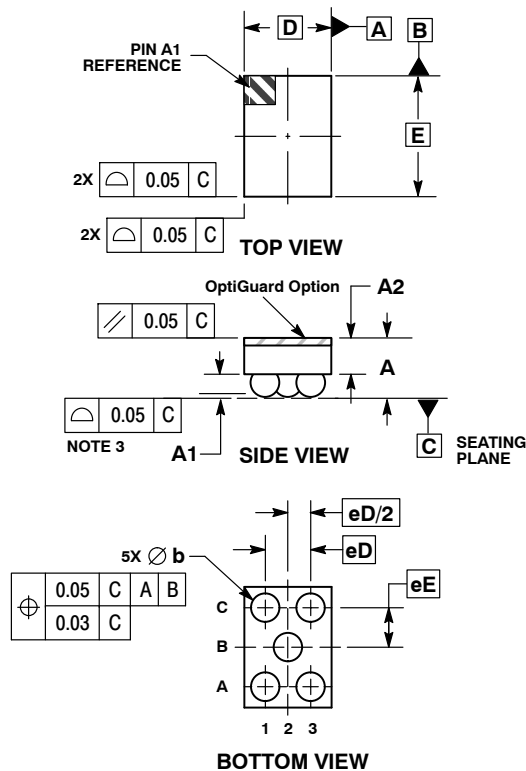


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BALLS.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.56        | 0.72 |
| A1  | 0.21        | 0.27 |
| A2  | 0.40 REF    |      |
| b   | 0.29        | 0.35 |
| D   | 0.96 BSC    |      |
| E   | 1.33 BSC    |      |
| eD  | 0.50 BSC    |      |
| eE  | 0.435 BSC   |      |

**RECOMMENDED SOLDERING FOOTPRINT\***

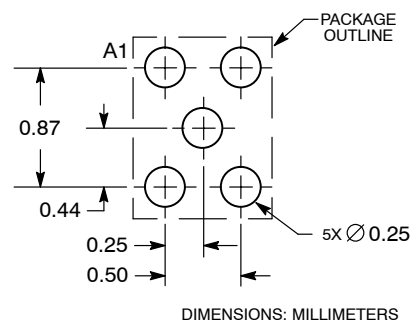

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

**PUBLICATION ORDERING INFORMATION**



**LITERATURE FULFILLMENT:**  
 Literature Distribution Center for ON Semiconductor  
 P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
 Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
 Phone: 81-3-5773-3850



**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
 For additional information, please contact your local Sales Representative

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CSPESD304G](#) on WIN SOURCE
-  [ON Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management