


Product Overview

Qorvo's QPA2966 is a packaged wideband power amplifier, fabricated on Qorvo's QGaN15 GaN on SiC process. The QPA2966 operates from 2 to 18 GHz, providing 20 W of saturated power with 12 dB large signal gain and 20 % power-added efficiency at 22 V drain bias.

The QPA2966 is in a 10-lead 0.6 x 0.6 x 0.205 inch bolt-down package with a Cu base for superior thermal management. To simplify system integration, QPA2966 is fully matched to 50 ohms including integrated DC blocking capacitors and an RF choke.

The combination of wideband power, gain and efficiency provides system designers the flexibility to improve system performance while reducing size and cost. QPA2966 is ideally suited for wideband communications systems, electronic warfare, test instrumentation and radar applications across both military and commercial markets.

Lead free and RoHS compliant.

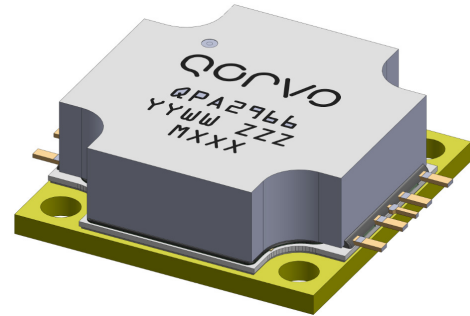


Key Features

- Frequency Range: 2 – 18 GHz
- P_{SAT} ($P_{IN} = 31$ dBm): 43 dBm
- PAE ($P_{IN} = 31$ dBm): 20 %
- Power Gain ($P_{IN} = 31$ dBm): 12 dB
- Small Signal Gain: 19 dB
- Bias: CW, $V_D = 22$ V, $I_{DQ} = 3360$ mA
- Package Dimensions: 0.6 x 0.6 x 0.205 in

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

Functional Block Diagram

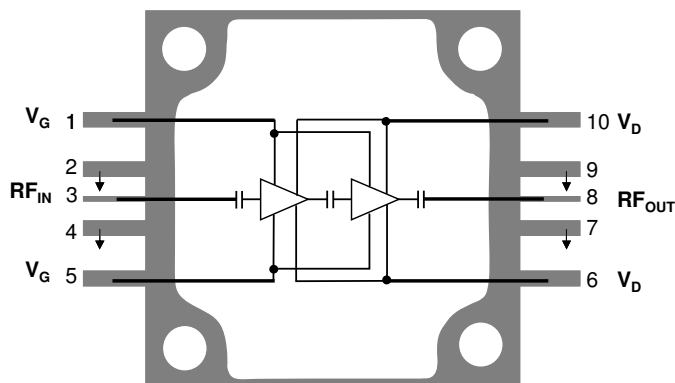

Applications

- Communication Systems
- Electronic Warfare
- Radar
- Test Equipment

Ordering Information

Part No.	Description
QPA2966	2 - 18 GHz 20 Watt GaN Amplifier
QPA2966EVB	Evaluation Board for QPA2966

Absolute Maximum Ratings

Parameter	Value / Range
Drain Voltage (V_D)	29.5 V
Gate Voltage Range (V_G)	-5 to 0 V
Drain Current (I_D)	5695 mA
Gate Current (I_G)	20 mA
Power Dissipation (P_{DISS}), $T_{BASE} = 85^\circ\text{C}$	77.5 W
Input Power (P_{IN}), 50 Ω , $V_D = 22$ V, $I_{DQ} = 3360$ mA, $T_{BASE} = 85^\circ\text{C}$	37 dBm
Input Power (P_{IN}), 3:1 VSWR, $V_D = 22$ V, $I_{DQ} = 3360$ mA, $T_{BASE} = 85^\circ\text{C}$	37 dBm
Mounting Temperature	Refer to Assembly Notes, page 25
Storage Temperature	-55 to 150 $^\circ\text{C}$

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Drain Voltage (V_D)		22	22	V
Drain Current, Quiescent (I_{DQ})		3360		mA
Drain Current, RF (I_{D_Drive})	See charts page 6, 7, 10, 13, 16			mA
Gate Voltage Typ. Range (V_G)	-1.2 to -2.7			V
Gate Current, RF (I_{G_Drive})	See charts page 6 - 7			mA
P_{IN}	$T_{BASE} = -40^\circ\text{C}, +25^\circ\text{C}$			dBm
	$T_{BASE} = +85^\circ\text{C}$			
P_{DISS}	$T_{BASE} = +85^\circ\text{C}$			W
Operating Temp. Range, $T_{BASE}^{(2)}$	-40	+25	+85	$^\circ\text{C}$

1. Limited by thermal (T_{CH}); recommended ≥ 6 dBm back off from P_{SAT} when operating at 85°C T_{BASE}

2. T_{BASE} is back side of package QPA2966 (see p. 23 offset temperature based on Qorvo's EVB design for reference)

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all

Electrical Specifications







Parameter	Conditions ^{(1) (2)}	Min	Typ	Max	Units
Operational Frequency Range		2		18	GHz
Output Power at Saturation, $P_{SAT}^{(3)}$	$P_{IN} = +31$ dBm ⁽³⁾ , Frequency = 2 - 16 GHz	42	43		dBm
	$P_{IN} = +31$ dBm ⁽³⁾ , Frequency = 17 - 18 GHz	41	42		
Power Added Efficiency, PAE	$P_{IN} = +31$ dBm ⁽³⁾ , Frequency = 2 - 16 GHz	16	22		%
	$P_{IN} = +31$ dBm ⁽³⁾ , Frequency = 17 - 18 GHz	10	17		
Small Signal Gain, S_{21}	$P_{IN} = -20$ dBm		19		dB
Input Return Loss, IRL	$P_{IN} = -20$ dBm		10		dB
Output Return Loss, ORL	$P_{IN} = -20$ dBm		10		dB
P_{SAT} Temperature Coefficient	$T_{DIFF} = -40^\circ\text{C}$ to $+85^\circ\text{C}$; $P_{IN} = +31$ dBm		-0.005		dBm/ $^\circ\text{C}$
S_{21} Temperature Coefficient	$T_{DIFF} = -40^\circ\text{C}$ to $+85^\circ\text{C}$		-0.04		dB/ $^\circ\text{C}$
Gate Leakage	$V_D = 10$ V, $V_G = -3.7$ V, no RF	-16.8		0.1	mA

Notes:

1. Test conditions unless otherwise noted: CW, $V_D = 22$ V, $I_{DQ} = 3360$ mA, adjusting V_G , $T_{BASE} = +25^\circ\text{C}$, $Z_0 = 50 \Omega$ (reference planes are at QPA2966)
2. T_{BASE} is back side (bottom) of package QPA2966 (see page 23 temperature measurement and offset)
3. Recommended ≥ 6 dBm back off from P_{SAT} when operating 85°C T_{BASE} (see Recommended Operating Conditions)




Performance Plots – Small Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

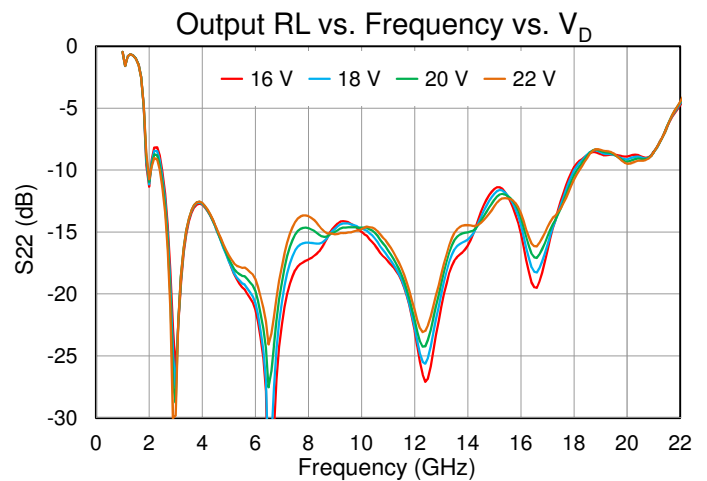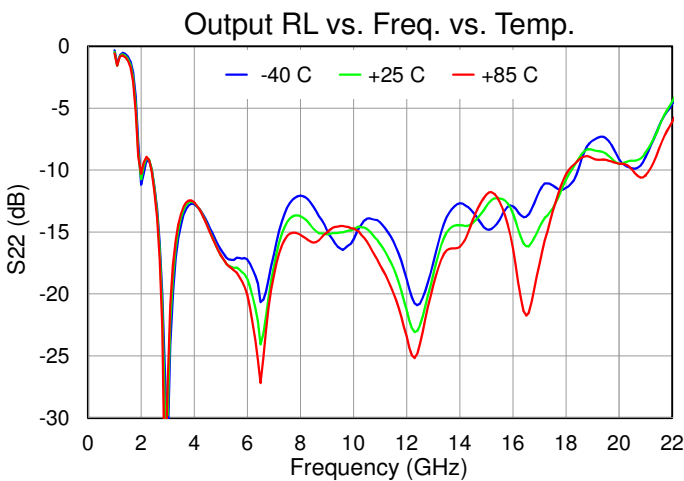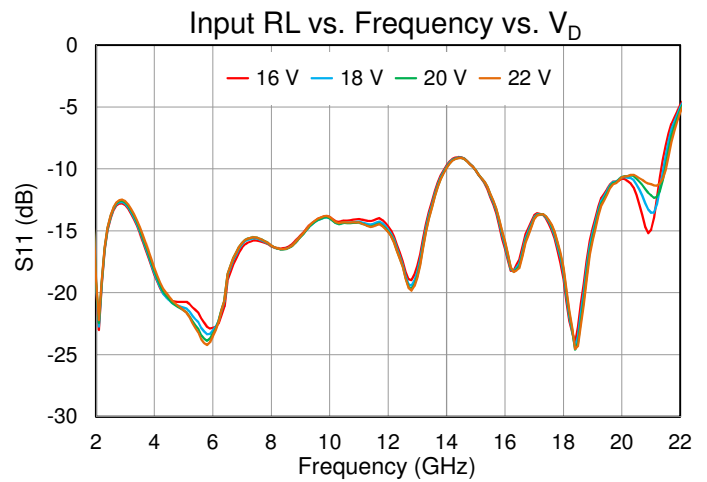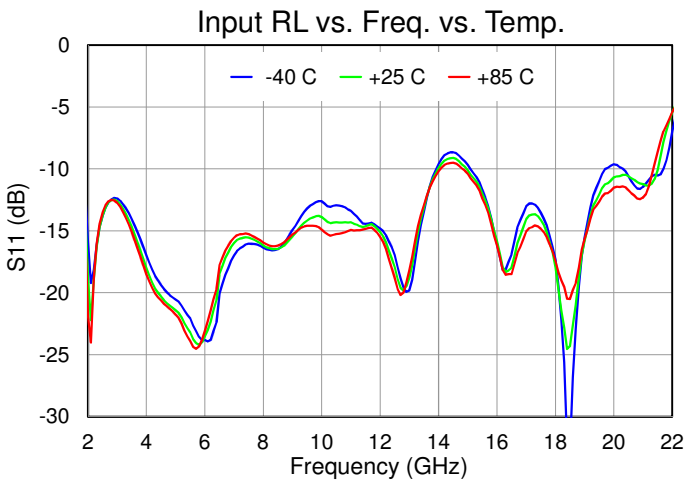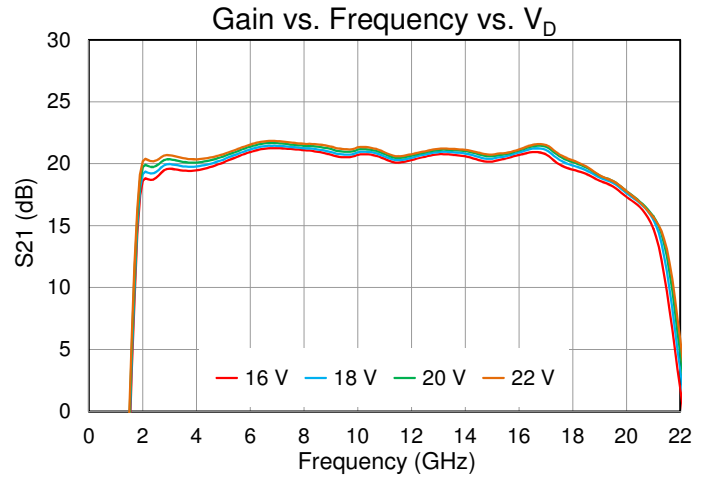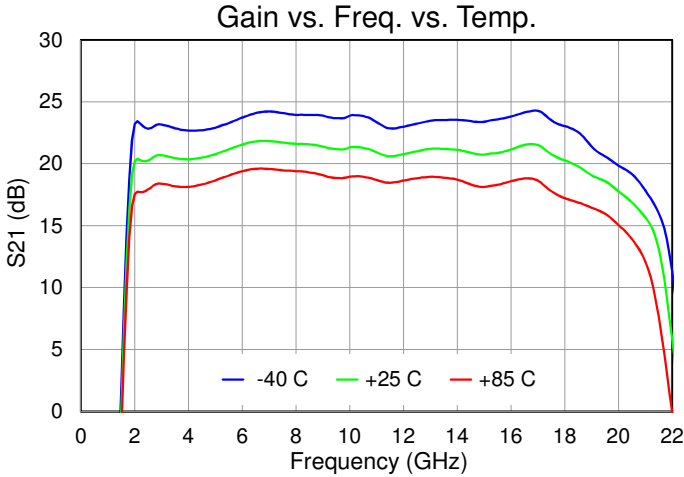







Performance Plots – Small Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

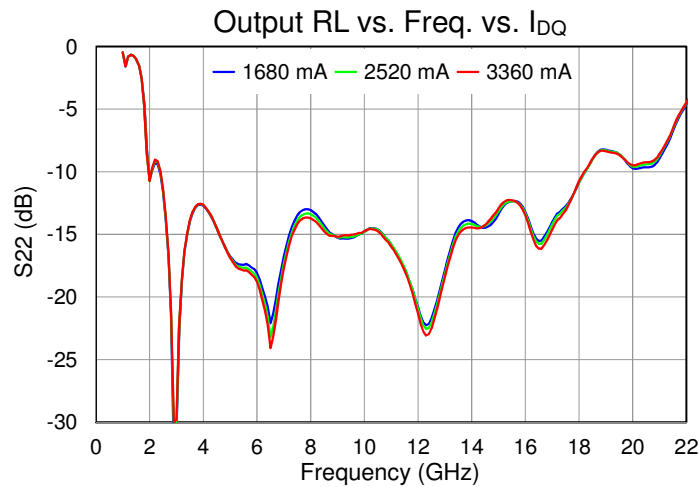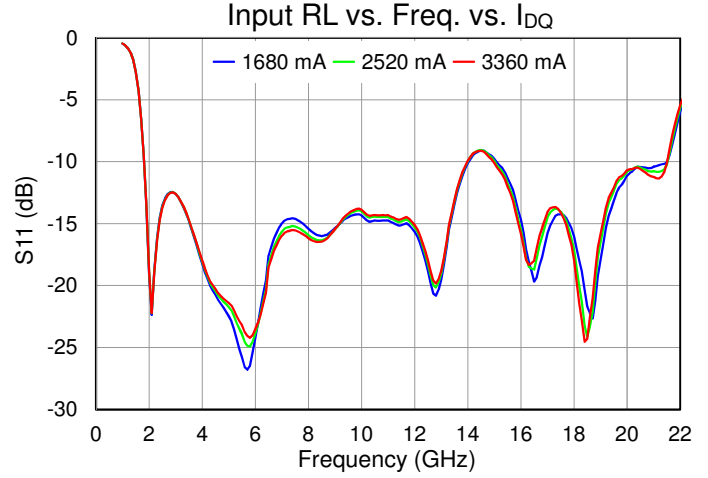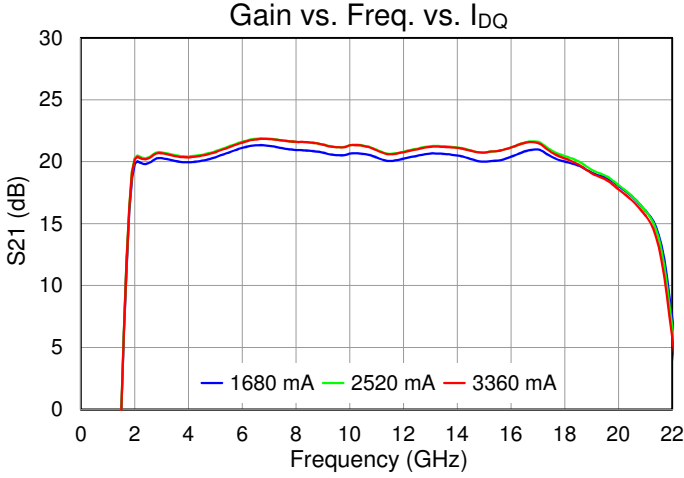







Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

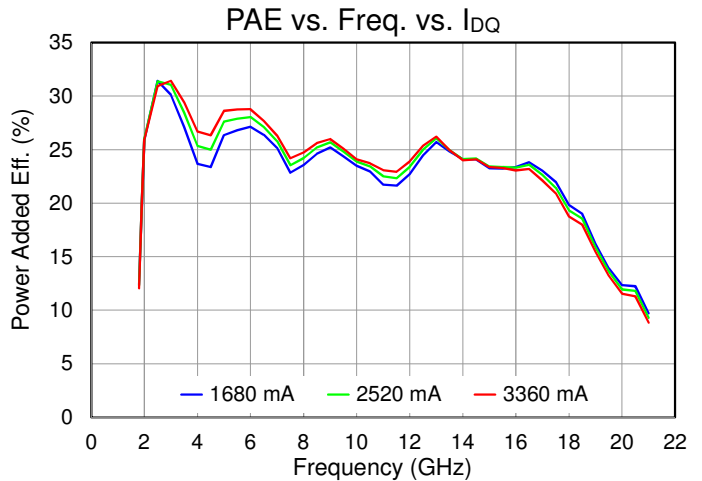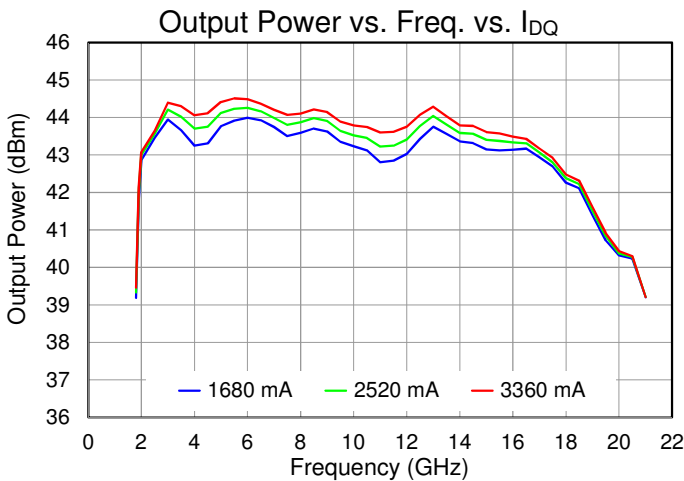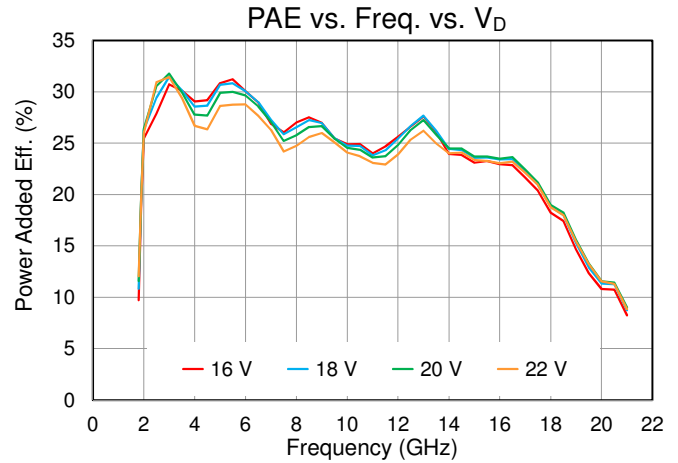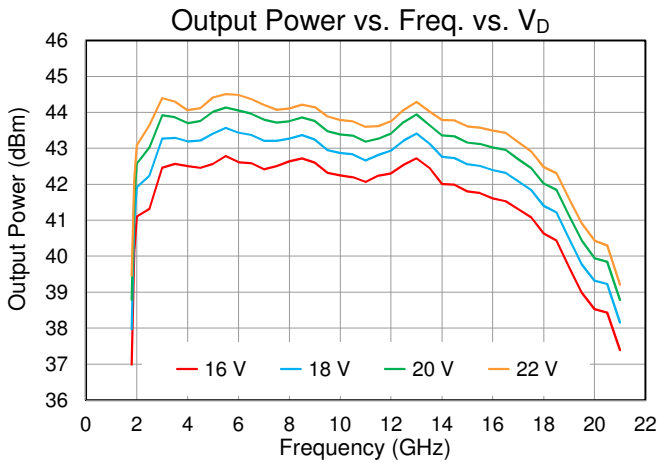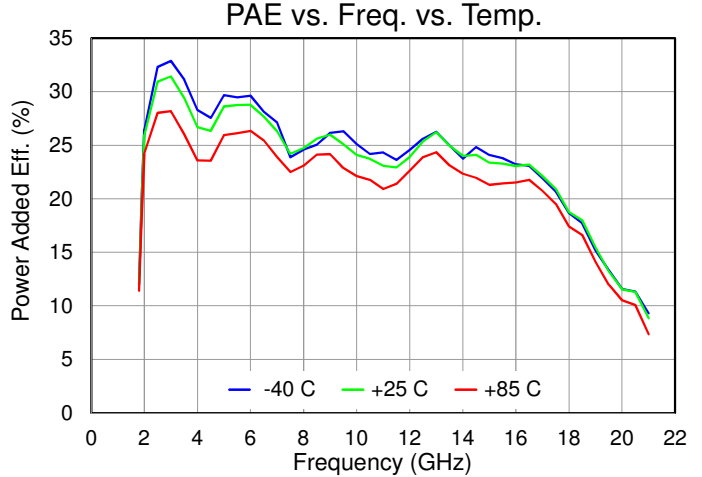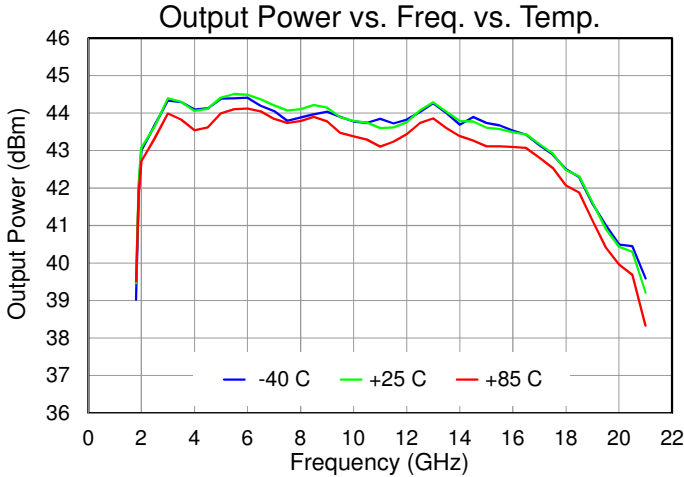





Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

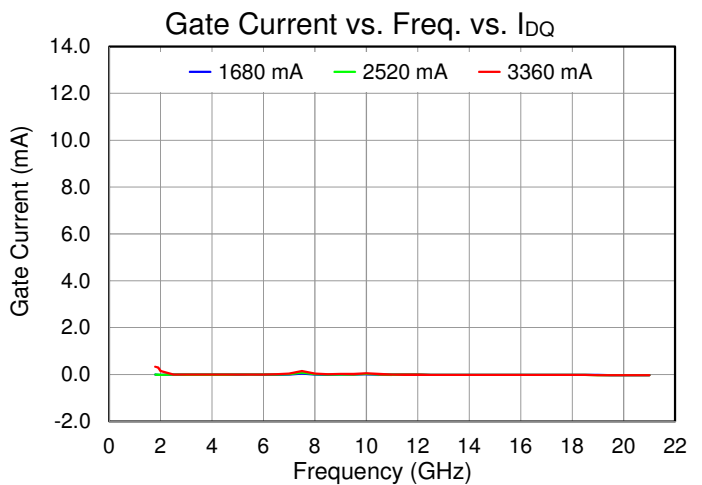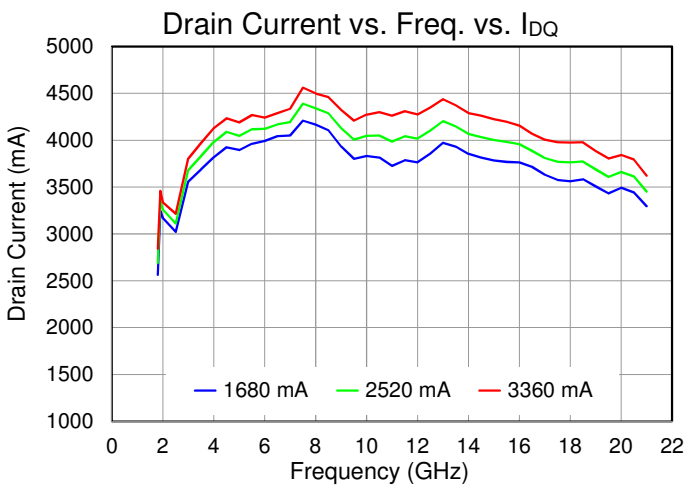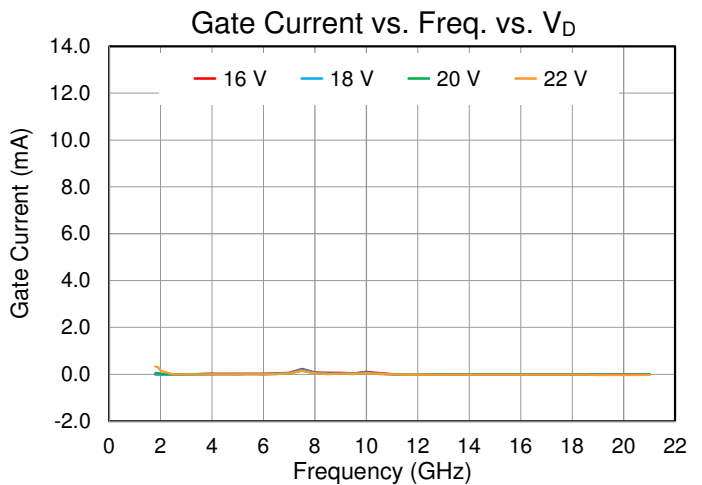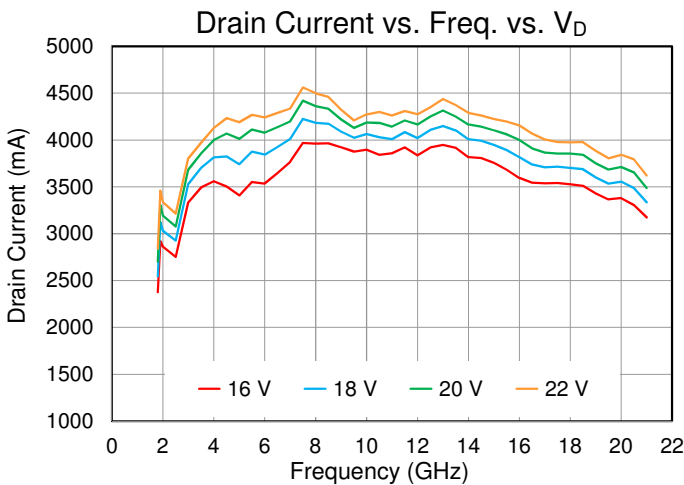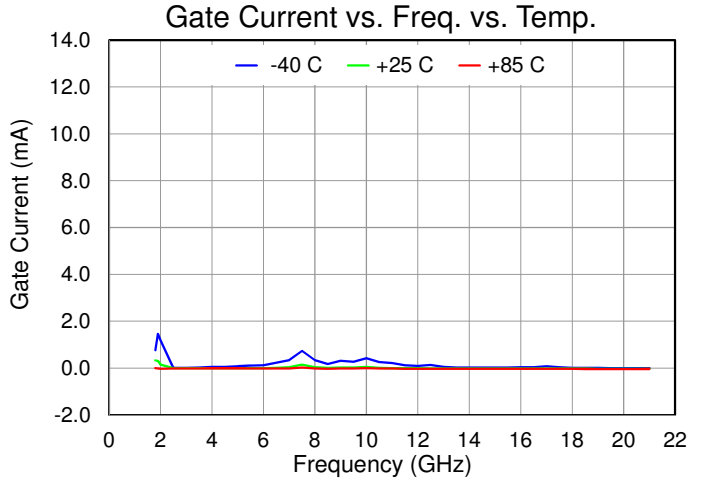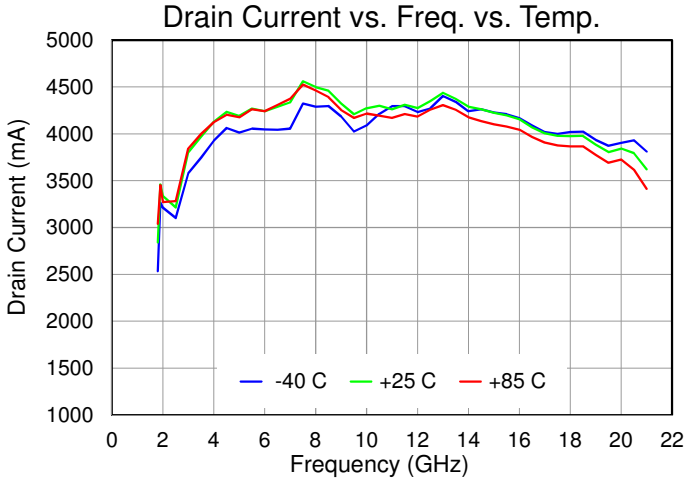






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

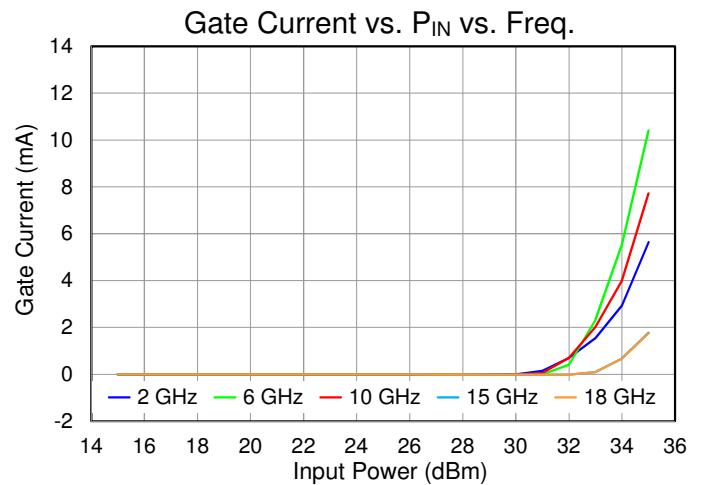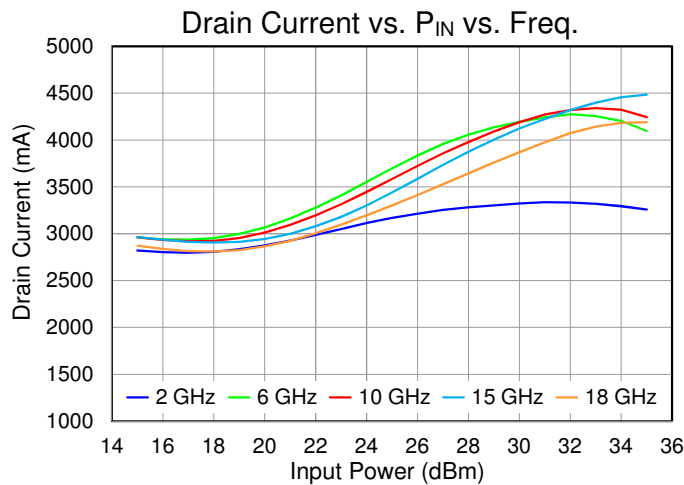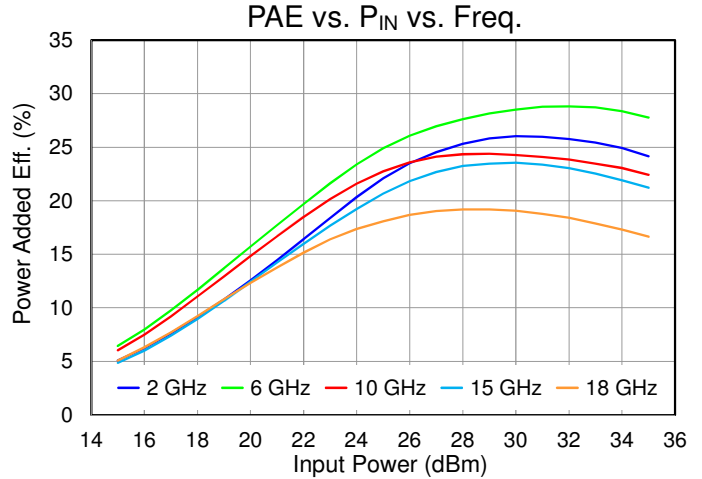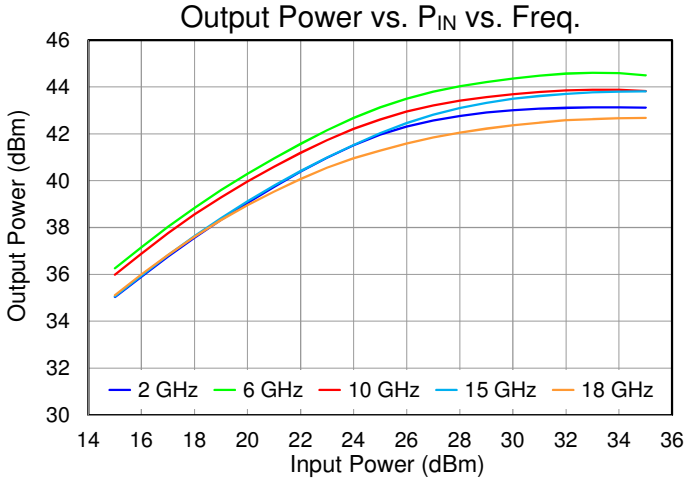






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

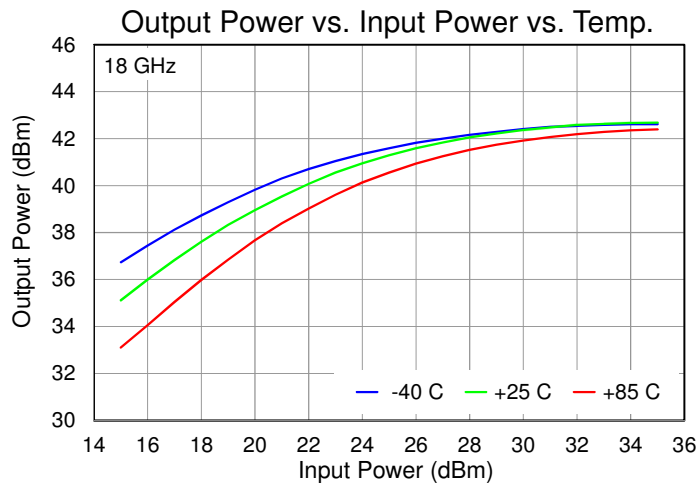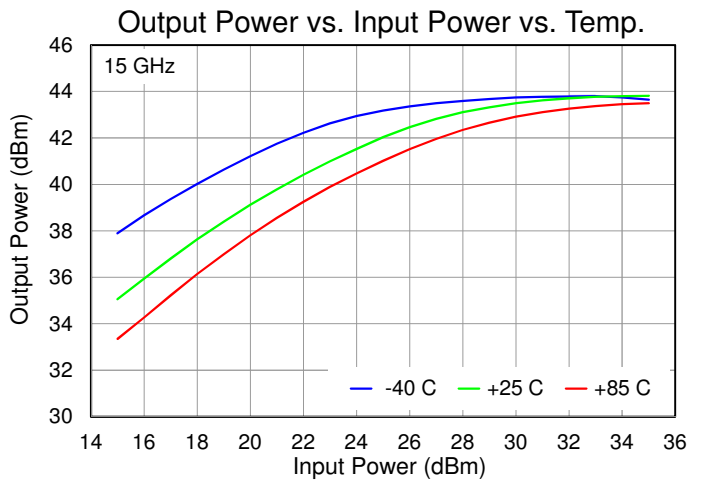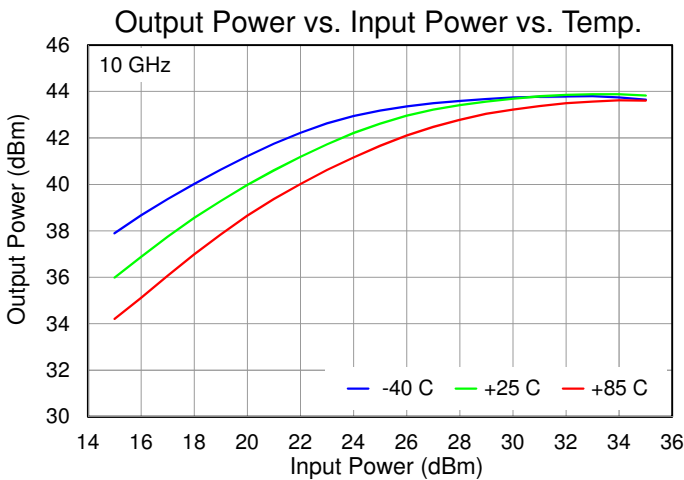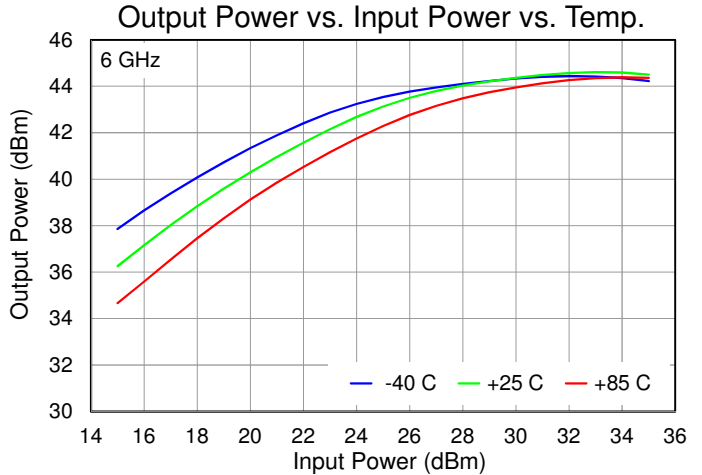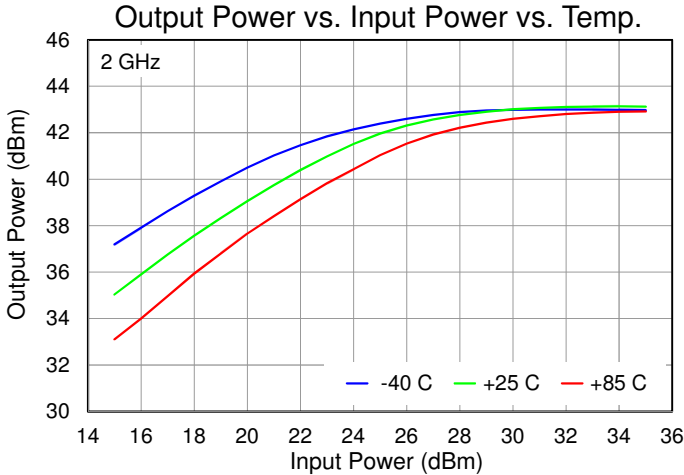






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

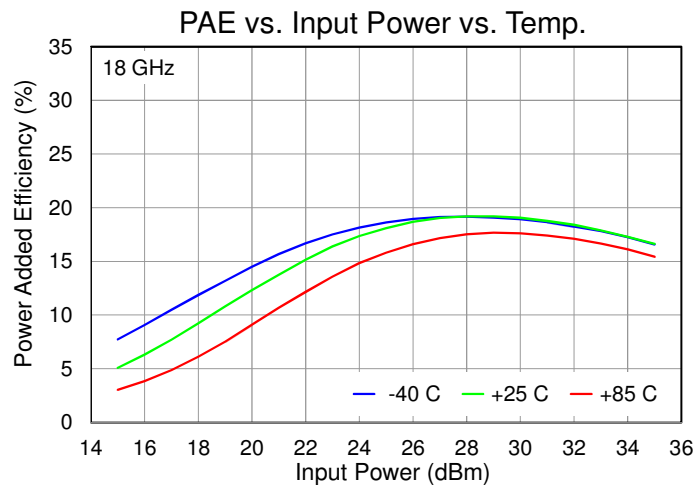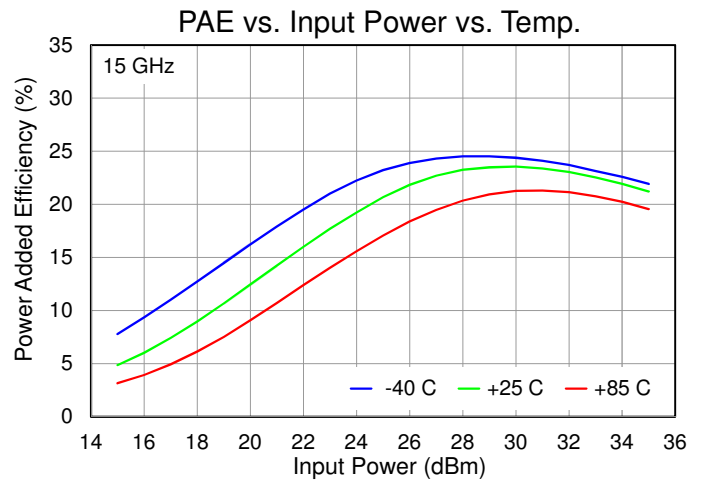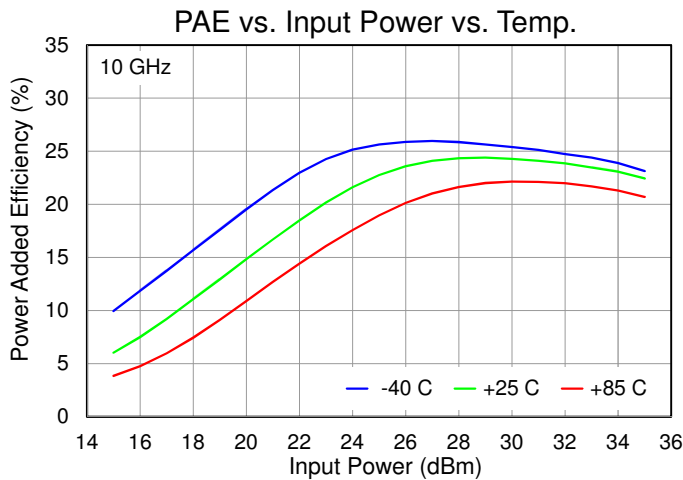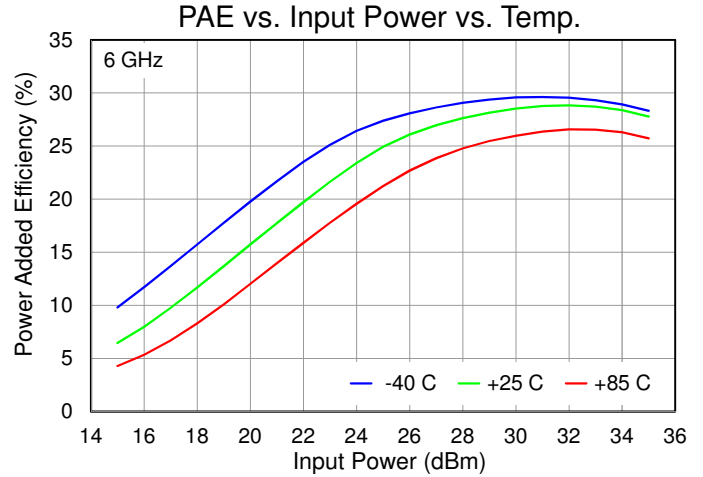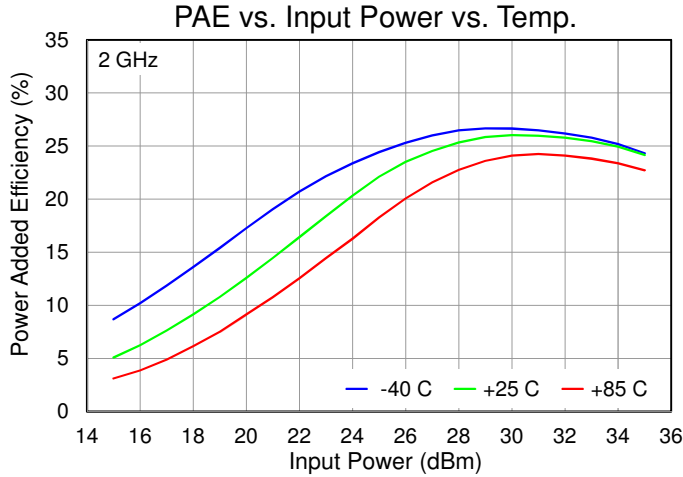






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

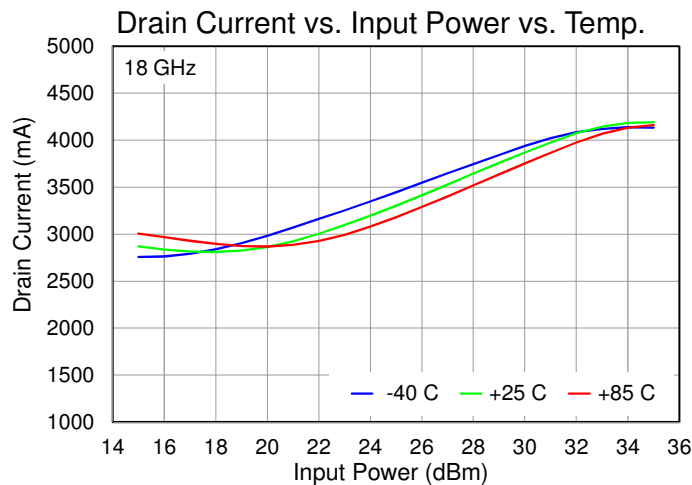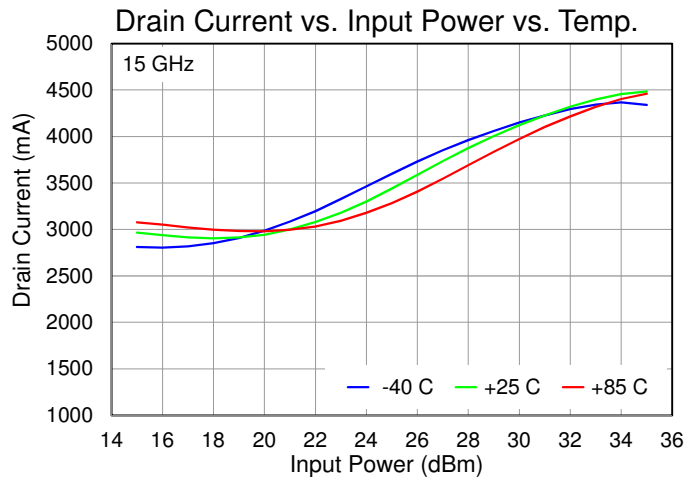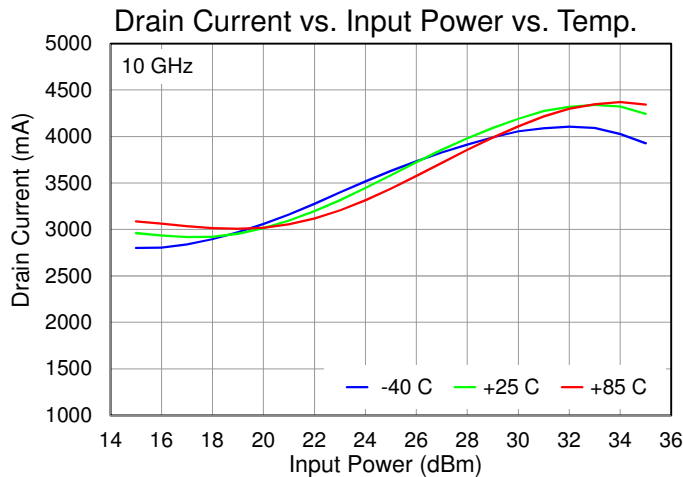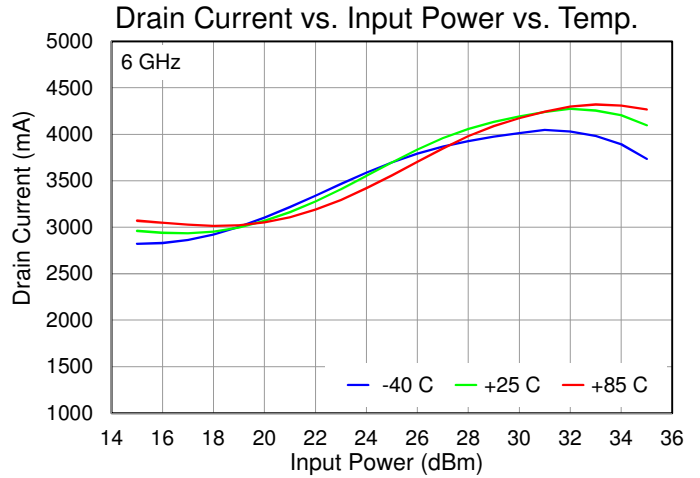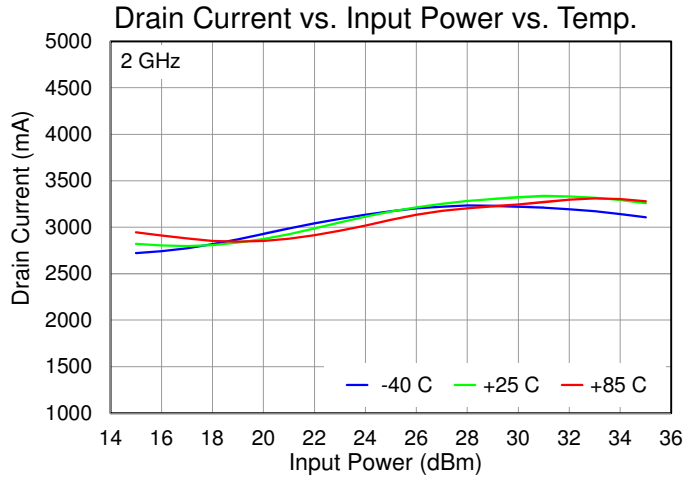






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

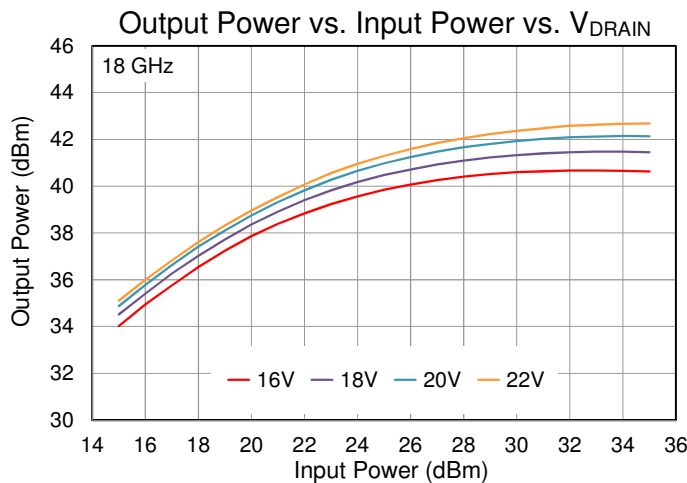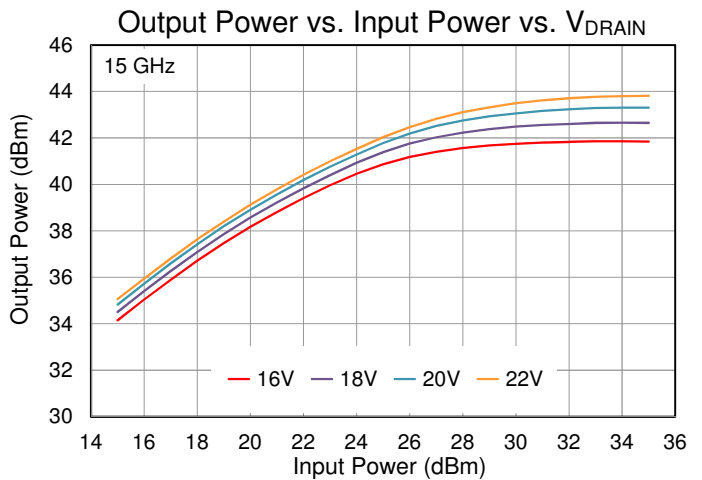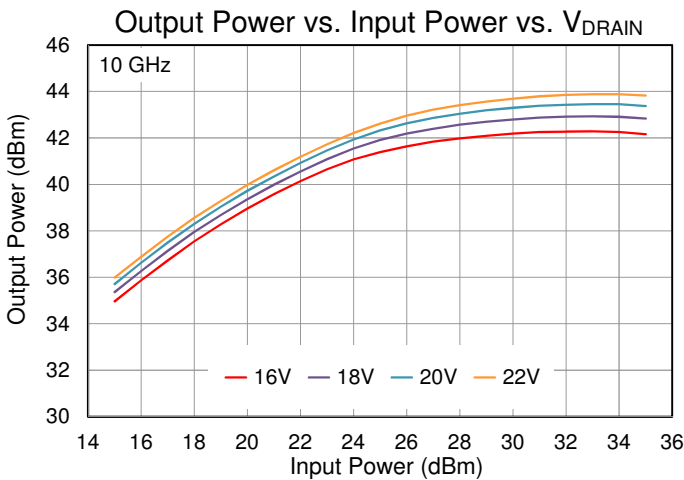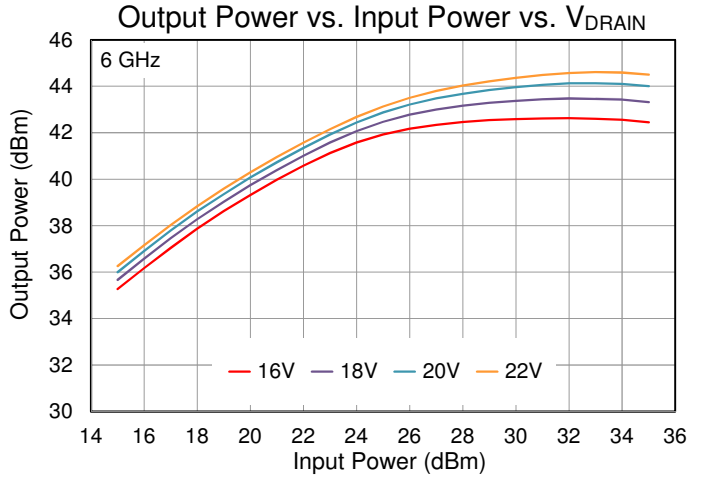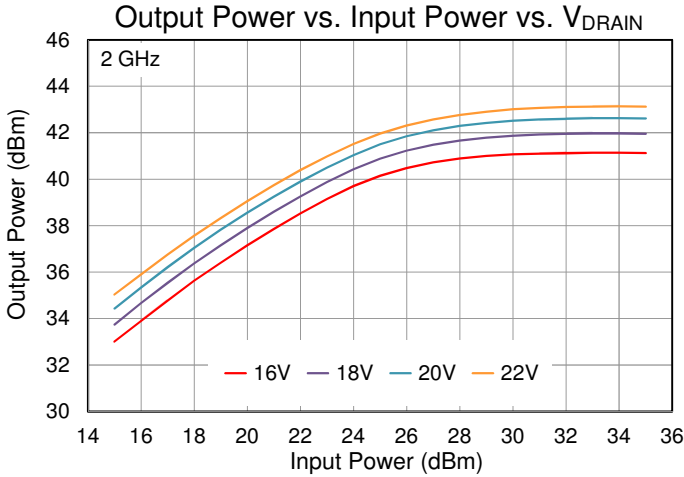






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

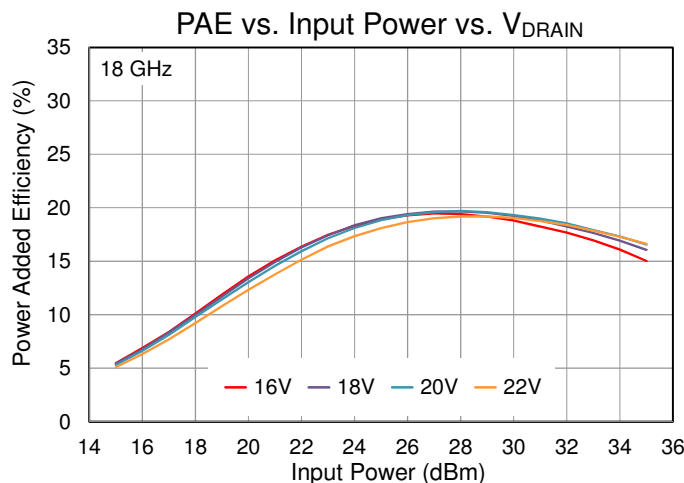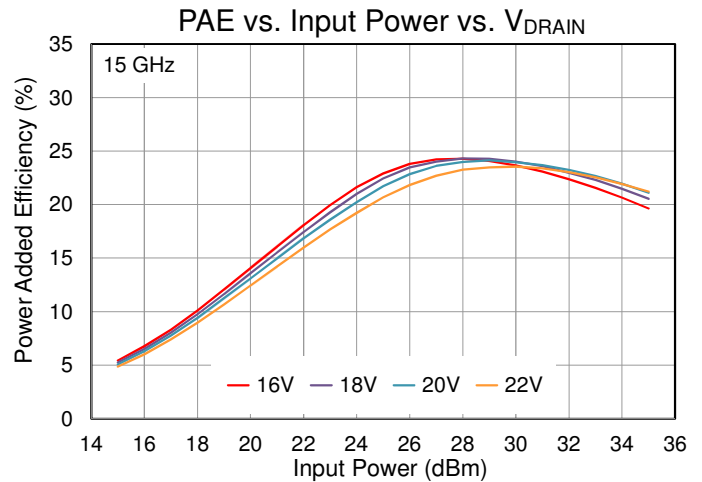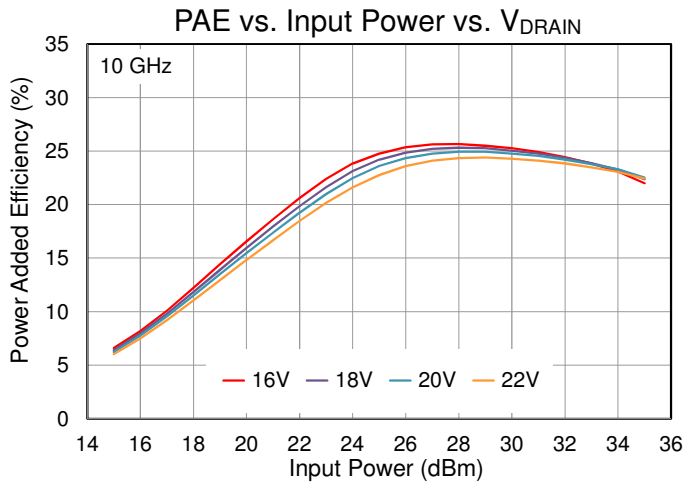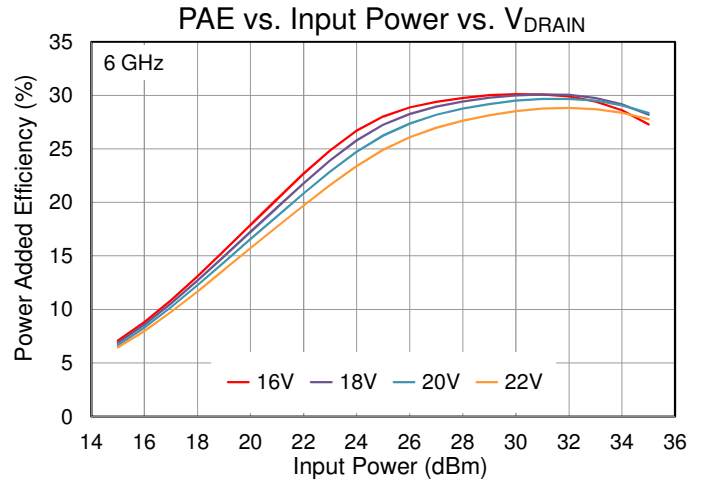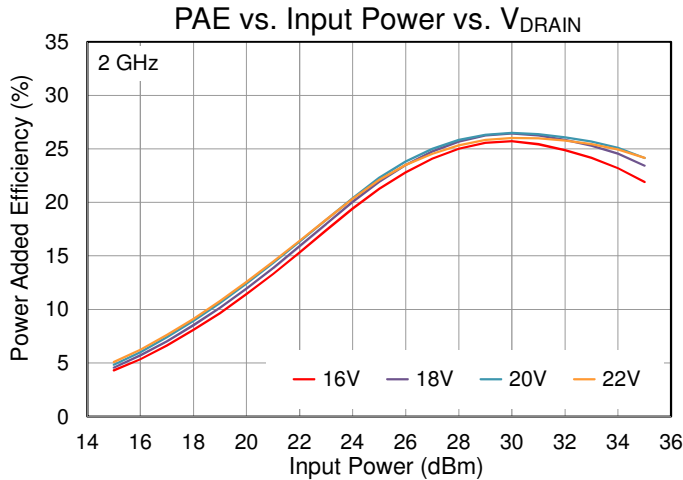






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

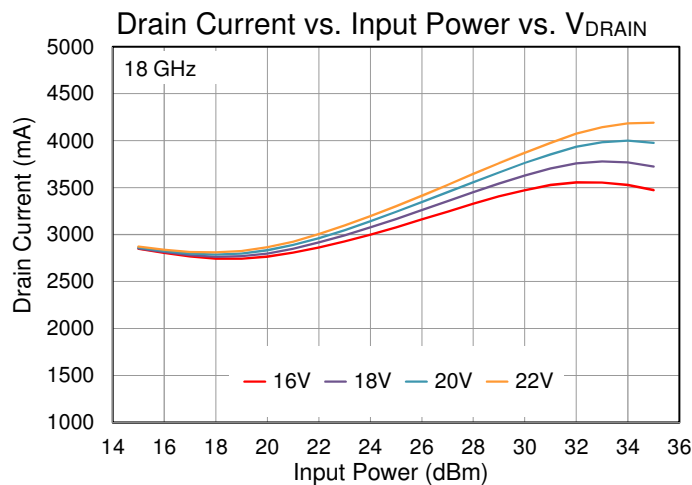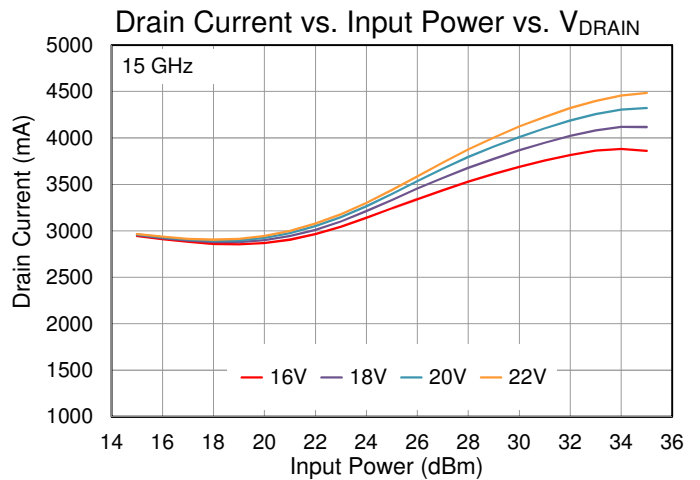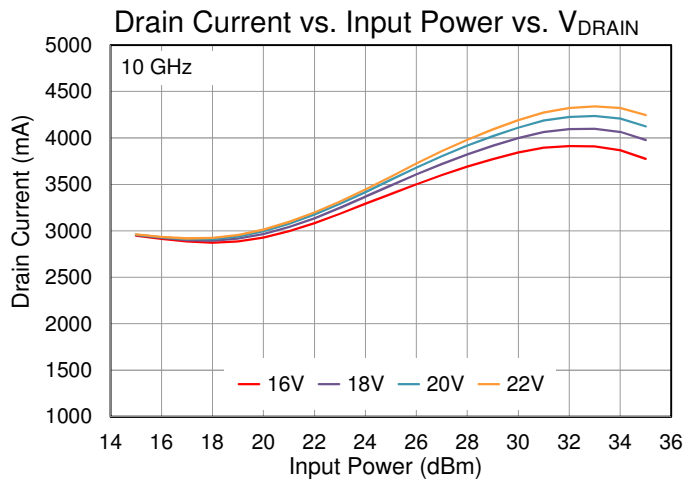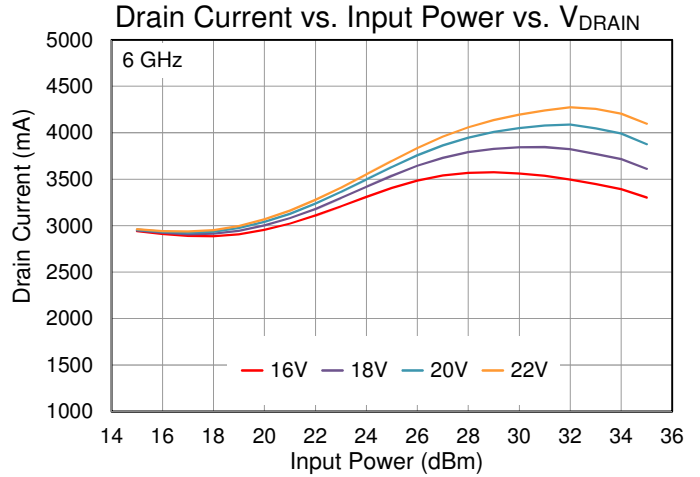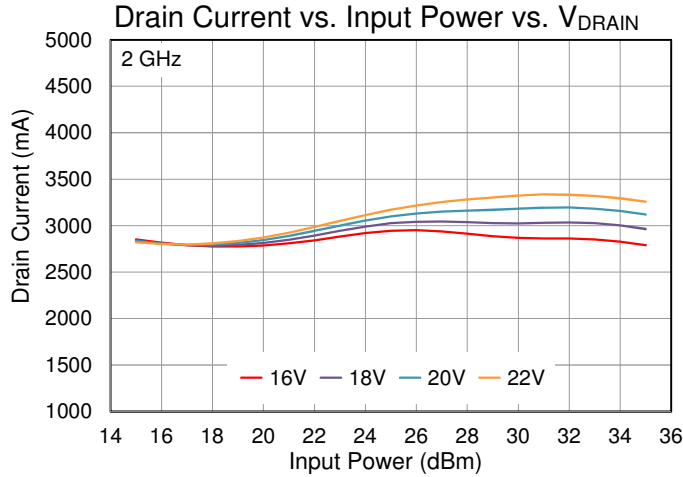






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

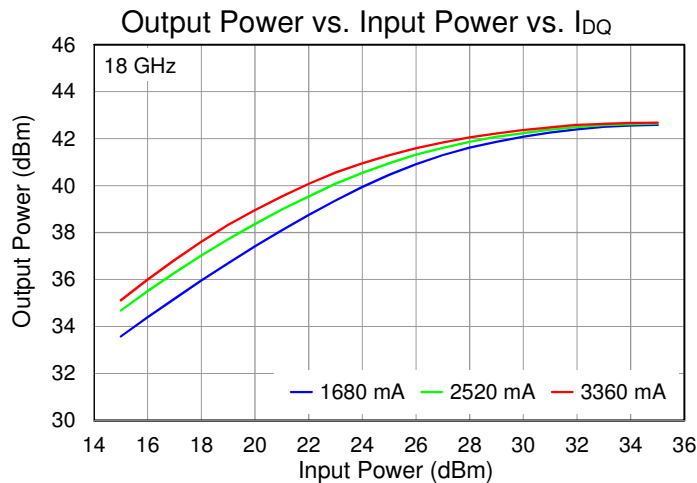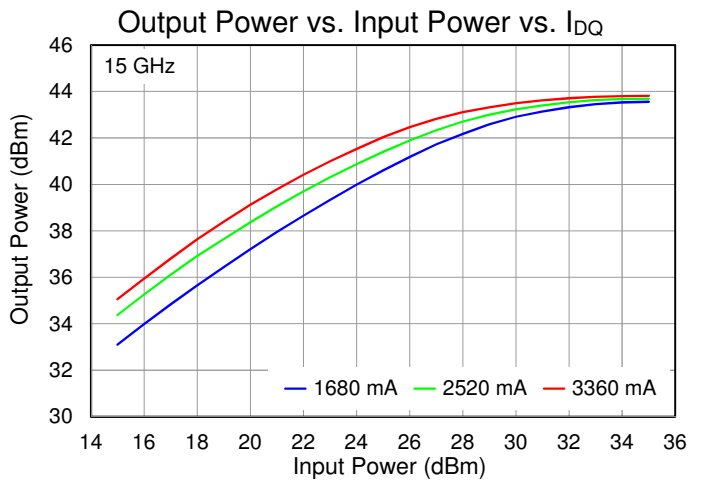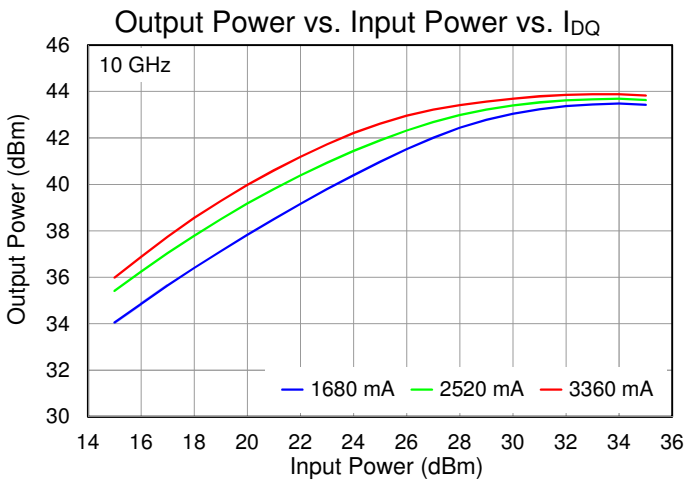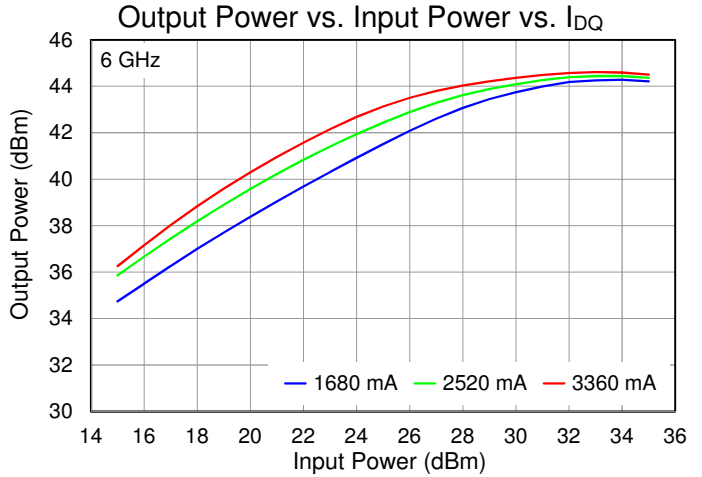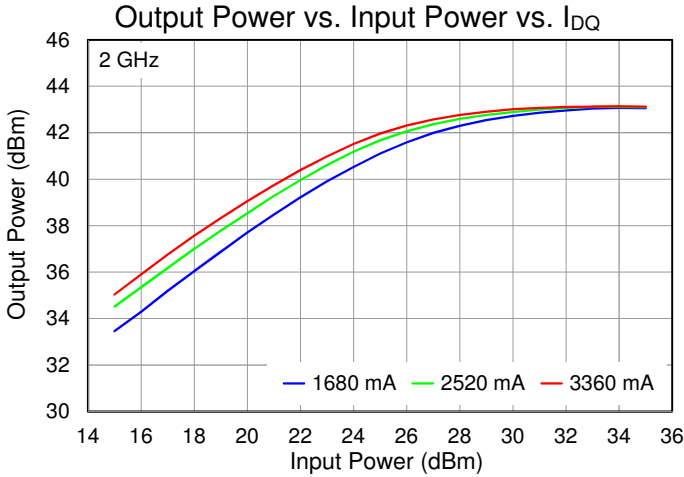






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

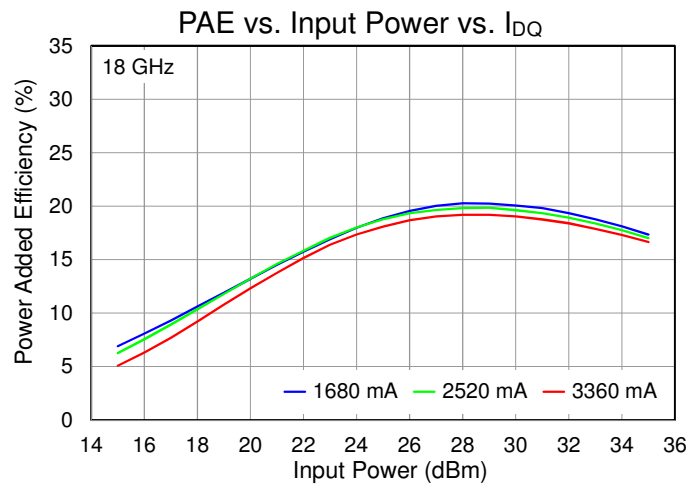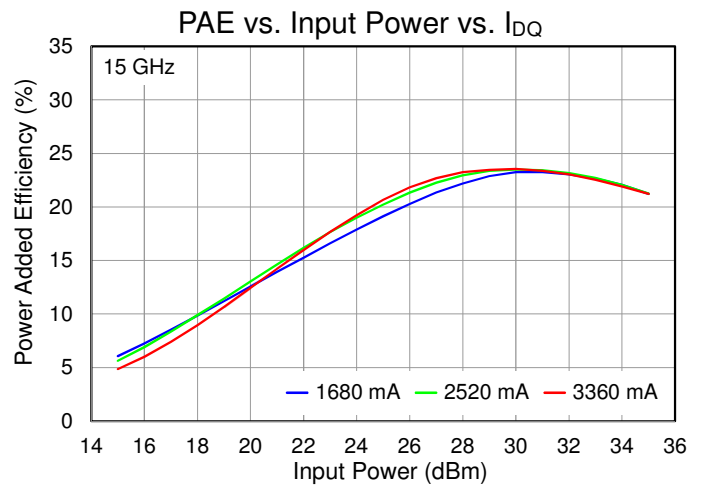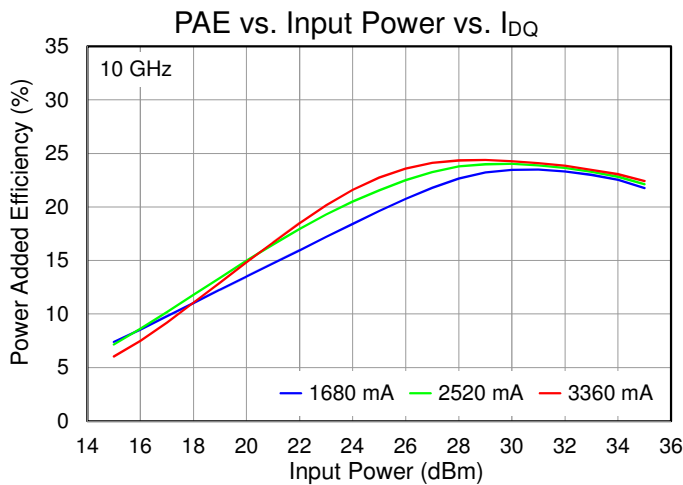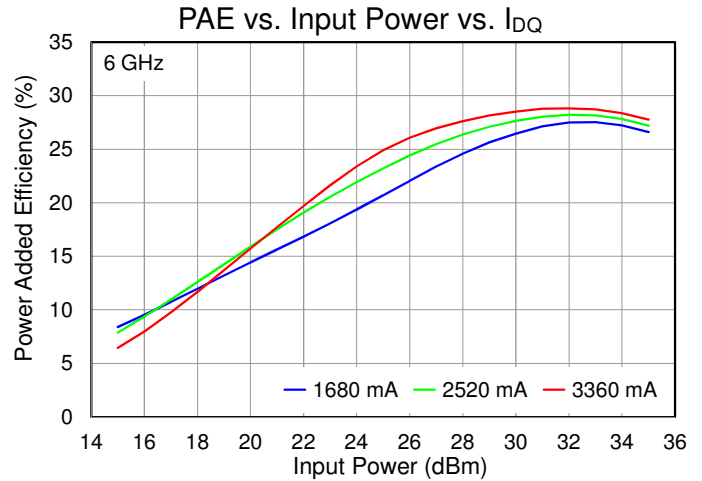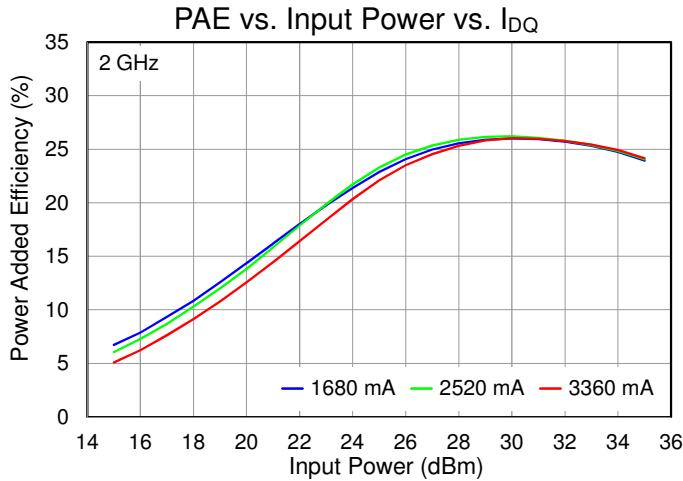






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

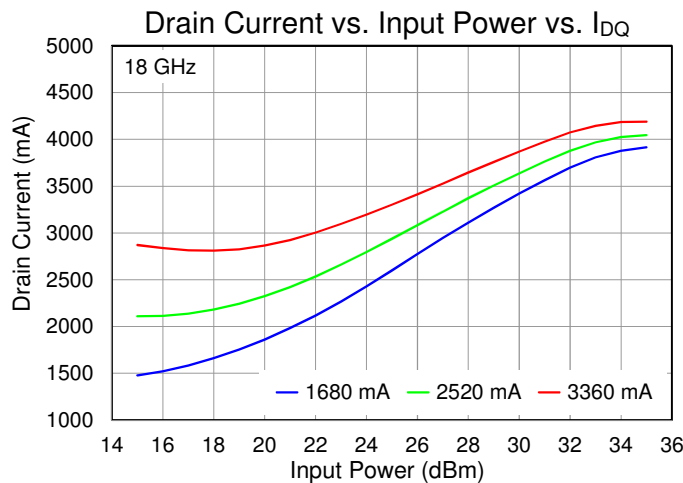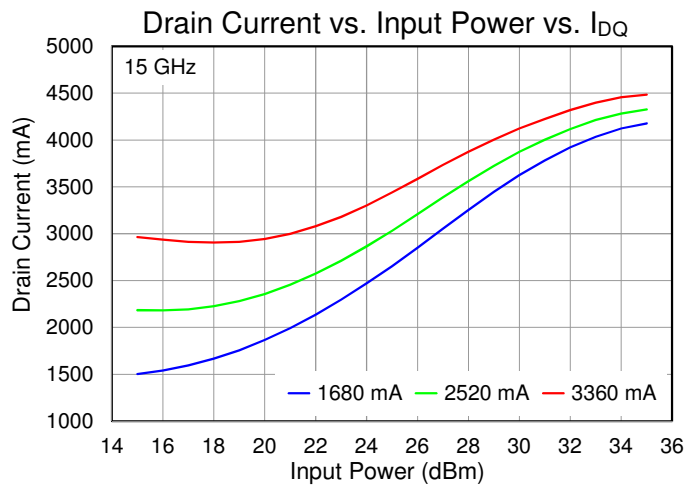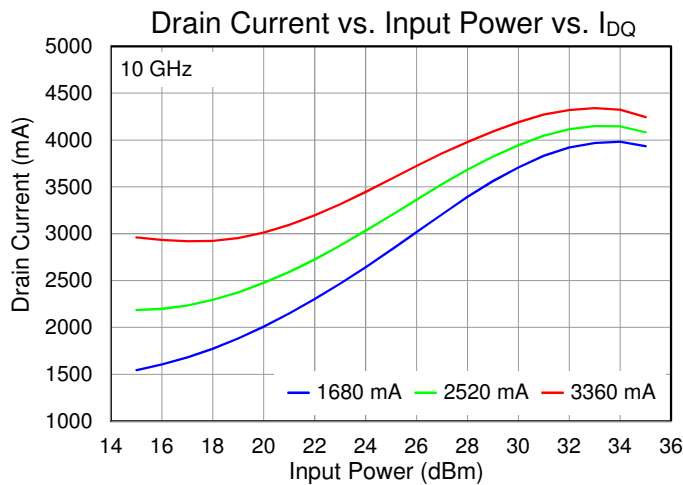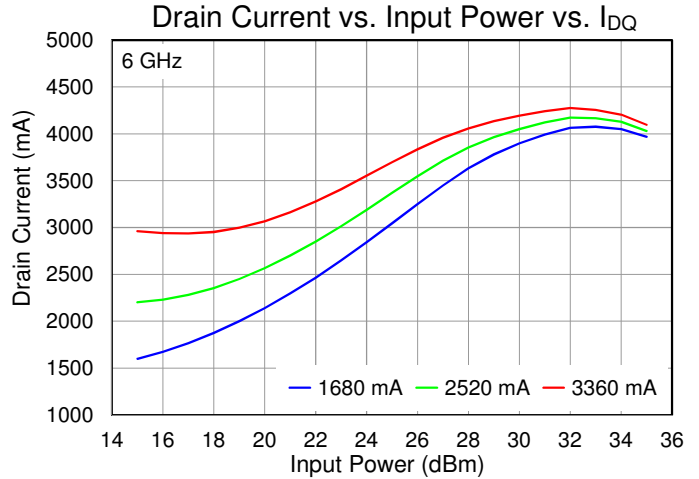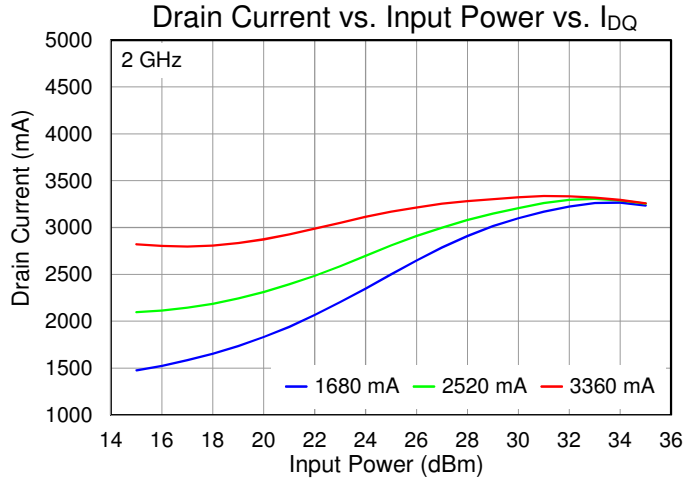






Performance Plots – Linearity

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, Tone Spacing = 100 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

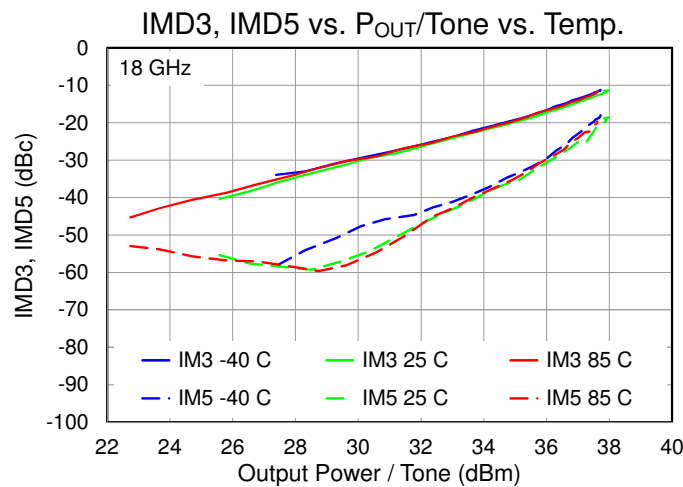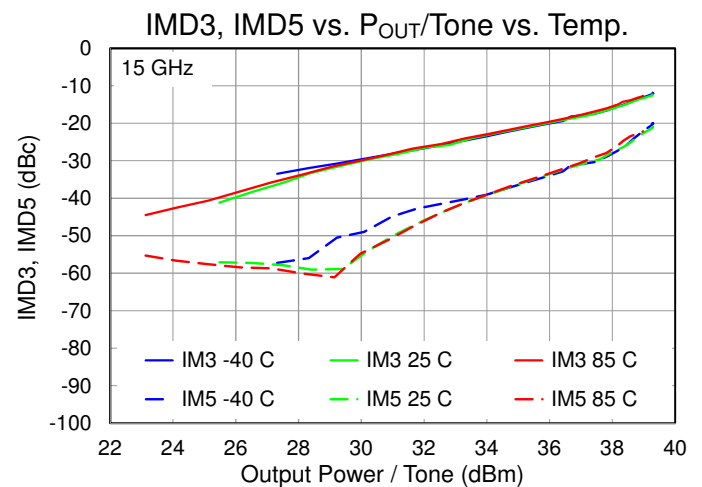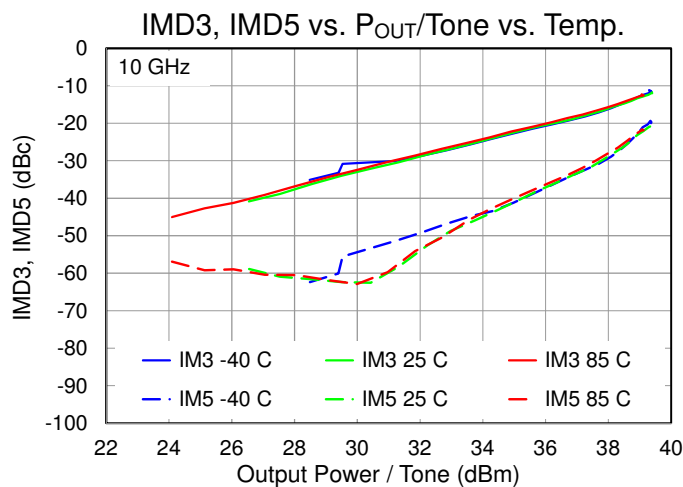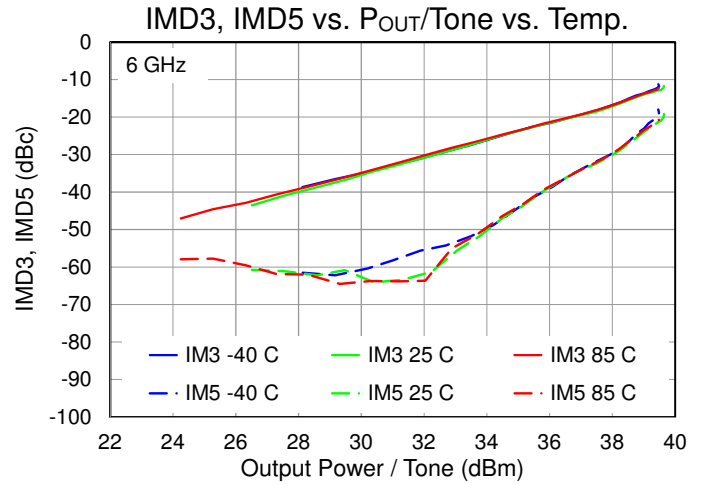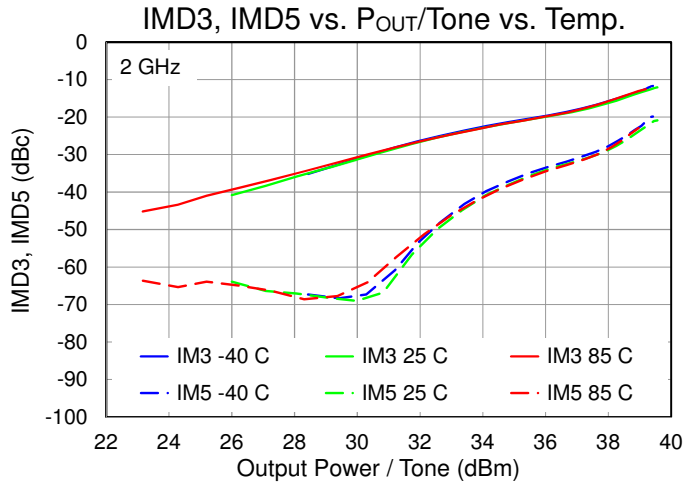






Performance Plots – Linearity

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, Tone Spacing = 100 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

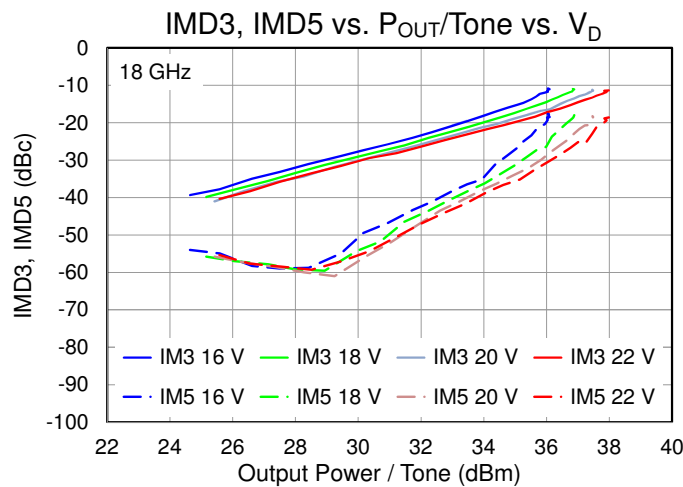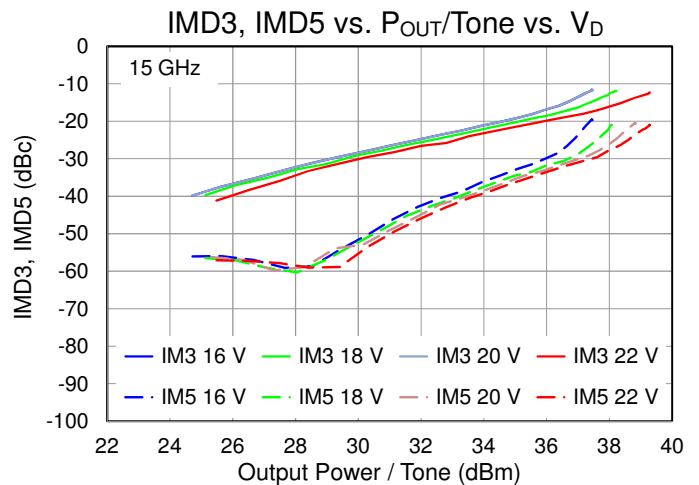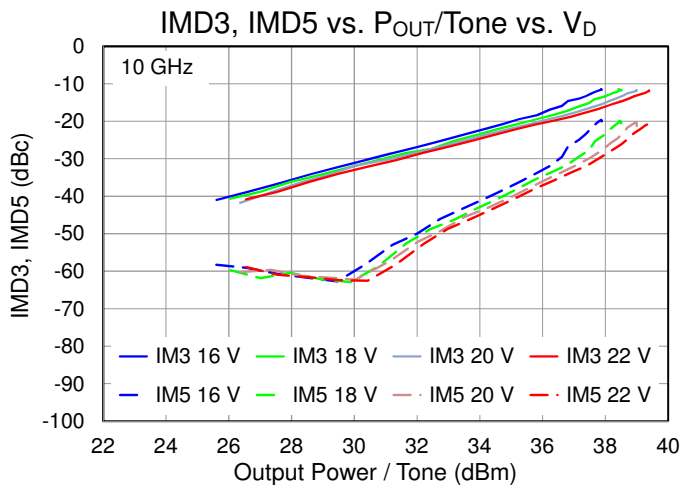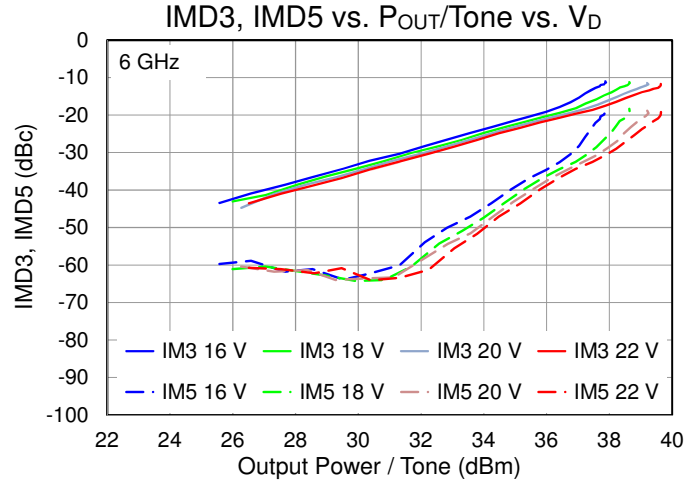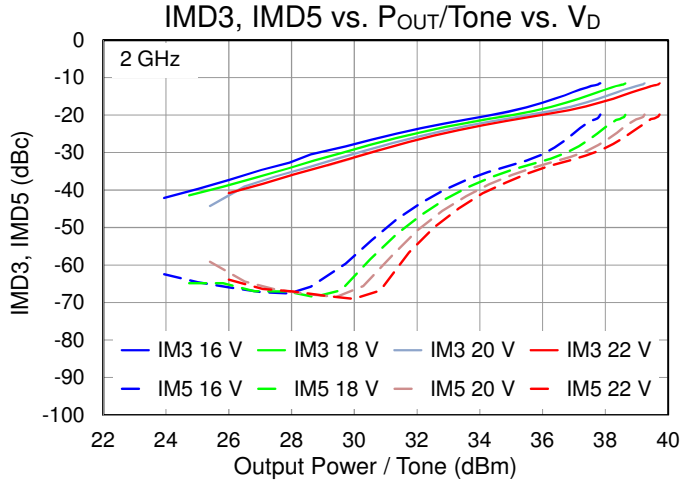







Performance Plots – Linearity

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, Tone Spacing = 100 MHz, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

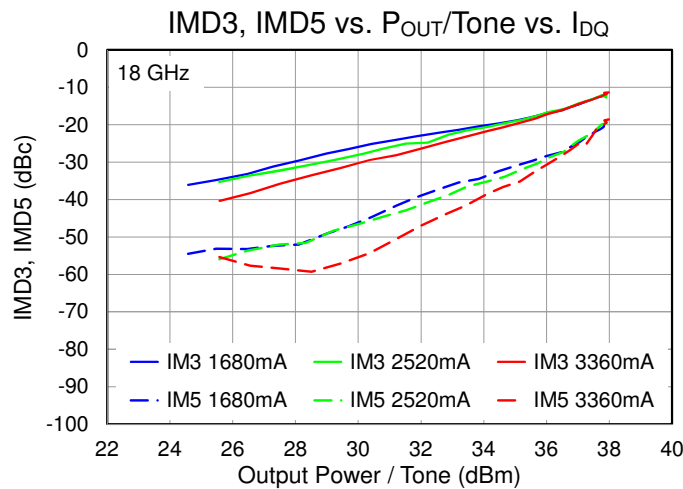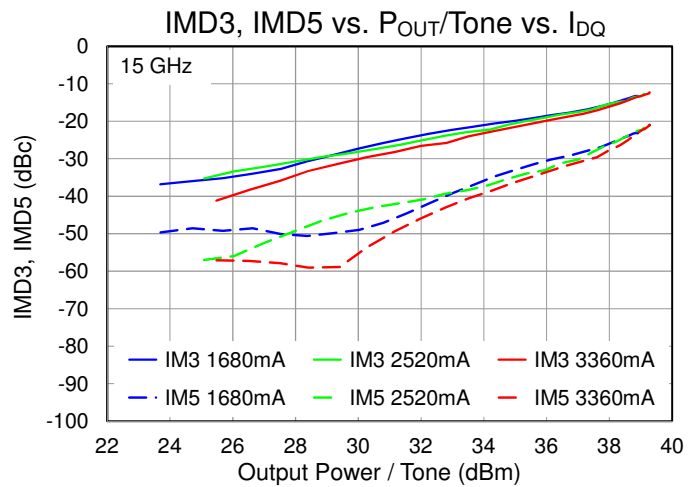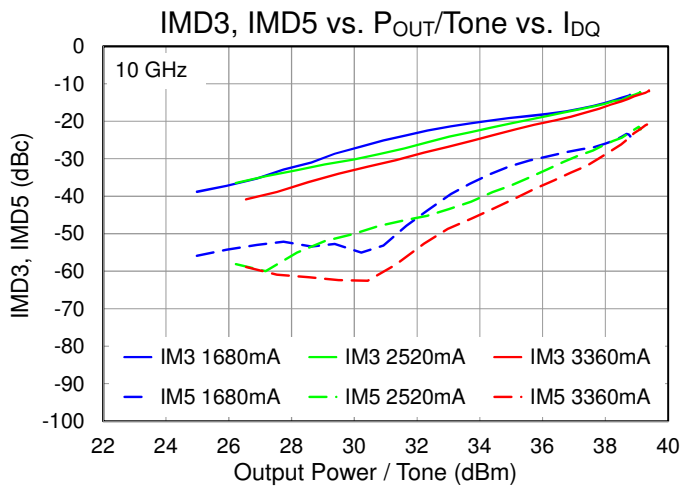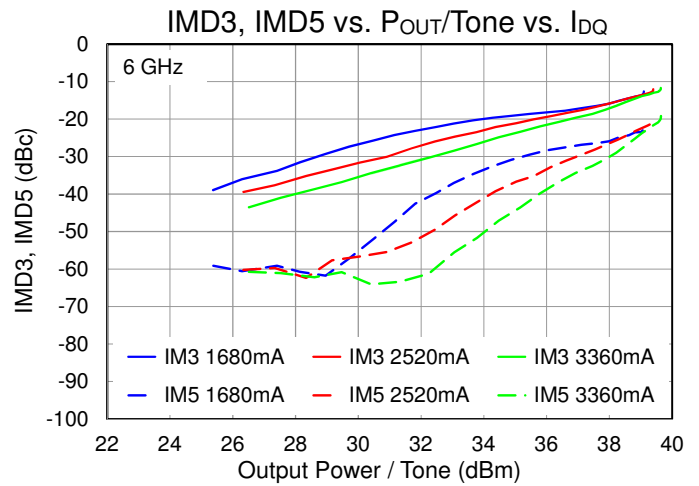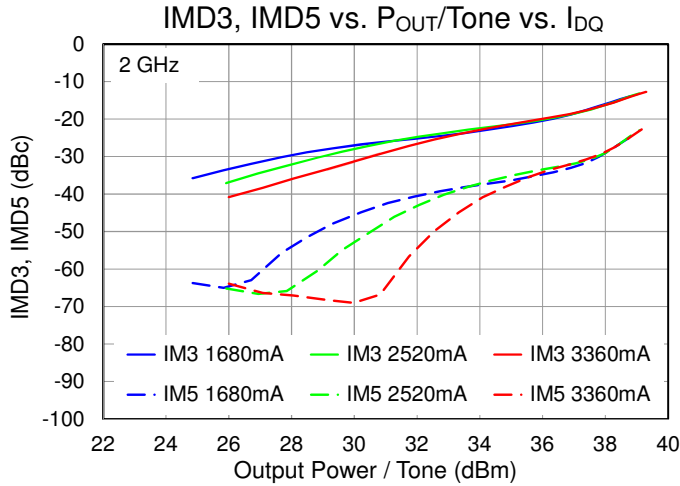

Performance Plots – Harmonics

Test conditions unless otherwise noted: CW, $V_D = 22\text{ V}$, $I_{DQ} = 3360\text{ mA}$, $P_{IN} = 31\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$ (T_{BASE} is backside of QPA2966)

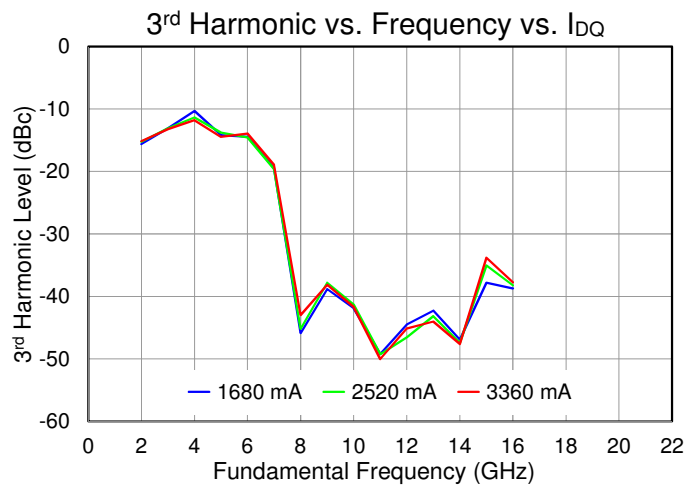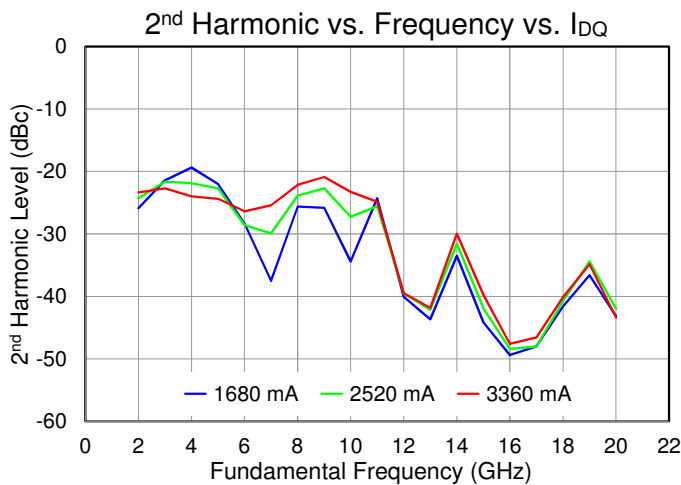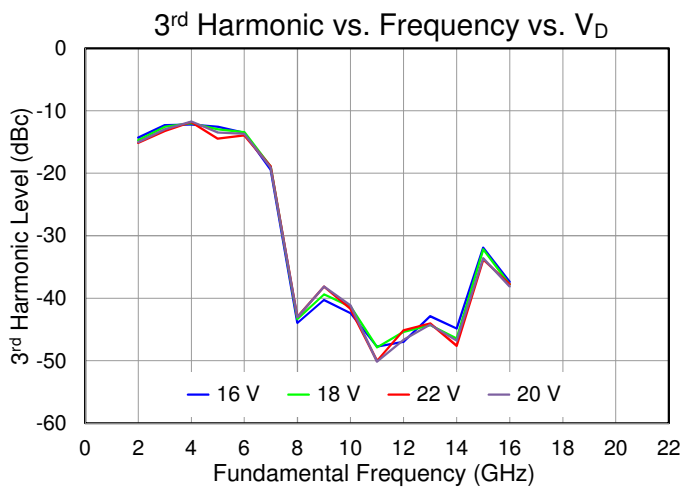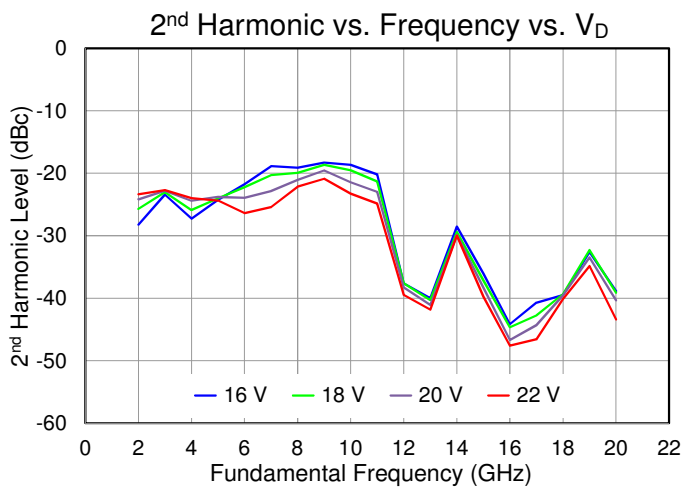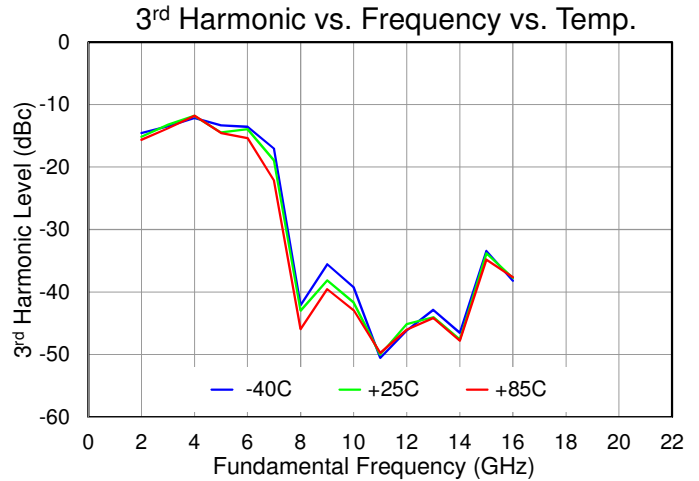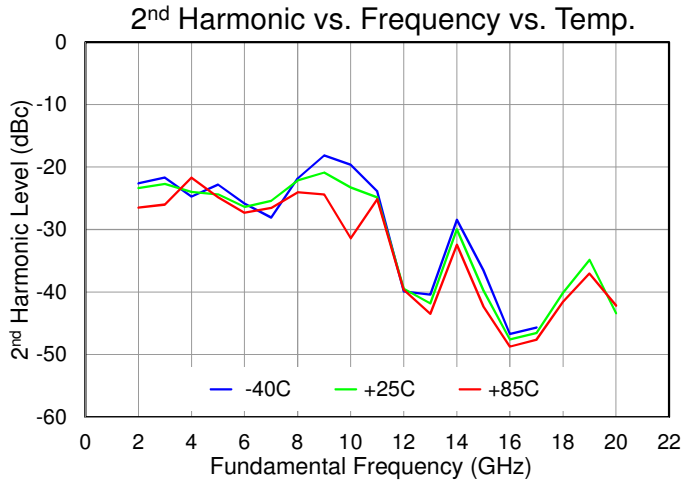



Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾	T _{BASE} = 85 °C, V _D = 22 V, I _{DQ} = 3360 mA, No RF (quiescent DC operation)	1.28	°C/W
Channel Temperature, T _{CH} (Under RF) ⁽²⁾		P _{DISS} = 74 W	180
Thermal Resistance (θ_{JC}) ⁽¹⁾	T _{BASE} = 85 °C ⁽³⁾ , CW, V _D = 22 V, I _{DQ} = 3360 mA, Freq = 7.5 GHz, I _{D_Drive} = 4525 mA, P _{IN} = 31 dBm ⁽³⁾ , P _{OUT} = 43.7 dBm	1.55	°C/W
Channel Temperature, T _{CH} (Under RF) ⁽²⁾		P _{DISS} = 77 W ⁽³⁾	204 ⁽³⁾
Thermal Resistance (θ_{JC}) ⁽¹⁾	T _{BASE} = 85 °C, CW, V _D = 22 V, I _{DQ} = 3360 mA, Freq = 7.5 GHz, P _{IN} = 20 dBm, P _{OUT} = 38.5 dBm,	1.55	°C/W
Channel Temperature, T _{CH} (Under RF) ⁽²⁾		P _{DISS} = 61 W	175


Notes:

- Thermal resistance determined to T_{BASE} = 85 °C (T_{BASE} is backside of QPA2966)
- Channel temperature indicated is an IR scan equivalent temperature. Thermal resistance is calculated using this value. Additional information can be found in the Qorvo Applications Note “GaN Device TCHMAX Theta-JC and Reliability Estimates”, located here <https://www.qorvo.com/products/d/da006480>
- Recommended either reducing T_{BASE} or P_{DISS} to maintain T_{CH} ~ 175C (equivalent to 225C thermal model); see Recommended Operating Conditions (P_{IN}, P_{DISS} vs. T_{BASE}) on page 2

Test conditions, unless otherwise noted:
V_D = 22 V, I_{DQ} = 1680 mA, T_{BASE} = 25 °C, P_{IN} = 27 dBm

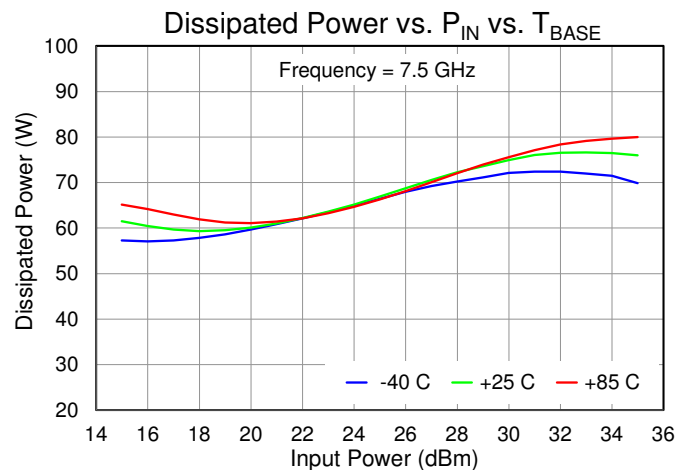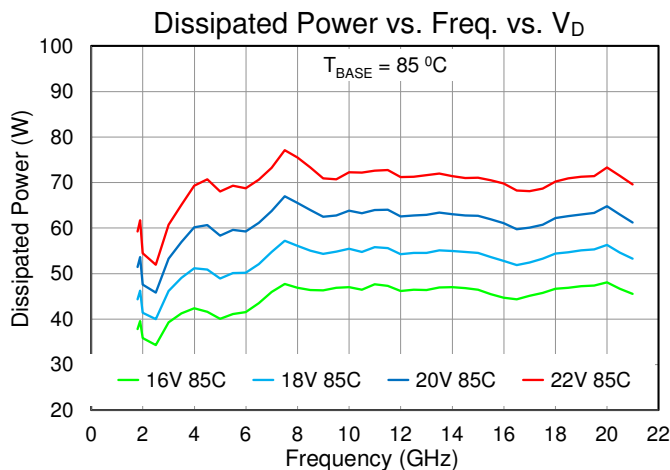

Applications Circuit

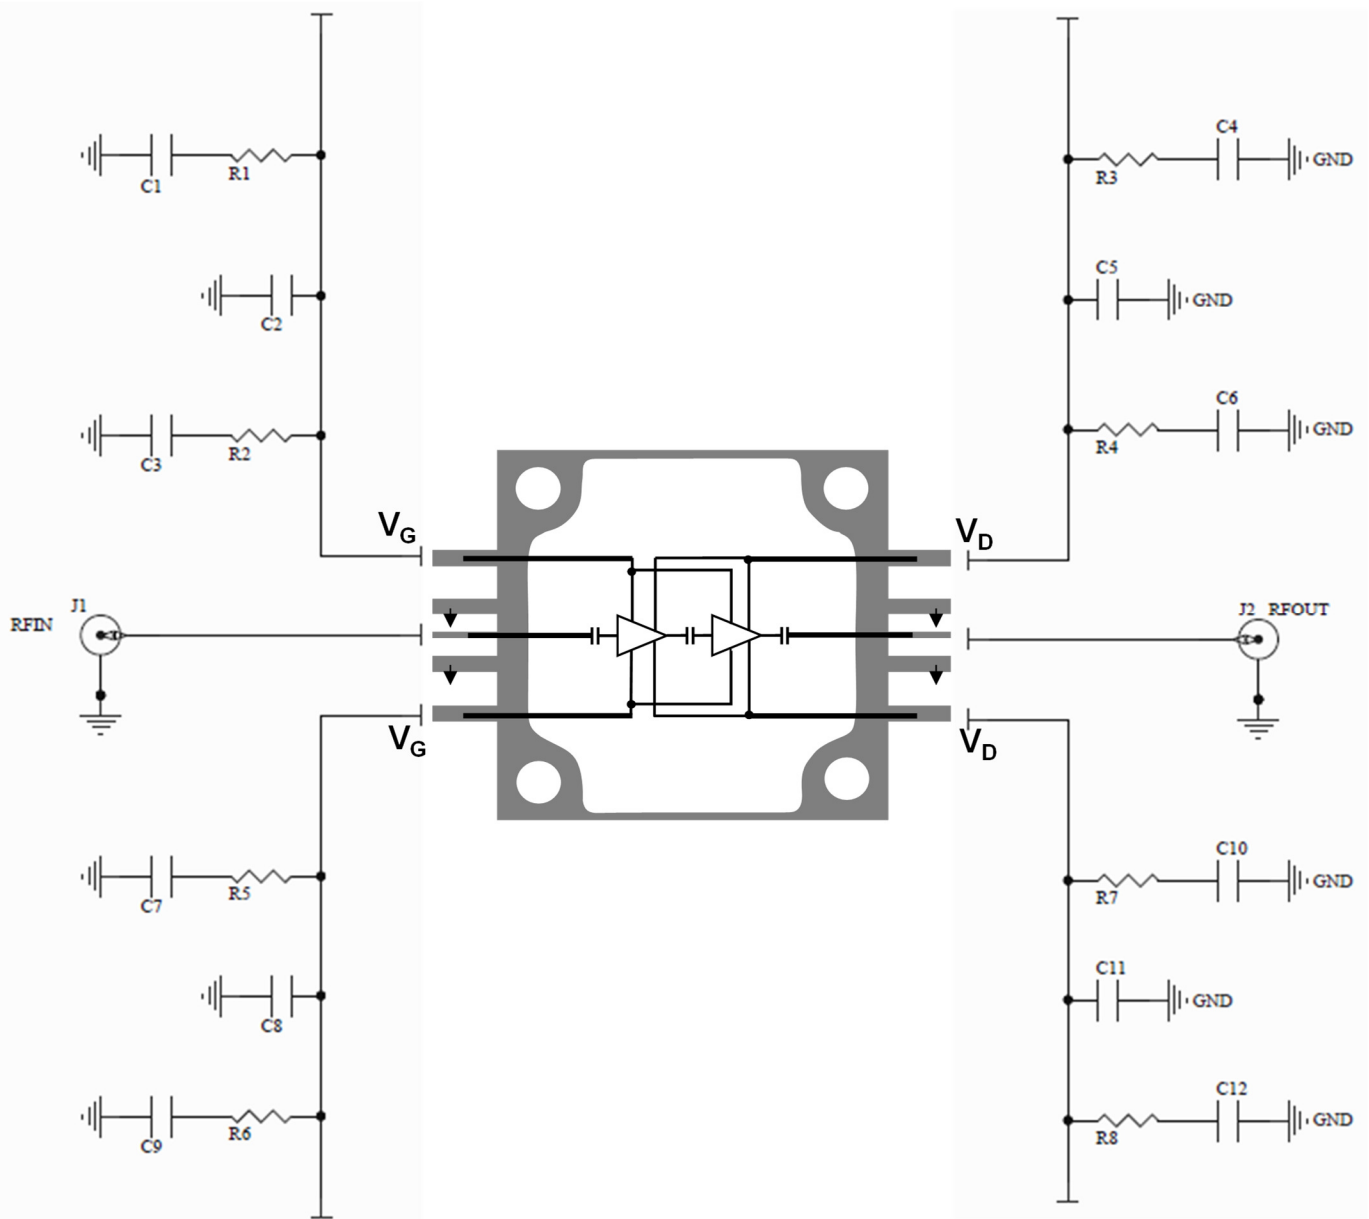

Must be biased on both V_G (pin 1 and 5); both V_D (pin 6 and 10)
Tie all V_G together, tie all V_D together

Bias-Up Procedure


1. Set I_D limit to 5500 mA, I_G limit to 20 mA
2. Set V_G to -4 V
4. Set V_D to $+22$ V. Ensure $I_{DQ} \sim 0$ mA
5. Adjust V_G more positive until $I_{DQ} = 3360$ mA
6. Apply RF signal

Bias-Down Procedure

1. Turn off RF signal
2. Reduce V_G to -4.0 V. Ensure $I_{DQ} \sim 0$ mA
3. Set V_D to 0 V
4. Turn off V_D supply
5. Turn off V_G supply


Application Evaluation Board

Remove cover (not shown, if any) during testing; use screw (x2) to mount the EVB on cold plate (apply thermal compound between interfaces)

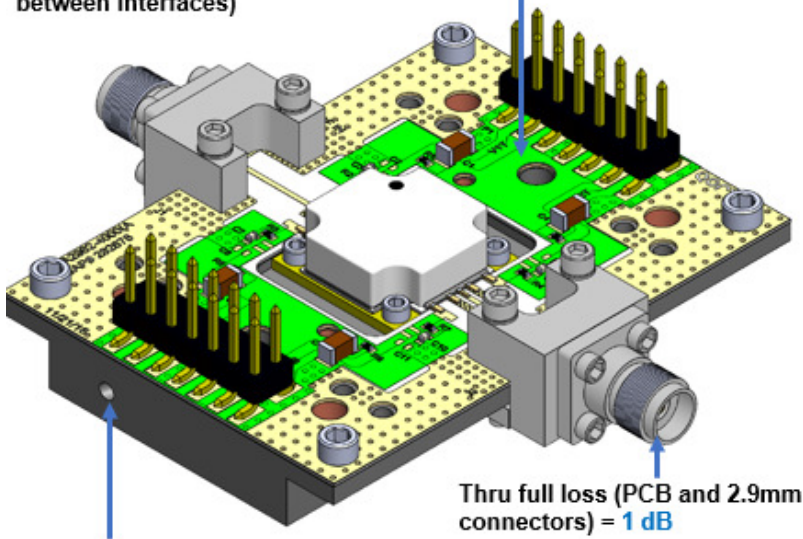

T_{BASE} is backside (bottom) of QPA1314
Slide in Thermocouple into this Carrier's hole
T_{BASE} ≈ Thermocouple + 25 °C Offset

Thru full loss (PCB and 2.9mm connectors) = 1 dB

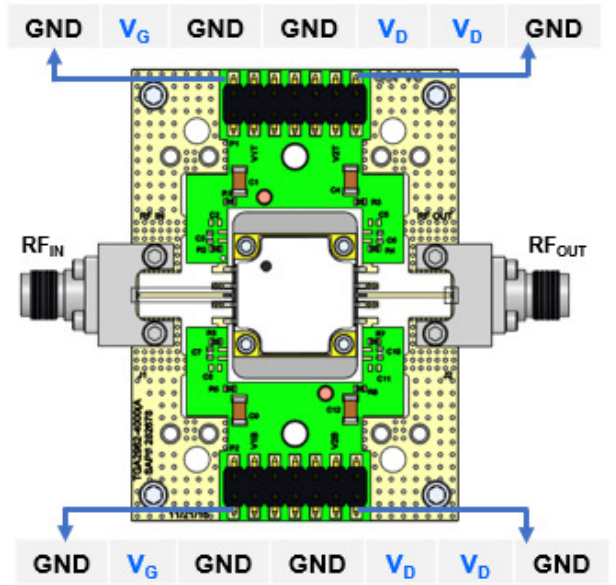


Layer Stack Legend (Copper Thickness is Finished Copper Thickness)

Material	Layer	Thickness	Dielectric	Material Type
	Silkscreen_Top			Legend
Surface Material	Soldermask_Top	0.10mil	Solder Resist	Solder Mask
Copper	Metal1_Top	1.40mil		Signal
Core		10.00mil	ROGERS 6035HTC	Dielectric
Copper	Metal2_Bot	1.40mil		Signal
Total thickness: 12.90mil				

Bill of Materials

Reference Des.	Value	Description	Manuf.	Part Number
C3, C6, C7, C10	0.01uF	CAP, 0.01uF, ±10%, 50V, X7R, 0402	Various	
C1, C4, C9, C12	10 uF	CAP, 10uF, ±20%, 50V, X5R, 1206	Various	
R2, R4, R5, R7	0 Ω	RES, 0 OHM, JMPR, 0402	Various	
R1, R3, R6, R8	5.1 Ω	RES, 5.1 OHM, 5%, 50V, 0402	Various	
R5	0 Ω	RES, 0 OHM, 0.1W, 0603	Various	
H1, H2	-	Header, Connector, 2x7, SMD	TE Connectivity	5-146130-6
J1, J2	-	Connector, Female, End Launch, 2.9mm	Southwest Microwave	1092-01A-5
S5 – S8	-	Screw, cap, socket head, 2-56x1/8"	Various	
S1 – S4	-	Screw, cap, socket head, 0-80x3/32"	Various	
PCB	-	Rogers 4035HTC 8 mil dielectric, 1 oz. copper (gold plated), 2 layers; finished thickness 0.013"	Qorvo	Custom
Carrier	-	T-Carrier, Copper C110, 1.594 x 2.200 x 0.275"	Qorvo	Custom
Arctic Silver	-	Chem, Thermal Compound, Silver 5GR	Arctic Silver	AS5-5G
Epoxy	-	Preform, Epoxy 5025E 10 x 12 x 0.003"	Various	
Solder	-	Paste, solder, Sn63/Pb37	Various	

Mechanical and Marking

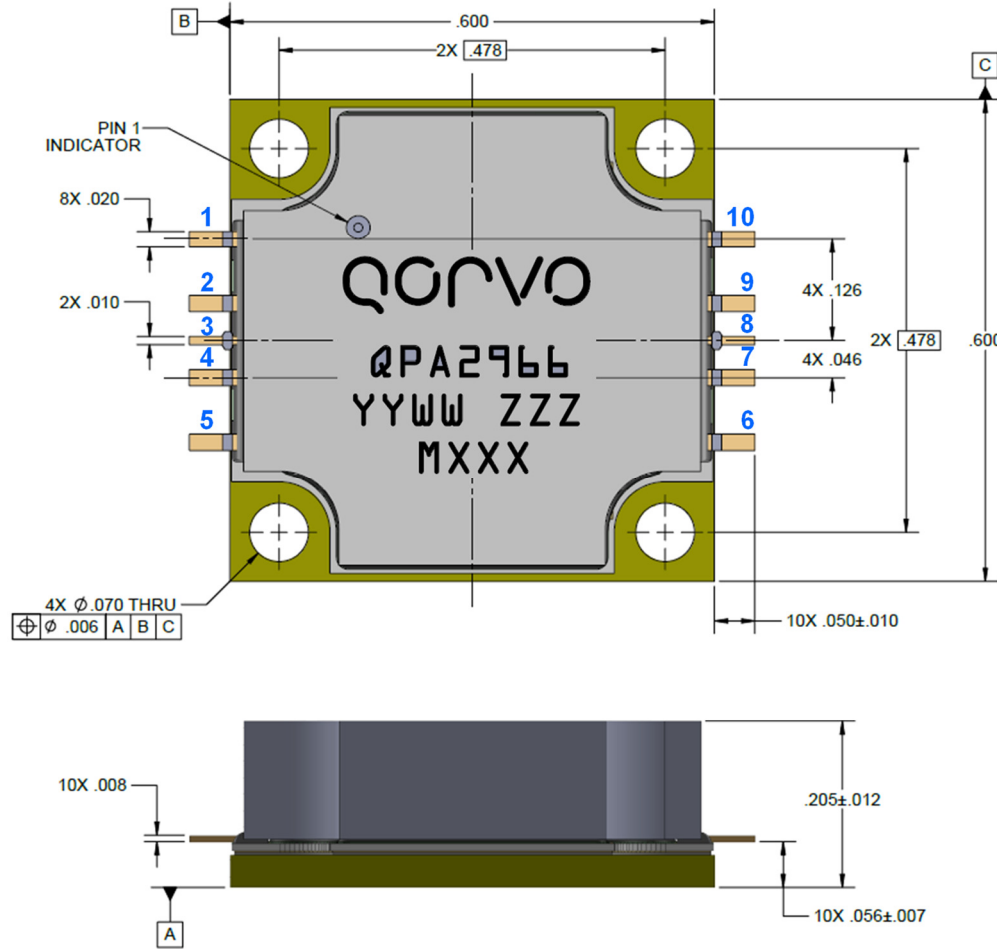

Notes:

- Materials:
Base : Copper
Finish: Gold
Leads : Alloy 194
Lid : FR4
- Part is epoxy sealed
- Marking:
QPA2966: Part number
YY: Part assembly year
WW: Part assembly week
ZZZ: Serial number
MXXX: Batch ID
- Dimensions: inches
- Tolerances:
.XX: ± 0.01
.XXX: ± 0.005
.XXXX: ± 0.0010
Angles: ± 0.5 °

Pin Description


Pin Number	Symbol	Description
1, 5	V _G	Gate voltage, stage 1 and 2. Must be biased on both pins; bypass network required; refer to page 22.
2, 4, 7, 9	Ground	Must be grounded to PCB
3	RF _{IN}	RF input. 50 Ohms. DC blocked.
6, 10	V _D	Drain voltage, stage 1 and 2. Must be biased on both pins; bypass network required; refer to page 22.
8	RF _{OUT}	RF output. 50 Ohms. DC blocked.

Assembly Notes

1. Carefully clean the PC board, base plate, and package leads with alcohol. Allow it to dry fully.
2. To improve the thermal and RF performance, Qorvo recommends attaching a heat sink to the bottom of the package and apply either a thermal compound (Arctic Silver 5 recommended) or a .004 inch (maximum thickness) Indium shim between the heat sink and the package. Refer to the applications note [Application of Arctic Silver 5 Thermal Compound and Indium Shims for Qorvo CP-style Packaged Components](#) for more information.
3. The component leads should be manually soldered. Apply a low residue solder alloy meeting J-STD-001 (ROL0, ROL1 or equivalent) with a liquidus temperature below 220 °C to each pin of the TGA/QPA/QPMxxxx. The use of low residue/no-clean flux (ROL0, ROL1) is recommended. The package lead temperature should not exceed 260 deg C. Each solder connection should be completed within 2 to 5 seconds. Adding flux during hand soldering of the component leads with localized spot cleaning is acceptable. Soldering irons meeting the requirements of J-STD-001, Appendix A are acceptable.
4. The leads should be soldered in a staggered or star pattern from side to side, and never solder two adjacent leads. This allows the heat to dissipate on each lead, and not cause the adjacent leads to become de-soldered and damaged or displaced.



5. The packaged part should not be subjected to conventional SMT automated solder reflow processes.
6. (The following is for information only. There are many variables in a second level assembly that Qorvo does not control, so Qorvo does not recommend an absolute torque value.) Use screws to attach the component to the heat sink. A suggested final torque value is 16 in-oz. for a 0-80 screw. Start with screws finger tight, then torque to 8 in-oz., then torque to final value. Use the following tightening pattern:



Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	1C	ANSI/ESD/JEDEC JS-001
ESD – Charged Device Model (CDM)	C3	ANSI/ESD/JEDEC JS-002
MSL – Moisture Sensitivity Level	N/A	Blank, null, no content



Caution!
ESD-Sensitive Device

Solderability

The component leads should be manually soldered, and the package cannot be subjected to conventional reflow processes. The use of no-clean solder to avoid washing after soldering is recommended.

RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- SVHC Free
- PFOS Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained in this Data Sheet and any associated documents ("Data Sheet Information") is believed to be reliable; however, Qorvo makes no warranties regarding the Data Sheet Information and assumes no responsibility or liability whatsoever for the use of or reliance on said information. All Data Sheet Information is subject to change without notice. Customers should obtain and verify the latest relevant Data Sheet Information before placing orders for Qorvo® products. Information concerning Qorvo's product life cycles is available at <https://www.qorvo.com/support/product-lifecycle-information>. Data Sheet Information or the use thereof does not grant, explicitly, implicitly or otherwise any rights or licenses with respect to patents or any other intellectual property whether with regard to such Data Sheet Information itself or anything described by such information.

Qorvo grants you permission to use this Data Sheet and any associated resources only to develop an application that uses the Qorvo products described in the Data Sheet and any associated resources. Other reproduction and display of this Data Sheet and any associated resources is prohibited.

Qorvo's products are provided subject to Qorvo's [Terms of Sale](#) or provided in conjunction with such Qorvo products. Qorvo objects to and rejects any additional or different terms customer may have proposed regarding the purchase of Qorvo products.

DATA SHEET INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo® products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. Applications described in the Data Sheet Information are for illustrative purposes only. Customers are responsible for validating that a particular product described in the Data Sheet Information is suitable for use in a particular application.

© 2025 Qorvo US, Inc. All rights reserved. This document is subject to copyright laws in various jurisdictions worldwide and may not be reproduced or distributed, in whole or in part, without the express written consent of Qorvo US, Inc.

QORVO® is a registered trademark of Qorvo US, Inc. All other trademarks and trade names are property of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View QPA2966 on WIN SOURCE](#)

 [Qorvo US Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management