Current Transducer HTFS 200 ... 800-P

I_{PN} = 200 ... 800 A

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.

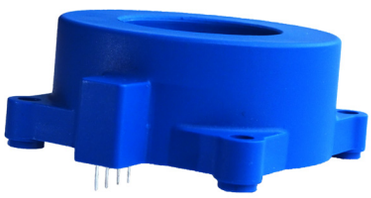

All data are given with R_L = 10 kΩ

Electrical data

Primary nominal RMS current I_{PN} (A)	Primary current measuring range I_{PM} (A)	Type
200	±300	**HTFS 200-P**
400	±600	**HTFS 400-P**
600	±900	**HTFS 600-P**
800	±1200	**HTFS 800-P**

U_{out}	Output voltage (Analog) @ I_P		U_{ref} ±(1.25 · I_P/ I_{PN})	V
		I_P = 0	U_{ref} ±0.025	V
U_{ref}	Reference voltage	[1] Output voltage	1/2 U_C ±0.025	V
		U_{ref} Output impedance	typ. 200	Ω
		U_{ref} Load impedance	≥ 200	kΩ
R_L	Load resistance		≥ 2	kΩ
R_{out}	Output internal resistance		< 5	Ω
C_L	Load capacitance		= 4.7	nF
U_C	Supply voltage (±5 %)		5	V
I_C	Current consumption @ U_C = 5 V		19 (typ)	mA
			25 (max)	mA

Accuracy - Dynamic performance data

ε_{tot}	Total error [2] @ I_{PN}, T_A = 25° C	≤ ±1	%
ε_L	Linearity error 0 ... 1.5 × I_{PN}	≤ ±0.5	%
TCU_{OE}	Temperature coefficient of U_{OE} @ I_P = 0	≤ ±0.1	mV/K
TCU_{ref}	Temperature coefficient of U_{ref}	≤ ±190	ppm/K
TCS	Temperature coefficient of U_{out}	≤ ±420	ppm/K
U_{OM}	Magnetic offset voltage @ I_P = 0 and specified R_M, after an overload of 3 × I_{PNDC}	< ±0.5	%
U_{no}	RMS noise voltage referred to primary (DC ... 20 MHz)	< 40	mVpp
t_{D10}	Delay time to 10 % of the final output value for I_{PN} step	< 2	µs
t_{D90}	Delay time to 90 % of the final output value for I_{PN} step	< 3.5	µs
di/dt	di/dt accurately followed	>100	A/µs
BW	Frequency bandwidth (–3 dB) [3]	DC ... 240	kHz

Notes: [1] It is possible to overdrive U_{ref} with an external reference voltage between 0.5 - 2.65 V
[2] Excluding offset and magnetic offset voltage
[3] Small signal only to avoid excessive heatings of the magnetic core.

Features

- Hall effect measuring principle
- Galvanic separation between primary and secondary circuit
- Low power consumption
- Single power supply +5 V
- Ratiometric offset
- Insulating plastic case recognized according to UL 94-V0
- Fixation by M3 nuts and screws
- T_A = –40 °C ... +105 °C.

Advantages

- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference
- U_{ref} IN/OUT.

Applications

- Forklift drives
- AC variable speed drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

LEM reserves the right to carry out modifications on its transducers, in order to improve them.
LEM International SA
Route du Nant-d'Avril, 152
1217 Meyrin
www.lem.com

Current Transducer HTFS 200 ... 800-P

General data

T_A	Ambient operating temperature	–40 ... +105	°C
$T_{A\,st}$	Ambient storage temperature	–40 ... +105	°C
m	Mass	60	g
	Standard	EN 50178: 1997	

Insulation coordination

U_d	RMS voltage for AC insulation test, 50 Hz, 1 min	2.5	kV
U_t	Partial discharge RMS test voltage (q_m< 10 pC)	> 1	kV
U_{Ni}	Impulse withstand voltage 1.2/50 µs	4	kV
		Min	
d_{Cp}	Creepage distance	> 4	mm
d_{Cl}	Clearance distance	> 4	mm
CTI	Comparative Tracking Index (group IIIa)	> 220	

Applications examples

	EN 50178	IEC 61010-1
d_{Cp}, d_{Cl}, U_{Ni}	Rated insulation voltage	Nominal voltage
Basic insulation	300 V	300 V
Reinforced insulation	150 V	150 V

According to EN 50178 and IEC 61010-1 standards and following conditions:
- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.

This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.

Caution, risk of electrical shock
When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.
This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.
Main supply must be able to be disconnected.

16May2024/Version 13

LEM reserves the right to carry out modifications on its transducers, in order to improve them.

LEM International SA
Route du Nant-d'Avril, 152
1217 Meyrin
www.lem.com

HTFS measuring range with external U_{ref}

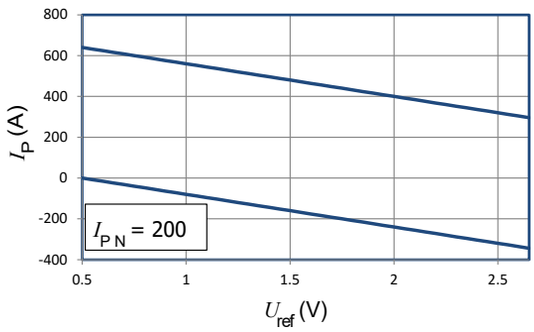

Upper limit: $I_P = -160 \times U_{ref} + 720$ (U_{ref} = 0.5 ... 2.65 V)

Lower limit: $I_P = -160 \times U_{ref} + 80$ (U_{ref} = 0.5 ... 2.65 V)

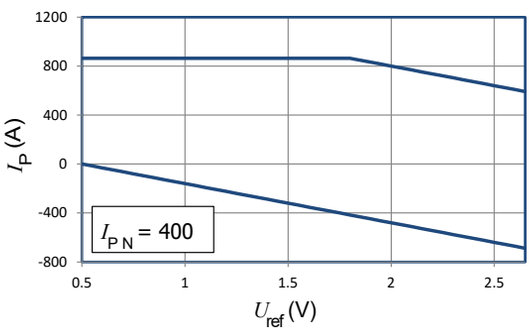

Upper limit: $I_P = 864$ (U_{ref} = 0.5 ... 1.8 V)
Upper limit: $I_P = -320 \times U_{ref} + 1440$ (U_{ref} = 1.8 ... 2.65 V)

Lower limit: $I_P = -320 \times U_{ref} + 160$ (U_{ref} = 0.5 ... 2.65 V)

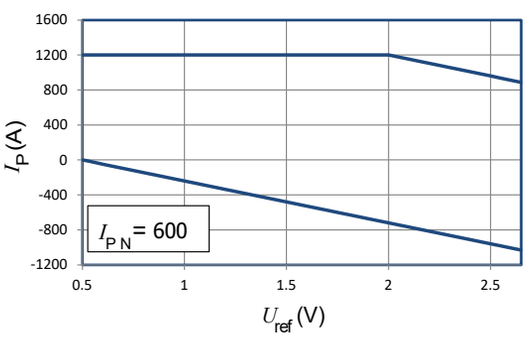

Upper limit: $I_P = 1200$ (U_{ref} = 0.5 ... 2.0 V)
Upper limit: $I_P = -480 \times U_{ref} + 2160$ (U_{ref} = 2 ... 2.65 V)

Lower limit: $I_P = -480 \times U_{ref} + 240$ (U_{ref} = 0.5 ... 2.65 V)

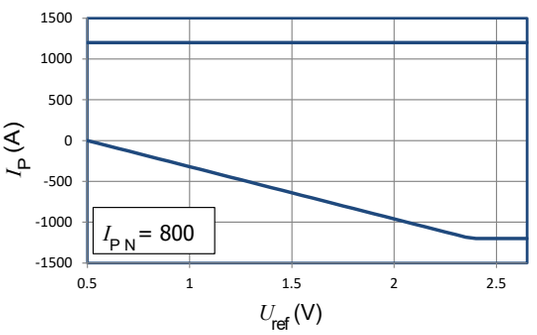

Upper limit: $I_P = 1200$ (U_{ref} = 0.5 ... 2.625 V)
Upper limit: $I_P = -640 \times U_{ref} + 2880$ (U_{ref} = 2.625 ... 2.65 V)

Lower limit: $I_P = -640 \times U_{ref} + 320$ (U_{ref} = 0.5 ... 2.4 V)
Lower limit: $I_P = -1200$ (U_{ref} = 2.4 ... 2.65 V)

LEM reserves the right to carry out modifications on its transducers, in order to improve them.

LEM International SA
Route du Nant-d'Avril, 152
1217 Meyrin
www.lem.com

Dimensions HTFS 200 ... 800-P (in mm)

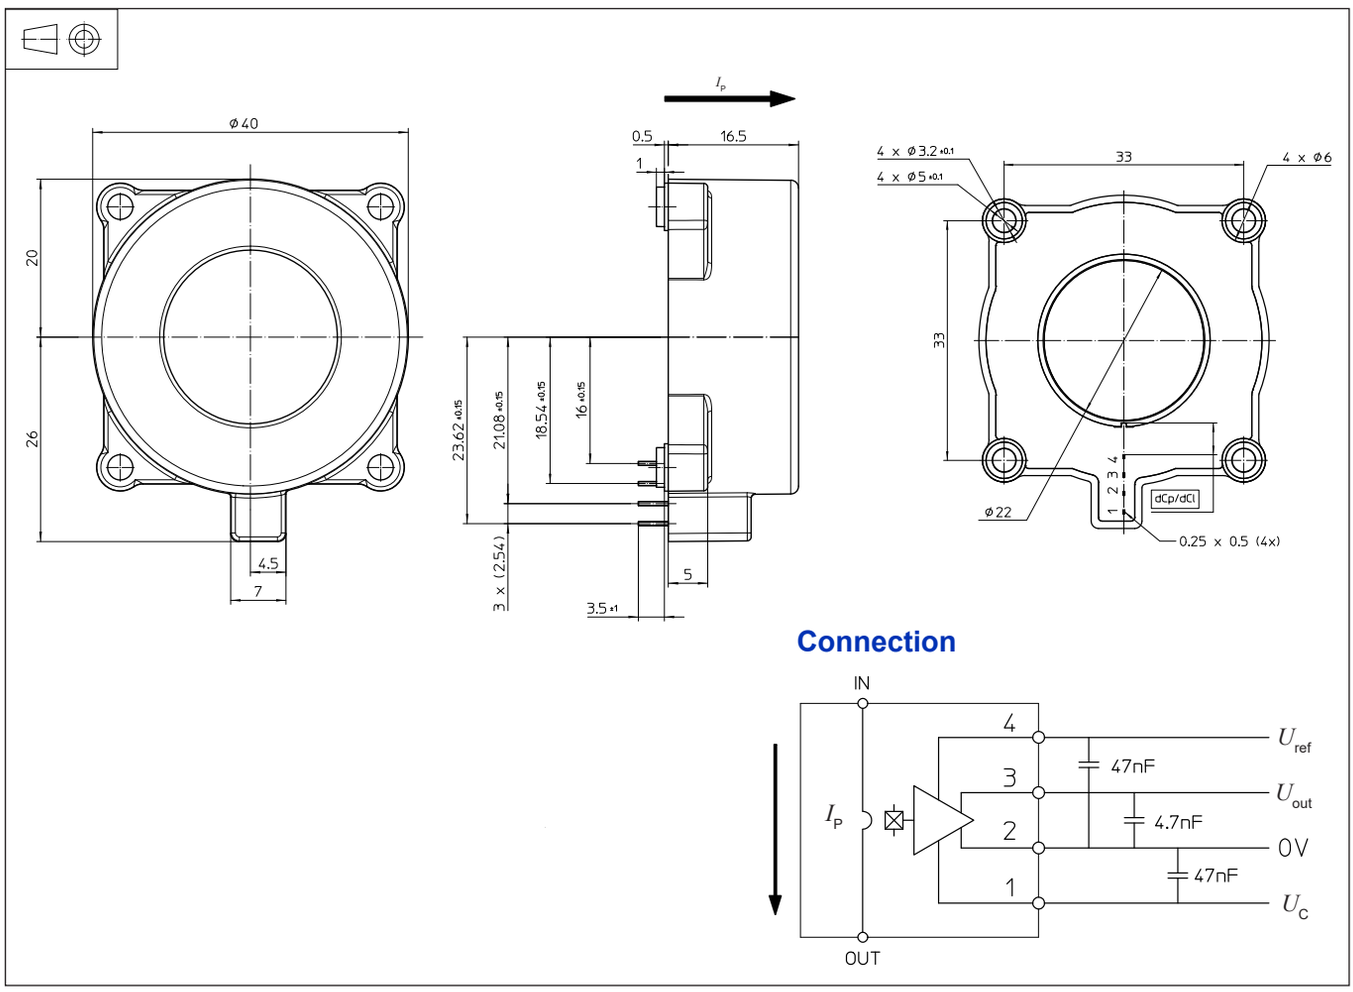

Connection

Mechanical characteristics

• General tolerance	±0.2 mm
• Mounting to PCB	4 × M3 (not supplied)
Recommended PCB hole	⌀ 5.3 mm
• Fastening torque	0.6 N·m
• Connection to secondary	4 pins 0.5 × 0.25 mm
Recommended PCB hole	⌀ 0.7 mm

Remarks

- U_{out} is positive when I_P flows in the direction of arrow.
- Temperature of the primary conductor should not exceed 120 °C.
- Must be mounted using PCB holes
- Installation of the transducer must be done, unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: https://www.lem.com/en/file/3137/download/

16May2024/Version 13

LEM reserves the right to carry out modifications on its transducers, in order to improve them.

LEM International SA
Route du Nant-d'Avril, 152
1217 Meyrin
www.lem.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View HTFS 600-P on WIN SOURCE
- LEM USA Inc. Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management