

# Ceramic High Pass Filter

## HFCG-2000+

50Ω      2100 to 10000 MHz



*Generic photo used for illustration purposes only*  
CASE STYLE: GE0805C-9

### The Big Deal

- Low insertion loss, 0.9 dB typical
- Very good rejection, 50 dB typical
- Small size 2.0 mm x 1.25 mm
- Excellent Power handling, 4W
- Ceramic construction

### Product Overview

HFCG-2000+ is a high pass filter with passband from 2100 MHz to 10000 MHz supporting a variety of applications. This model provides 0.9 dB typical insertion loss over a wide band due to strategically constructed layout. Housed in a tiny 0805 ceramic form factor with wraparound terminations, the filter is ideal for dense PCB layouts with minimal performance variation due to parasitics.

### Key Features

Feature	Advantages
Small size, 2.0 mm x 1.25 mm	Accommodates tight space requirements for dense PCB layouts.
Wrap around termination	Provides excellent solderability and easy visual inspection capability.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.
Ultra-wide pass band	This filter has a very wide passband from 2.1 GHz to 10 GHz.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Ceramic High Pass Filter

50Ω 2100 to 10000 MHz

## HFCG-2000+



Generic photo used for illustration purposes only  
CASE STYLE: GE0805C-9

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Features

- Low insertion loss, 0.9 dB typ.
- Very good rejection, 50 dB typ.
- Small size 2.0 mm x 1.25 mm
- Temperature stable
- LTCC construction

### Applications


- Test and measurements
- Military applications
- Telecommunications and broadband wireless systems
- 5G Sub 6 GHz
- WiFi 6E and X-band Radar

### Electrical Specifications<sup>(1,2)</sup> at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	DC - 1100	42	50	-	dB
		F1-F2	1100 - 1530	20	27	-	dB
	Freq. Cut-Off	F3	1930	-	3.0	-	dB
Pass Band	Insertion Loss	F4-F5	2100 - 2300	-	1.7	-	dB
		F5-F6	2300 - 2800	-	1.4	1.8	dB
		F6-F7	2800 - 10000	-	0.9	1.3	dB
	Return loss	F4-F7	2100 - 10000	-	14	-	dB

1 This component is not intended to act as a DC block. Please consult with Mini-Circuits for further details  
2 Measured on Mini-Circuits Characterization Test Board TB-HFCG-2000+

### Functional Schematic

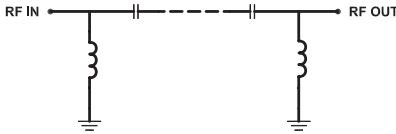

### Maximum Ratings





Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	4W @ 25°C

\*Passband rating, derate linearly to 0.9W at 125°C ambient  
Permanent damage may occur if any of these limits are exceeded.

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	70.24	0.11
100	65.72	0.11
500	52.32	0.22
1000	49.64	0.32
1100	50.00	0.35
1400	46.80	0.50
1530	32.18	0.67
1660	20.51	1.09
1750	12.91	1.96
1900	3.70	9.35
1930	2.89	12.78
2000	1.94	25.29
2100	1.43	30.41
2300	1.03	21.70
2800	0.66	18.46
3000	0.55	21.95
5000	0.29	24.58
8000	0.24	26.03
10000	0.28	25.76
14000	7.18	3.17

### Typical Frequency Response

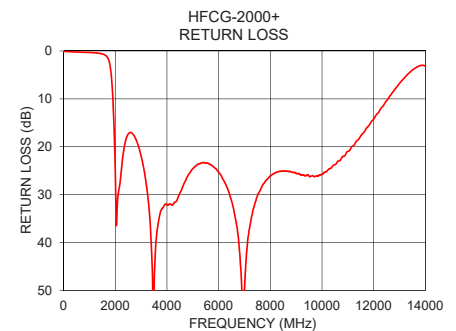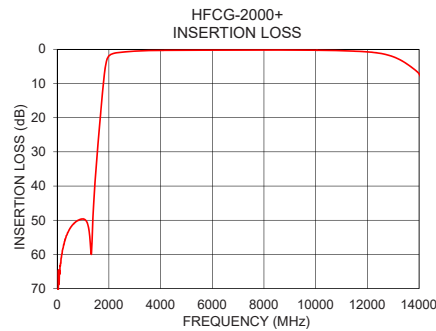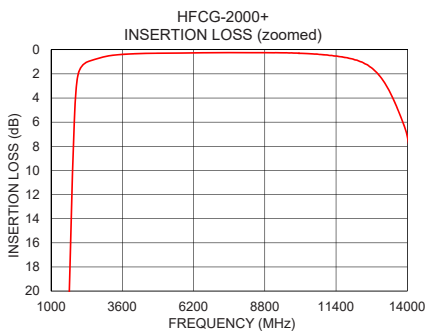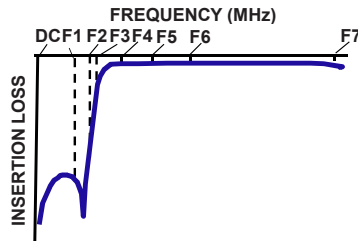

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV A  
ECO-007187  
HFCG-2000+  
EDU3746  
URJ  
210402  
Page 2 of 3

## Pad Connections

INPUT	1
OUTPUT	3
GROUND	2, 4, 5, 6

Product Marking: NF


Demo Board MCL P/N: TB-HFCG-2000+  
Suggested PCB Layout (PL-633)

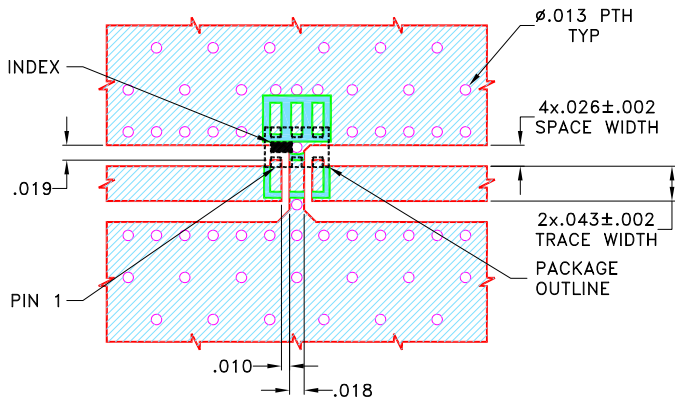

### NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020±.0015. COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

## Outline Drawing

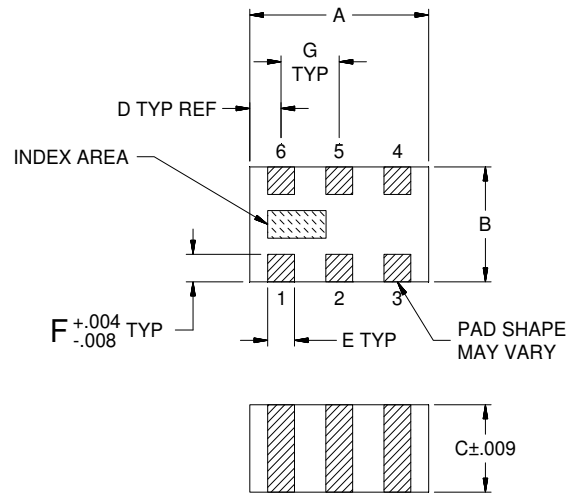

## Outline Dimensions ( inch mm )

A	B	C	D	E	F	G	Wt.
.079	.049	.037	.014	.012	.012	.026	grams
2.00	1.25	0.95	0.35	0.30	0.30	0.65	.008



Note: Please refer to case style drawing for details.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HFCG-2000+ on WIN SOURCE](#)
-  [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management