



COAXIAL

# Ultra-Wideband Amplifier

## ZVA-503GX+

50Ω 50 kHz to 50 GHz Gain 12 dB 2.4mm Female

### KEY FEATURES

- Ultra-Broadband Coverage, 50 kHz to 50 GHz
- Excellent Gain Flatness, ±1.5 dB Typ.
- Single +5 V Supply
- Compact Case for Ease of System Integration




Generic photo used for illustration purposes only

### APPLICATIONS

- Fiber Optics
- Wideband Test and Instrumentation
- 4G LTE & 5G FR1, FR2 & FR2+ Infrastructure
- WiFi 6E & WiFi 7
- Aerospace and Defense

### FUNCTIONAL DIAGRAM

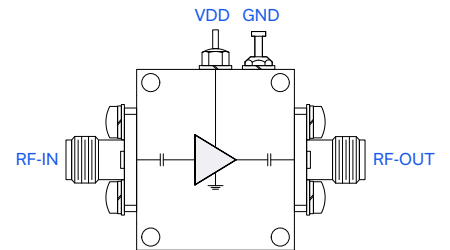

### PRODUCT OVERVIEW

Mini-Circuits' ZVA-503GX+ is a coaxial, ultra-wideband amplifier offering flat gain across an extremely wide frequency range from 50 kHz to 50 GHz. This model operates on a single +5 V supply with just 100 mA typical current consumption and is capable of delivering up to 20 mW output power at 1 dB compression. The amplifier comes in a rugged, compact case (0.84" x 0.96" x 0.36") with 2.4mm RF connectors.

### ELECTRICAL SPECIFICATIONS AT +25 °C BASEPLATE AND $V_{DD} = +5.0 V$

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.01		50	GHz
Gain	0.01 – 7.5	11.0	12.5	-	dB
	7.5 – 15	10.0	12.0	-	
	15 – 40	9.0	11.0	-	
	40 – 50	8.0	10.5	-	
Noise Figure	0.01 – 7.5	-	4.0	-	dB
	7.5 – 15	-	3.5	-	
	15 – 40	-	4.0	-	
	40 – 50	-	6.5	-	
Input Return Loss	0.01 – 7.5	10.0	14.0	-	dB
	7.5 – 15	8.0	14.0	-	
	15 – 40	8.0	14.0	-	
	40 – 50	8.0	14.0	-	
Output Return Loss	0.01 – 7.5	9.0	12.0	-	dB
	7.5 – 15	9.0	14.0	-	
	15 – 40	8.0	14.0	-	
	40 – 50	8.0	13.0	-	
Output Power at 1 dB Compression (P1dB)	0.01 – 7.5	-	+13.0	-	dBm
	7.5 – 15	-	+13.0	-	
	15 – 40	-	+10.5	-	
	40 – 50	-	+8.0	-	
Output Third Order Intercept Point (OIP3)	0.01 – 40	-	+23.0	-	dBm
	40 – 50	-	+18.0	-	
DC Supply Voltage ( $V_{DD}$ )		+4.5	+5.0	+5.5	V
DC Current		50	100	150	mA





COAXIAL


# Ultra-Wideband Amplifier

ZVA-503GX+


50Ω 50 kHz to 50 GHz Gain 12 dB 2.4mm Female

## TYPICAL PERFORMANCE GRAPHS


GAIN

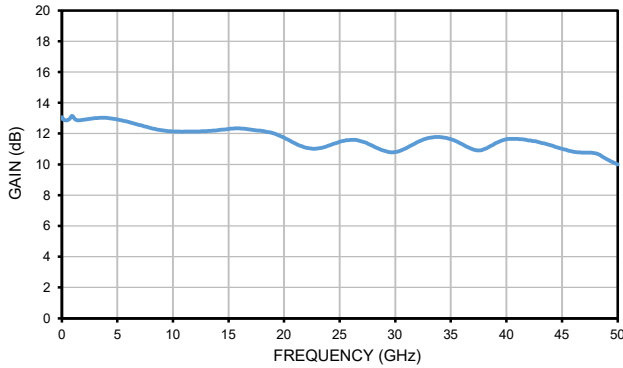


DIRECTIVITY

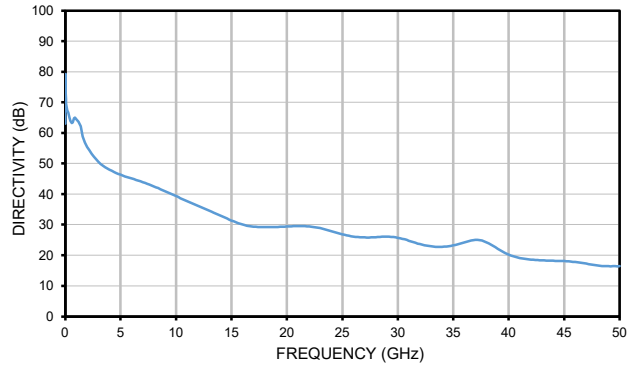


RETURN LOSS

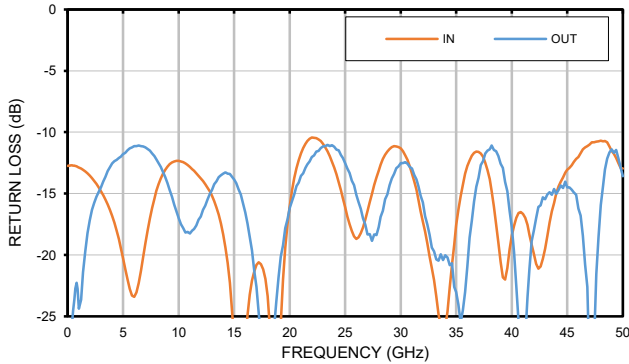


NOISE FIGURE

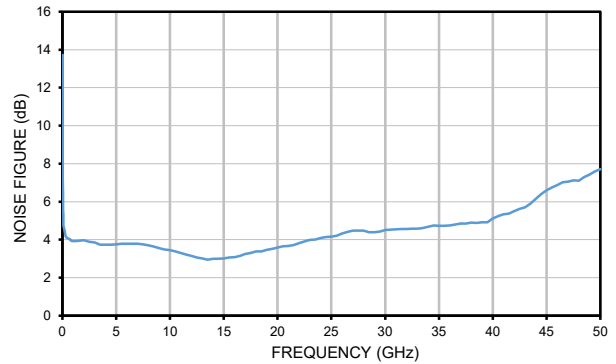

P<sub>OUT</sub> @ 1dB GAIN COMPRESSION

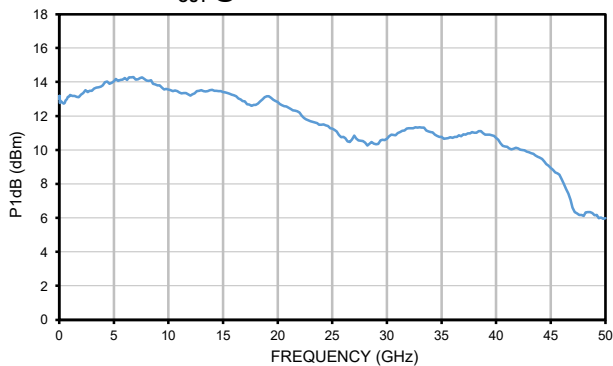

OUTPUT IP3

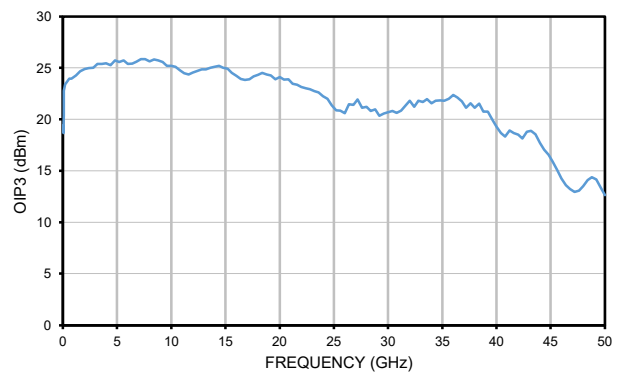



COAXIAL

# Ultra-Wideband Amplifier

ZVA-503GX+

50Ω 50 kHz to 50 GHz Gain 12 dB 2.4mm Female

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup>

Parameter	Ratings
Operating Temperature (Baseplate)	-10 °C to +85 °C
Storage Temperature	-55 °C to +100 °C
Total Power Dissipation	0.75 W
RF Input Power <sup>2</sup> (CW), V <sub>DD</sub> = +5.0 V	+4 dBm
DC Operating Voltage <sup>3</sup> (V <sub>DD</sub> )	+6 V

1. Continuous operation is not recommended at these extremes. Permanent damage may occur if any of these limits are exceeded.
2. Specified under matched load to 50 ohms.
3. This model does not contain an internal voltage regulator. Take caution when applying voltage.

## DETERMINING MAXIMUM THERMAL RESISTANCE OF USERS' EXTERNAL HEAT SINK

<i>MAXIMUM THERMAL RESISTANCE</i>	= $\frac{\text{MAXIMUM OPERATING CASE TEMP} - \text{MAXIMUM USER AMBIENT TEMP}}{\text{POWER DISSIPATION}}$
<b>Example:</b>	MAXIMUM OPERATING CASE TEMP = +50 °C (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE) MAXIMUM USER AMBIENT TEMP = +30 °C (USER DEFINED) POWER DISSIPATION = 10 WATTS (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE) THEN MAXIMUM ALLOWABLE THERMAL RESISTANCE = 2 °C/W






COAXIAL

# Ultra-Wideband Amplifier

## ZVA-503GX+

50Ω 50 kHz to 50 GHz Gain 12 dB 2.4mm Female

### CASE STYLE DRAWING

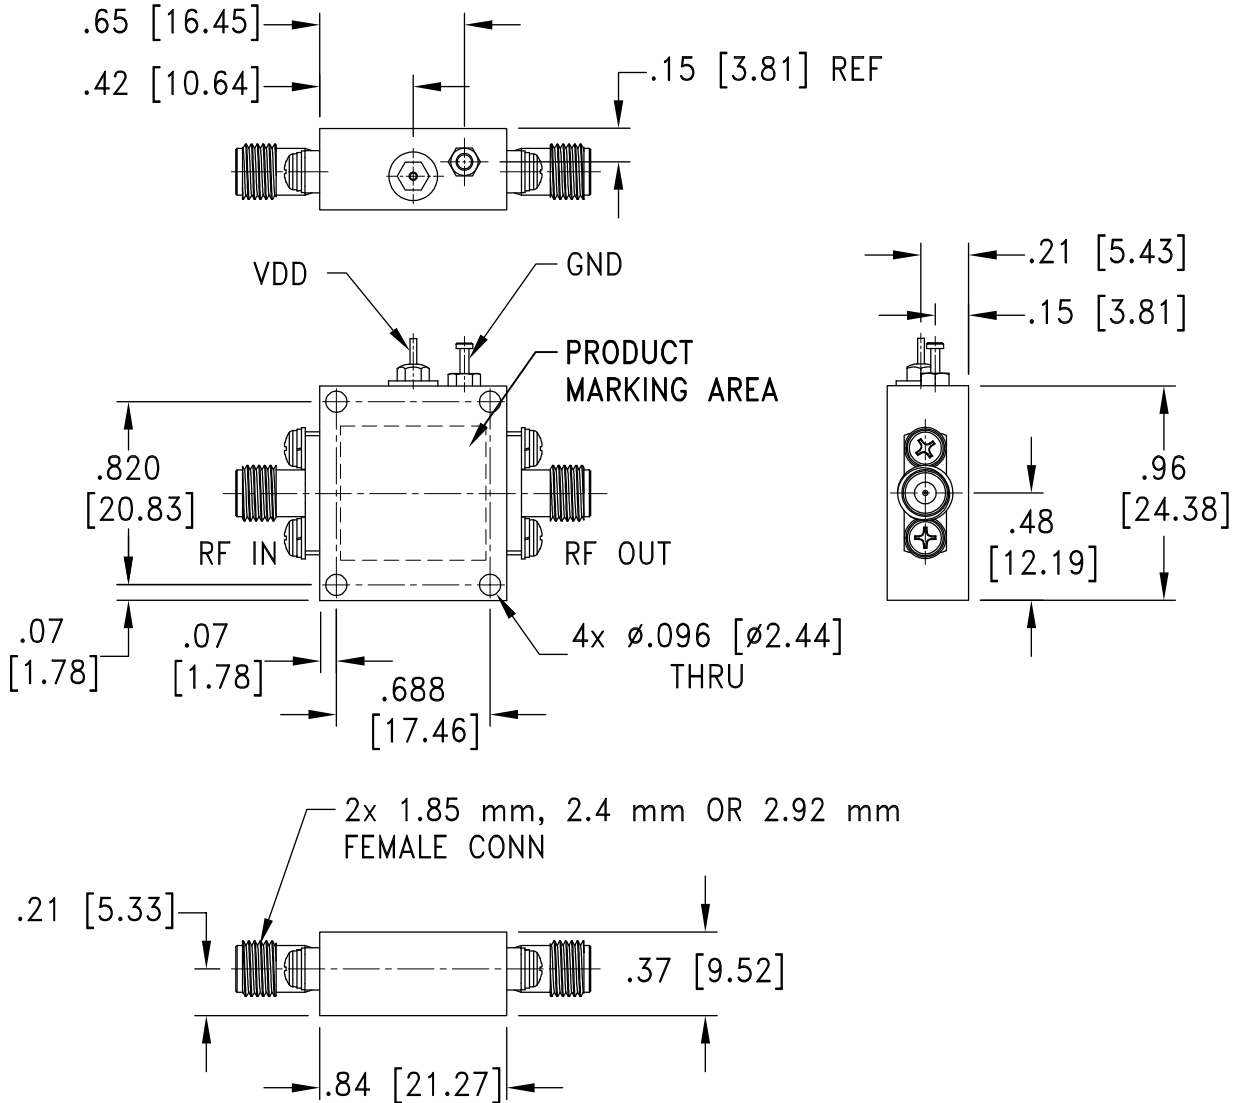

Weight: 45 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl.  $\pm$ .03; 3 Pl.  $\pm$ .015





COAXIAL

# Ultra-Wideband Amplifier

## ZVA-503GX+

50Ω 50 kHz to 50 GHz Gain 12 dB 2.4mm Female

### ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD.

Performance Data	Table
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
RoHs Status	Compliant
Environmental Ratings	ENV96
Export Information	ECCN# EAR99

### ORDERING INFORMATION

Model No. Links	<a href="#">ZVA-503GX+</a>
Product Marking	ZVA-503GX+
Case Style	AV2578
Connector	2.4 mm (Female)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ZVA-503GX+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management