

Current Transducer HASS 50 ... 600-S

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



All data are given with $R_L = 10\text{ k}\Omega$

$$I_{PN} = 50 \dots 600\text{ A}$$



Electrical data

Primary nominal RMS current	Primary current measuring range	Type
I_{PN} (A)	I_{PM} (A)	
50	± 150	HASS 50-S
100	± 300	HASS 100-S
200	± 600	HASS 200-S
300	± 900	HASS 300-S
400	± 1100	HASS 400-S
500	± 1100	HASS 500-S
600	± 1100	HASS 600-S

S_{Th}	External detection threshold sensitivity @ I_{PN}	0.625	V / I_{PN}
U_{out}	Analog output voltage @ I_p	$U_{OE} \pm (0.625 \cdot I_p / I_{PN})$	V
U_{ref}	Reference voltage ¹⁾	2.5 \pm 0.025	V
	Output voltage	typ. 200	Ω
	Output impedance	≥ 200	Ω
	Load impedance	≥ 2	k Ω
R_L	Load resistance	< 5	Ω
R_{out}	Output internal resistance	= 4.7	nF
C_L	Load capacitance ($\pm 20\%$)	5	V
U_C	Supply voltage ($\pm 5\%$) ²⁾	19 (typ)	mA
I_C	Current consumption @ $U_C = 5\text{ V}$	25 (max)	mA

Accuracy - Dynamic performance data

ϵ_{tot}	Total error ³⁾ @ $I_{PN}, T_A = 25^\circ\text{C}$	$\leq \pm 1$	%
ϵ_L	Linearity error	$0 \dots I_{PN}$	%
		$0 \dots I_{PM}$	%
TCU_{OE}	Temperature coefficient of U_{OE} ($U_{out} - U_{ref}$ @ $I_p = 0$)	$\leq \pm 0.1$	mV/K
TCU_{ref}	Temperature coefficient of U_{ref}	$\leq \pm 190$	ppm/K
TCS	Temperature coefficient of S	$\leq \pm 250$	ppm/K
U_{OE}	Electrical offset voltage @ $I_p = 0, T_A = 25^\circ\text{C}$	$U_{ref} \pm 0.015$	V
U_{OM}	Magnetic offset voltage @ $I_p = 0$ after an overload of I_{PM}	< ± 0.4	%
t_{D10}	Delay time to 10 % of the final output value for I_{PN} step ⁴⁾	< 3	μs
t_{D90}	Delay time to 90 % of the final output value for I_{PN} step		
	HASS 50-S	< 4	μs
	others	< 3.5	μs
U_{no}	RMS noise voltage referred to primary (DC ... 20 MHz)	< 40	mVpp
BW	Frequency bandwidth (-3 dB) ⁵⁾	DC ... 240	kHz

Features

- Hall effect measuring principle
- Galvanic separation between primary and secondary circuit
- Insulation test voltage 3300 V
- Low power consumption
- Single power supply +5 V
- Fixed offset & sensitivity
- Insulating plastic case recognized according to UL 94-V0.

Advantages

- Easy installation
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference
- Internal & external reference.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Current Transducer HASS 50 ... 600-S

General data

T_A	Ambient operating temperature	-40 ... +105 °C	
T_{Ast}	Ambient storage temperature	-40 ... +105 °C	
m	Mass	55	g
	Standard	EN 50178: 1997	

- Notes: ¹⁾ It is possible to overdrive U_{ref} with an external reference voltage between 0.5 - 2.65 V providing its ability to sink or source approximately 5 mA
- ²⁾ Maximum supply voltage (not operating) < 6.5 V
- ³⁾ Excluding offset and magnetic offset voltage
- ⁴⁾ For a $di/dt = 100 \text{ A}/\mu\text{s}$
- ⁵⁾ Small signal only to avoid excessive heatings of the magnetic core.

Insulation coordination

U_d	RMS voltage for AC insulation test, 50 Hz, 1 min	3.3	kV
U_t	Partial discharge RMS test voltage ($q_m < 10 \text{ pC}$)	> 1	kV
U_{Ni}	Impulse withstand voltage 1.2/50 μs	6	kV
		Min	
d_{Cp}	Creepage distance	6.9	mm
d_{Cl}	Clearance distance	4.4	mm
CTI	Comparative Tracking Index (group I)	> 600	

Applications examples

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
d_{Cp}, d_{Cl}, U_{Ni}	Rated insulation voltage	Nominal voltage
Basic insulation	600 V	600 V
Reinforced insulation	300 V	150 V

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.




Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.


This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected.


Dimensions HASS 50 ... 600-S (in mm)

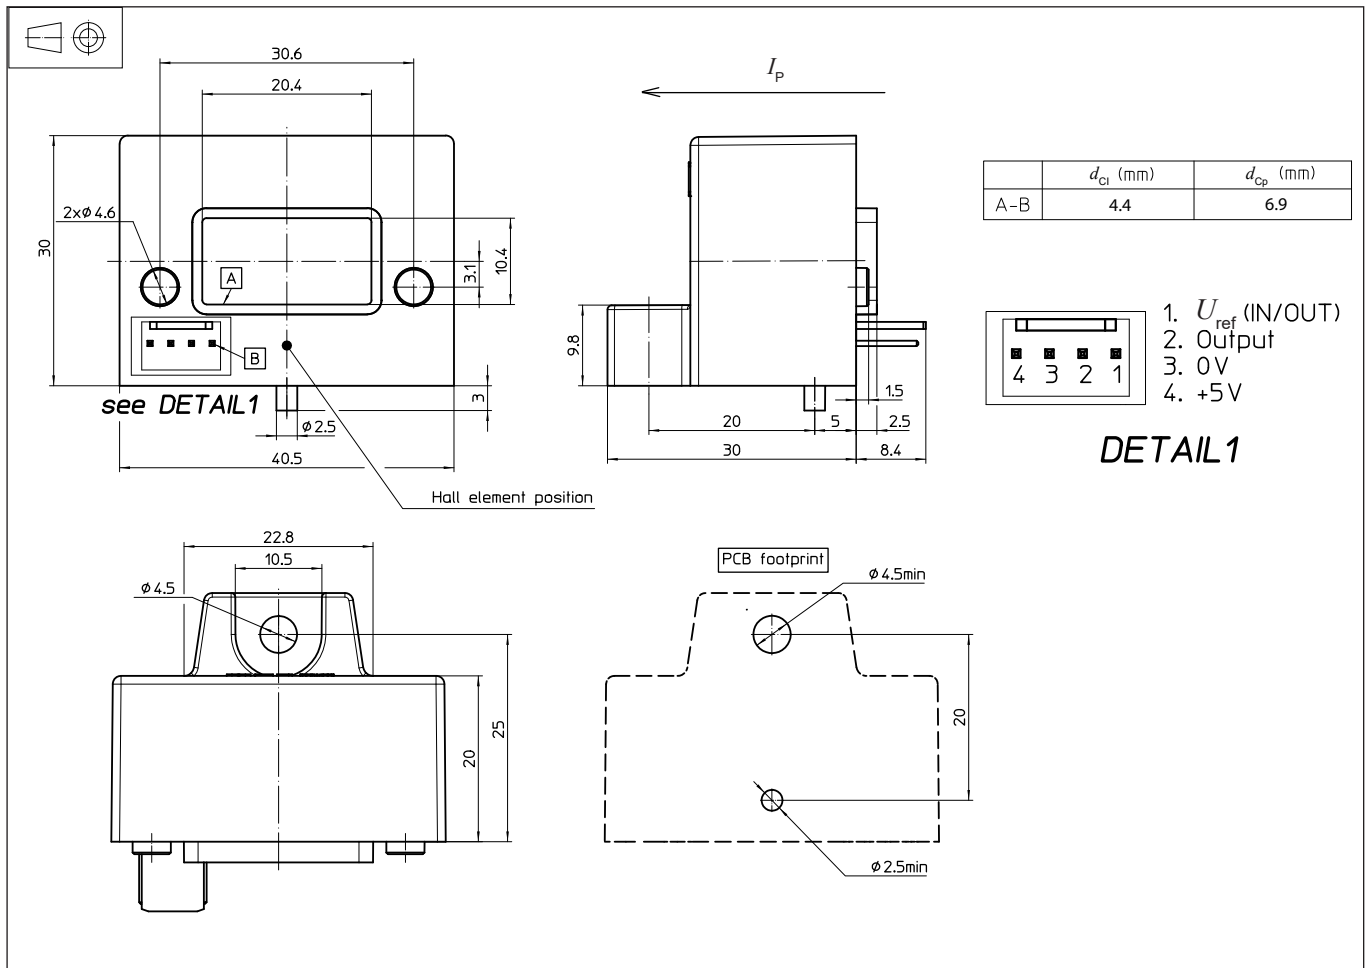

Required connection circuit

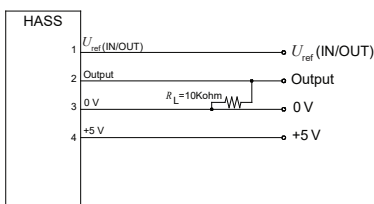

Operation principle

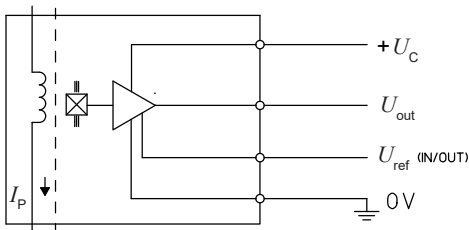

Mechanical characteristics

- General tolerance ± 0.5 mm
 - Aperture for primary conductor $20.4 \times 10.4 \times 0.5$ mm
 - Transducer fastening M4
 - Recommended fastening torque < 1.5 N·m
 - Connection of secondary Molex type 5045-04A/22-04-1041
Leoco 2501P04V00A
- Alternative

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 120 °C.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: <https://www.lem.com/en/file/3137/download>

IMPORTANT NOTICE

The information in this document is considered accurate and reliable. However, LEM International SA and any company directly or indirectly controlled by LEM Holding SA ("LEM") do not provide any guarantee or warranty, expressed or implied, regarding the accuracy or completeness of this information and are not liable for any consequences resulting from its use. LEM shall not be responsible for any indirect, incidental, punitive, special, or consequential damages (including, but not limited to, lost profits, lost savings, business interruption, costs related to the removal or replacement of products, or rework charges) regardless of whether such damages arise from tort (including negligence), warranty, breach of contract, or any other legal theory.

LEM reserves the right to update the information in this document, including specifications and product descriptions, at any time without prior notice. Information in this document replaces any previous versions of this document. No license to any intellectual property is granted by LEM through this document, either explicitly or implicitly. Any Information and product described herein is subject to export control regulations.

LEM products may possess either unidentified or documented vulnerabilities. It is the sole responsibility of the purchaser to design and operate their applications and products in a manner that mitigates the impact of these vulnerabilities. LEM disclaims any liability for such vulnerabilities. Customers must select products with security features that best comply with applicable rules, regulations, and standards for their intended use. The purchaser is responsible for making final design decisions regarding its products and for ensuring compliance with all legal, regulatory, and security-related requirements, irrespective of any information or support provided by LEM.

LEM products are not intended, authorized, or warranted for use in life support, life-critical, or safety-critical systems or equipment, nor in applications where failure or malfunction of an LEM product could result in personal injury, death, or significant property or environmental damage. LEM and its suppliers do not assume liability for the inclusion and/or use of LEM products in such equipment or applications; thus, this inclusion and/or use is at the purchaser's own and sole risk. Unless explicitly stated that a specific LEM product is automotive qualified, it should not be used in automotive applications. LEM does not accept liability for the inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

Applications that are described herein are for illustrative purposes only. LEM makes no representation or warranty that LEM products will be suitable for a particular purpose, a specified use or application. The purchaser is solely responsible for the design and operation of its applications and devices using LEM products, and LEM accepts no liability for any assistance with any application or purchaser product design. It is purchaser's sole responsibility to determine whether the LEM product is suitable and fit for the purchaser's applications and products planned, as well as for the planned application and use of purchaser's third-party customer(s).



Stressing and using LEM products at or above limiting values will cause permanent damage to the LEM product and potentially to any device embedding or operating with LEM product. Limiting values are stress ratings only and operation of the LEM product at or above conditions and limits given in this document is not warranted. Continuous or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the LEM product.

LEM products are sold subject to the general terms and conditions of commercial sale, as published at www.lem.com unless otherwise agreed in a specific written agreement. LEM hereby expressly rejects the purchaser's general terms and conditions for purchasing LEM products by purchaser. Any terms and conditions contained in any document issued by the purchaser either before or after issuance of any document by LEM containing or referring to the general terms and conditions of sale are explicitly rejected and disregarded by LEM, and the document issued by the purchaser is wholly inapplicable to any sale or licensing made by LEM and is not binding in any way on LEM.

© 2025 LEM INTERNATIONAL SA – All rights reserved

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HASS 300-S on WIN SOURCE](#)
-  [LEM USA Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management